

FLOOR PLAN LEGEND

- NEW WALL - REFER TO WALL TYPES.
- EXISTING WALL TO REMAIN
- EXISTING DOOR TO REMAIN

WASHROOM FIXTURE LEGEND

- REFER TO SPECIFICATIONS
- RH ROBE HOOK
- GB GRAB BAR - REFER TO SPEC.
- TP TOILET PAPER DISPENSER
- HD HAND DRYER
- SD SOAP DISPENSER
- SND SANITARY NAPKIN DISPOSAL
- MI MIRROR
- BCS BABY CHANGING STATION
- ADO AUTOMATIC DOOR OPERATOR

FLOOR PLAN KEYNOTES

- NEW HIGH DENSITY POLYETHYLENE TOILET PARTITIONS - REFER TO SPEC.
- RE-PAINT EXISTING DOOR AND FRAME (INT. AND EXT.). REFER TO 2/A05 FOR COLOUR.
- NEW WALL HUNG WATER CLOSET - REFER TO MECH.
- NEW URINAL - REFER TO MECH.
- NEW TILE FLOOR FINISH - REFER TO FLOOR FINISH PLAN (1/A05).
- NEW STAINLESS STEEL COUNTER C/W SALVAGED SINK AND FAUCET - REFER TO SPEC, MECH. & INT. ELEV. ON A04 AND DETAILS 7, 8, 9/A05.
- NOT USED.
- EXISTING KITCHEN MILLWORK MODIFIED TO SUIT NEW SINK AND UNDERCOUNTER FRIDGE. 13, 17/A04.
- NEW SINK AND FAUCET - REFER TO MECH.
- EXISTING CHEST FREEZER FOR PARKS CANADA ADVENTURE STORE. CONFIRM LOCATION WITH DEPT. REP.
- NEW MILLWORK. REFER TO SPEC AND DRAWING ON A04 AND DETAILS 3, 4, 5/A05.
- LOCATION OF NEW W.C.'S TO MATCH EXISTING TO RE-USE EXISTING WALL CARRY CHANNELS TO SUPPORT NEW W.C.'S - TYP.
- NEW WALL MOUNTED ROUND CLOSET ROD C/W OPEN DOWEL MOUNTS (ONE EACH SIDE) - REFER TO SPEC.
- EXISTING ELECTRICAL PANELS - REFER TO ELECT.
- EXISTING HOT WATER TANK - REFER TO MECH.
- EXISTING MOP SINK - REFER TO MECH.
- EXISTING HATCH TO CRAWL SPACE
- PRINTER/SCANNER LOCATION (NIC)
- PROVIDE NEW LOCKABLE DOOR HARDWARE FOR EXISTING STORAGE ROOM DOOR - REFER TO SPEC.
- WALL MOUNTED SHELVES. REFER TO INTERIOR ELEVATIONS ON A04.
- PATCH AND PAINT EXISTING COLUMN. REFER TO ROOM FINISH SCHEDULE 2/A05.
- PAINT EXISTING WINDOW SILLS (INT. & EXT.) - TYP. REFER TO ROOF FINISH SCHEDULE 2/A05.
- UNDER COUNTER REFRIGERATOR (N.I.C.)
- ALIGN
- EXISTING WALL MOUNTED MECHELECT. EQUIP TO REMAIN - REFER TO MEC/ELECT. NEW MILLWORK TO SUITE.
- EXISTING BASEBOARD HEATER TO REMAIN - REFER TO ELECT.
- EXISTING ELECTRIC FORCE FLOW TO REMAIN - REFER TO ELECT.
- EXISTING WATER FOUNTAIN TO REMAIN.
- NOT USED.
- NEW ±100 mm HIGH CONC. HOUSE KEEPING PAD FOR FURNACE - SEE MECHANICAL
- EXISTING FLOOR DRAIN TO REMAIN - REFER TO MECH.
- SUPPORT POST FOR EXTENDED URINAL PARTITION - REFER TO SPEC.
- RE-USE EXISTING HAND DRYERS, HAND DRYER LOCATIONS TO MATCH EXISTING - REFER TO ELECT.
- NEW MECH. PANEL - REFER TO MECH.

WALL TYPE GENERAL NOTES

- FIRERATED WALL TYPE SYMBOLS ARE DESIGNATED WITH AN "R". REFER TO REFLECTED CEILING PLAN FOR LOCATION AND RATING OF FIRE RATED WALLS. FIRE RESISTANCE RATINGS (FRR) AND SOUND TRANSMISSION CLASSES (STC) ARE SHOWN FOR REFERENCE ONLY.
- REFER TO ROOM FINISH PLAN, SCHEDULE AND INTERIOR ELEVATIONS FOR WALL FINISHES.
- CONSTRUCT FIRE RATED WALLS TO UNDERSIDE OF FLOOR STRUCTURE OR DECK ABOVE.
- ACOUSTICALLY SEPARATE BACK TO BACK ELECTRICAL BOXES WHICH CANNOT BE SEPARATED BY MIN. 16" (1 FULL STUD SPACE), ATTACH DOUBLE LAYER 5/8" GWB TO SIDE OF STUD FROM FLOOR TO 48" HIGH. SEAL WITH ACOUSTIC CAULK ON BOTTOM AND SIDES.
- ALL INTERIOR WALL DIMENSIONS TO OUTSIDE FACE OF WALL FINISH. COORDINATE STRUCTURE TO SUIT.
- PROVIDE SLIP-JOINT FOR ALL FULL HEIGHT PARTITIONS. MAINTAIN FIRE RESISTANCE RATING WHERE REQUIRED.
- OFFSET DOOR FRAMES 100 FROM FACE OF WALL UNLESS OTHERWISE NOTED.

WALL TYPES

- A1 CERAMIC TILE FINISH
- 140 CONCRETE MASONRY BLOCK
- CERAMIC TILE FINISH




SYMBOL	DESCRIPTION
PT-1	PAINT 1 - WHITE
PT-2	PAINT 2 - "CLEAR SKY" #A1299 (#488G 54/244)
PT-3	PAINT 3 - "CRAYON GREEN" #A0966 (#94YY 46/629)
PT-4	PAINT 4 - BLACK
ACT-1	ACOUSTICAL CEILING TILE 1 - TBD
EXP	EXPOSED CEILING
CT-1	CERAMIC TILE 1 - 24" x 24" - REFER TO SPEC.
CT-2	CERAMIC TILE 2 - 4" x 16" - REFER TO SPEC.
EX	EXISTING

REFLECTED CEILING PLAN LEGEND

- CEILING HEIGHT
- EXISTING CEILING HEIGHT
- ACT CEILING - REFER TO SPEC.
- DOOR/WINDOW HEADER
- VANDAL RESISTANT LED (±300x1200). REFER TO ELECT.
- RECESSED FLUORESCENT LIGHT (±600x1200). REFER TO ELECT.
- NEW LIGHT - REFER TO ELECT.
- 1 HR. FIRE RATED SEPARATION

REFLECTED CEILING PLAN KEYNOTES

- REFER TO MECHANICAL FOR EXPOSED DUCTWORK
- NEW LIGHTING FIXTURES REFER TO ELEC.
- EXPOSED STRUCTURE TO BE PAINTED. PATCH AND REPAIR ANY DAMAGED EXPOSED CEILING. REFER TO ROOM FINISHES SCHEDULE 2/A05.
- REFERENCE POINT(S) FOR ACOUSTIC CEILING TILE. ALIGN CEILING GRID WITH ROOM'S SOUTH AND EAST CORNERS AND CENTERED ON SOUTH-EAST WALL AS SHOWN.

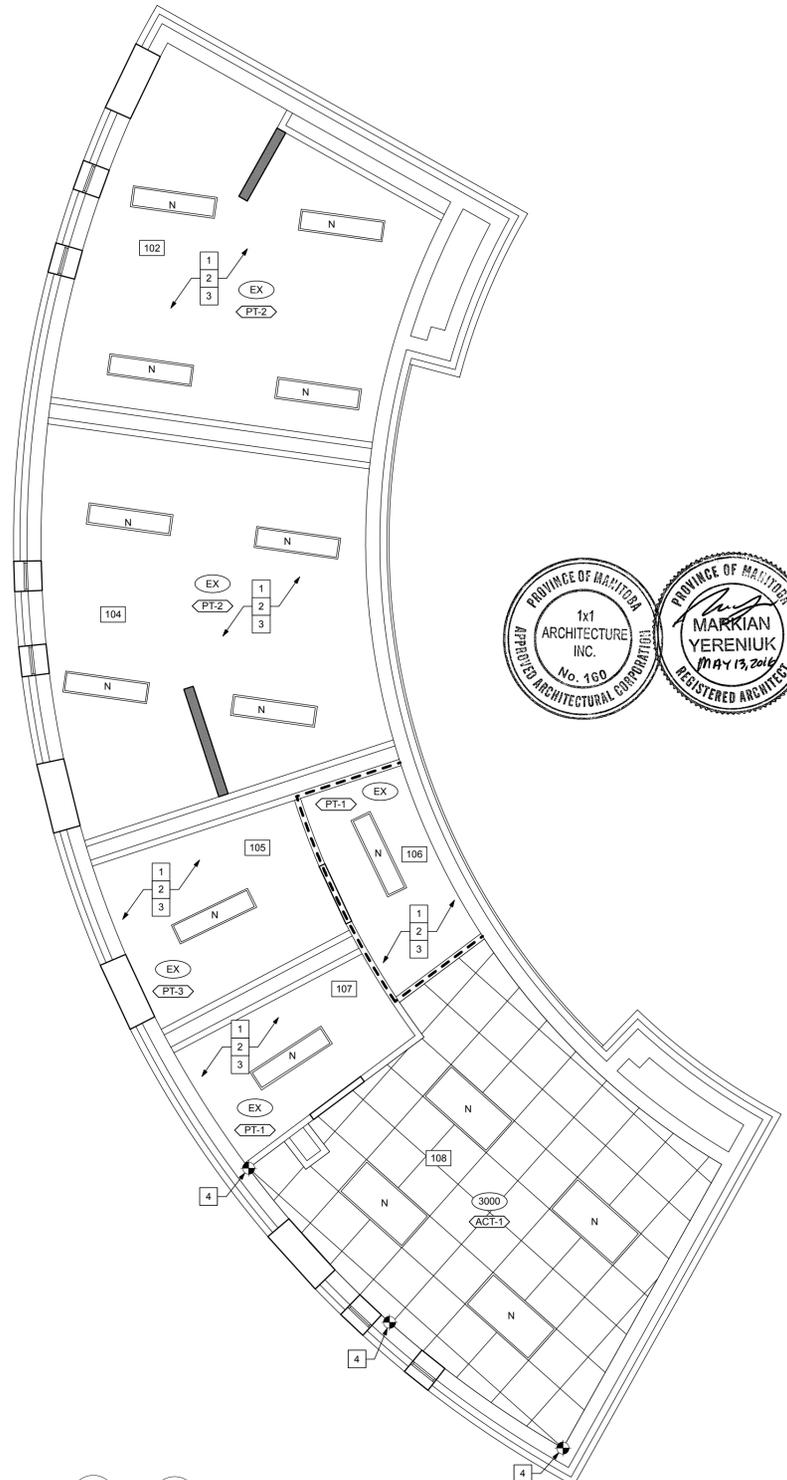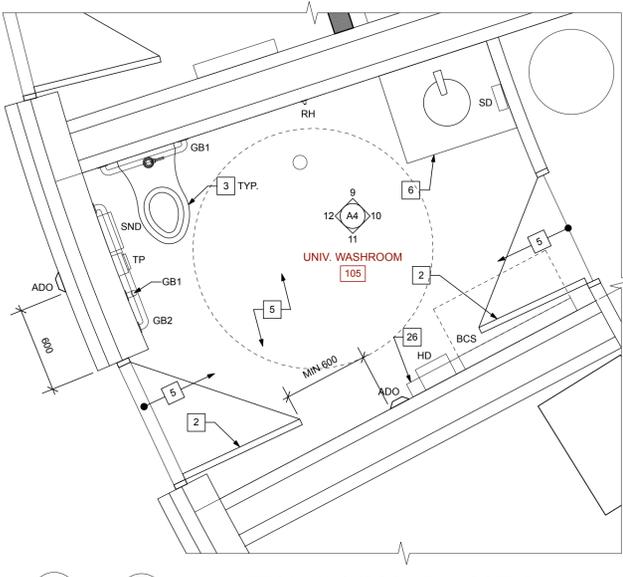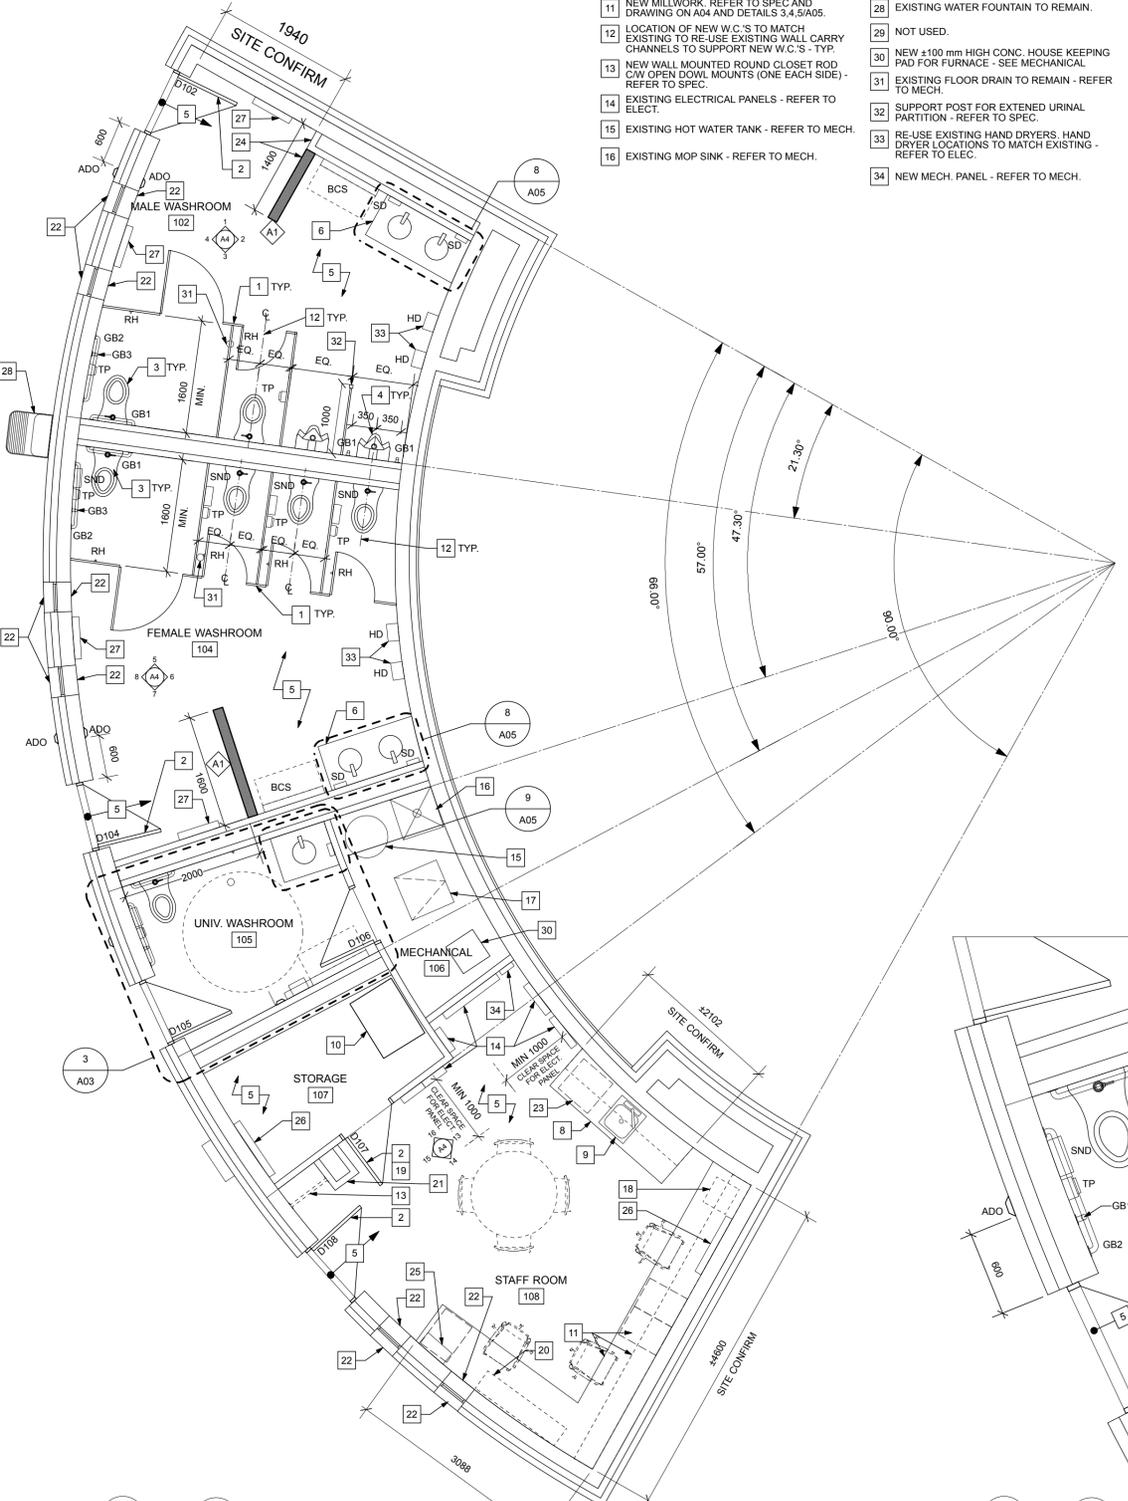

- FLOOR PLAN GENERAL NOTES**
- VERIFY EXISTING DIMENSIONS, CONDITIONS, AND FINISHES BEFORE PRICING AND/OR PROCEEDING WITH WORK. DISCREPANCIES SHALL BE BROUGHT TO THE DEPARTMENTAL REPRESENTATIVE'S ATTENTION IMMEDIATELY.
 - ALL PIPING, CONDUITS AND RELATED MECHANICAL AND ELECTRICAL ITEMS SHALL BE CONCEALED IN FINISHED AREAS WHETHER SHOWN ON DRAWINGS OR NOT. UNO.
 - ALL DIMENSIONS ARE CLEAR FROM THE FACE OF FINISHED WALL/PARTITION TO THE FACE OF FINISHED WALL/PARTITION OR GRID LINES. SEE PARTITION TYPES FOR ACTUAL THICKNESS OF PARTITIONS.
 - REFER TO SPECIFICATIONS 10800-100 FOR ALL TOILET ACCESSORIES PRODUCT INFORMATION
 - ENSURE THAT ALL EXISTING TO REMAIN COMPONENTS (INCLUDING CONCRETE RELIEFS, ENGRAVED STONE, LIMESTONE BLOCKS, ETC.) ARE PROTECTED FROM DAMAGE DURING CONSTRUCTION.
 - FURNITURE NOT INCLUDED IN CONTRACT. DEPARTMENT REP. TO PROVIDE.
 - INTERIOR GARBAGE CANS ARE NOT INCLUDED IN CONTRACT. DEPARTMENT REP. TO PROVIDE.
 - REFER TO MECHANICAL DRAWINGS FOR LOCATIONS OF FIRE EXTINGUISHERS.

REFLECTED CEILING PLAN GENERAL NOTES

- VERIFY EXISTING CONDITIONS AND DIMENSIONS PRIOR TO CEILING INSTALLATION.
- LIGHT FIXTURE LOCATIONS AND TYPES SHOWN ON ARCHITECTURAL CEILING PLANS. SEE ELECTRICAL DRAWINGS AND NARRATIVES DEVICE/FIXTURE TYPES AND SIZES. NOTE: DEVICES SHOWN ON ARCHITECTURAL PLAN AND NOT ON THE ENGINEERING DRAWINGS OR SPECIFICATION SHOULD BE BROUGHT TO DEPARTMENTAL REPRESENTATIVE'S ATTENTION FOR CLARIFICATION.
- REFER TO MECHANICAL FOR EXPOSED DUCTWORK LAYOUT/ DIFFUSERS/ ETC BOX LOCATIONS, TYPES & SIZES. ARCHITECTURAL CEILING PLAN SHOWS DESIGN INTENT ONLY.
- ACOUSTICAL CEILING GRID SHALL BE CENTERED IN ROOMS UNLESS NOTED OTHERWISE.
- CEILING HEIGHTS ARE DIMENSIONED FROM FLOOR LINE DESIGN ELEVATION TO FINISHED CEILING, U.N.O.
- MECHANICAL, PLUMBING AND ELECTRICAL CONTRACTORS SHALL COORDINATE ALL DEVICES REQUIRING ACCESS IN NON-ACCESSIBLE CEILING. PROVIDE ACCESS PANELS AS NEEDED (EXAMPLE: MECHANICAL VAV BOXES, PLUMBING CLEANOUTS, ETC.) LOCATIONS AS APPROVED BY ARCHITECT.
- MULTIPLE DEVICES BETWEEN LIGHT FIXTURES ARE TO BE EQUALLY SPACED AND IN LINE WITH LIGHTS, U.N.O.
- ALL CEILING FINISHES ADJACENT TO OR WITHIN THE LIMITS OF CONSTRUCTION DISTURBED OR DAMAGED BY CONSTRUCTION SHALL BE PATCHED TO MATCH EXISTING ADJACENT CEILING FINISH.

Revision	Description	Date
0	ISSUED FOR CONSTRUCTION	MAY 13, 2016

PUBLIC WORKS AND GOVERNMENT SERVICES CANADA

THE FORKS NHS INFRASTRUCTURE UPGRADES

THE FORKS WINNIPEG, MANITOBA

Designed by MY
 Drawn by KK
 Approved by Christina Kovacs
 PHWGSC Project Manager / Administrateur de Projets TPSGC

ARCHITECTURAL MAIN ORIENTATION NODE FLOOR PLAN & REFLECTED CEILING PLAN

Project no./No. du projet	Drawing no./No. du dessin	Revision no.
R.075208.001	A03	0