



Electronic Information Environment (EIE)

Service Specification Document/Interface Control Document Master Data Navy Industry Measurement Document Service— External

External – In the above context is intended to reflect that this content is for Industry partners who have been contracted to participate in an In-Service-Support phase of a Weapon System or Platform that the Department of National Defence has acquired.

EIE Project

document identification	identif du document
issue date	date de diffusion
30 October 2015	
version	version
Version 1.0	
OPI	BPR
EIE Solution Office	
designator	désignation
EIE Project	
group / division	groupe / division
ADM(IM) / DGEAS	

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Table of Contents

1	Introduction.....	1
1.1	Intended Audience.....	1
1.2	References	1
2	Business Information.....	2
2.1	Business Processes.....	3
2.2	Business Triggers.....	3
2.3	Unit of Work	4
3	Business Constraints.....	5
4	Service Use Case.....	6
4.1	Service Context	6
4.2	Successful Request and Technical Response	6
4.3	Alternate Scenarios.....	8
5	Service Description – Measurement Document Service.....	12
5.1	Service Overview	12
5.2	Service Properties	12
5.3	‘SendMDOC()’ Operation	13
5.4	‘SendMDOCAck()’ Operation	13
5.5	‘SendMDOCErr()’ Operation.....	14
6	Information Model	15
6.1	MDOC.....	15
6.2	As Built Structure	16
7	Operation Message Model.....	18
7.1	MDOC Input Body	18
7.2	MDOC Output Body	19
7.3	MDOC Fault Body.....	20
7.4	MDOC Acknowledgement Input Body.....	21
7.5	MDOC Error Input Body	22
7.6	Summary of Operation to input/output/fault body Mapping.....	23
8	Service Operation Details	25
8.1	Detailed Operation Characteristics – SendMDOC()	25
8.2	Detailed Operation Characteristics – SendMDOCErr().....	26
8.3	Detailed Operation Characteristics – SendMDOCAck()	28
8.4	Service Bindings	30
9	Definitions, Acronyms, Abbreviations.....	31
10	Appendix A - Entity Relationship Model.....	32
11	Document History	33

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



List of Figures

Figure 4-1 MDOC Message Flow	7
Figure 4-2 MDOC Message Flow with Type 1 Error	9
Figure 6-1 Information Model – Measurement Document	16
Figure 6-2 Information Model – As Built Structure.....	17
Figure 7-1 MDOC Input Body	19
Figure 7-2 MDOC Output Body	20
Figure 7-3 MDOC Fault Body.....	21
Figure 7-4 MDOC Acknowledgement Input Body.....	22
Figure 7-5 MDOC Fault Input Body	23
Figure 7-6 MDOC Operations to Input/Output/Fault Mapping.....	24
Figure 10-1 MDOC ERD	32

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



1 Introduction

This document establishes an interface between Canada Electronic Data Exchange (EDE) system and Industry responsible for maintenance of a ship class subject to Performance Based Contracting (PBC). This interface will be used by Canada to send Measurement Document (MDOC) messages to the ISS Contractor. To support the MDOC transfer between Canada EDE and the ISS Contractor, both systems need to support specific Web Service operations as well as request and response Extensible Markup Language (XML) schemas as described in this document. The Measurement Document service includes an operation for the ISS Contractor to report acknowledgement messages back to Canada EDE.

1.1 Intended Audience

- ISS Contractor System Designers
- Canada EDE Designers
- ISS Contractor Testers
- Canada EDE Testers

1.2 References

All references are to the baseline version of the reference at the time of publication of this document.

- [Ref. 1] Business Process Catalogue Annex P: Navy Canada Maintenance Management System Data Initialization In Support of Performance Based Contracting (PBC);
- [Ref. 2] Electronic Information Exchange Service Interaction Model;
- [Ref. 3] DRMIS Master Data Business Guidelines Air Force ISSCF fleets;
- [Ref. 4] Navy Materiel Master Record Service Specification;
- [Ref. 5] Industry Data Package Service Specification;
- [Ref. 6] EIE Business Use Case BUC 2.1 Exchange Master Data – Outbound.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



2 Business Information

Business Information is based on the EIE Business Process model for Data Initialization [Ref. 1] and the Defense Resource Management Information System (DRMIS) Master Data Business Guidelines Air Force ISSCF fleets [Ref. 3].

A Materiel Master Record (MMR) identifies all items required to support the weapon system maintenance and supply processes in DND. MMRs include all materiel (spares, consumables, serialized or not, tools, test equipment, etc.) subject to materiel management processes. An MMR is required before the item or part can be referenced or transacted upon in Canada's systems. For PBC managed weapon systems, materiel is always identified by the combination of the manufacturer CAGE code and the Manufacturer Part Number (MPN).

The serialized parts¹ which make up a Weapon System (WS) are tracked with an Equipment Master Record (EMR). Every EMR references an MMR to define the EMR type and its location relative to the WS "As-Designed" structure.

Another view of the WS used in maintenance is the *Functional Location* (FLOC) hierarchy. A functional location refers to a physical part of a WS which is intrinsic to the body of the WS and cannot be removed or replaced by normal maintenance procedures.

An EMR or FLOC may have associated Measurement Points to define data about the EMR/FLOC for maintenance purposes. The measurement point defines the *measurement code* to determine what is measured. A measurement point's actual measurement values – as they are recorded over time - are saved in a structure called a Measurement Document (MDOC). The measurement values may be entered manually, may be inserted by a Health and Usage Monitoring System "HUMS"² type system, or may be propagated automatically from other measurement points.

Measurement Documents are considered part of "As-Built" data and apply to an individual Weapon System (WS) instances.

The goal of the MDOC service is to provide a means for Canada to send to ISS Contractor the MDOCs for a ship class and for ISS Contractor to acknowledge receipt of the MDOC data or report errors in the data or transmission.

Within Canada, maintenance business processes are supported by two types of information systems, known generically as:

- Canada Maintenance Management System (CMMS)
- Canada Supply System (CSS)

Currently both functions are supported within Canada by the Defense Resource Management Information System (DRMIS).

¹ In other words, parts with serial numbers.

² "HUMS" refers in general to a system to upload data from on-board (the WS) computers to CMMS.



2.1 Business Processes

For some PBC contracts, the WS supplier is responsible to produce a complete set of master data for each ship class. The initial LSAR data set for the ship is provided to Canada by the shipbuilder and will be the basis for the initial data load into CMMS. Canada will provide CMMS master data associated with platform, including MDOC data, to the ISS Contractor through the EDE.

See [Ref. 1] for further details.

2.2 Business Triggers

As per the EIE Business Process model for Data Initialization [Ref. 1], the following business events may result in MDOC data being sent to ISS Contractor.

- The ISS Contractor initiates a Master Data demand request for a ship

For Master Data a direct³ communication will take place between ISS Contractor and Canada DND to advise Industry⁴ of the availability of new Master Data. ISS Contractor will, through Canada EDE, initiate the request for transfer of the Master Data to ISS Contractor.

³ Phone, fax, email, but not through Canada EDE services.

⁴ Within this document, Industry and ISS Contractor are synonymous and are used interchangeably

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



2.3 Unit of Work

According to PBC, Industry assumes the responsibility for Configuration Management (CM) of every WS in a ship class. With this responsibility Industry must be certain of the consistency of Master Data between their source system and CMMS. This is particularly difficult for Master Data as Master Data packages may be very large (i.e., on new WS delivery) and there is a high degree of inter-dependence between Master Data business objects.

To achieve consistency, Master Data business objects are always sent from Canada EDE to Industry in a single **unit of work**. The unit of work is a logical “package” of Master Data business objects (possibly of more than one type) with a unique identifier. Every individual Master Data message has a reference to its containing unit of work. A unit of work will have a **manifest** which explicitly defines the exchange types and number of **business objects**⁵ per exchange type, in the unit of work.

For further discussion on units of work, including retry and error scenarios, please see the EIE Service Interaction Model [Ref. 2] and Master Data Operational Model [Ref. 7].

⁵ When multiple business objects are combined in a single message, the manifest count always applies to the number of business objects irrespective of the number of messages.

3 Business Constraints

Terminology

The input to the service is an **MDOC message** which consists of one or more **MDOC business objects** and metadata (e.g., message header) required for correct message processing between Canada and Industry.⁶

Constraints on Usage of the Service

- 1) The Industry MDOC service shall only be invoked by the Canada EDE System.
- 2) Canada DND systems shall ensure the MDOC data for a WS is sent only to the Industry system which is properly authenticated and authorized to see maintenance and materiel data for that ship class
- 3) Canada must define a unit of work with a unique identifier prior to sending Master Data; each Master Data message must reference its containing unit of work.
- 4) The unit of work for Master Data always contains an explicit manifest.
- 5) Master Data messages will be signed using digital certificates between Canada EDE and Industry. Please see Service Interaction Model [Ref. 2] for details.

Constraints on Behaviour of the Service

- 6) Canada EDE **does** expect that within a single message there can be more than one Master Data business object - all business objects must be of the same exchange type as defined by the interface and declared in the message header.
- 7) Industry will authorize invocations of operations of the MDOC service.
- 8) Canada EDE may attempt to re-send Master Data messages (i.e., repeat operation invocations) in response to technical errors. This behaviour is controlled by parameters for each operation. Please see Service Interaction Model [Ref. 2] for details.

⁶ MDOC messages are defined in section 7. MDOC business objects are defined in section 6. The message / business subject distinction is used throughout the document.

4 Service Use Case

The requirements for the MDOC service are defined by one use case with several scenarios.

4.1 Service Context

When used in the context of a Master Data business process the service context is the same as the Materiel Master Record Service. Please see the Materiel Master Record Service Specification [Ref. 4].

4.2 Successful Request and Technical Response

This is the main or “Happy Day” scenario. This scenario describes the interaction between Canada EDE and Industry for the MDOC Service. Some validation steps and technical responses are not shown in the following sequence diagram ([Figure 4-1](#)~~Figure 4-1~~) – full details are in the Service Interaction Model [Ref. 2].

The “technical response” either (i) confirms a party in the exchange has accepted a message for further processing, or (ii) contains a fault message. A technical acceptance does not preclude subsequent “business” errors. Error scenarios are described below.

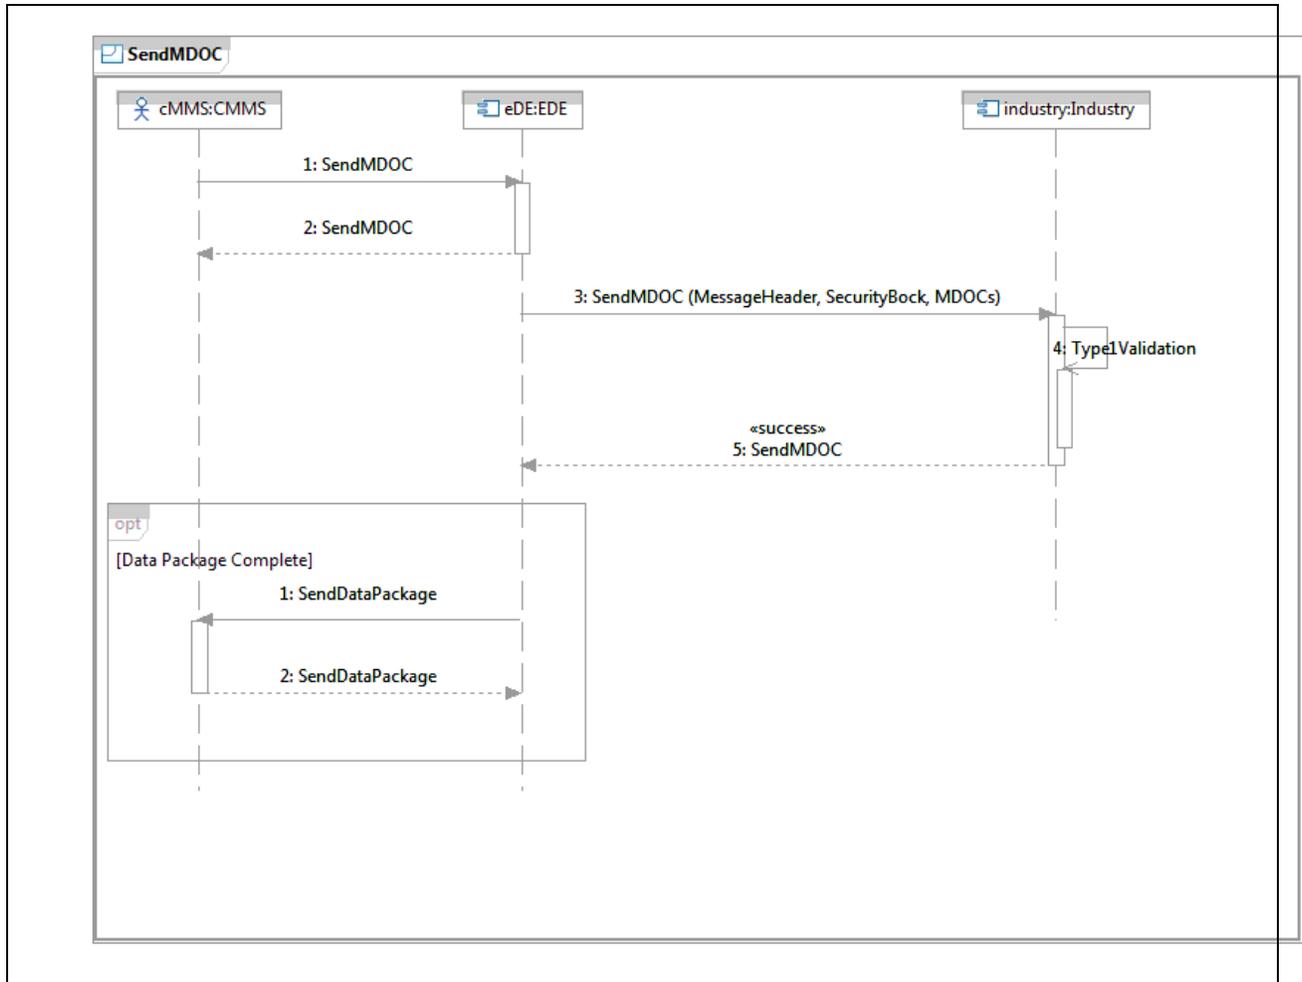


Figure 4-1 MDOC Message Flow

Main Flow	
Scenario	“Happy Day:” Canada EDE successfully sends MDOC business objects to Industry.
Pre-Condition	Canada has prepared a data package containing one or more MDOC business objects. If a unit of work is required, Canada EDE has initiated creation of the unit of work and Industry has confirmed creation.
Post-Condition	MDOC business objects successfully received by Industry.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Steps	<ol style="list-style-type: none">1) CMMS sends MDOC message to Canada EDE.2) Canada EDE returns a “success” response to Canada CMMS.3) Canada EDE invokes ‘SendMDOC()’ operation passing UOW ID and one or more MDOC business objects. (See Input Body definition.) Canada EDE waits for technical response.4) Industry initiates “Type 1” validation. In this scenario there is no error. Industry accepts “custody” of the MDOC business objects in the message.5) Industry returns to Canada EDE a “success” technical response for the SendMDOC() operation. (See Output Body definition.)<ol style="list-style-type: none">a. Industry begins internal processing of the message. In this scenario there is no error.b. Industry saves MDOC business objects for processing once unit of work is complete. <p>Once Industry has received a complete Master Data package from Canada EDE, Industry will process the received data. The details of this process are out of scope of this specification.</p>
-------	--

Please see Data Package Service Specification [Ref. 5] for the scenario of confirmation from Industry Master Data has been deployed to operations.

4.3 Alternate Scenarios

The MDOC Message Flow with Type 1 Error sequence diagram is shown in [Figure 4-2](#). The following scenarios apply to all uses of the MDOC service.

Alternate Scenarios distinguish between “**Type 1**” and “**Type 2**” errors. Type 1 errors are those errors detected prior to the service provider accepting custody of a message. Type 2 errors are those errors detected during internal processing prior to business validation by the target “back-end” business system. Please see the Service Interaction Model [Ref. 2] for details.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.

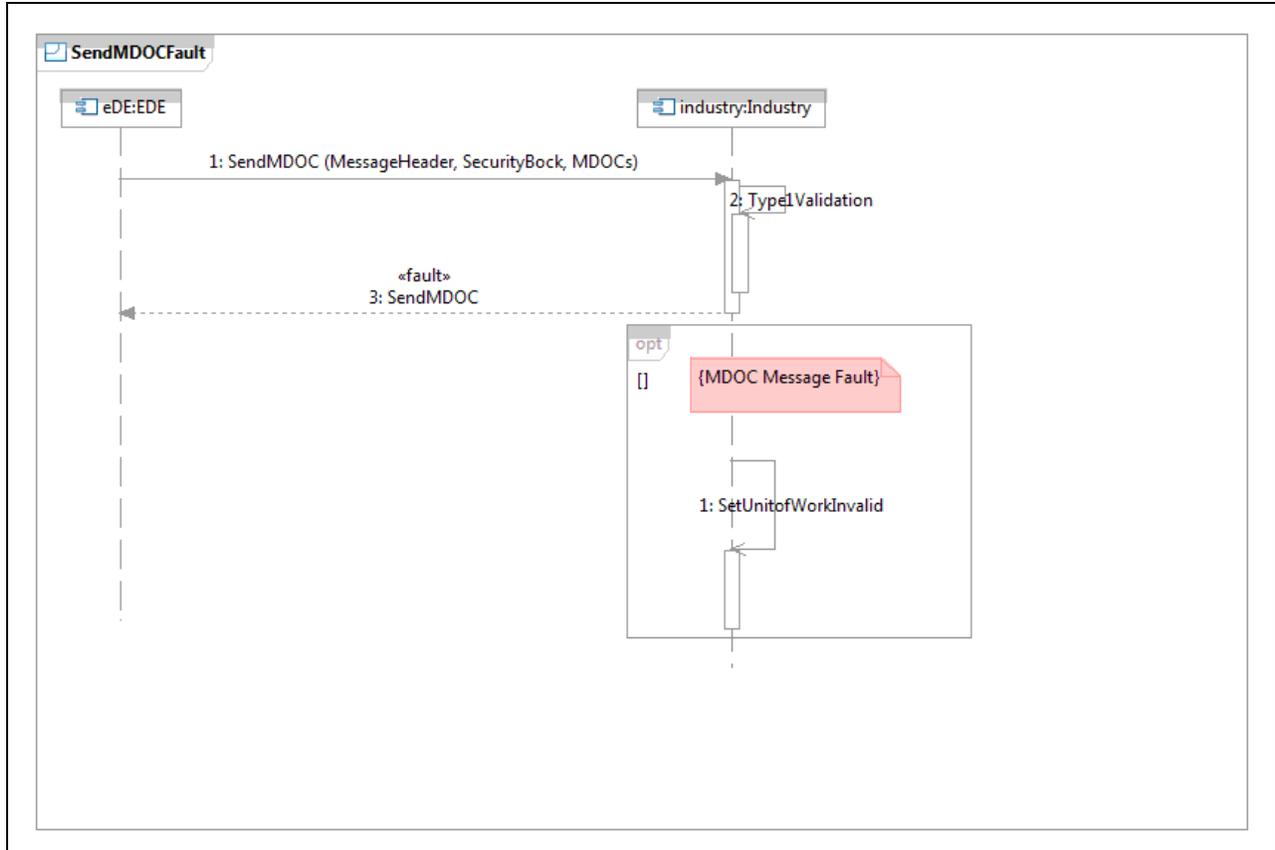


Figure 4-2 MDOC Message Flow with Type 1 Error

Alternate Flow 1	
Scenario	Type 1 Errors detected by Industry prior to accepting custody of the message. Detailed specification of Type 1 errors are in Service Interaction Model [Ref. 2].
Pre-Condition	Same as main Flow.
Post-Condition	Industry sends technical response containing a fault message to Canada EDE. Canada EDE ceases sending Master Data (of any exchange type) for this unit of work.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Steps	<ol style="list-style-type: none">1) Canada EDE invokes 'SendMDOC()' operation containing one or more MDOCs.2) Industry checks for Type 1 errors – an error is found;3) Industry constructs the fault message and sends the fault message to Industry in the technical response to the original SendMDOC() operation invocation. (See Fault Body definition.) <p>In the same iteration through the loop where a MDOC Message fault was found:</p> <ol style="list-style-type: none">1) Industry updates unit of work status to Invalid and deletes the Master Data received so far in the invalid unit of work.
-------	--

Note that in this scenario (depending on timing factors) Canada EDE may receive additional fault technical responses for other Master Data operations which were invoked for an invalid unit of work.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Alternate Flow 2 (Industry Service unresponsive)	
Scenario	Canada EDE does not receive technical response within ACK_TIME_INTERVAL.
Pre-Condition	Canada EDE has invoked the operation but does not receive the technical response within the time specified for the MDOC service.
Post-Condition	Canada EDE marks the message as Dead Message.
Steps	<ol style="list-style-type: none">1) Canada EDE does not receive any response from Industry within the allowed ACK_TIME_INTERVAL.2) Canada EDE will retry sending the message up to the defined maximum retry count and/or Time to Live interval.3) If there is no response, then Canada EDE marks the request message as Dead and handles it via the Dead Message protocol (See Service Interaction Model [Ref. 2]).
Alternate Flow 3 (Industry Business Error)	
Scenario	Industry reports a business error when attempting to load one or more Master Data business objects.
Pre-Condition	All business objects have been received by Industry, and Industry starts its data load process.
Post-Condition	Industry sends technical problem through TPMS interface to Canada EDE.
Steps	<ol style="list-style-type: none">4) Industry invokes Canada EDE TPMS operation and receives a positive technical response.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



5 Service Description – Measurement Document Service

5.1 Service Overview

Measurement Document service requires interacting web services exposed by Canada EDE System and Industry. Industry will implement and expose a service and operation which Canada EDE will use to send the MDOC input message (see Section 7 for message definition). After receipt of the input message, Industry will return a technical response back to Canada EDE.

As part of the Measurement Document service Canada EDE will implement and expose two operations:

- An error reporting operation used by Industry to report technical errors (Section 4, Alternate Flow 2) and business errors (Section 4, Alternate Flow 4);
- An acknowledgement service optionally⁷ used by Industry to report successful delivery of MDOC business objects to Industry systems.

Message interaction is further described in Service Interaction Model [Ref. 2].

5.2 Service Properties

Service Property	Description
Enterprise Service Name (Business)	Measurement Document Service
Enterprise Service Name (Technical)	MeasurementDocumentService_Industry (Abbreviated in this document to MDOC service.)
Purpose	This service supports the Canada EDE Master Data and Supply business processes. On the occurrence of business triggers, Canada EDE uses this service to send MDOC messages to Industry.
Business Response Time Interval	Will be determined between Canada and Industry on a per-ship class basis.
Service Domains	Master Data, Maintenance History and Supply Materiel
Business Owner	ADM (IM)
Service Grouping	Master Data
Source Provider	SendMDOC() - Industry SendMDOCack() – Canada EDE SendMDOCError() - Canada EDE

⁷ Use of this positive acknowledgement is determined between Canada and Industry on a per-ship class basis.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Service Property	Description
Target Service Consumers	SendMDOC() - Canada EDE SendMDOCAck() – Industry SendMDOCError() – Industry
Business Process Supported (now)	Master Data processes: <ul style="list-style-type: none">Send Platform Data to ISS Contractor;
Business Process Supported (future)	None currently identified.
Business Objective Supported	See Section 2: Business Information .
Expected life time	The full lifecycle of the subject weapons system.

5.3 'SendMDOC()' Operation

This operation is used by Canada EDE to send an MDOC input message to Industry. Industry's implementation of this operation will perform Type 1 validation on the MDOC message. Industry will return a status or fault information to Canada EDE in a technical response. If the status is "success", Industry accepts custody of the message for further processing. Any returned fault implies Industry does NOT accept the message and error processing (as per Section 4.3 Alternate Flow 1) is performed.

5.4 'SendMDOCAck()' Operation

This operation is used by Industry to report back to Canada EDE that a set of MDOC business objects have been accepted into Industry systems. The specific MDOC business objects which were accepted are identified by a list of business identifiers (see Section 7). Canada EDE's implementation of this operation will perform Type 1 validation on the acknowledgement message. Canada EDE will return a technical response to Industry.

This operation may be optionally used with an Industry which does not operate on an optimistic model as defined in the Service Interaction Model [Ref. 2].

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



5.5 'SendMDOCError()' Operation

This operation is used by Industry to send an error message to Canada EDE after internal message processing detects a Type 2 error condition (see Service Interaction Model [Ref. 2]). The specific MDOC business objects which are in error are identified by a list of business identifiers (see Section 7). Canada EDE's implementation of this operation will perform Type 1 validation on the error message. Canada EDE will return a technical response to Industry.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



6 Information Model

This section describes the **business objects** which are used in the MDOC service. The Unified Modeling Language (UML) notation is used. A functional view⁸ of the information model is provided in the Master Data Business Guidelines [Ref. 3].

The purpose of this section is to provide a bridge between the functional view of the information model and the concrete details of the design as ultimately expressed in an XML Schema.

The XML Schema is the authoritative source for purpose of the information exchange.

6.1 MDOC

A Measurement Document business object is used to represent actual recorded values for measurement points defined on EMRs or FLOCs.

Figure 6-1 shows the Information Model used in the Measurement Document service. This section primarily discusses the structure of the information model, details of attributes may be found in the EIE Business Process model for Data Initialization [Ref. 1P]. In the following underlined italic text refers to specific classes in Figure 6-1.

The class MeasurementDocument represents recorded values corresponding to Measurement Points. MeasurementDocument is similar to MeasurementPoint, in particular the included EMR FLOC REF and the two fields MeasurementName (the physical property to measure) and MeasurementPosition (to distinguish multiple measurements of the same physical property) which link to a unique MeasurementPoint. Both MeasurementName and MeasurementPosition have description fields for further detail.

Attributes of the MeasurementDocument class store the actual measured value and the time it was measured.

In some cases a MeasurementPoint may include a reference to a code table (in an attribute named 'Code_Group'). In this scenario, when creating a measurement document the user may select a value from the referenced code table and the selected value will be included in the MeasurementDocument. The class CatalogueCode⁹ represents the selected code, with its associated code group name and descriptions.

⁸ The Functional View details the collection of fields which make up MDOC business objects.

⁹ The same class is used in Maintenance History services.

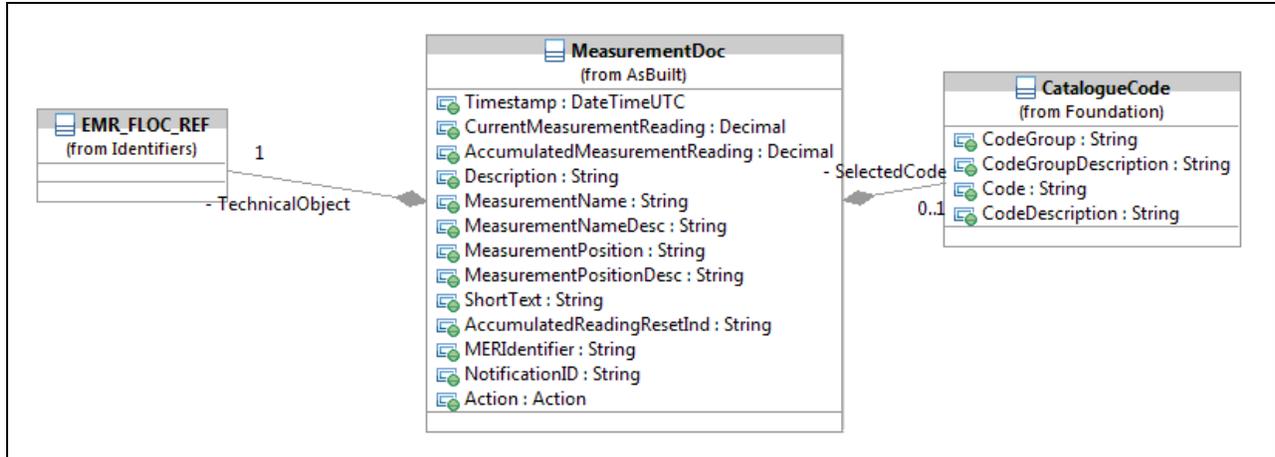


Figure 6-1 Information Model – Measurement Document

6.2 As Built Structure

The Measurement Document is part of the WS “As Built” structure. An overview of “As Built” structure is shown in ~~Figure 6-2~~ [Figure 6-2](#) below; each business object is described in one of the Service Specification documents.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.

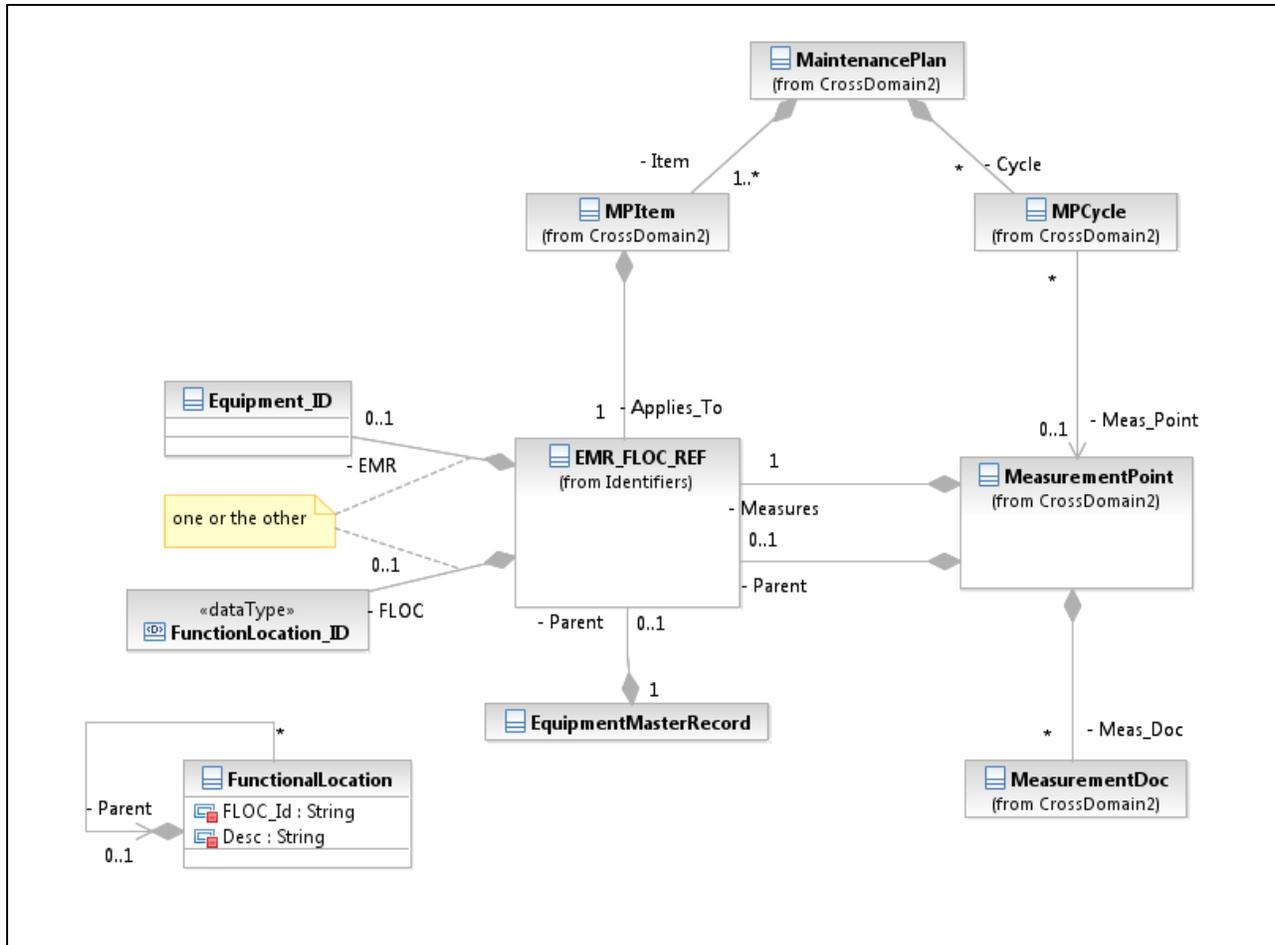


Figure 6-2 Information Model – As Built Structure

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



7 Operation Message Model

This section describes how the business objects described above (Section 6 Information Model) are aggregated for the purpose of PBC information exchange.

All Master Data services follow the request/response model and each operation definition includes a distinct input, output and fault message. See Service Interaction Model [Ref. 2] for definition of the common MessageHeader and SecurityClassification elements. BusinessContext allows Canada EDE to include contextual information with an input message. The 'Purpose' field is a value agreed between Canada EDE and Industry and may affect handling of the message. The remaining fields are populated by Canada EDE and may be replayed in error messages¹⁰.

Several message constructs (i.e., Fault Body, Acknowledgement Input Body and Error Input Body) include one or more **Business Identifiers** (BizIDs). The BizID consists of a set of key fields in the MDOC Input Body sufficient to uniquely identify a business object and its context. The fields which make up the BizID are explicitly identified in the XML Schema file MeasurementDocument.xsd.

Note that all date or time values must be in **Coordinated Universal Time (UTC)**. If an explicit time zone offset is not provided it is assumed to be zero.

7.1 MDOC Input Body

As shown in [Figure 7-1](#), an MDOC input body consists of:

- A Message Header;
- A Security Block;
- A Business Context;
- One or more MDOC business objects.

¹⁰ Business Context is further discussed in the Unit of Work service specification.

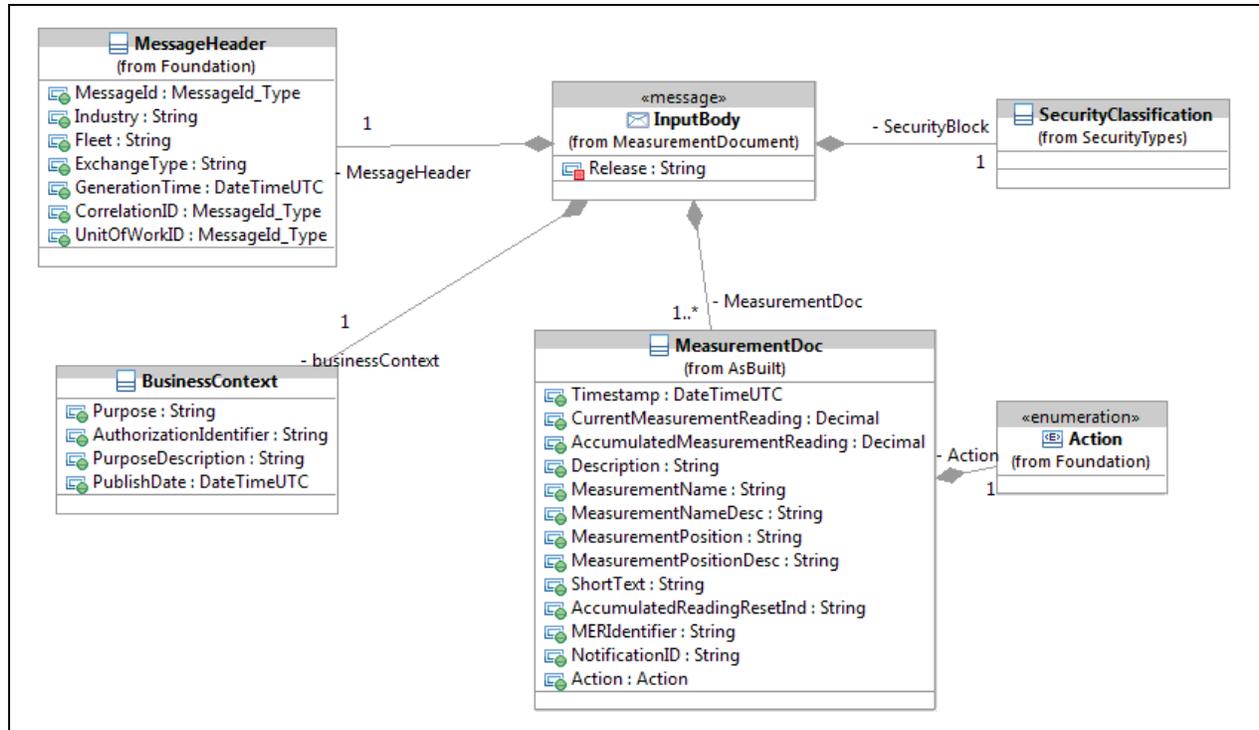


Figure 7-1 MDOC Input Body

The MessageHeader UnitOfWorkID must equal the UnitOfWorkID value of an existing valid unit of work.¹¹ The MessageHeader Correlation ID must equal the Message ID of the message which created the unit of work. Purpose and ContextDescription fields must match the corresponding fields in the Unit of Work which envelopes this input message.

The MDOC InputBody also contains an attribute ‘Release’ which designates the release of the MDOC service. The ‘Release’ attribute uses an “X.Y” numbering convention and the value is hard-coded in the XML schema for every service. The value will be incremented when a new version of the service is released¹².

The ‘Release’ attribute is mandatory in every instance of the InputBody to allow any input body instance to be traced back to the appropriate release. A ‘Release’ attribute appears in all message bodies.

Within each MDOC business objects there is an attribute named ‘Action’ which is set by the service consumer as a directive to CMMS on handling the business object. See Service Interaction Model [Ref. 2] for definition of valid values of ‘Action’.

7.2 MDOC Output Body

The output of the SendMDOC() operation is the MDOC OutputBody. As shown in [Figure 7-2](#), the output body consists of:

¹¹ Type 1 validation will check if the unit of work is in a non-error state.

¹² The rules for incrementing the ‘Release’ attribute for a service will be in a separate document.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.

- A Message Header;
- A Custody object.

The MDOC OutputBody has no security block. The MDOC OutputBody must not contain any sensitive or protected information.

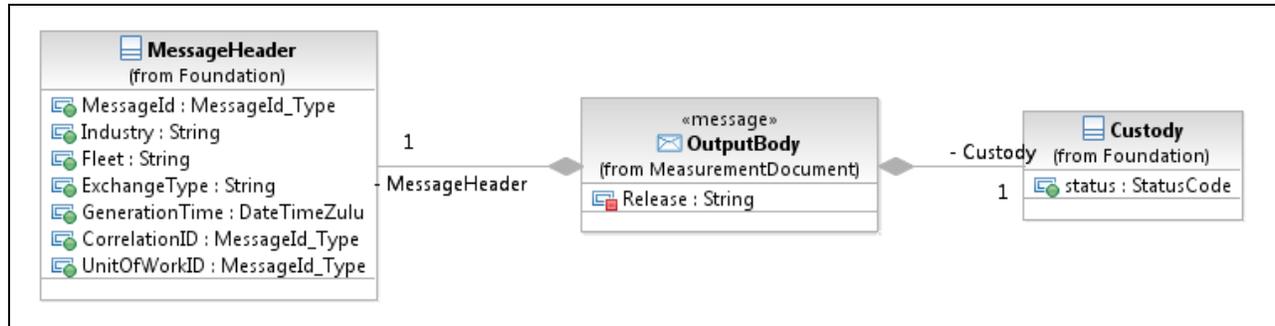


Figure 7-2 MDOC Output Body

For an MDOC OutputBody:

- The MessageHeader Message Id is a **new** unique value;
- The MessageHeader GenerationTime is the time the **output** message is generated;
- The MessageHeader CorrelationID is set to the MessageId of the MDOC Input Body;
- The MessageHeader ExchangeType must be set to the ExchangeType of the MDOC InputBody;
- The value of the Custody status field is “success”¹³.

7.3 MDOC Fault Body

A fault returned by the SendMDOC() operation uses the MDOC FaultBody element. As shown in [Figure 7-3](#), the MDOC FaultBody consists of:

- A Message Header;
- A Security Block;
- One or more FaultBlocks.

Each fault block pertains to zero to many business object(s), to the level of granularity which the Service Provider can provide. If the system cannot determine a Business Identifier then this is omitted. To report differing faults on more than one business object, extra fault blocks can be included in the fault message.

¹³ As stated in Section 5.3, the main significance of the output is that, by its presence, there is no fault.

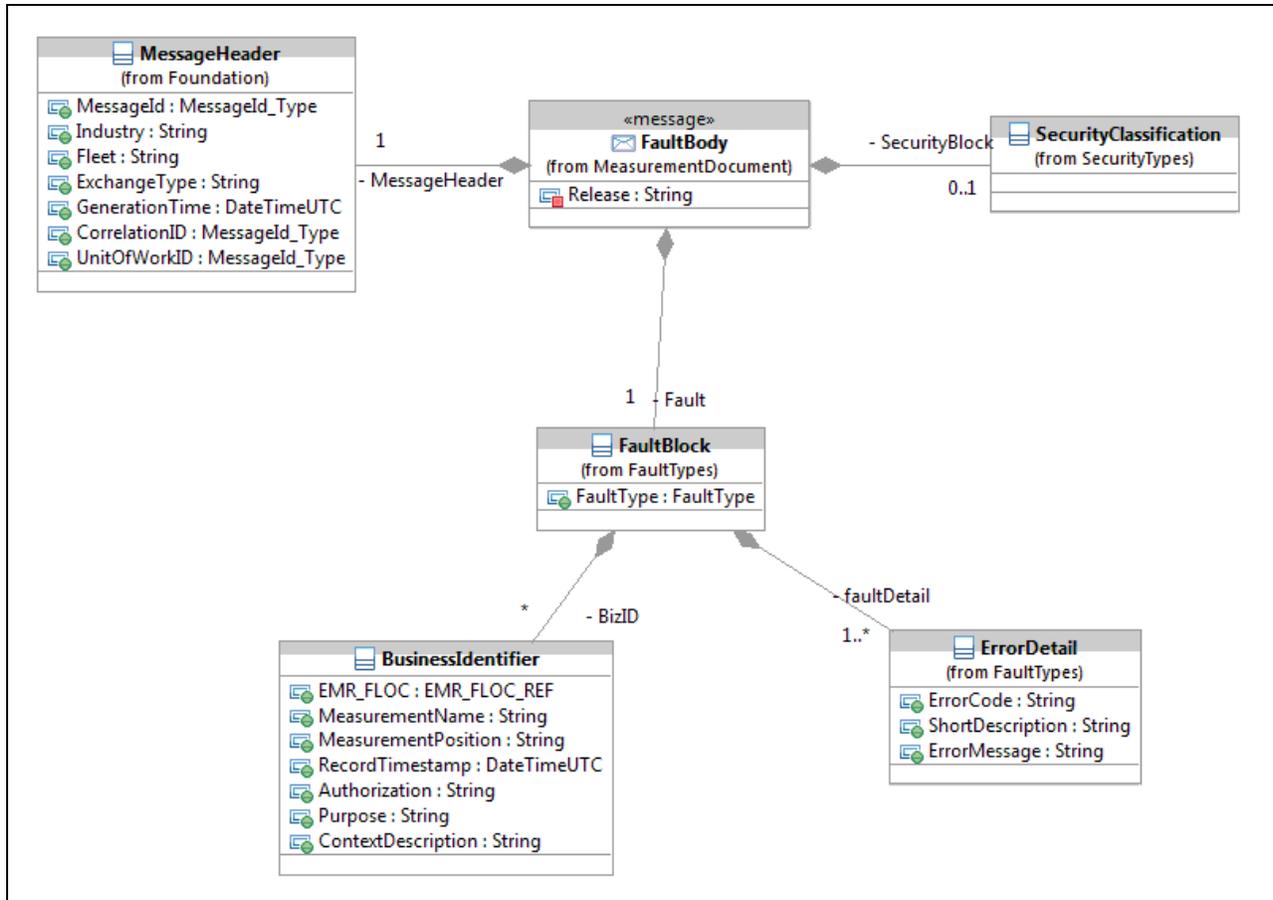


Figure 7-3 MDOC Fault Body

MessageHeader is mandatory, but only MessageId and GenerationTime are mandatory within the header (both are new values, as for the Output Body). This is for the scenario where the input message is so damaged that the necessary attributes cannot be found.

CorrelationID is set to the MessageId of the input message – whenever it is available.

SecurityClassification is optional for the scenario where the input message is so damaged that the necessary attributes cannot be determined.

7.4 MDOC Acknowledgement Input Body

The input to the SendMDOCack() operation consists of a Message Header, a list of business identifiers, and a “success” status indicating the business objects were accepted in Industry systems. (see [Figure 7-4](#)).

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.

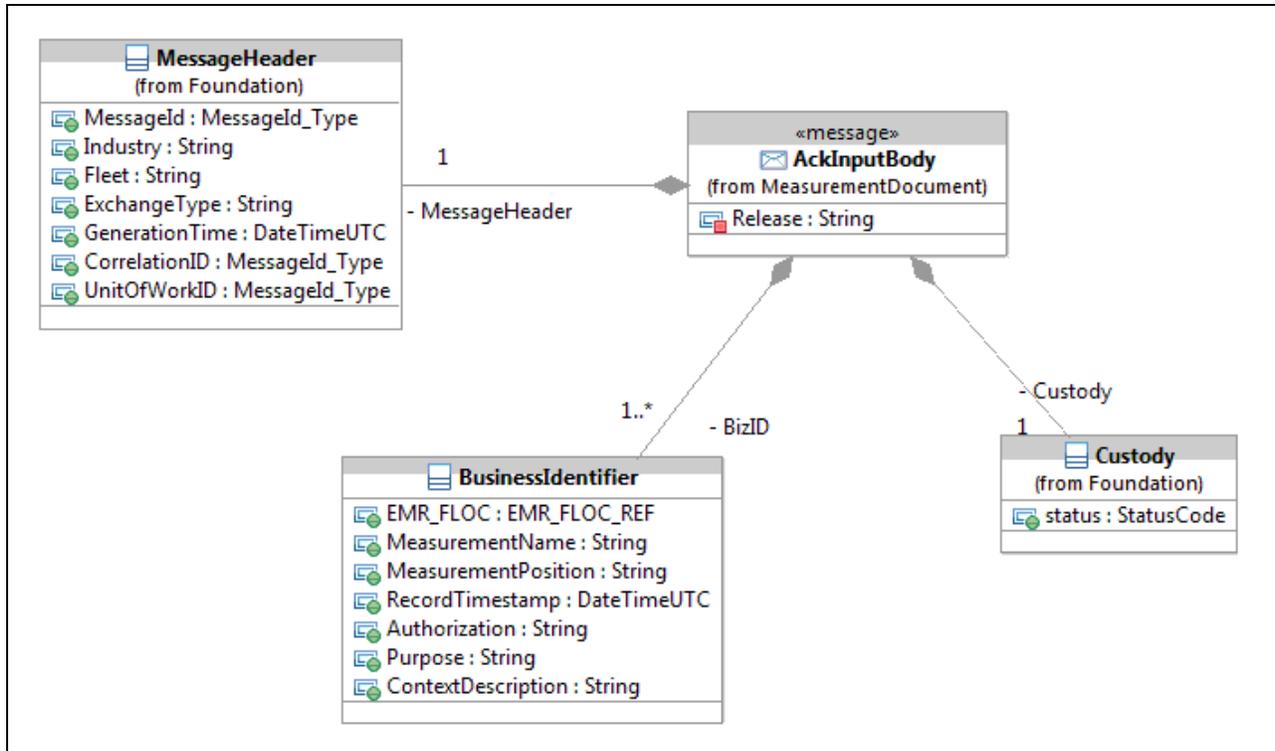


Figure 7-4 MDOC Acknowledgement Input Body

The MessageHeader has a new unique MessageId and the CorrelationID is set to the MessageId of the MDOC InputBody which is being acknowledged.

7.5 MDOC Error Input Body

The input to the SendMDOCError() operation consists of a Message Header, a Security Block and a list of Error Blocks, as shown in [Figure 7-5](#). Each Error Block references business object(s) (by business identifier) and a list of list of one or more errors pertaining to the business object.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.

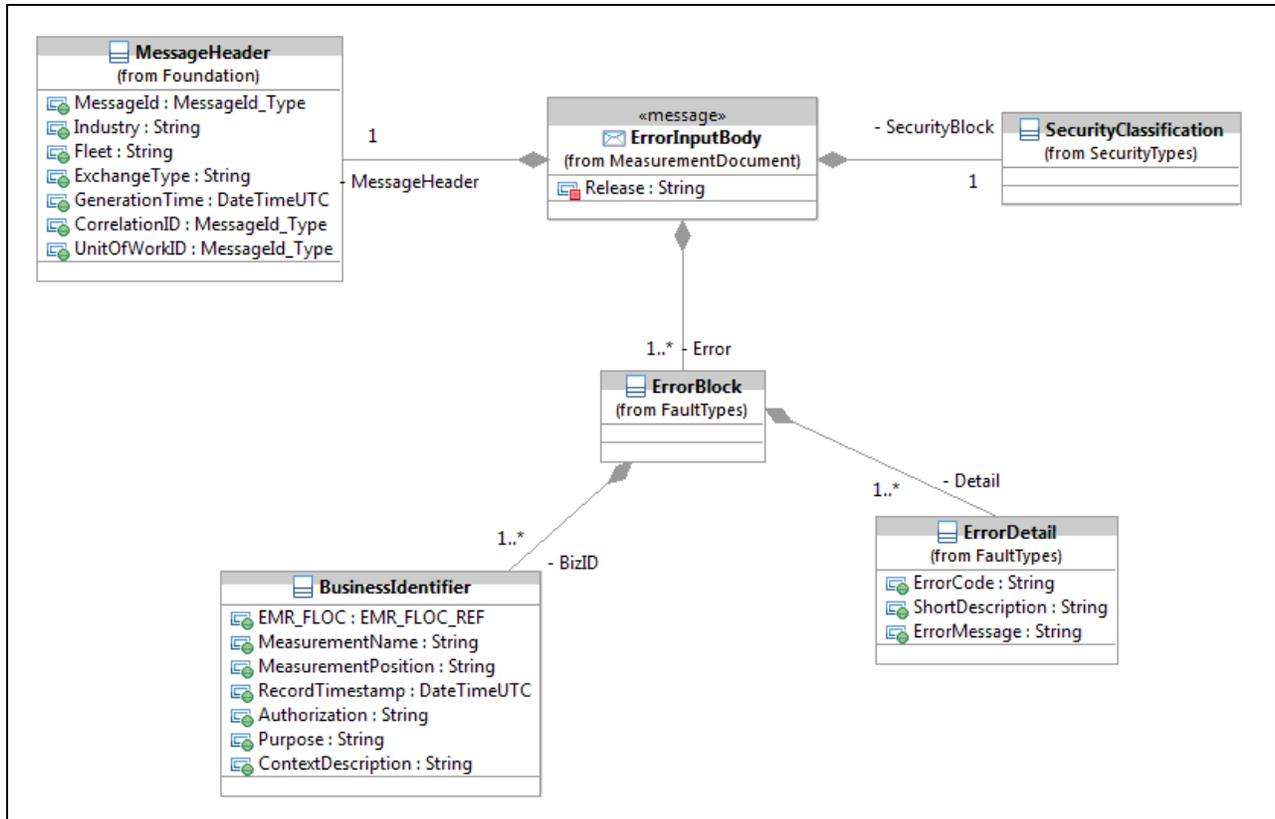


Figure 7-5 MDOC Fault Input Body

MessageHeader and SecurityClassification are mandatory as in this scenario (after Type 1 validation has passed) the input message is well-formed.

The MessageHeader has a new unique MessageId.

7.6 Summary of Operation to input/output/fault body Mapping

The following diagram in [Figure 7-6](#) shows the mapping for each of the three operations in the MDOC service - SendMDOC(), SendMDOCAck() and SendMDOCError() - to their respective input, output and fault bodies as further defined in the MDOC Web Service Definition Language (WSDL) file.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.

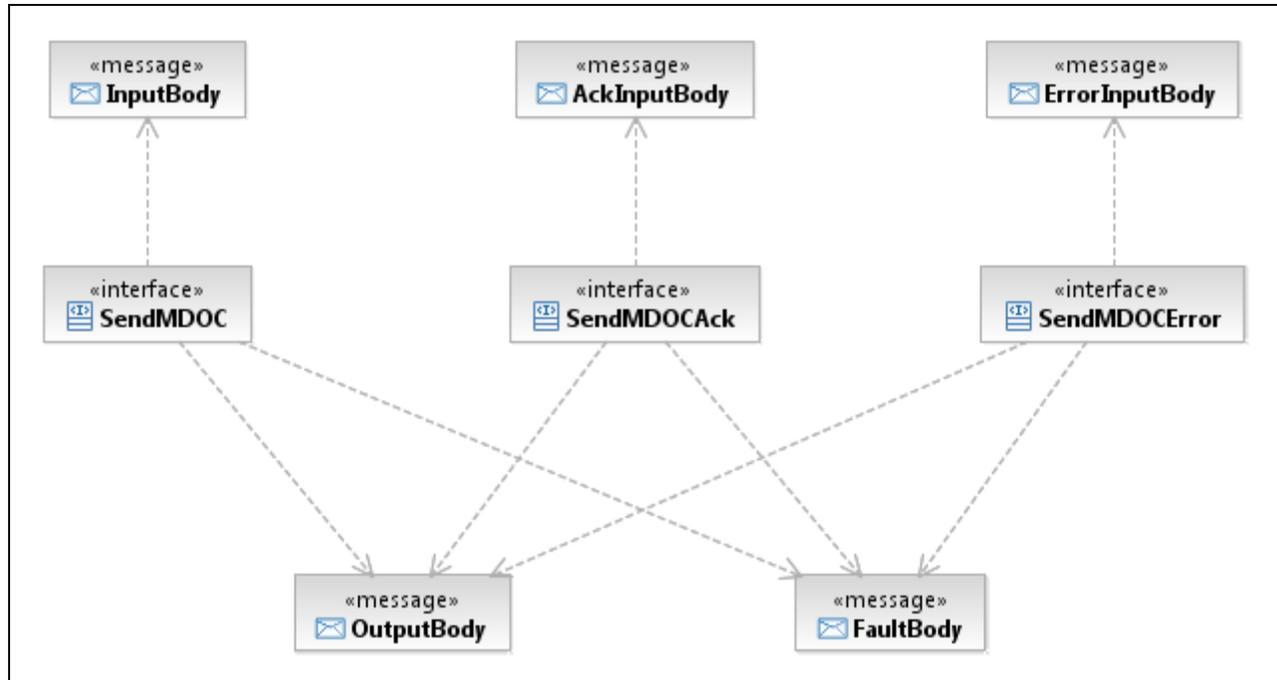


Figure 7-6 MDOC Operations to Input/Output/Fault Mapping

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



8 Service Operation Details

8.1 Detailed Operation Characteristics – SendMDOC()

Canada EDE will invoke the exposed Industry MDOC service through this operation. The input will consist of a MDOC InputBody (as above).

Please refer to Service Interaction Model [Ref. 2] for definitions of the terminology used in the non-functional requirements section.

Please refer to Measurement Document WSDL files for implementation details.

Detailed Operation Characteristics

Interface Definition	Description
Operation Name	Send MDOC
Operation Technical Name	SendMDOC()
Operation Description	This operation is invoked by Canada EDE to send one or more MDOC business objects to Industry.
Target Operation Provider	Industry
Target Operation Consumer	Canada EDE
Properties	<i>Request/Response</i> message exchange pattern.
Input Message Definition	Please refer to Operation Message Model Section 7.1 MDOC Input Body for details.
Output Message Definition	Please refer to Operation Message Model Section 7.2 MDOC Output Body for details.
Fault Definition	Please refer to Section 7.4 MDOC Fault Body for details. Please see Service Interaction Model [Ref. 2] for Type 1 faults.

Non-Functional Requirements

Non-Functional Requirements/Technical Details	
Frequency	A-periodic according to business triggers (Section 2.2). Will be determined between Canada and Industry on a per-ship class basis.
Peak Throughput Time	Based on Service Level Agreements (SLA) to be determined between Canada and Industry on a per-ship class basis.
Peak Throughput Volume	Based on Service Level Agreements (SLA) to be determined between Canada and Industry on a per-ship class basis.
Payload Size	<1Kb per business object.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Non-Functional Requirements/Technical Details	
Attachments	None
Attachment Size	N/A
ACK Time Interval	Nominal value is 2 minutes – to be confirmed between Canada and Industry on a per-ship class basis.
Retry Time Interval	Nominal value is 10 minutes – to be confirmed between Canada and Industry on a per-ship class basis.
Number of Retries	Nominal value is 3 retries – to be confirmed between Canada and Industry on a per-ship class basis.
Biz. Response Time Interval	N/A
Time to Live Span	For Master Data context: <ul style="list-style-type: none"> - 24 hours from the creation of the unit of work. -
Service Op Availability	During core processing hours. The specific period will be defined during later phases of service realization 95% available uptime is the goal of the service
Downtime Requirements	The service cannot be used during established maintenance windows, which is currently expected to be for about 2 hours per week. The unavailability window may be accumulated and invoked during major maintenance periods, but ensuring that the overall availability of the service is still maintained.
Dead Message Handling	Alternative communication channel applies to report that this operation is not available when Canada EDE cannot successfully send MDOC business objects to Industry. See Service Interaction Model [Ref. 2].

8.2 Detailed Operation Characteristics – SendMDOCError()

Industry will use this operation to inform Canada EDE of errors detected in internal processing and faults returned from delivery to Industry systems.

Refer to Measurement Document WSDL files for implementation details.

Detailed Operation Characteristics

Interface Definition	Description
Operation Name	Send MDOC Error
Operation Technical Name	SendMDOCError()
Operation Description	This operation is invoked by Industry to send one or more MDOC errors to Canada EDE.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Interface Definition	Description
Target Operation Provider	Canada EDE
Target Operation Consumer	Industry
Properties	<i>Request/Response</i> message exchange pattern.
Input Message Definition	Please refer to Operation Message Model Section 7.5 MDOC Error Input Body for details. Please refer to Service Interaction Model [Ref. 2] for Type 2 faults for the error inputs which may be sent in this operation.
Output Message Definition	Please refer to Operation Message Model Section 7.2 MDOC Output Body for details.
Fault Definition	Please refer to Section 7.3 MDOC Fault Body for details. Please see Service Interaction Model [Ref. 2] for faults which may be returned by this operation.

Non-Functional Requirements

Non-Functional Requirements/Technical Details	
Frequency	Same as SendMDOC() operation. Worst case is one error per MDOC business object.
Peak Throughput Time	Same as SendMDOC() operation.
Peak Throughput Volume	Same as SendMDOC() operation.
Payload Size	5KB – estimated for one ErrorBlock with one BizID and two ErrorMessage's.
Attachments	None
Attachment Size	N/A
ACK Time Interval	Nominal value is 2 minutes – to be confirmed between Canada and Industry on a per-ship class basis.
Retry Time Interval	Nominal value is 10 minutes – to be confirmed between Canada and Industry on a per-ship class basis.
Number of Retries	Nominal value is 3 retries – to be confirmed between Canada and Industry on a per-ship class basis.
Biz. Response Time Interval	N/A
Time to Live Span	60 minutes.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Non-Functional Requirements/Technical Details	
Service Op Availability	During core processing hours. The specific period will be defined during later phases of service realization 95% available uptime is the goal of the service
Downtime Requirements	The service cannot be used during established maintenance windows, which is currently expected to be for about 2 hours per week. The unavailability window may be accumulated and invoked during major maintenance periods, but ensuring that the overall availability of the service is still maintained.
Dead Message Handling	Alternative communication channel applies to report that this operation is not available when Canada EDE cannot successfully send MDOC business objects to Industry. See Service Interaction Model [Ref. 2].

8.3 Detailed Operation Characteristics – SendMDOCAck()

Industry *may* use this operation to inform Canada EDE of successful processing of business objects. Usage of this operation is to be confirmed between Canada and Industry on a per-ship class basis.

Refer to Measurement Document WSDL files for implementation details.

Detailed Operation Characteristics

Interface Definition	Description
Operation Name	Send MDOC Acknowledgement
Operation Technical Name	SendMDOCAck
Operation Description	This operation is invoked by Industry to send one or more MDOC acknowledgement objects to Canada EDE.
Target Operation Provider	Canada EDE
Target Operation Consumer	Industry
Properties	<i>Request/Response</i> message exchange pattern.
Input Message Definition	Please refer to Operation Message Model Section 7.4 MDOC Ack Input Body for details.
Output Message Definition	Please refer to Operation Message Model Section 7.2 MDOC Output Body for details.
Fault Definition	Please refer to Section 7.3 MDOC Fault Body for details. Please see Service Interaction Model [Ref. 2] for faults which may be returned by this operation.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



Non-Functional Requirements

Non-Functional Requirements/Technical Details	
Frequency	To be confirmed between Canada and Industry on a per-ship class basis. Depends on pace of back-end processing.
Peak Throughput Time	To be confirmed between Canada and Industry on a per-ship class basis. Depends on pace of back-end processing.
Peak Throughput Volume	To be confirmed between Canada and Industry on a per-ship class basis. Depends on pace of back-end processing.
Payload Size	~ 2KB per acknowledgement
Attachments	None
Attachment Size	N / A
ACK Time Interval	Nominal value is 2 minutes – to be confirmed between Canada and Industry on a per-ship class basis.
Retry Time Interval	Nominal value is 10 minutes – to be confirmed between Canada and Industry on a per-ship class basis.
Number of Retries	Nominal value is 3 retries – to be confirmed between Canada and Industry on a per-ship class basis.
Biz. Response Time Interval	N/A
Time to Live Span	60 minutes.
Service Op Availability	During core processing hours. The specific period will be defined during later phases of service realization 95% available uptime is the goal of the service
Downtime Requirements	The service cannot be used during established maintenance windows, which is currently expected to be for about 2 hours per week. The unavailability window may be accumulated and invoked during major maintenance periods, but ensuring that the overall availability of the service is still maintained.
Dead Message Handling	Alternative communication channel applies to report that this operation is not available when Canada EDE cannot successfully send MDOC business objects to Industry. See Service Interaction Model [Ref. 2].

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



8.4 Service Bindings

8.4.1 SOAP Over http

The implementation of this service will use a Simple Object Access Protocol (SOAP) binding with document style messages and http transport.

The business objects (Section 6) are bound to the SOAP Body element. The SOAP Header is used for EIE adopted WS-* standards-based elements (e.g., WS_Security assertions) and, typically, MessageHeader and SecurityMarkings elements.

In this binding the http response is used for each operation's technical response (i.e., output or fault messages).

See the Measurement Document Service WSDL file for the precise binding.

8.4.2 SOAP Over JMS

Not currently supported.

8.4.3 XML files via SFTP

As an interim measure while an industry partner implements their web service infrastructure, Canada EDE supports sending XML files to a secure DND SFTP site for Industry consumption.

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



9 Definitions, Acronyms, Abbreviations

Term	Description
CM	Configuration Management
CMMS	Canada Maintenance Management System
CSS	Canada Supply System
DND	Department of National Defence
DRMIS	Defense Resource Management Information System
EDE	Electronic Data Exchange
EIE	Electronic Information Environment
EMR	Equipment Master Record
FLOC	Functional LOCAtion
ISS	In Service Support
ISSCF	In Service Support Contracting Framework
MDOC	Measurement Document
MER	Master Equipment Record
MPN	Manufacturer Part Number
MMR	Materiel Master Record
NATO	North Atlantic Treaty Organization
NSN	NATO Stock Number
PBC	Performance Based Contracting
SFTP	Secure File Transfer Protocol
SOAP	Simple Object Access Protocol
UTC	Coordinated Universal Time
WS	Weapon System
WSDL	Web Service Definition Language
XML	Extensible Markup Language

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



10 Appendix A - Entity Relationship Model

Information Model – Entity-Relationship View

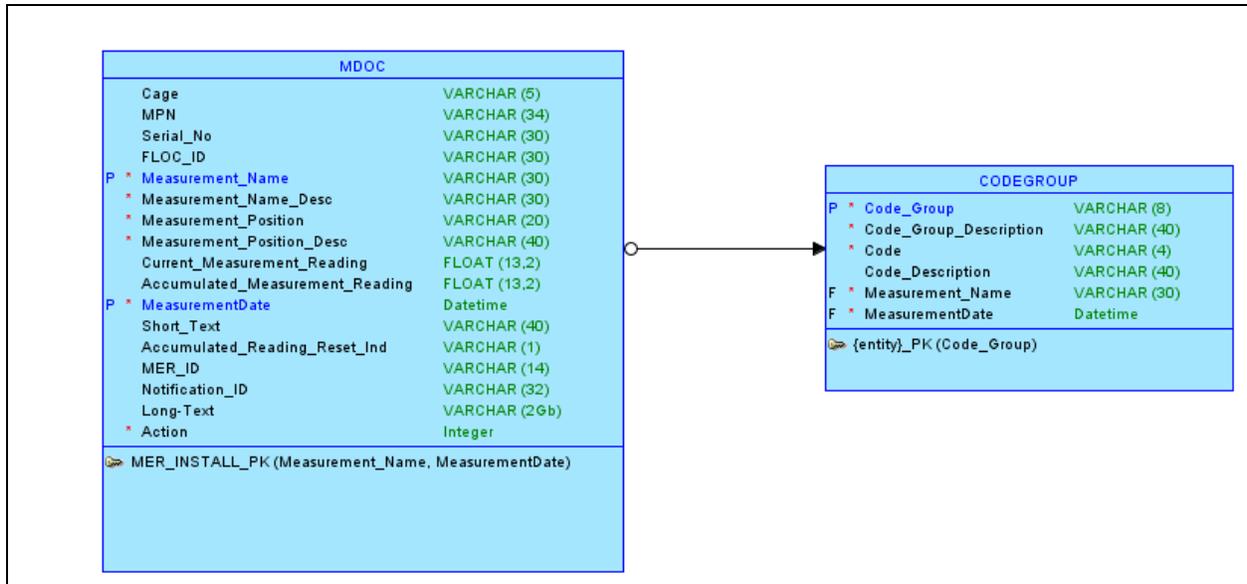


Figure 10-1 MDOC ERD

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.



11 Document History

Revision Number	Description	Date
1.0	Ready for Navy RFP	30 October 2015

The information being provided is to illustrate the model that exists for business processes and information exchange within the Performance Based Contracting (PBC) solution for the Department of National Defence. The information is provided to facilitate an understanding of the business architecture and the solution architecture that exist for the PBC program. The content is not intended to reflect the end state specifications for all of the PBC EIE related services.