


1 SITE PLAN  
E-100 SCALE = 1:75



2 SITE PLAN  
E-100 SCALE = 1:75

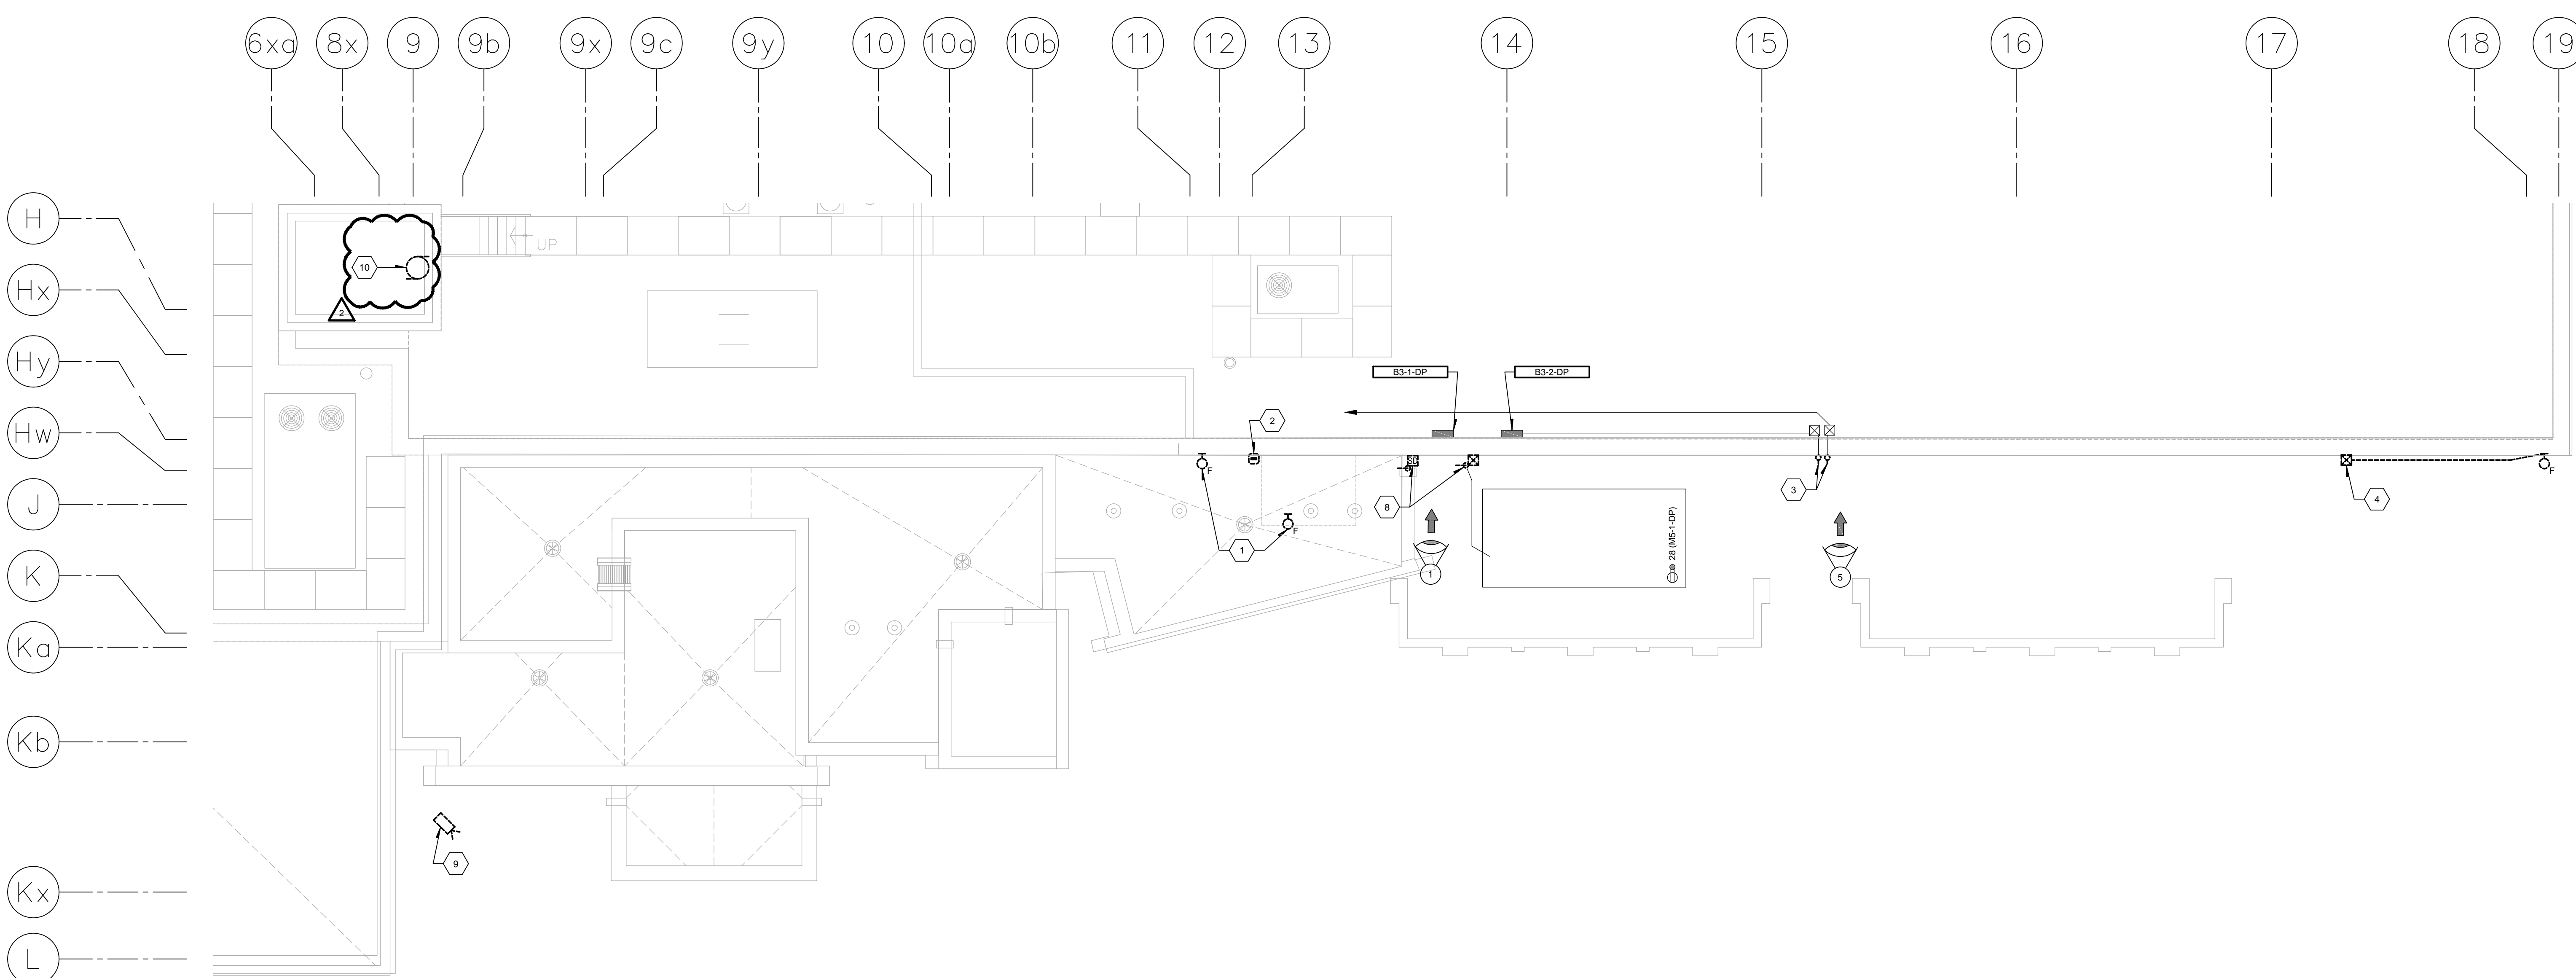

1



3



4



5

GENERAL NOTE(S):

- 1- ELECTRICAL CONTRACTOR TO TRACE AND IDENTIFY ALL EXISTING BRANCH CIRCUITS POWER WIRING INVOLVED IN DISCONNECTION / RECONNECTION.
- 2- ELECTRICAL CONTRACTOR TO DISCONNECT / DE-ENERGIZE MECHANICAL EQUIPMENT WHICH IS AFFECTED BY ENVELOPE REPLACEMENT DURING CONSTRUCTION. COORDINATE WORK WITH MECHANICAL AND OTHER TRADE.
- 3- UPDATE THE SCHEDULE OF ALL MODIFIED PANELS.

IDENTIFICATION(S):

- 1- EXTERIOR LIGHTING FIXTURE AND CONDUIT (WHEN APPLICABLE) TO BE REMOVED. COIL WIRES FOR REUSE. REFER TO E-200 FOR NEW FIXTURE LOCATION.
- 2- EXISTING CARD READER TO BE REMOVED DURING ENVELOPE REPLACEMENT AND RE-INSTATED AFTER REPLACEMENT.
- 3- PVC CONDUITS ON BUILDING WALL COMING OUT AT INDICATED LOCATION, THEN GOING UNDERGROUND TO FEED CAMERA. CONDUIT AND CABLEING TO BE REMOVED FROM WALL DURING BUILDING ENVELOPE WORK. REINSTALL AND RECONNECT AFTER BUILDING ENVELOPE WORK IS COMPLETED.
- 4- EXTERIOR LIGHTING FIXTURE AND CONDUIT (WHEN APPLICABLE) TO BE REMOVED. COIL WIRES FOR REUSE. REFER TO E-200 FOR NEW FIXTURE LOCATION. SURFACE CONDUIT AND JUNCTION BOX TO BE REMOVED.
- 5- EXISTING DOOR CONTROL PUSH-BUTTON STATION ON WALL TO BE REMOVED DURING CONSTRUCTION. DISCONNECT WIRES AT DEVICE AND PULL WIRES BACK TO JUNCTION BOX. COIL WIRES FOR RECONNECTION.
- 6- EXISTING DOOR CONTROL PUSH-BUTTON STATION ON WALL FOR BAY 2 (MECH/OIC CHAMBER) DOOR. DOOR IS CONTROLLED BY THIS DOOR OPERATOR AND THE ONE LOCATED INSIDE ROOM 123 (NEAR AXIS 8x AND AXx). REMOVE CONDUIT MOUNTED ON WALL AND CABLEING FOR BOTH CONTROLLERS.
- 7- EXISTING OVERHEAD DOOR TO BE REMOVED BY OTHER DIVISIONS. DIVISION 26 TO DISCONNECT DOOR MOTOR. REMOVE WIRES (W/ CONDUIT) BACK TO PANEL IN BASEMENT ELECTRICAL ROOM E2. REMOVE DISCONNECT, PULL BOXES, DOOR OPERATOR CONTROL DEVICES, AND ALL ASSOCIATED EQUIPMENT. UPDATE PANEL SCHEDULE.
- 8- EXISTING SENSOR DEVICES AND COOLING TOWER CONNECTION. DISCONNECT AND REMOVE FROM WALL. TO BE STORED PROPERLY DURING BUILDING ENVELOPE WORK. REINSTALL AND RECONNECT AFTER BUILDING ENVELOPE WORK IS COMPLETED. COORDINATE ON SITE.
- 9- EXISTING (DISCONNECTED) CAMERA TO BE REMOVED.
- 10- EXISTING EXHAUST FAN TO BE REMOVED BY DIVISION 25 DURING CONSTRUCTION. DIVISION 26 TO DISCONNECT POWER AT UNIT AND PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING. COIL WIRES FOR RECONNECTION. COORDINATE WORK WITH OTHER DIVISIONS.

Public Works and  
Government Services  
Canada

Traavaux publics et  
services gouvernementaux  
Canada

Canadian Space  
Agency

Agence spatiale  
canadienne

PAGEAUMOREL

1465.00.00

Cleland Jardine  
Engineering Limited

580 TERRY FOX DRIVE, SUITE 200  
KANATA, ONTARIO, K2L 4B9  
TEL: (613) 591-1533 FAX: (613) 591-1703  
EMAIL: mail@clelandjardine.com

COLE+Associates  
ARCHITECTS

2016-07-27

5.		
4.		
3.		
2.	ADDENDUM No 1	2016.07.28
1.	ISSUED FOR TENDER	2016.05.01
No.	Revision	Date

PROFESSIONAL STAMP

A

C

A: detail no.  
no. du détail  
B: location drawing no.  
sur dessin no.  
C: drawing no.  
dessin no.

A

B

C

project

project

DAVID FLORIDA LABORATORY  
BUILDING No. 65, SHIRLEY'S BAY, ONTARIO

BUILDING ENVELOPE REFIT  
PROJECT- CSA15-G1

drawing

dessin

ELECTRICAL  
EXISTING SERVICES

designed	P. CATELLIER	conçu
date	2016.04.07	
drawn	P. CANTIN	dessiné
date	2016.04.07	
reviewed	E. VAILLANCOURT	examiné
date	2016.04.07	
approved	E. VAILLANCOURT	approuvé
date	2016.04.07	
scale		

project no.	no. du projet
CSA15-G1	
drawing no.	no. du dessin
E-100	