

1 SITE PLAN
SCALE = 1/75




13




12




10

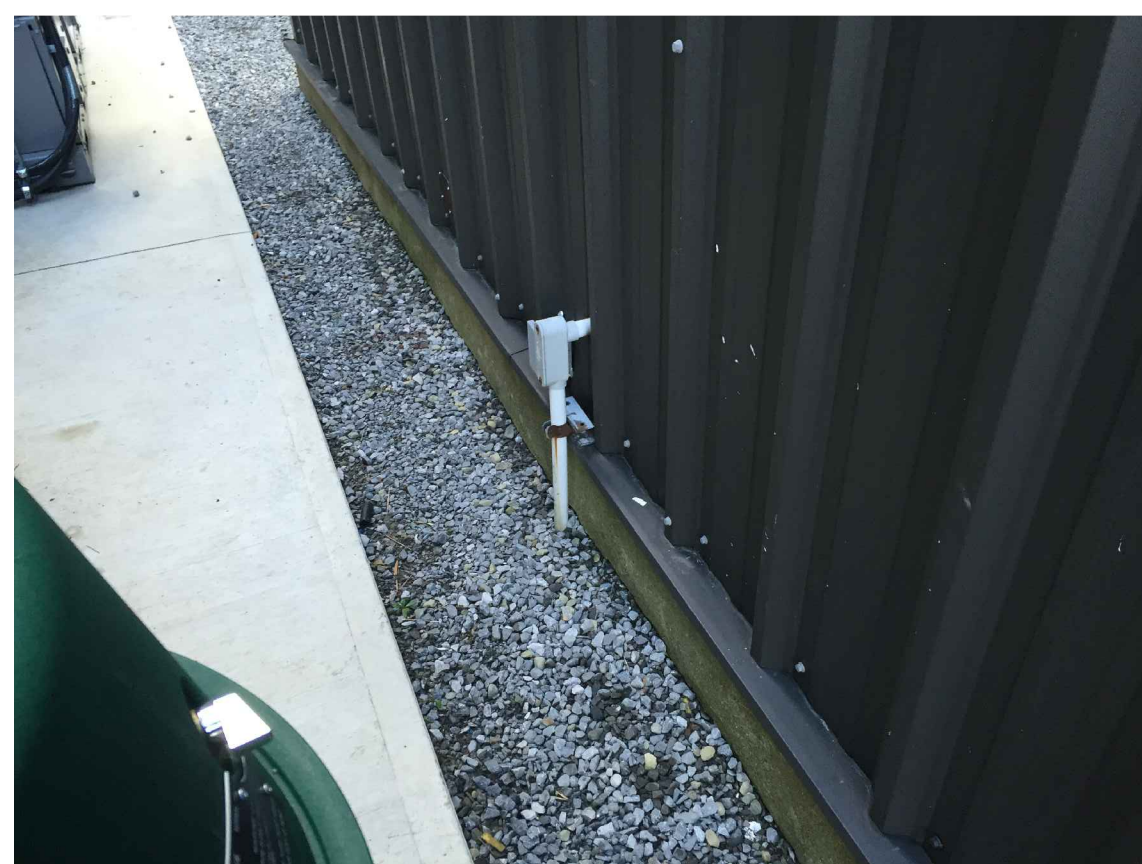


11

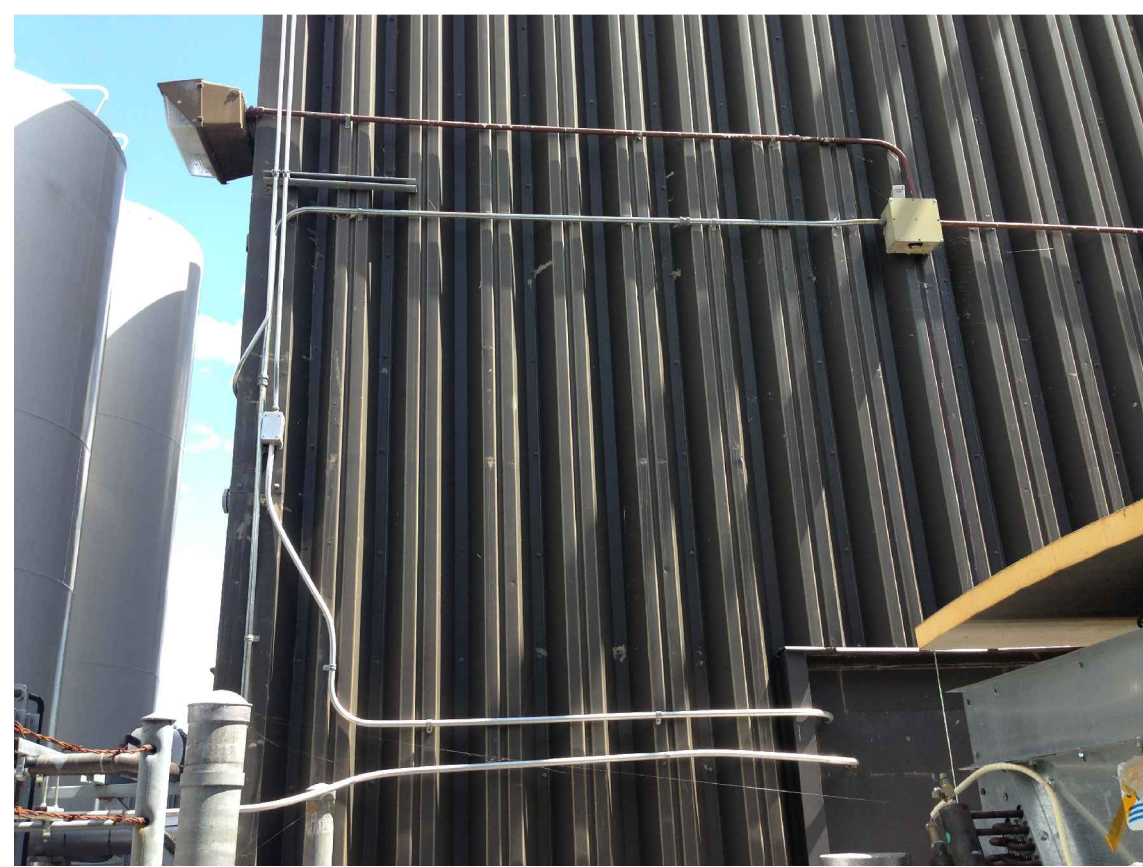

7

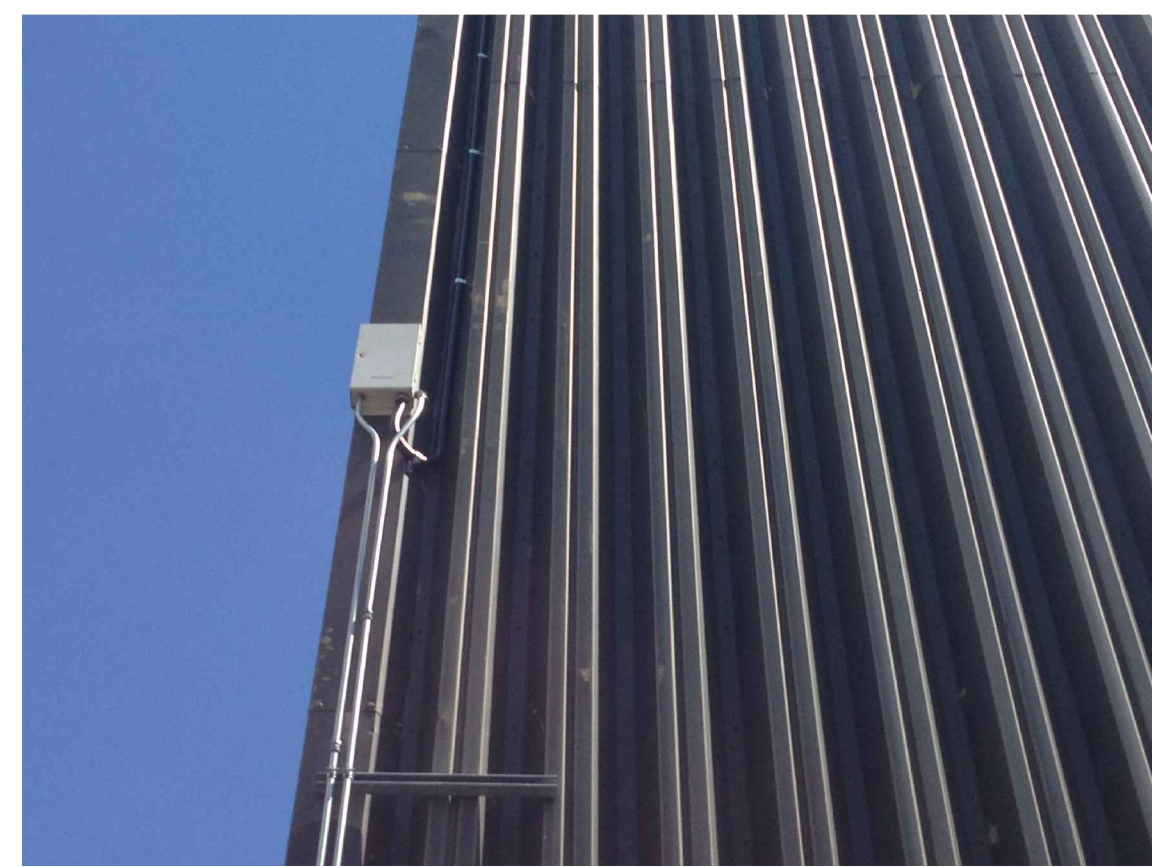

8

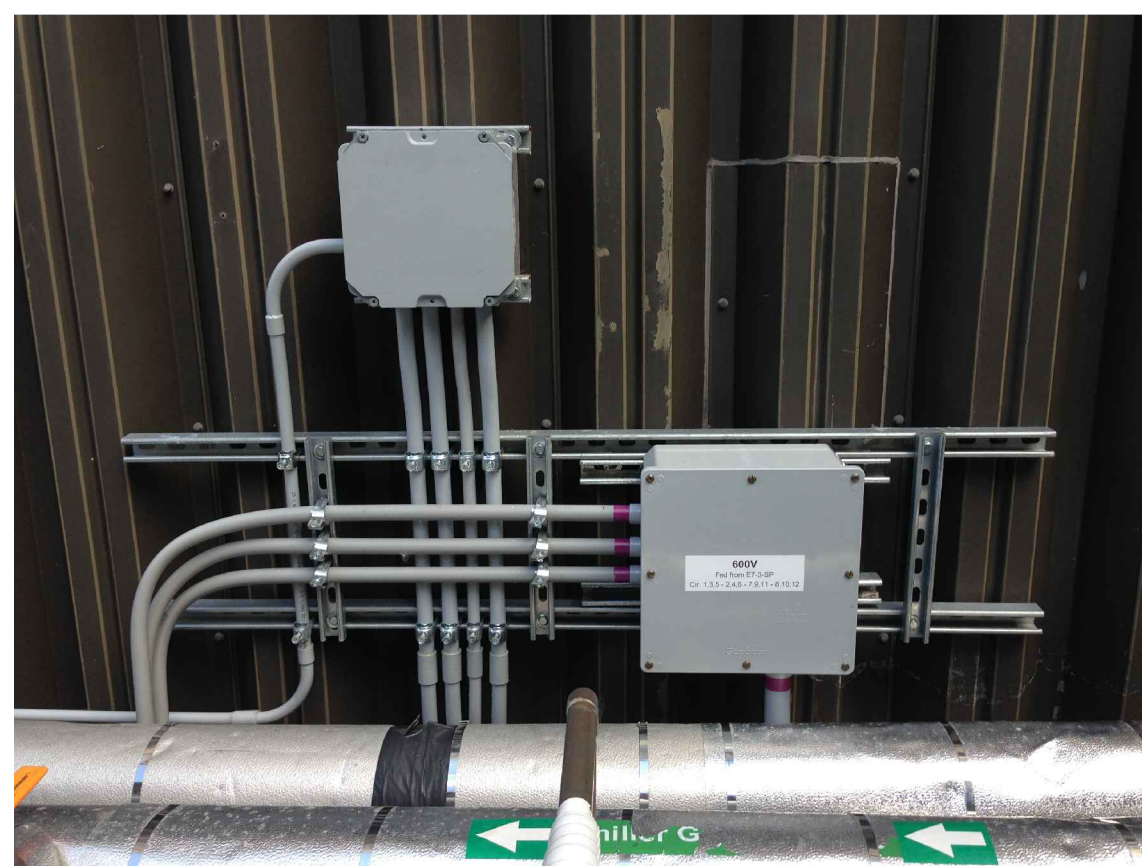

9



5



6




1



2



3

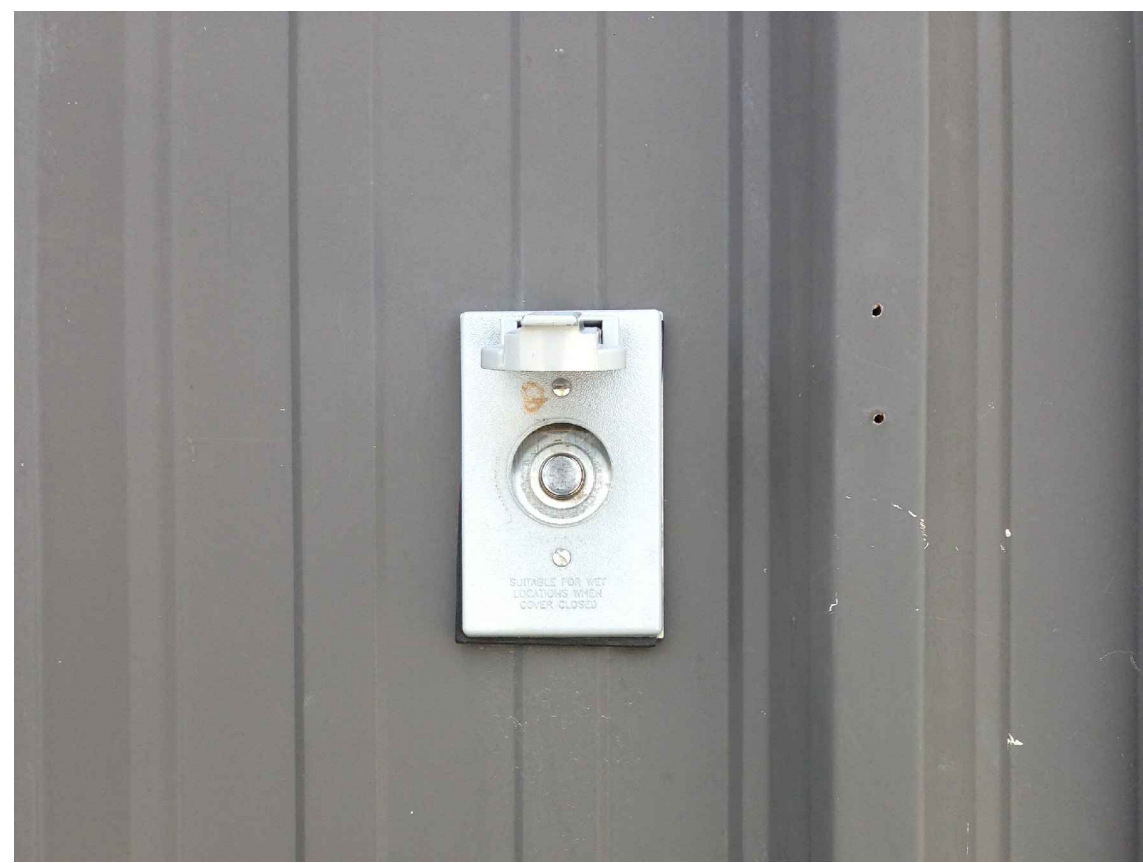



4

GENERAL NOTE(S):


1. ELECTRICAL CONTRACTOR TO TRACE AND IDENTIFY ALL EXISTING BRANCH CIRCUITS POWER WIRING INVOLVED IN DISCONNECTION / RECONNECTION.
2. ELECTRICAL CONTRACTOR TO DISCONNECT / DE-ENERGIZE MECHANICAL EQUIPMENT WHICH IS AFFECTED BY ENVELOPE REPLACEMENT DURING CONSTRUCTION. COORDINATE WORK WITH MECHANICAL AND OTHER TRADE.
3. UPDATE THE SCHEDULE OF ALL MODIFIED PANELS.

IDENTIFICATION(S):

1. EXISTING LIGHTING FIXTURE AND CONDUIT (WHEN APPLICABLE) TO BE REMOVED. COIL WIRES FOR REUSE. REFER TO E-201 FOR NEW FEATURE LOCATION.
2. EXISTING EXHAUST FAN TO BE REMOVED BY DIVISION 25 DURING CONSTRUCTION. DIVISION 26 TO DISCONNECT POWER AT UNIT AND PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING. COIL WIRES FOR RECONNECTION. COORDINATE WORK WITH OTHER DIVISIONS.
3. EXISTING WALL MOUNTED RECEPTACLE TO BE REMOVED DURING CONSTRUCTION. PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING AND COIL FOR RECONNECTION.
6. TECK CABLE PENETRATION. DISCONNECT WIRES AND PULL THEM BACK TO SOURCE AND REINSTALLED AFTER CONSTRUCTION.
7. EXISTING TELEPHONE / COMMUNICATION BOX CW CONDUIT MOUNTED ON WALL TO BE REMOVED DURING CONSTRUCTION. DISCONNECT WIRES AT BOX AND PULL WIRES BACK TO CONNECTION BOX. COIL WIRES FOR RECONNECTION.
8. EXISTING PUSH BUTTON TO BE REMOVED AND STORED DURING CONSTRUCTION. PULL WIRES BACK TO CONNECTION BOX INSIDE AND COIL THEM FOR RECONNECTION.
9. EXISTING CHILLER GLYCOL FEEDER, PERFORMING BUILDING AT THIS LOCATION. PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING AND COIL FOR RECONNECTION.
10. CHILLER TO BE PERMANENTLY DISCONNECTED. WIRES AND CONDUITS ARE TO BE REMOVED UP TO SOURCE. PANEL SCHEDULE IS TO BE UPDATED. ALLOW 25m OF WIRES AND CONDUIT TO BE REMOVED.
11. EXISTING CAMERA CW WIRES AND CONDUIT TO BE REMOVED DURING CONSTRUCTION. PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING. COIL WIRE FOR RECONNECTION.
12. EXISTING JUNCTION / PULL BOX ON WALL CW CONDUIT TO BE REMOVED DURING CONSTRUCTION. DISCONNECT WIRES AT UNIT / JUNCTION BOX AND PULL WIRES BACK TO SOURCE / JUNCTION BOX INSIDE BUILDING. COIL WIRES FOR RECONNECTION. COORDINATE WORK WITH BUILDING OPERATOR.
13. EXISTING TOGGLE SWITCH MOUNTED ON WALL CW CONDUIT TO BE REMOVED DURING CONSTRUCTION. DISCONNECT AT LIGHT FIXTURE AND COIL WIRES FOR RECONNECTION AFTER CONSTRUCTION.
14. EXISTING ETHERNET CONNECTION BOX MOUNTED ON WALL CW CONDUIT. PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING AND COIL FOR RECONNECTION.
15. EXISTING CONDUIT PERFORATION AT THIS LOCATION. PULL WIRES BACK TO JUNCTION BOX INSIDE BUILDING AND COIL THEM FOR RECONNECTION.
16. EXISTING MOTORIZED DAMPER TO BE REMOVED BY DIVISION 25 DURING DEMOLITION. DIVISION 26 TO DISCONNECT POWER AT UNIT AND PULL WIRES BACK TO JUNCTION BOX. COIL WIRES FOR RECONNECTION. COORDINATE WORK WITH OTHER DIVISIONS.

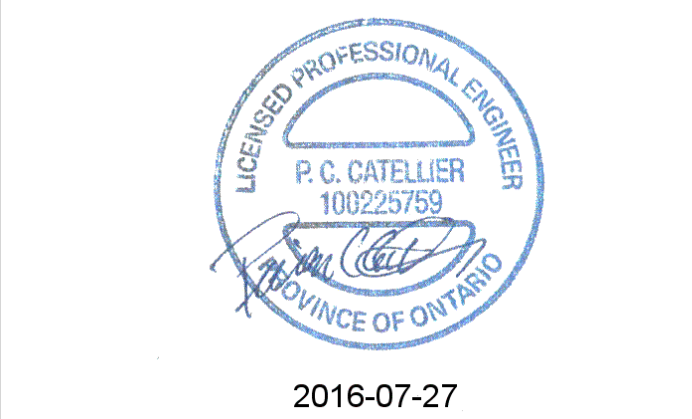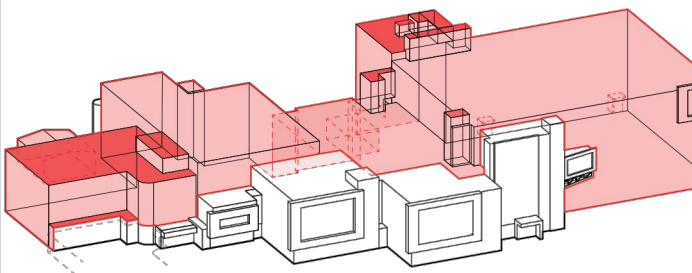

5.		
4.		
3.		
2.	ADDENDUM No 1	2016.07.28
1.	ISSUED FOR TENDER	2016.05.01
No.	Revision	Date

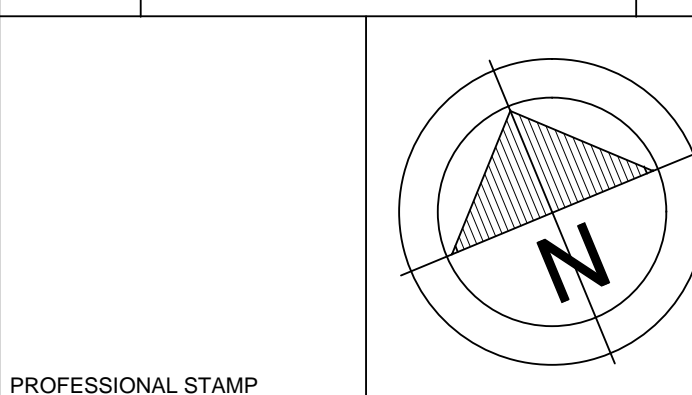

A	A detail no. du detail	A
C	B location drawing no. sur dessin no.	B C
	C drawing no. dessin no.	

project DAVID FLORIDA LABORATORY
BUILDING No. 65, SHIRLEY'S BAY, ONTARIO

BUILDING ENVELOPE REFIT
PROJECT- CSA15-G1

drawing E-101

ELECTRICAL
EXISTING SERVICES

designed	P. CATELLIER	conçu
date	2016.04.07	
drawn	P. CANTIN	dessiné
date	2016.04.07	
reviewed	E. VAILLANCOURT	examiné
date	2016.04.07	
approved	E. VAILLANCOURT	approuvé
date	2016.04.07	
scale		

project no. CSA15-G1

drawing no. E-101