

KEY PLAN

NOTES:

- VISIT SITE TO CONFIRM ALL CRITICAL DIMENSIONS. DIMENSIONS SHOWN ARE IN MILLIMETRES AND ARE APPROXIMATE.
- HIGH PRESSURE WASH AND/OR SAND BLAST THE EXTERIOR FOUNDATION WALL TO REMOVE ALL PAINT DOWN TO BARE CONCRETE. NO EXISTING PAINT IS TO REMAIN ON THE EXTERIOR OF THE FOUNDATION WALL. IMPLEMENT HOARDING TO ENSURE CONTAINMENT OF LEAD DUST.
- CARRY OUT SHALLOW CONCRETE REPAIRS AS DETAILED ON THIS PAGE. FOR SHALLOW REPAIRS, USE MASTER EMACO N425 (OR APPROVED EQUIVALENT) IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS. ALLOW REPAIRS TO CURE.
- ONCE REPAIRS HAVE CURED, PRESSURE WASH THE ENTIRE EXTERIOR FOUNDATION WALL TO REMOVE ALL CONTAMINANTS THAT MAY BE ON THE SURFACE.
- APPLY 2 COATS OF MASTERPROTECT EL750 ELASTOMERIC COATING (OR APPROVED EQUIVALENT) TO THE ENTIRE EXTERIOR FOUNDATION WALL. APPLY AS PER MANUFACTURER'S WRITTEN INSTRUCTIONS.

REMOVE ALL PAINT FROM CONCRETE FOUNDATION AND REPAINT



NORTH ELEVATION
SCALE : N.T.S.


REMOVE ALL PAINT FROM CONCRETE FOUNDATION AND REPAINT



EAST ELEVATION
SCALE : N.T.S.

REPLACE ROTTED SHEATHING IN THIS AREA BY REMOVING EXISTING SIDING, INSTALLING NEW SHEATHING AND RE-INSTATING OR SUPPLYING NEW SIDING (FOR BIDDING ASSUME SIDING ON THIS ENTIRE WALL MAY HAVE TO BE REMOVED) - COORDINATE WITH THE DEPARTMENTAL REPRESENTATIVE AS THE INTENT IS TO STOP WATER FROM ENTERING THE SHED

REMOVE CONCRETE TANK CRADLES

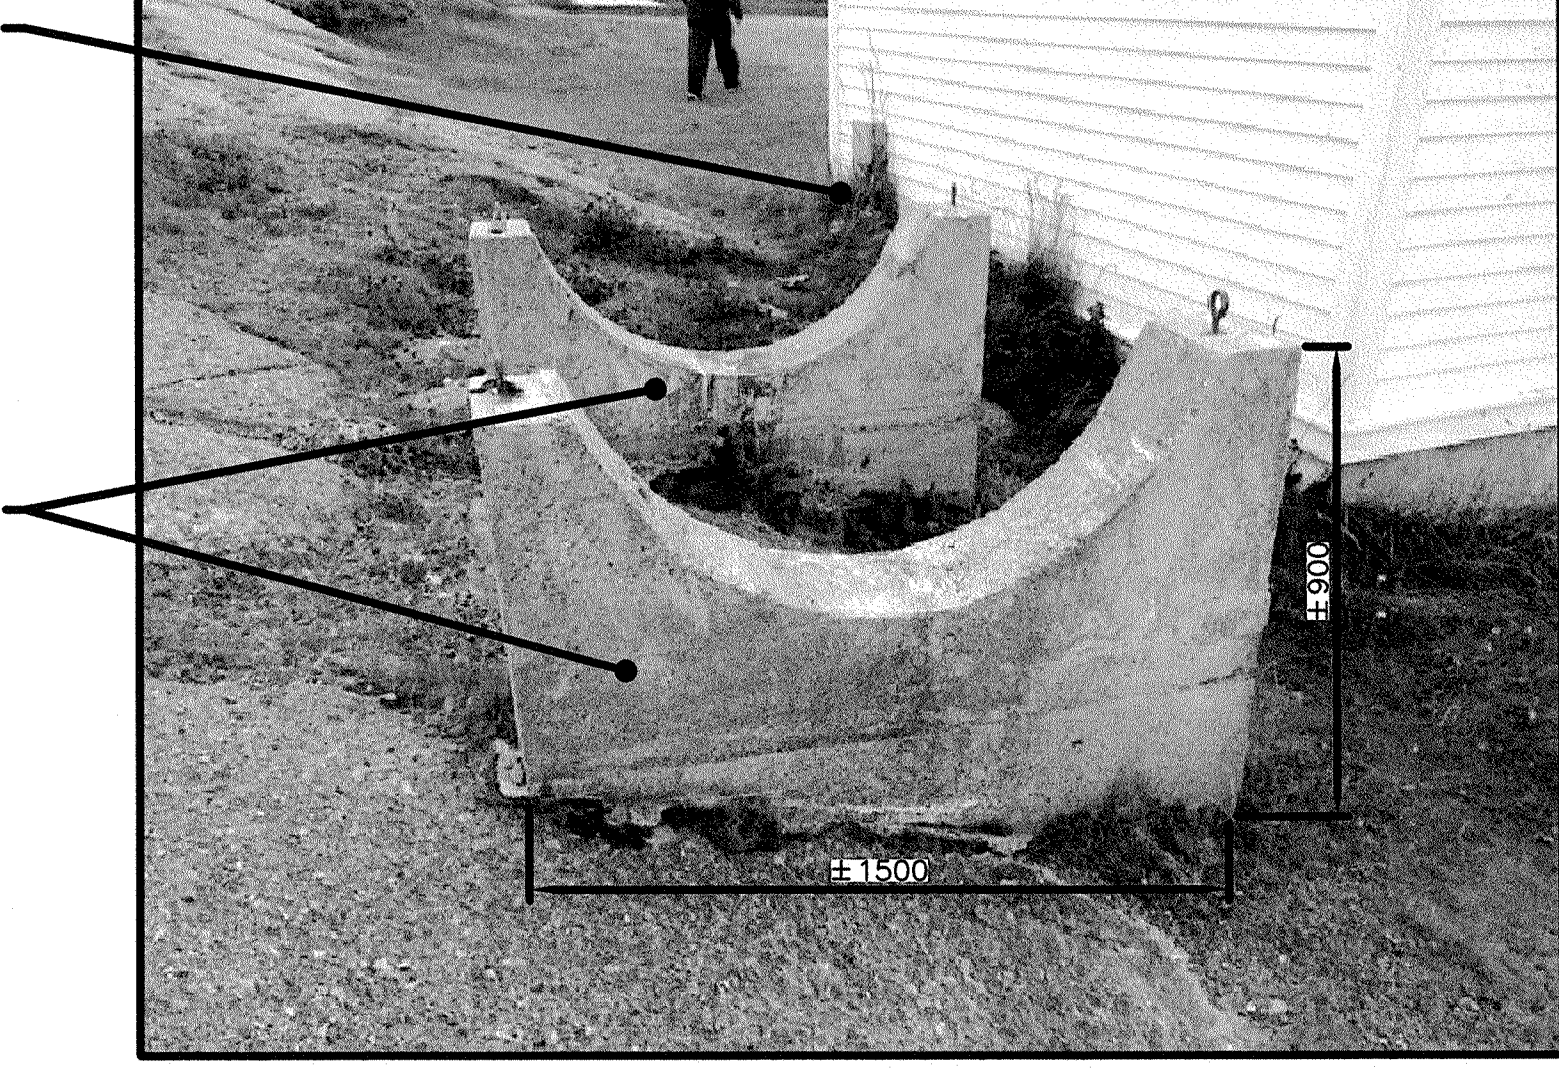

SOUTH ELEVATION
SCALE : N.T.S.

REMOVE ALL PAINT FROM CONCRETE FOUNDATION AND REPAINT (REMOVE GRASS AS REQUIRED TO EXPOSE CONCRETE FOUNDATION)



WEST ELEVATION
SCALE : N.T.S.

B	ISSUED FOR TENDER	09/26/16
A	ISSUED FOR REVIEW	06/21/16
revisions		date
project		project

CAPE SPEAR LIGHTSTATION REMEDIATION/RISK MANAGEMENT

ALUMNI STORAGE BUILDING

designed N.H.	conçu
date SEPTEMBER 26, 2016	
drawn P.H.	dessiné
date SEPTEMBER 26, 2016	
approved	approuvé
date	
Tender	Soumission
PWOSC Project Manager	Administrateur de projets TPSC
project number	no. du projet
R.082643.015	
drawing no.	no. du dessin
C4	