

POLE DESIGNATION TABLE	
CN#	CANAL POLE
BR#	BRIDGE ROADWAY POLE
FL#	FISH LADDER POLE
FF#	FLAG FLOODLIGHT POLE

- NOTES:
1. ALL EXISTING DEVICES AND ELECTRICAL COMPONENTS TO BE DEMOLISHED ONCE NEW SYSTEM IS OPERATIONAL (WHERE APPLICABLE).
 2. CONTRACTOR TO CONFIRM ALL EXISTING TO REMAIN WIRE SIZES. SEE APPENDIX FOR CURRENT AS-BUILT DRAWINGS.
 3. ALL ABOVE GRADE CONDUIT ASSOCIATED WITH THE BRIDGE ROADWAY LIGHTING, CANOPY LIGHTING, LOCK AREA LIGHTING OR BRIDGE UNDER DECK LIGHTING TO BE DEMOLISHED. ALL U/G CONDUIT TO REMAIN.
 4. EXISTING LIGHTING ON BRIDGE ROADWAY MUST BE MAINTAINED FOR THE DURATION OF THE WORK. SHOULD MULTIPLE POLES NEED TO BE REPLACED AT ANY ONE TIME, ONLY EVERY OTHER LUMINAIRE BE SHALL PERMITTED TO BE OFF.
 5. EXISTING CAMERAS, SIRENS AND MOTION SENSOR TO BE TEMPORARILY DISCONNECTED AND REMOVED FROM EXISTING POLE CN#7. EXISTING CABLEING TO BE CAPPED AND SEALED TO PREVENT MOISTURE INGRESS. SCHEDULE SHUTDOWN OF THESE SYSTEMS WITH OWNER. TOTAL OF 4 CAMERAS, 2 SIRENS AND 1 MOTION SENSOR.
 6. EXISTING RANGE LIGHT AND SIGN TO BE TEMPORARILY REMOVED.
 7. ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR INSPECTION OF THE CONDITION OF ALL POLE BASES AND BOLTS PRIOR TO COMMENCEMENT OF WORK. REPORT TO DEPARTMENTAL REPRESENTATIVE IF ANY ARE DAMAGED. ALL DAMAGED BASES AND BOLTS ARE THE RESPONSIBILITY OF THE CONTRACTOR ONCE WORK COMMENCES.



Public Works and
Government Services
Canada

Travaux publics et
Services gouvernementaux
Canada

REAL PROPERTY SERVICES
Western Region
SERVICES IMMOBILIERS
Région de l'ouest



HDK CONSULTING
INCORPORATED
55-81 Garry St.
Winnipeg, Manitoba
Canada R3C 4J9
T: 204.818.0388
F: 204.818.0388
www.hdkconsulting.com
info@hdkconsulting.com

Mechanical | Electrical | Communications | Security Engineering





Certificate of Authorization
HDK Consulting Incorporated
No. 5539 Date: 04/30/2017

2	ISSUED FOR CONSTRUCTION	July 27, 16
1	ISSUED FOR 99% CONSTRUCTION DOCUMENTS	June 9, 16
0	ISSUED FOR 50% CONSTRUCTION DOCUMENTS	May 26, 16
Revision/Revision	Description/Description	Date/Date

Client/client

ST. ANDREWS
LOCK AND DAM

ST. ANDREWS, MANITOBA

Project title/Titre du projet

ST. ANDREWS LOCK AND DAM
ST. ANDREWS, MANITOBA

LIGHTING AND
ELECTRICAL UPGRADES

Approved by/Approuvé par
HCC

Designed by/Concept par
PL

Drawn by/Dessiné par
RD

PWGSC Project Manager/Administrateur de Projets TPSGC
KEVIN GALLAYS

PWGSC, Architectural and Engineering Resources Manager/
Ressources Architectural et de Directeur d'ingénierie, TPSGC

Client/client


Drawing title/Titre du dessin

NORTH-WEST
SITE - EXISTING/DEMOLITION PLAN

Project No./No. du projet
R.076331

Sheet/Fauille
E2
OF 17

Revision no./
La Révision
no.
2

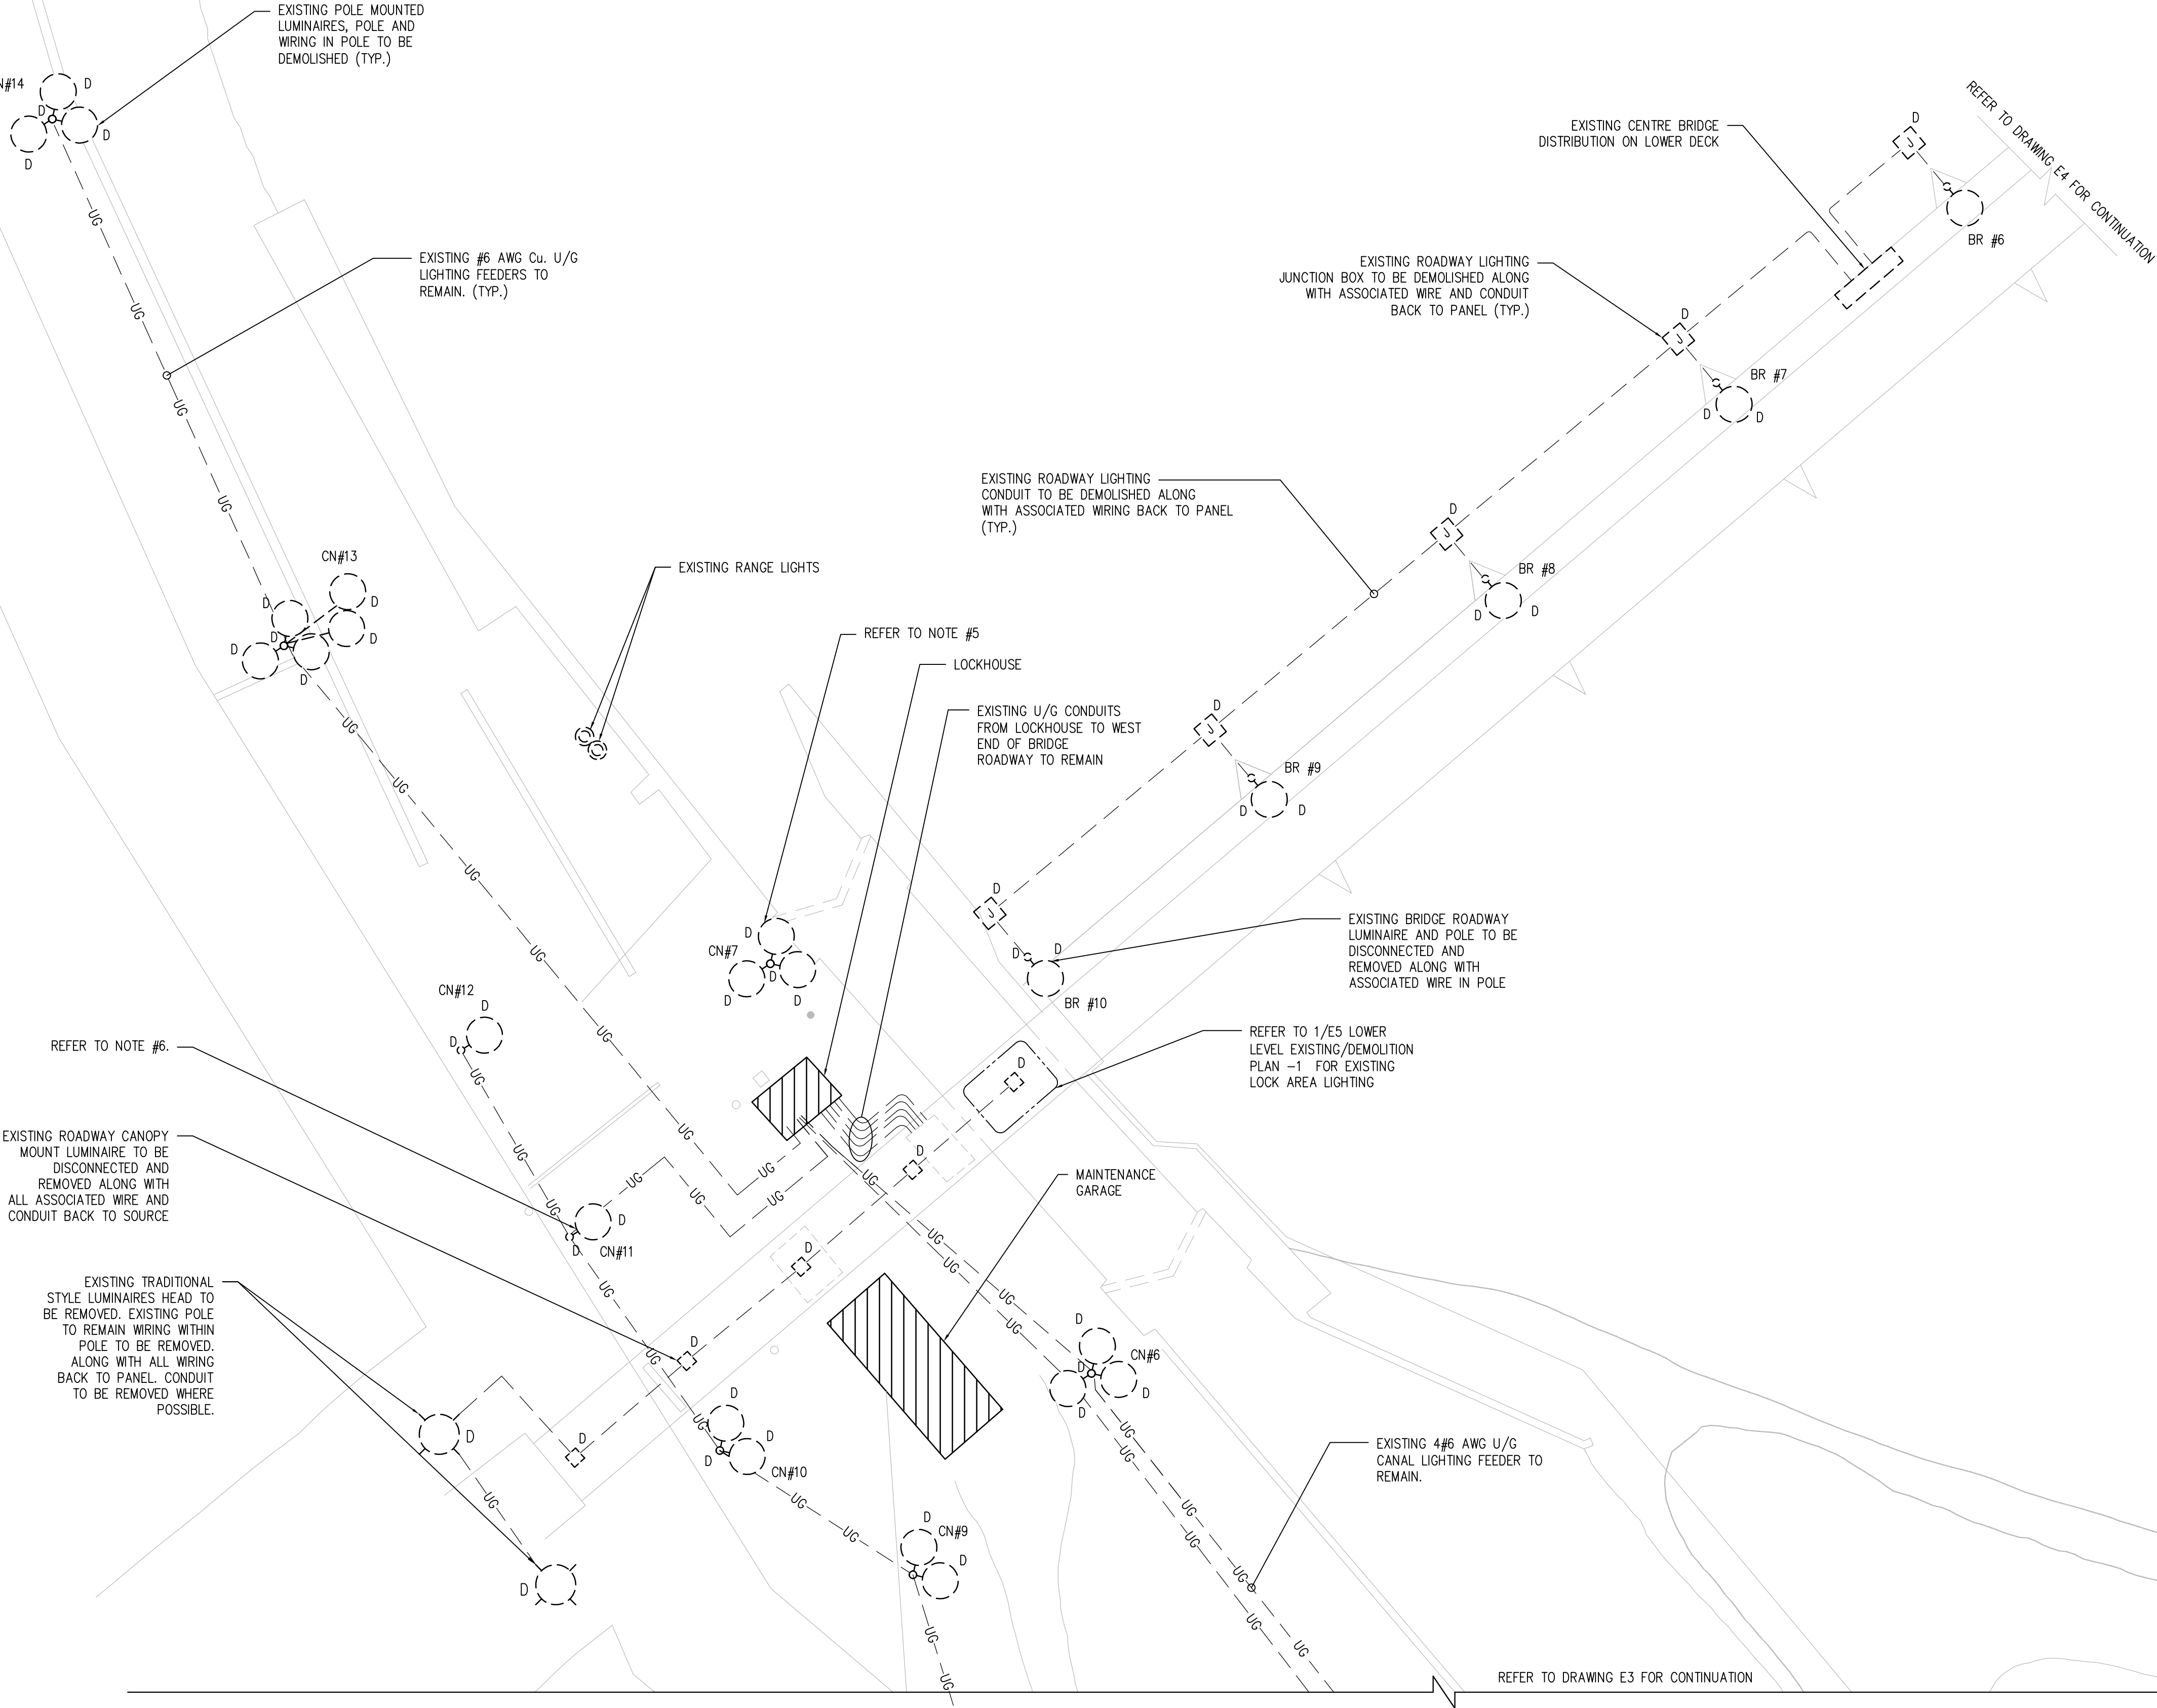

1 NORTH-WEST
E2 SITE - EXISTING/DEMOLITION PLAN
1:500

