


A1844 (A)

architects

18 Botsford St.
Moncton, NB
E1C 4W7


tel.: 506 857 8601
fax.: 506 856 9729

CBCL LIMITED
Consulting Engineers

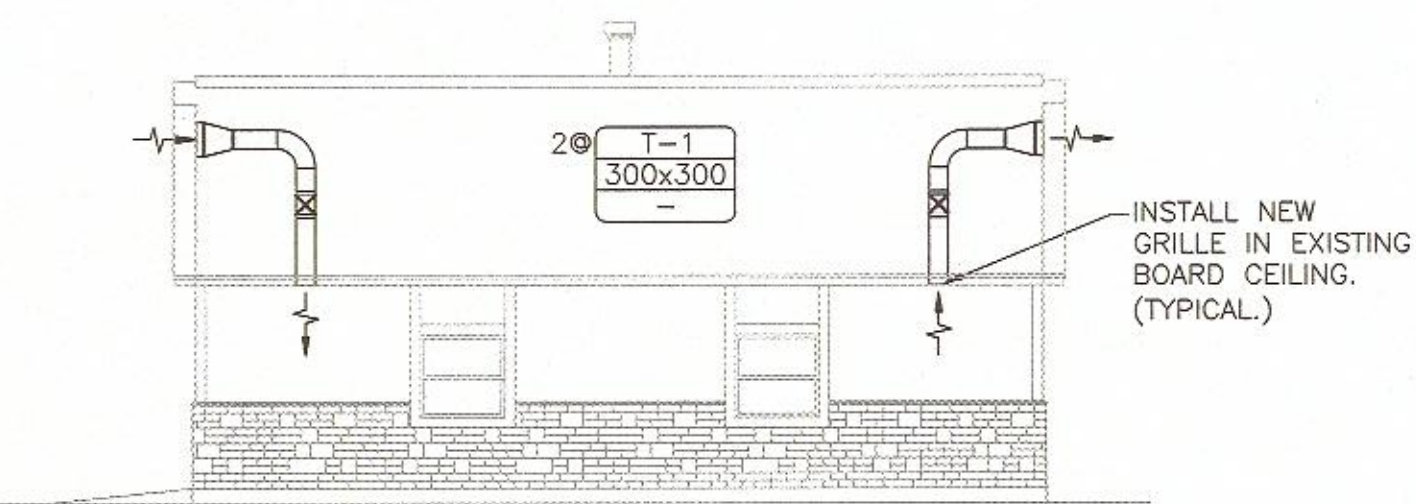


**TYP. SIDE ELEVATION
KITCHEN SHELTER #3, 5, 6**

SCALE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

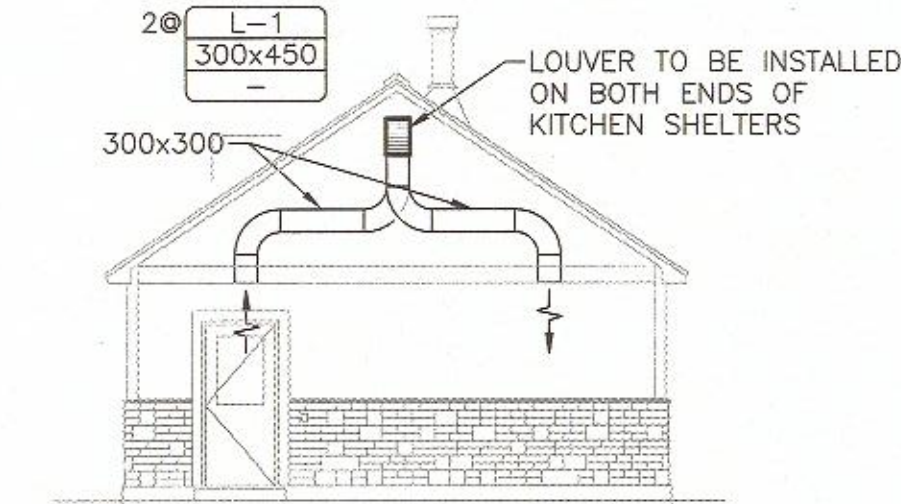

**TYP. END ELEVATION
KITCHEN SHELTER #3, 5, 6**

SCALE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

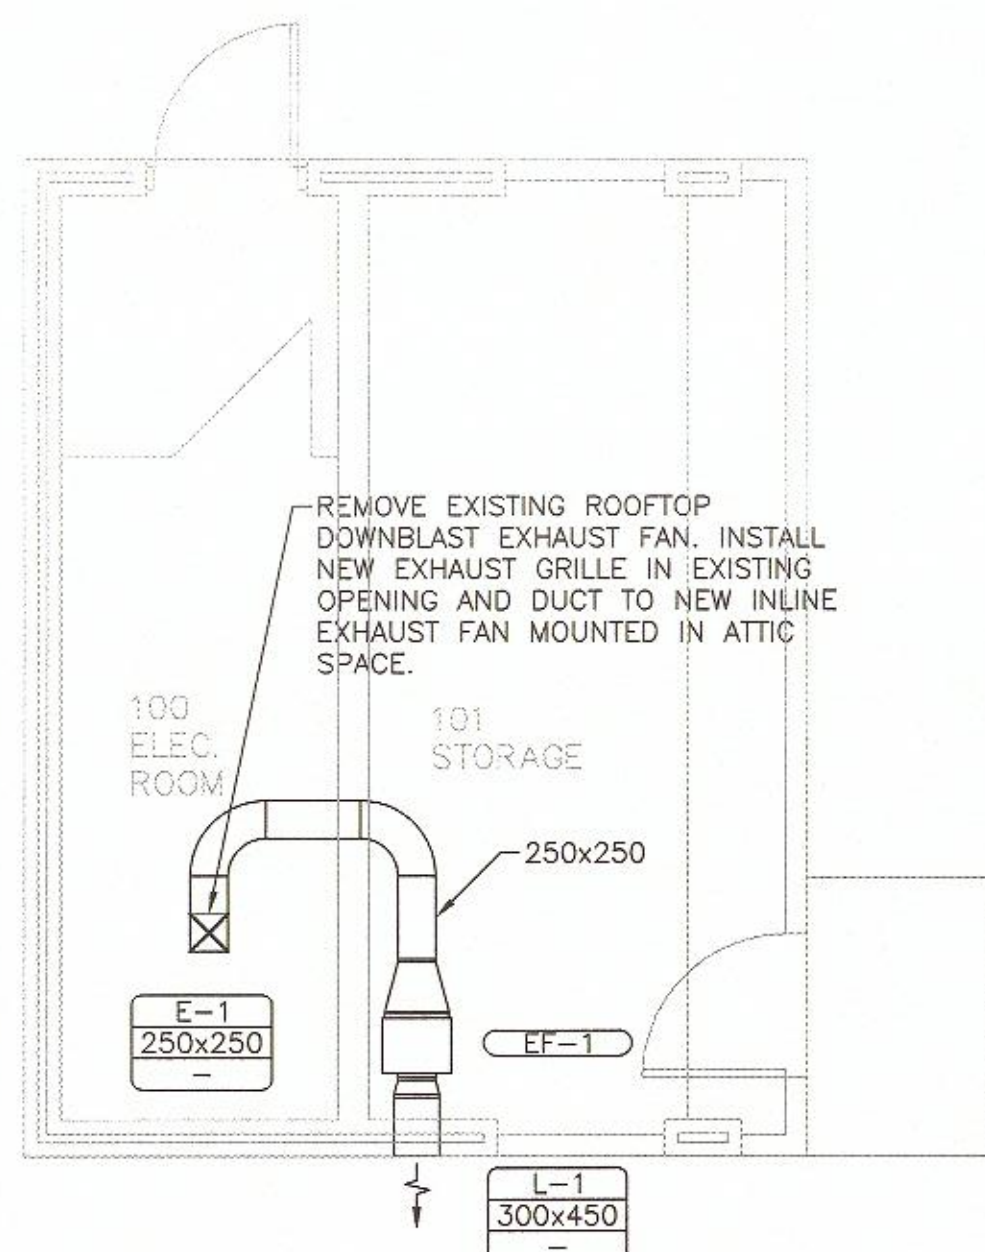

NEW EXHAUST FAN - LAUNDRY

SCALE: 1:50
0m 1m 2m 3m 4m 5m

PLUMBING FIXTURE SCHEDULE


TAG	DESCRIPTION	MATERIAL	ACCESSORIES	DCW	DHW	SAN
WC-1	ELONGATED, WALL HUNG TOILET AMERICAN STANDARD MODEL 3351.101.020	VITREOUS CHINA	C/W 6LPPF (1.6 GPF) MANUAL FLUSH VALVE (SLOAN MODEL 111-1.6-XL-CP); HEAVY DUTY ELONGATED OPEN FRONT TOILET SEAT (AMERICAN STANDARD MODEL 5901.110.020); AND HORIZONTAL COATED CAST IRON CARRIER WASTE FITTING SUITABLE FOR WALL THICKNESS (JAY R. SMITH MODEL 0210)	25	-	75
WC-2	BARRIER FREE ELONGATED, WALL HUNG TOILET AMERICAN STANDARD MODEL 3351.101.020	VITREOUS CHINA	C/W 6LPPF (1.6 GPF) MANUAL FLUSH VALVE (SLOAN MODEL 111-1.6-XL-CP); HEAVY DUTY ELONGATED OPEN FRONT TOILET SEAT (AMERICAN STANDARD MODEL 5901.110.020); AND HORIZONTAL COATED CAST IRON CARRIER WASTE FITTING SUITABLE FOR WALL THICKNESS (JAY R. SMITH MODEL 0210)	25	-	75
LAV-1	COUNTERTOP LAVATORY AMERICAN STANDARD MODEL 9494.001	VITREOUS CHINA	C/W VANDAL RESISTANT METERING FAUCET, 1.9L/MIN (0.5 GPM) OUTLET, 100mm (4") CAST CENTERSET, COLOR INDEXED HOT/COLD PUSH BUTTONS, ADJUSTABLE FLOW CYCLE, CHROME PLATED SUPPLY AND TRAP, OPEN GRID DRAIN CHICAGO FAUCET MODEL 802-VE2805-665ABCP	15	15	30
LAV-2	BARRIER FREE, COUNTERTOP LAVATORY AMERICAN STANDARD MODEL 9494.001	VITREOUS CHINA	C/W VANDAL RESISTANT METERING FAUCET, 1.9L/MIN (0.5 GPM) OUTLET, 100mm (4") CAST CENTERSET, COLOR INDEXED HOT/COLD PUSH BUTTONS, ADJUSTABLE FLOW CYCLE, CHROME PLATED SUPPLY AND TRAP, OPEN GRID DRAIN CHICAGO FAUCET MODEL 802-VE2805-665ABCP	15	15	30
UR-1	WALL HUNG TOP SPUD URINAL AMERICAN STANDARD MODEL 6590.001	VITREOUS CHINA	C/W 3.8LPPF (1.0 GPF) MANUAL FLUSH VALVE SLOAN MODEL 186-1.0-XL	20	-	50
SH-1	VANDAL RESISTANT SHOWER ACORN MODEL SV16-CSH25	CHROME FINISH	C/W PRESSURE BALANCING MIXING VALVE, TEMPERATURE ONLY CONTROL, VANDAL RESISTANT, TRI-LEVER LIGATURE RESISTANT HANDLE, HOT/COLD COLOR INDEX ON ESCUTCHEON, AND CHROME FINISH. 9.5L/MIN (2.5 GPM) CONICAL LIGATURE RESISTANT SHOWERHEAD C/W CHROME FINISH. SHOWER DRAIN TO BE FD-1.	15	15	75
SH-2	BARRIER FREE VANDAL RESISTANT SHOWER ACORN MODEL SV16-HHC25-HHSH-GR30-HHSE	CHROME FINISH	C/W PRESSURE BALANCING MIXING VALVE, TEMPERATURE ONLY CONTROL, VANDAL RESISTANT, TRI-LEVER LIGATURE RESISTANT HANDLE, HOT/COLD COLOR INDEX ON ESCUTCHEON, AND CHROME FINISH. 9.5L/MIN (2.5 GPM) CHROME FINISH HANDHELD SHOWER C/W 1500mm (60") S.S. HANDHELD SHOWER HOSE, 750mm (30") GLIDE RAIL, AND HANDHELD SUPPLY ELBOW. SHOWER DRAIN TO BE FD-1.	15	15	75
SK-1	SINGLE BASIN 600mm x 600mm (24"x24") SCULLERY SINK W/ BACKSPLASH, AND RIGHT & LEFT DRAIN BOARDS ELKAY MODEL 1C18X24-2-18X	16 GAUGE S/S	C/W ADJUSTABLE LEGS, RADIUS CORNERS, ROLLED RIM, AND PRE-DRILLED FAUCET HOLES IN BACKSPLASH. FAUCET TO BE WALL MOUNTED FAUCET C/W HEAVY DUTY CAST BRASS BODY, 200mm (8") ADJUSTABLE CENTERS, CHROME FINISH, 1/4 TURN CERAMIC DISC CARTRIDGES, AND COLOR INDEXED VANDAL RESISTANT LEVER BLADE HANDLES. CHICAGO FAUCET MODEL 540-LDL9XKABCP	15	15	40
SS-1	SINGLE BASIN 600mm x 600mm (24"x24") SCULLERY SINK W/ BACKSPLASH FRANKE MODEL SL2424-1/2	16 GAUGE 304 S/S	C/W ADJUSTABLE LEGS, RADIUS CORNERS, ROLLED RIM, AND PRE-DRILLED FAUCET HOLES IN BACKSPLASH. FAUCET TO BE WALL MOUNTED SERVICE SINK FAUCET C/W HEAVY DUTY CAST BRASS BODY, 200mm (8") CENTERS, CHROME FINISH, 1/4 TURN CERAMIC DISC CARTRIDGES, COLOR INDEXED LEVER BLADE HANDLES, INTEGRAL VACUUM BREAKER, THREADED HOSE CONNECTION, AND PALE HOOK. CHICAGO FAUCET MODEL 445-897SRCKKCP	15	15	40
HB-1	FLUSH MOUNTED ENCASED WALL HYDRANT JAY R. SMITH MODEL 55090T	-	C/W AUTOMATIC DRAIN, ANTI-SIPHON, CERAMIC DISC CARTRIDGE, INTEGRAL BACKFLOW PREVENTER, AND LOCKABLE COVER.	20	-	-
FD-1	ADJUSTABLE FLOOR DRAIN W/ ROUND STRAINER WATTS MODEL FD-200 SERIES	EPOXY COATED CAST IRON	C/W 127mm (5") STAINLESS STEEL STRAINER, AND CORROSION RESISTANT STAINLESS STEEL SCREWS.	-	-	100

FAN SCHEDULE

UNIT NO.	LOCATION	SERVICE	MFR	MODEL	TYPE	FLOW (L/S)	E.S.P. (PA)	FAN SPEED (RPM)	ELECTRICAL MOTOR		REMARKS
									FLA	V/ø	
EF-1	LAUNDRY	ELECTRICAL RM EXHAUST	GREENHECK	CSP-A710	INLINE CABINET FAN	270	75	1,080	4.4	115/1	DIRECT DRIVE CABINET FAN C/W GALVANIZED STEEL HOUSING WITH DUCT COLLARS, FACTORY DISCONNECT, STAINLESS STEEL BIRD SCREEN ON INLET, AND GRAVITY BACKDRAFT DAMPER. FAN TO BE ENERGIZED BY EXISTING REVERSE ACTING THERMOSTAT LOCATED IN ELECTRICAL ROOM. ACCEPTABLE MANUFACTURERS: GREENHECK, ACME MFG. & ENG. CO. PENNBARRY, TWIN CITY, LOREN COOK, SOLER & PALAU, CANARM/DELHI
EF-2-1	W.R. #2	WOMEN'S W.R. EXHAUST	GREENHECK	CSP-A710	INLINE CABINET FAN	270	75	1,080	4.4	115/1	DIRECT DRIVE CABINET FAN C/W GALVANIZED STEEL HOUSING WITH DUCT COLLARS, FACTORY DISCONNECT, STAINLESS STEEL BIRD SCREEN ON INLET, AND GRAVITY BACKDRAFT DAMPER. EACH FAN TO BE ENERGIZED INDIVIDUALLY BY WALL MOUNTED SWITCH LOCATED IN SERVICE ROOM. EACH SWITCH TO BE C/W LAMACOID LABEL STATING SERVICE AS INDICATED ON THIS SCHEDULE. ACCEPTABLE MANUFACTURERS: GREENHECK, ACME MFG. & ENG. CO. PENNBARRY, TWIN CITY, LOREN COOK, SOLER & PALAU, CANARM/DELHI
EF-2-2		MEN'S W.R. EXHAUST									
EF-4-1	W.R. #4	WOMEN'S W.R. EXHAUST									
EF-4-2		MEN'S W.R. EXHAUST									
EF-7-1	W.R. #7	WOMEN'S W.R. EXHAUST									
EF-7-2		MEN'S W.R. EXHAUST									
EF-11-1	W.R. #11	WOMEN'S W.R. EXHAUST									
EF-11-2		MEN'S W.R. EXHAUST									


LOUVER & GRILLE SCHEDULE

SYMBOL	MFR/MODEL	TYPE	SIZE (mm)	CAPACITY (L/s)	REMARKS
L-1	REFER TO ARCHITECTURAL	LOUVER	AS SHOWN	AS SHOWN	
E-1/T-1	EH PRICE/96/L/A	SINGLE DEFLECTION	AS SHOWN	AS SHOWN	HEAVY DUTY ALUMINUM GRILLE C/W 19mm BLADE SPACING AND ANODIZED ALUMINUM FINISH

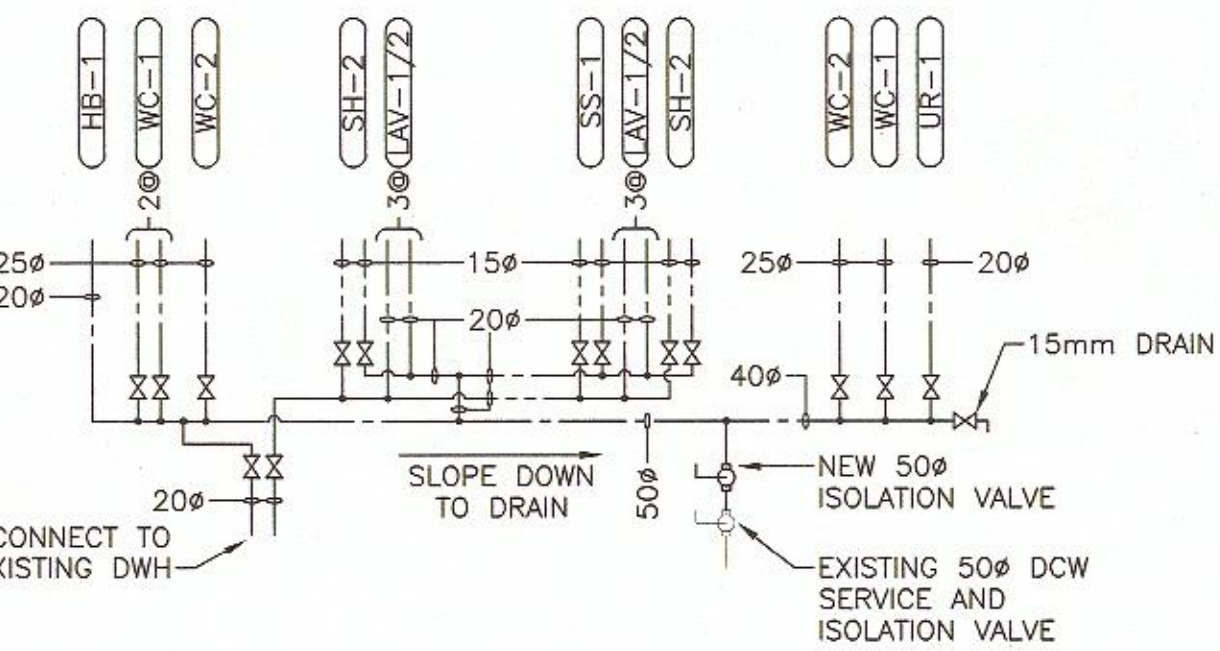


W.R. #2 PLUMBING SCHEMATIC

SCALE : N.T.S.

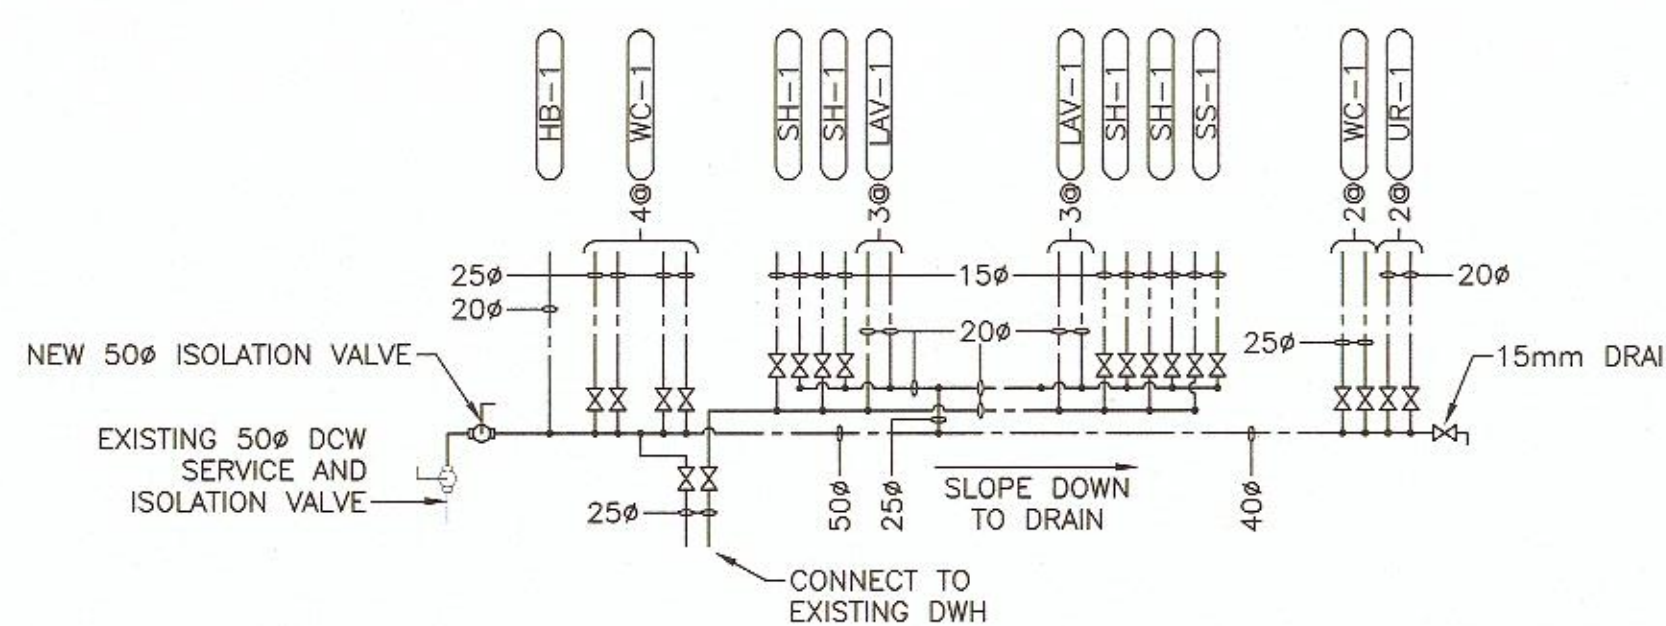


W.R. #4 & 7 PLUMBING SCHEMATIC

SCALE : N.T.S.

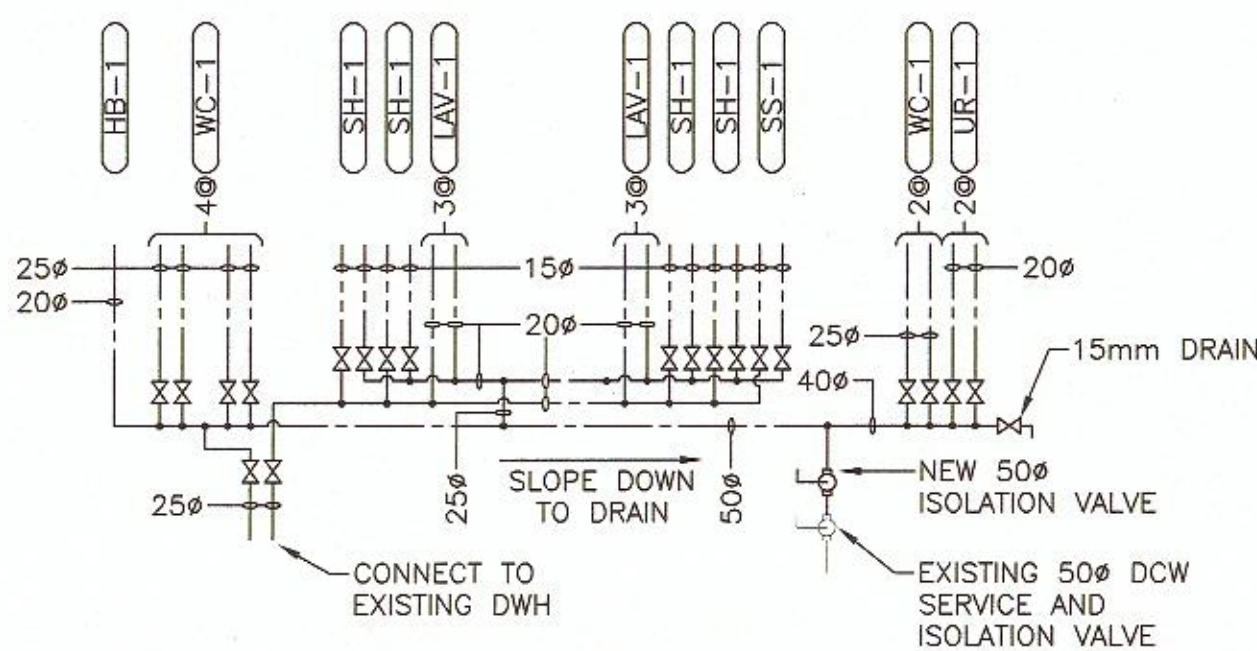


W.R. #11 PLUMBING SCHEMATIC

SCALE : N.T.S.

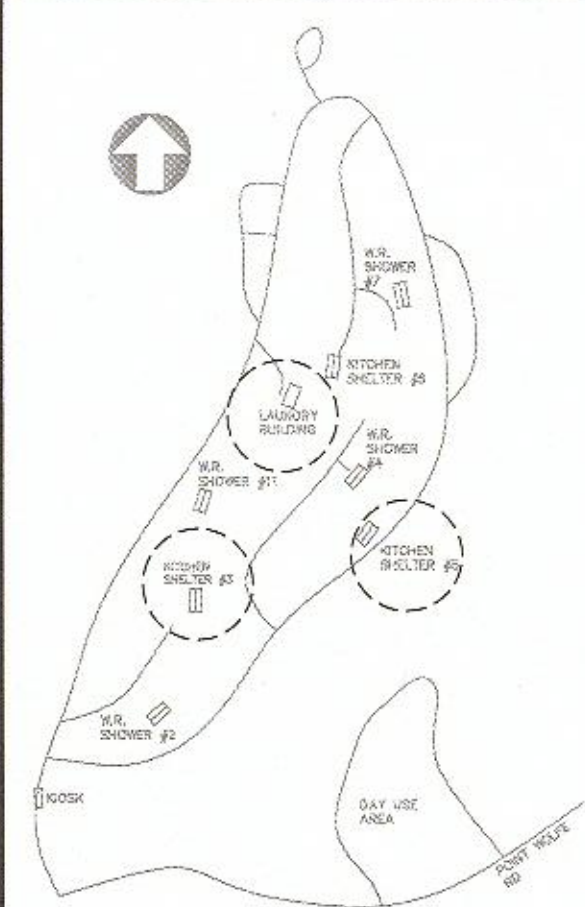

POINT WOLFE CAMPGROUND KEY PLAN
FUNDY NATIONAL PARK
1:2500 SCALE

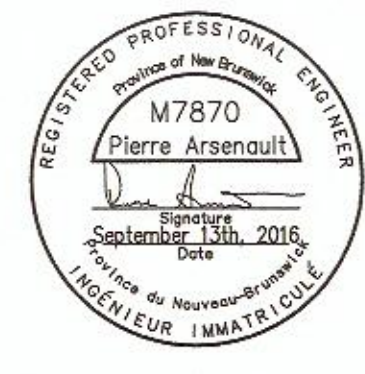

1	ISSUED FOR TENDER	SEP 13 2016
revisions		date

project
**POINT WOLFE
SERVICE BUILDINGS
FUNDY NATIONAL PARK
ALMA, NB**
ALBERT COUNTY, NB

drawing
**PLUMBING
FLOOR PLANS,
SCHEMATICS,
& SCHEDULES**
dessin

designed P. ARSENAULT conçu
date JULY 2016
drawn P. ARSENAULT dessiné
date JULY 2016
approved
date
Tender Soumission
PWSC Project Manager Administrateur de projets TPSCG
project number no. du projet
R.075852.001
drawing no. no. du dessin
M-3.0