





- ### DEMOLITION NOTES
- EXISTING DEMONSTRATION/CRAFTS BUILDING TO BE COMPLETELY DEMOLISHED, INCLUDING FOUNDATIONS.
  - REMOVE PORTION OF CEILING TO FACILITATE INSTALLATION OF NEW FOLDING PARTITION BULKHEAD.
  - REMOVE EXISTING "STALL PLATFORM" IN ITS ENTIRETY AND HAND OVER TO PARKS CANADA FOR FUTURE RE-INSTALLATION.
  - REMOVE DUCTS AND DUCT ENCLOSURE.
  - REMOVE EMERGENCY LIGHT AND SPEAKER MOUNTING BRACKET.
  - REMOVE MAPLE LEDGE FOR ENTIRE LENGTH AND REPLACE.
  - DUCTS TO BE REMOVED, FLOOR TO BE REMOVED TO RELOCATE DUCTS. INSTALL NEW JOISTS AS REQUIRED.
  - REMOVE STAIRS. SEE A12 FOR NEW.
  - REMOVE CARPET AND BENCHES.
  - REFER TO MECHANICAL, ELECTRICAL, STRUCTURAL, CIVIL, AND LANDSCAPE FOR FURTHER DEMOLITION.
  - REMOVE EXISTING SHINGLES FROM THIS AREA TO FACILITATE NEW ADDITION.
  - REMOVE WOOD SHINGLES FROM ROOF. SEE DRAWING A05.

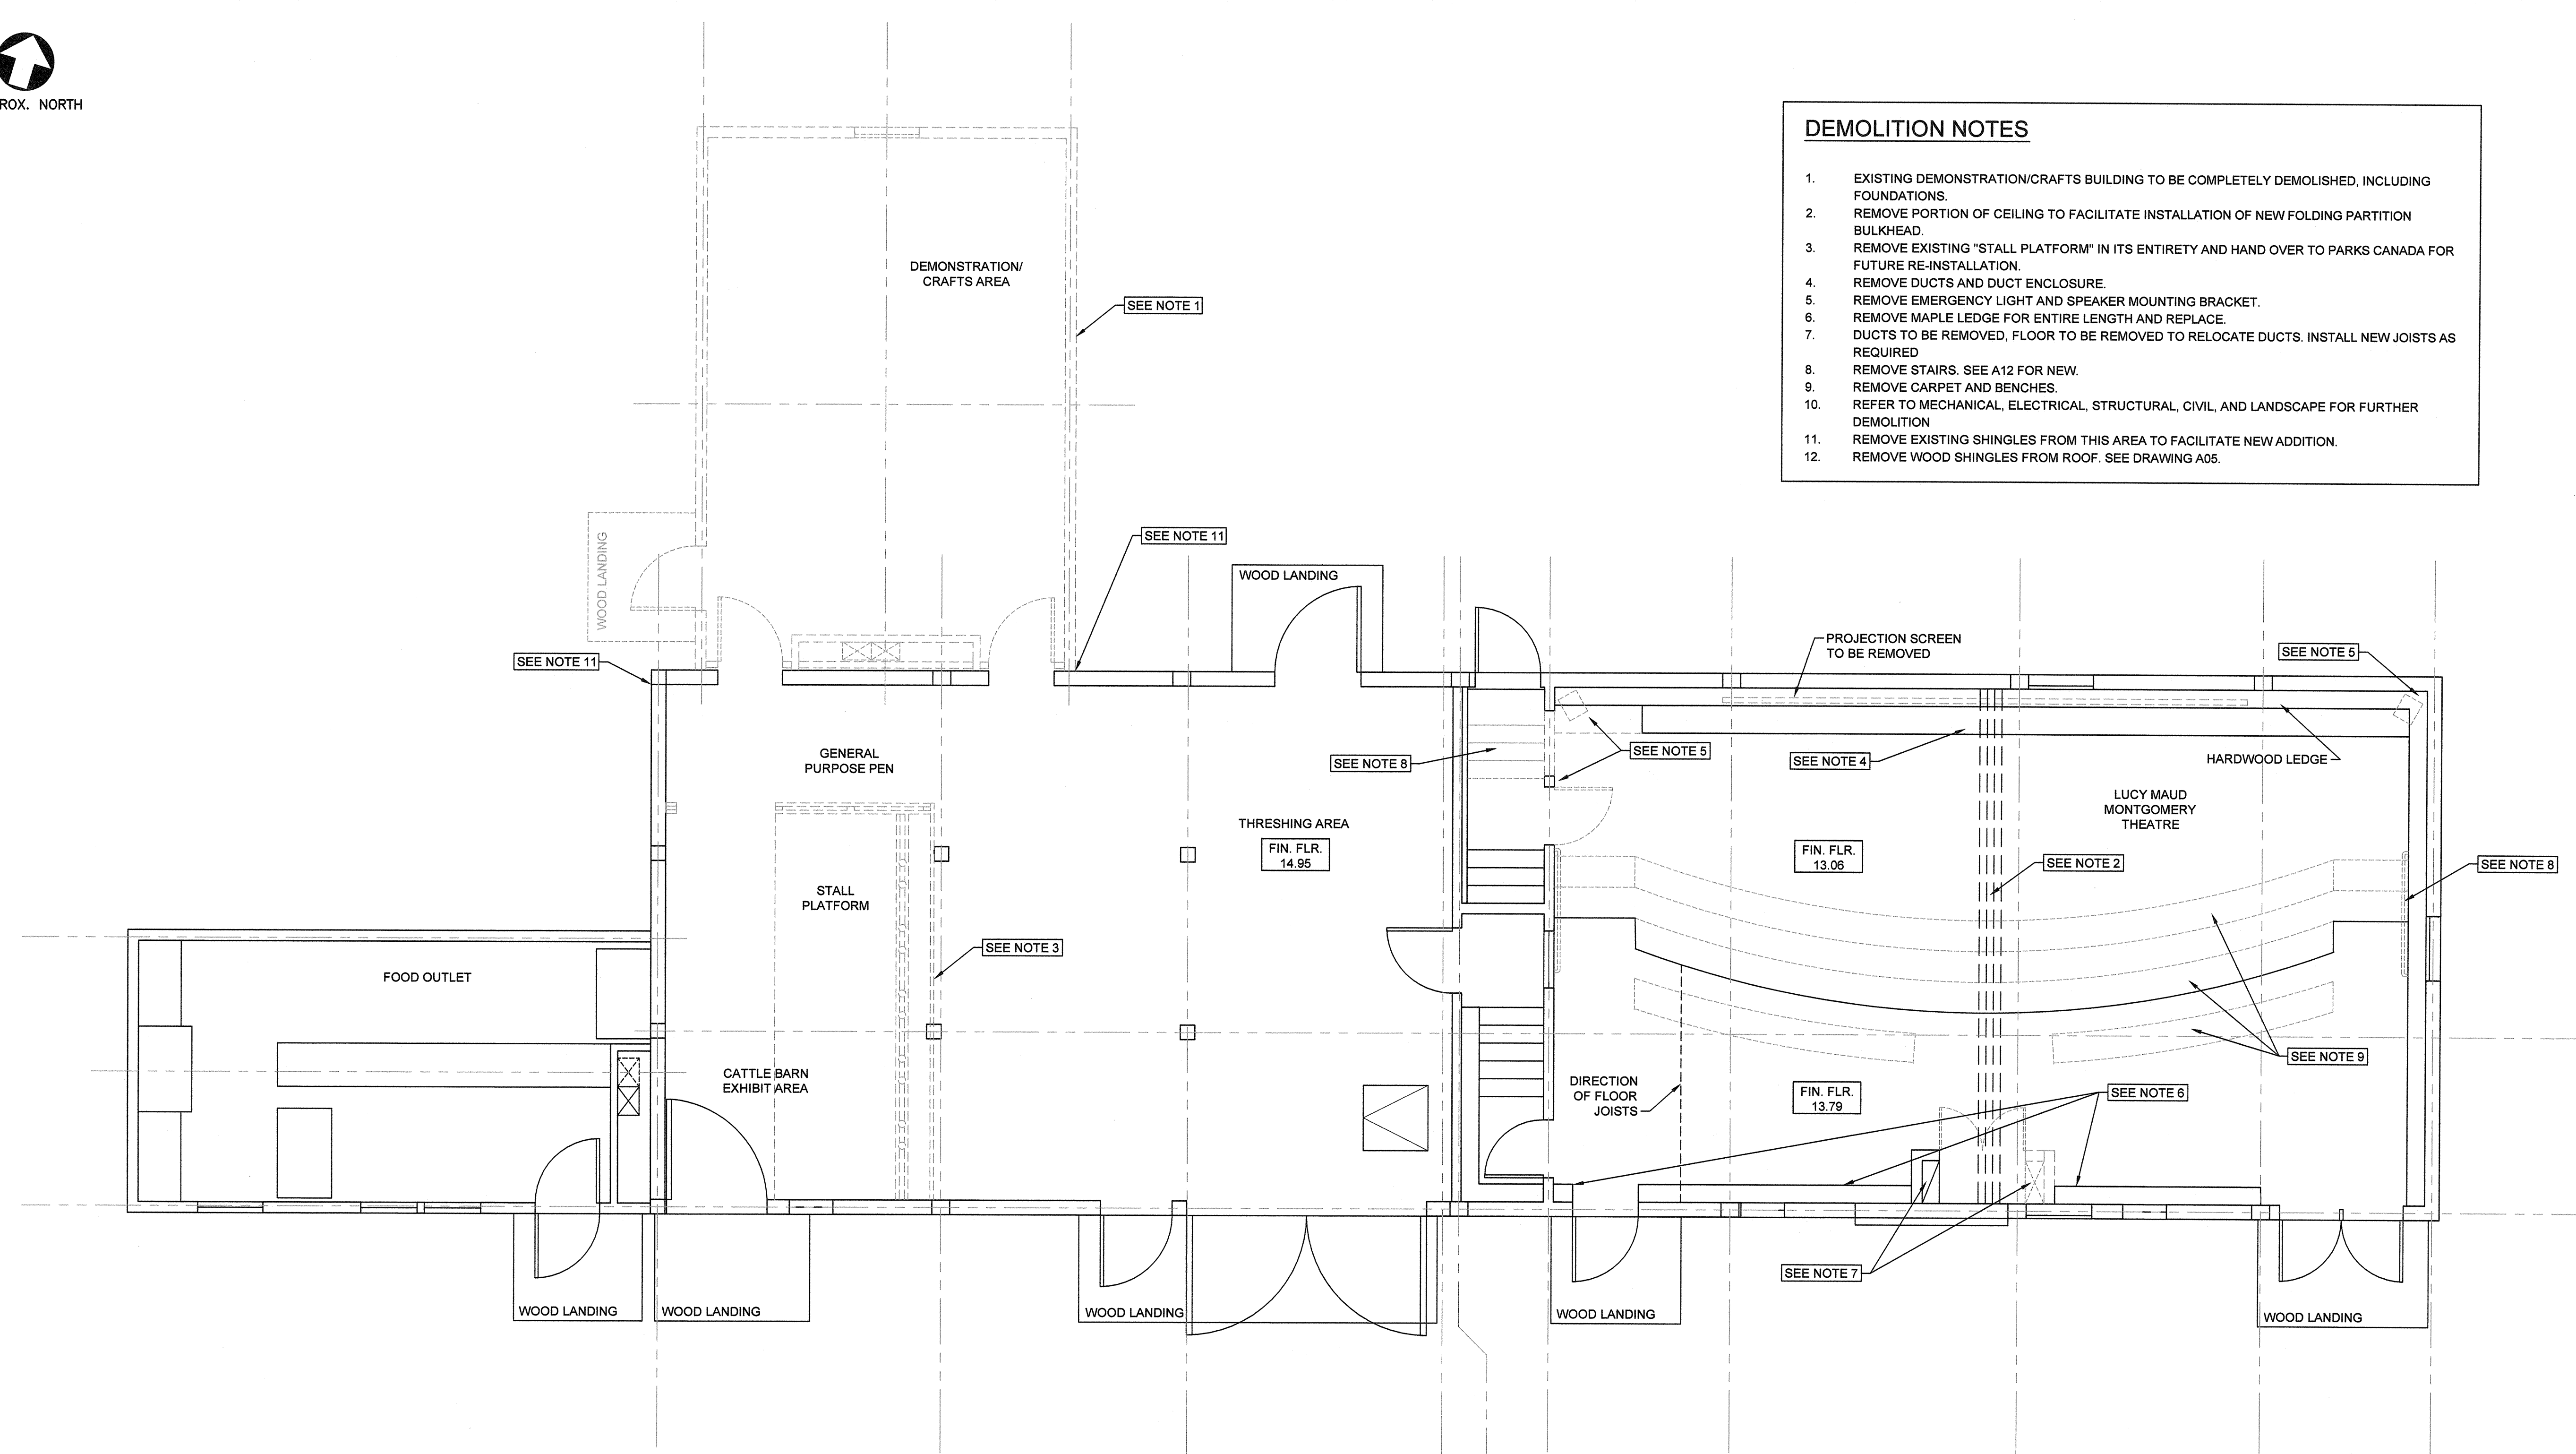

DEMOLITION PLAN

SCALE : 1:100



1  
A01 | A01

ROOM NAME	Rm No	FLOORS	BASE	WALLS	CEILINGS	MISC	REMARKS
BASEMENT	D001						
MULTI-PURPOSE ROOM	D101						NEW BASE TO MATCH EXISTING
THRESHING AREA	D102						
STORAGE	D103						RUBBER BASE AT NEW WALLS ONLY
CAFE	D104						FINISHES N.I.C.
BARRIER-FREE WASHROOM	D105						WASHROOM ACCESSORIES, FRP AT MOP SINK
CASH	D106						GYP. BD. TO 2740mm EXPOSED PINE ABOVE
GIFTSHOP	D107						GYP. BD. TO 2740mm EXPOSED PINE ABOVE
STAIR	D108						RAILINGS, BROOM FINISH ON STAIRS


FINISH SCHEDULE

SCALE : N.T.S.

ROOM NAME	Rm No	DOOR No	DOOR TYPE	SIZE W x H	MATERIAL	RATING	GLAZING	FINISH	FRAME	SECURITY	NOTES
BASEMENT	D001	D001	2	1067x2134	HM	-	-	-	-	-	3/4 HR. FIRE RATING
MULTI-PURPOSE ROOM	D101	D101	1	914x2134	HM	-	-	-	-	-	3/4 HR. FIRE RATING
B.F. WASHROOM	D105	D105	1	914x2134	W	-	-	-	-	-	
GIFT SHOP	D107	D107	1	914x2134	W	-	-	-	-	-	
GIFT SHOP	D107A	D107A	4	914x2134	W	-	-	-	-	-	EXTERIOR DOOR
GIFT SHOP	D107B	D107B	3	3608x2438	G	-	-	-	A	-	EXTERIOR DOOR - ALUM. CLAD
GIFT SHOP	D107C	D107C	3	3608x2438	G	-	-	-	A	-	EXTERIOR DOOR - ALUM. CLAD
GARBAGE AREA DOOR	D108	D108A	4	914x2134	W	-	-	-	-	-	EXTERIOR DOOR
STAIR	D108	D108B	5	914x2134	W	-	-	-	-	-	EXTERIOR DOOR


DOOR SCHEDULE

SCALE : N.T.S.


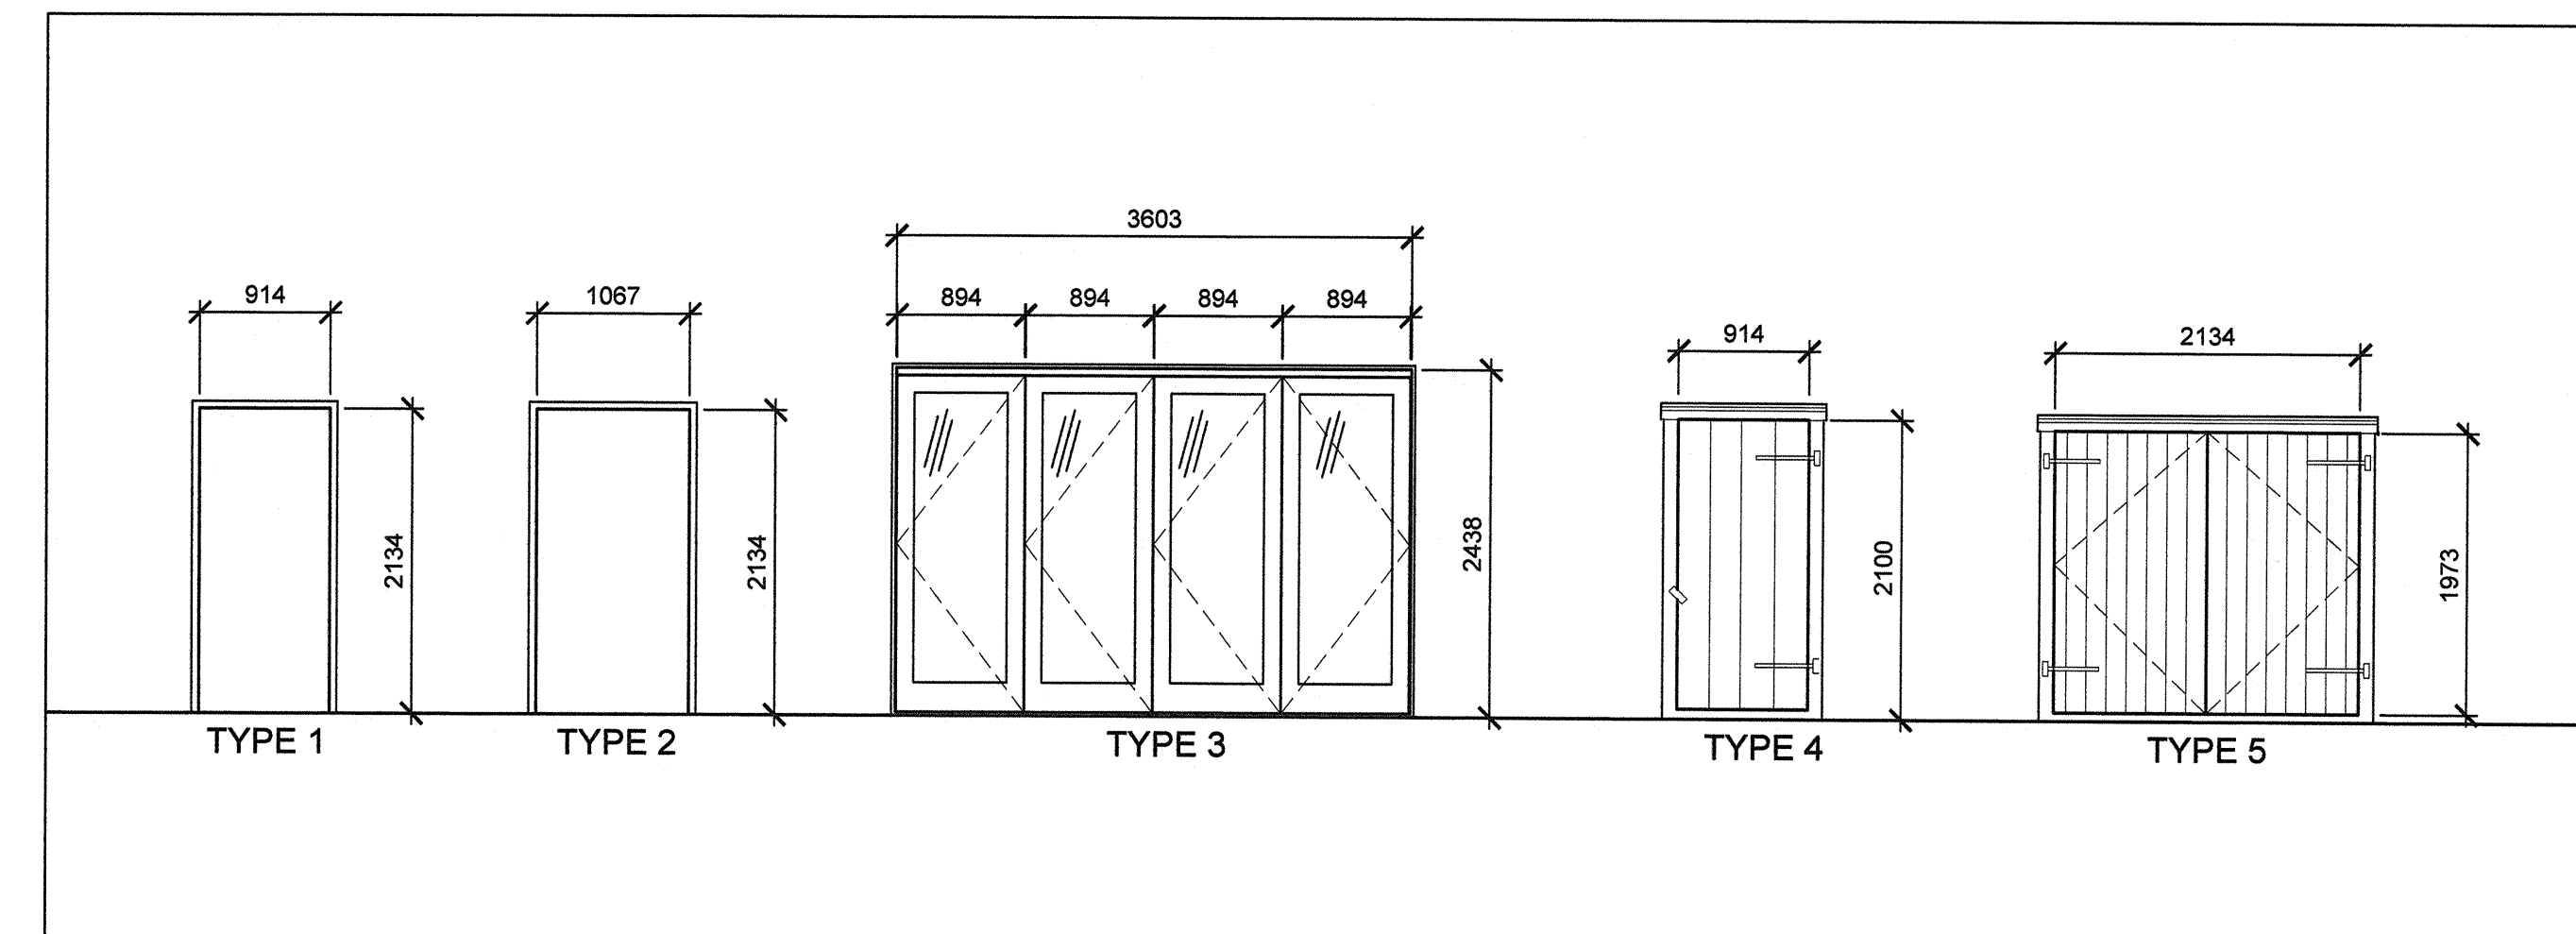


DOOR TYPES

SCALE : 1:50



4  
A01 | A01

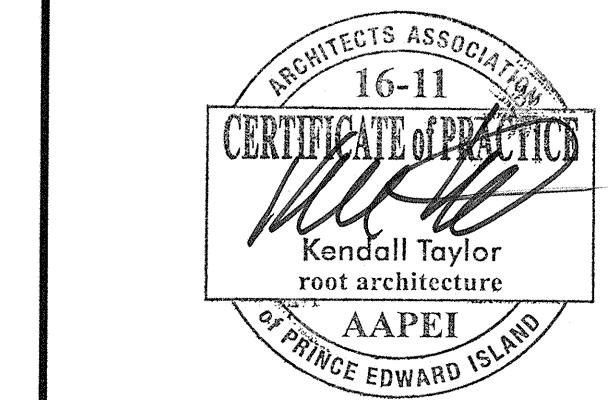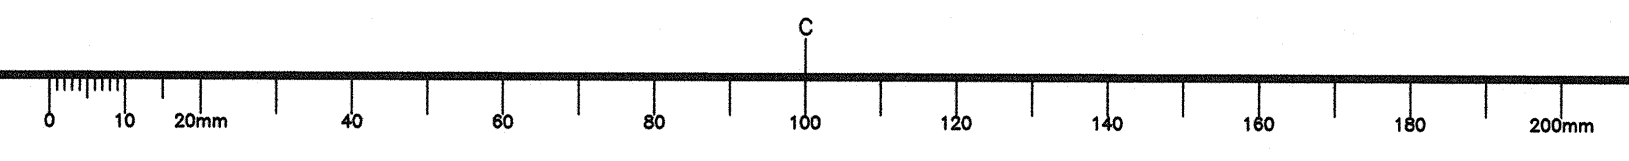

2	ISSUED FOR TENDER	11.29 2016
1	100% SUBMISSION	11.23 2016
0	99% SUBMISSION	11.8 2016

revisions date

project  
**GREEN GABLES-PHASE 1  
BARN EXPANSION  
AND RENOVATION**  
QUEENS CO., PEI

drawing  
**ARCHITECTURAL  
DEMOLITION PLAN  
AND SCHEDULES**

designed KST  
date NOV-2016  
drawn GUJ  
date NOV-2016  
approved  
date  
Tender  
PWSC Project Manager  
project number  
**R.081199.001**  
drawing no.  
**A01 OF 12**

conçu  
dessiné  
soumission  
Administrateur de projets TPSCG  
no. du projet  
no. du dessin