




APPROX. NORTH

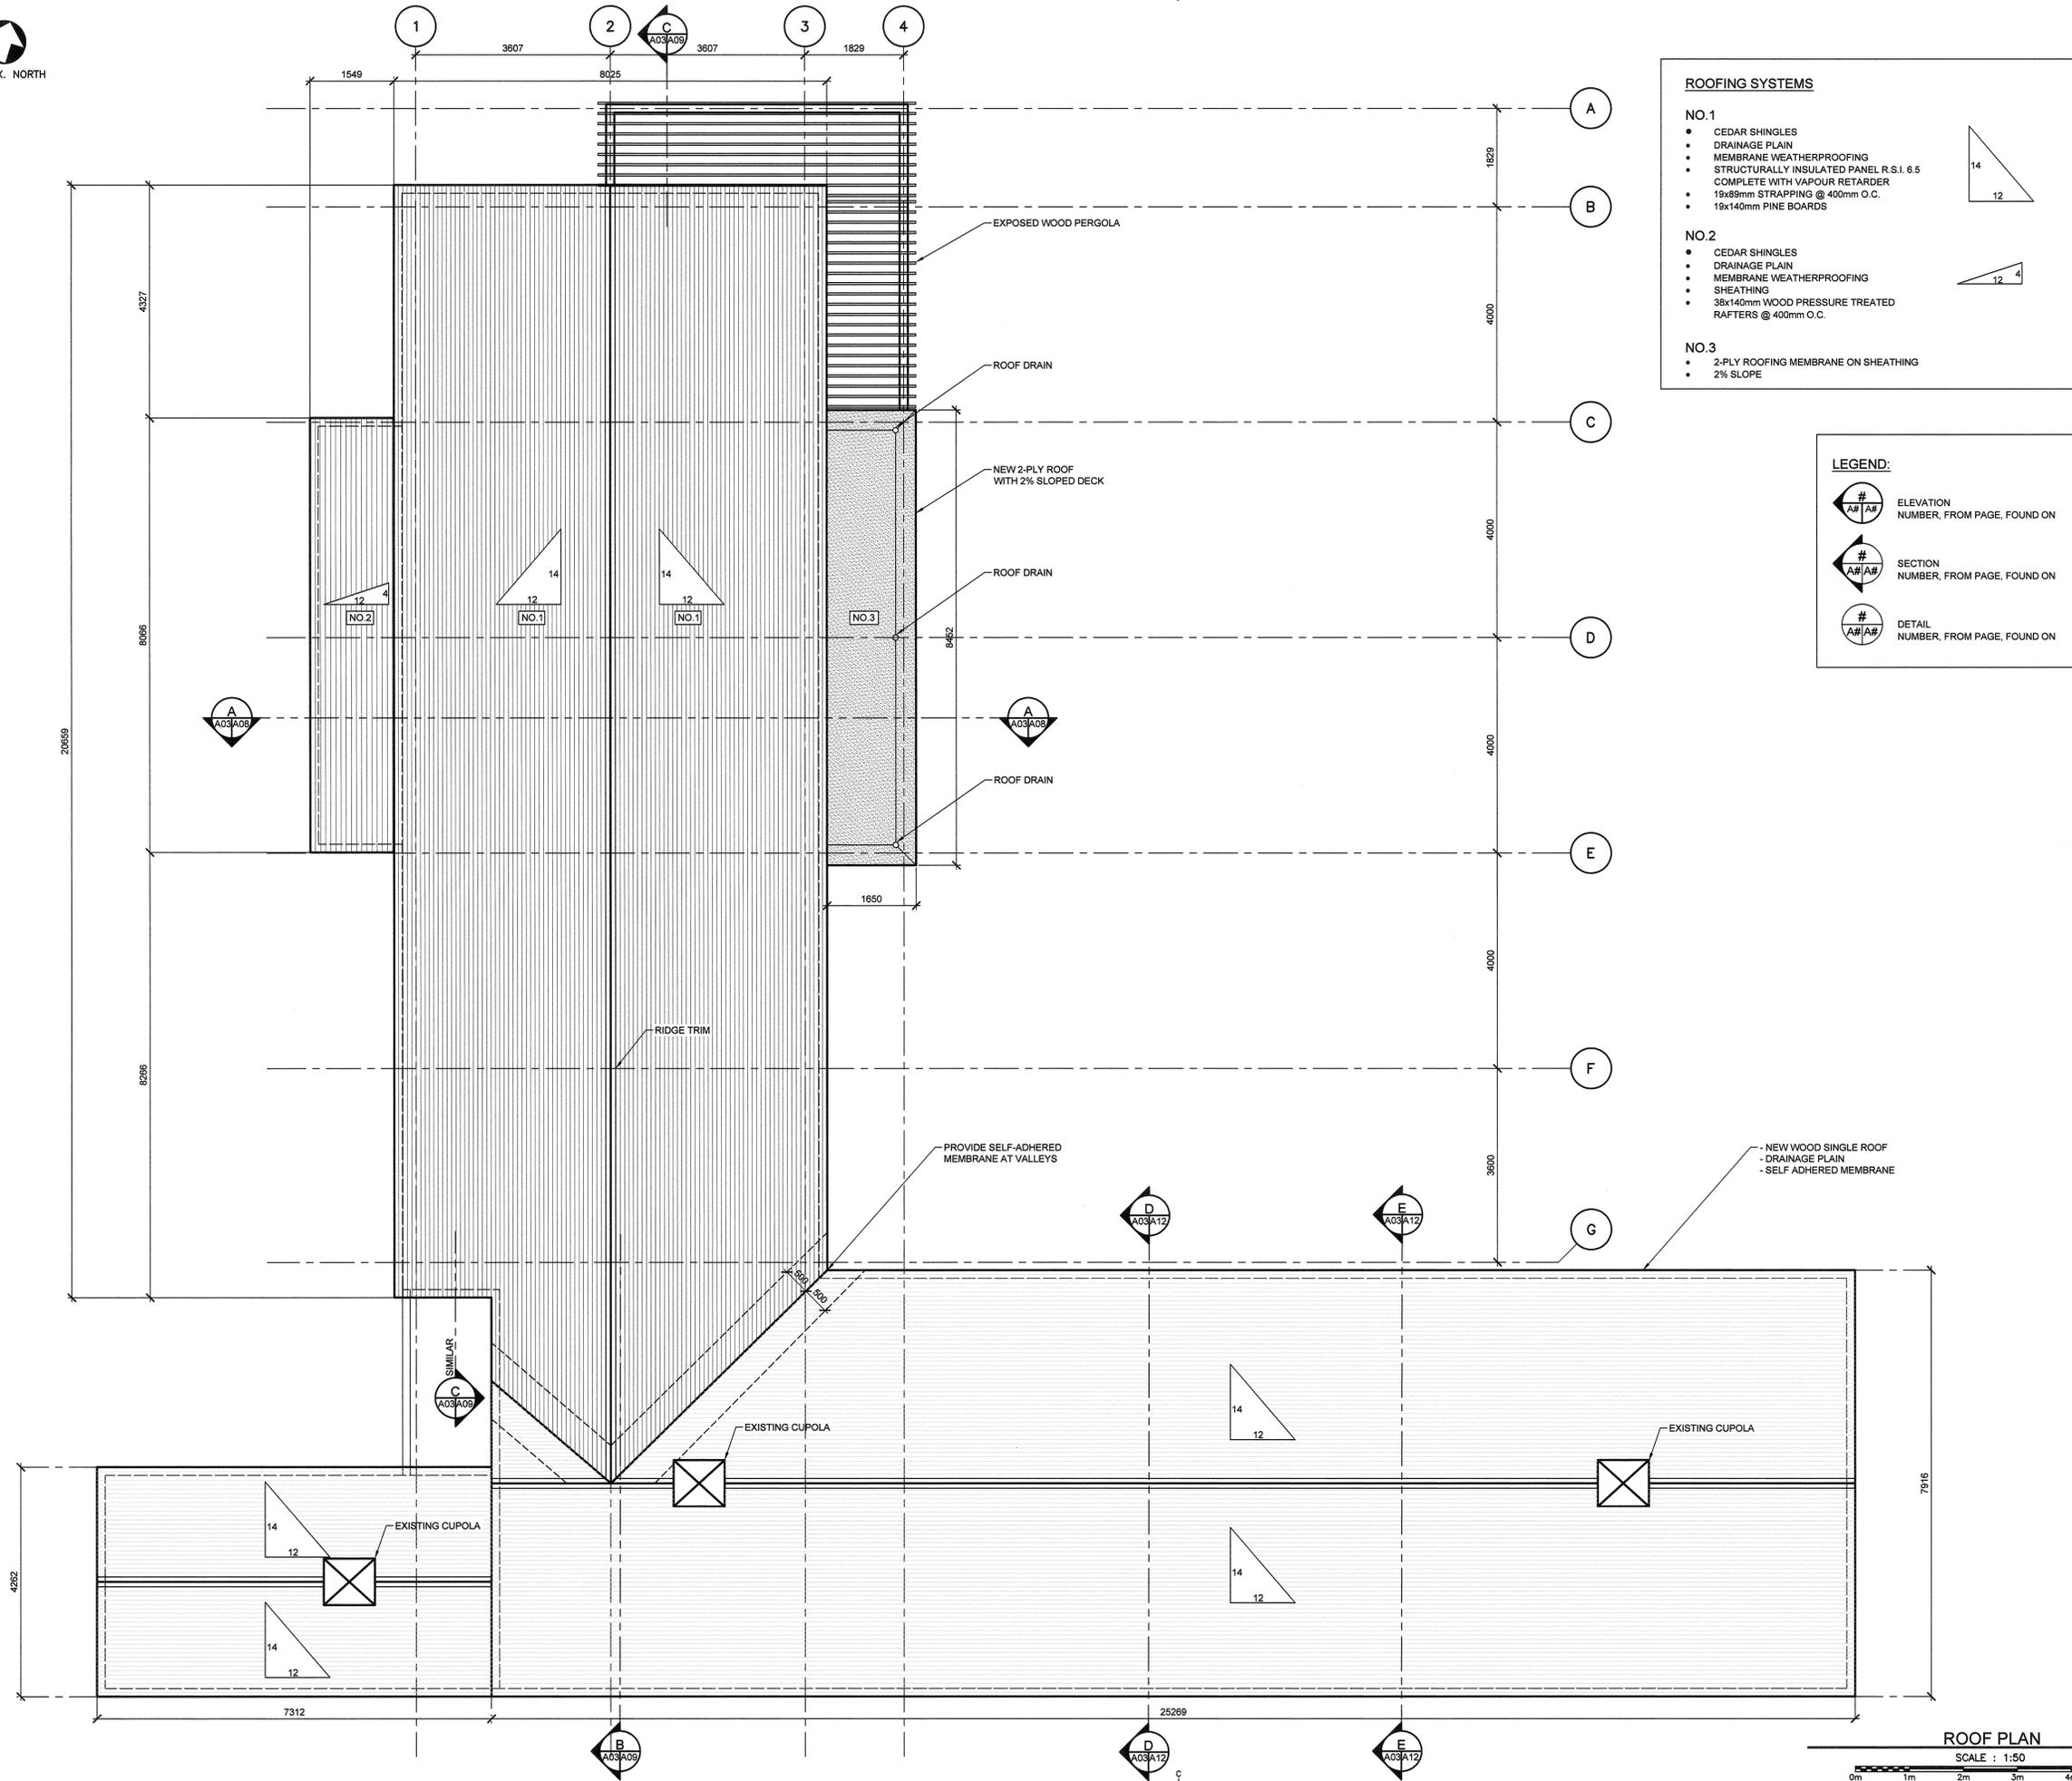

- ROOFING SYSTEMS**
- NO.1**
- CEDAR SHINGLES
  - DRAINAGE PLAIN
  - MEMBRANE WEATHERPROOFING
  - STRUCTURALLY INSULATED PANEL R.S.I. 6.5 COMPLETE WITH VAPOUR RETARDER
  - 19x99mm STRAPPING @ 400mm O.C.
  - 19x140mm PINE BOARDS
- NO.2**
- CEDAR SHINGLES
  - DRAINAGE PLAIN
  - MEMBRANE WEATHERPROOFING
  - SHEATHING
  - 38x140mm WOOD PRESSURE TREATED RAFTERS @ 400mm O.C.
- NO.3**
- 2-PLY ROOFING MEMBRANE ON SHEATHING
  - 2% SLOPE

**LEGEND:**

ELEVATION NUMBER, FROM PAGE, FOUND ON

SECTION NUMBER, FROM PAGE, FOUND ON

DETAIL NUMBER, FROM PAGE, FOUND ON



2	ISSUED FOR TENDER	11.29.2016
1	100% SUBMISSION	11.23.2016
0	99% SUBMISSION	11.9.2016

project / projet  
**GREEN GABLES-PHASE 1 BARN EXPANSION AND RENOVATION**  
 QUEENS CO., PEI

drawing / dessin  
**ARCHITECTURAL ROOF PLAN**

designed / conçu	KST
date	NOV - 2016
drawn / dessiné	GJU
date	NOV - 2016
approved / approuvé	
date	
Tender / Soumission	
PWGSC Project Manager / Administrateur de projets TPSC	
project number / no. du projet	R.081199.001
drawing no. / no. du dessin	A05 OF 12