

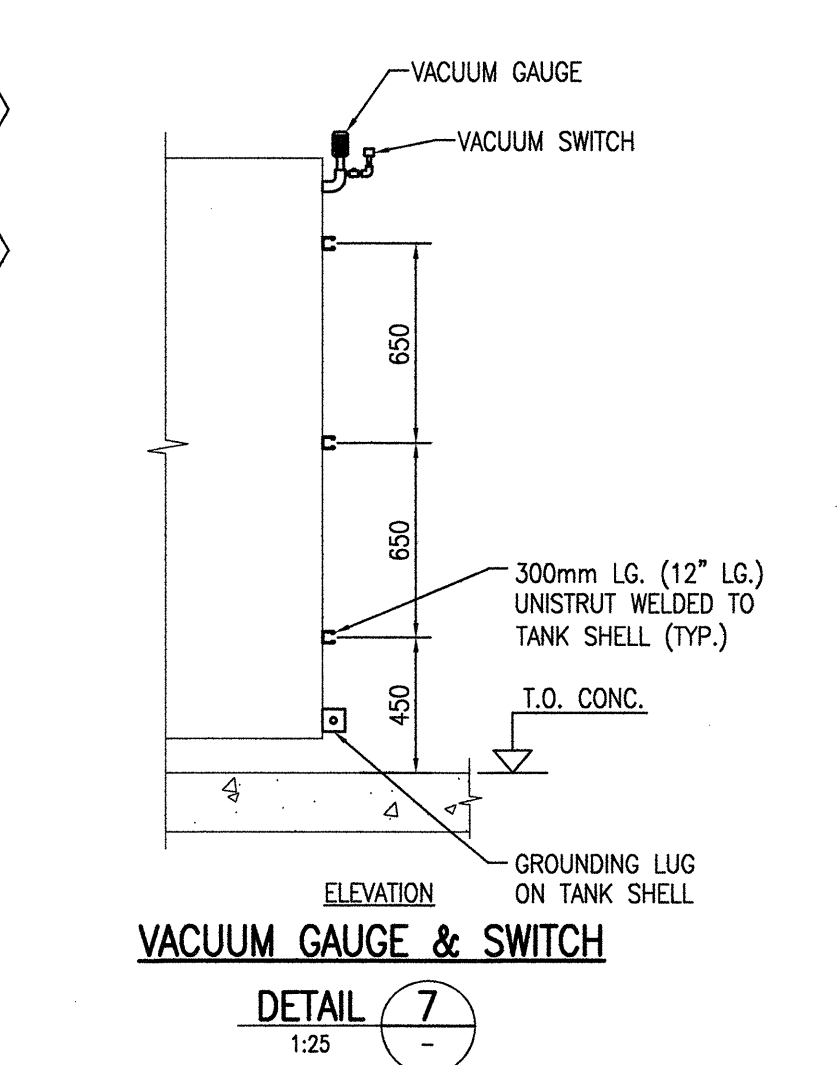
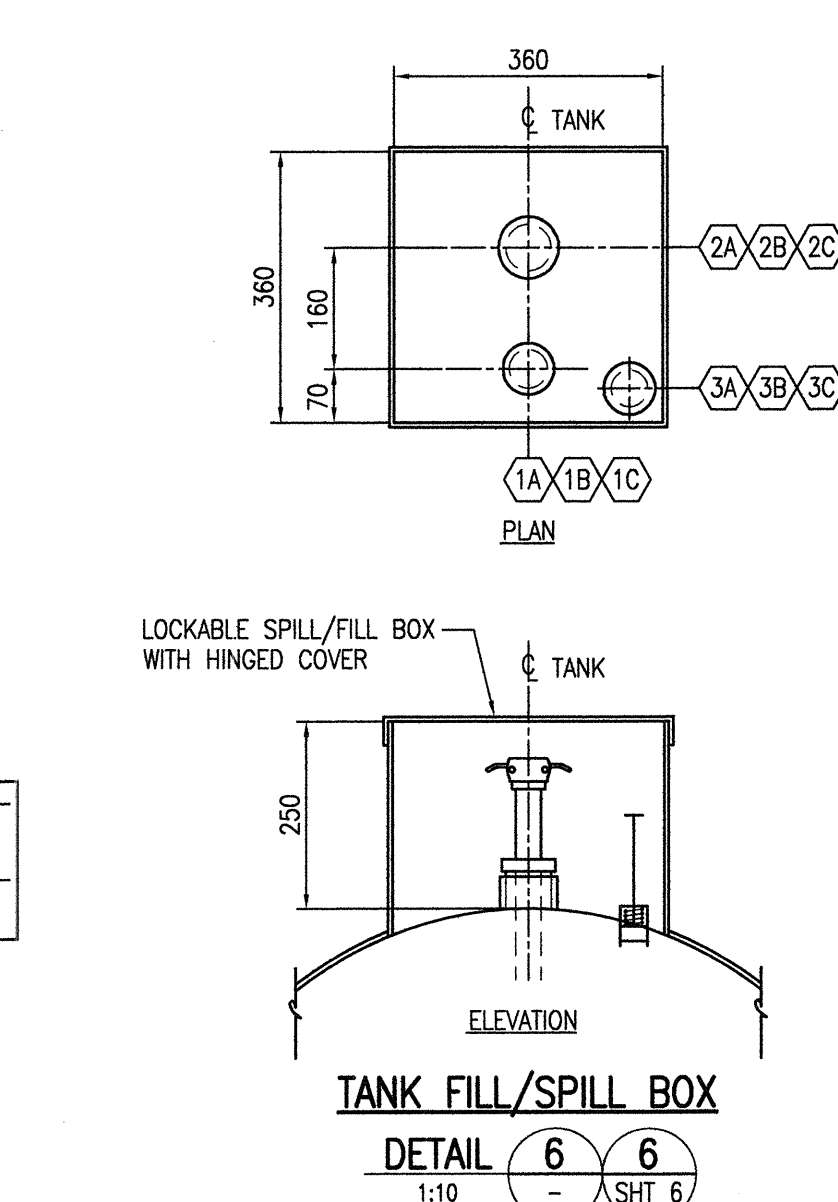
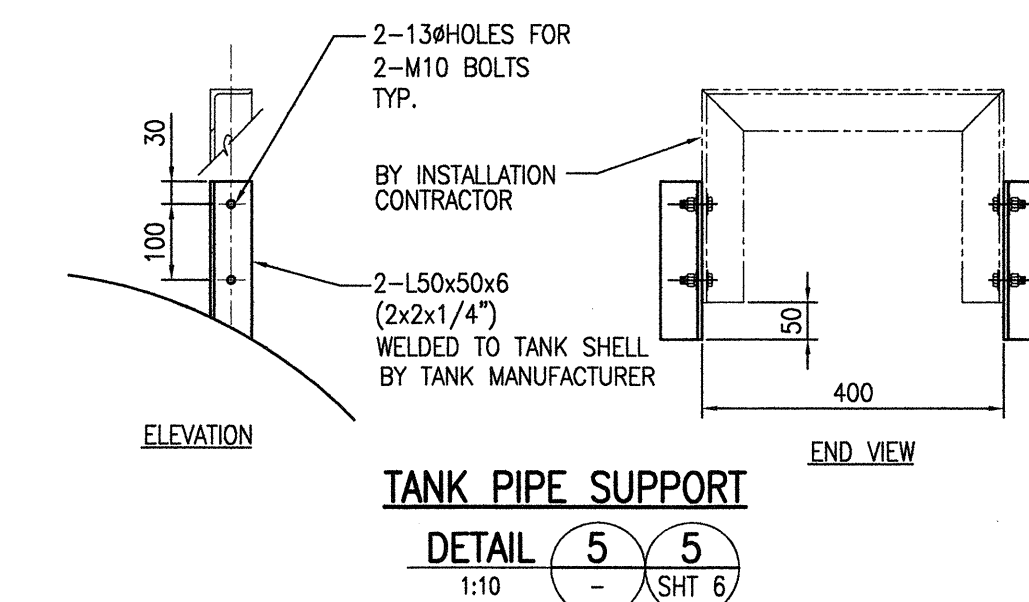
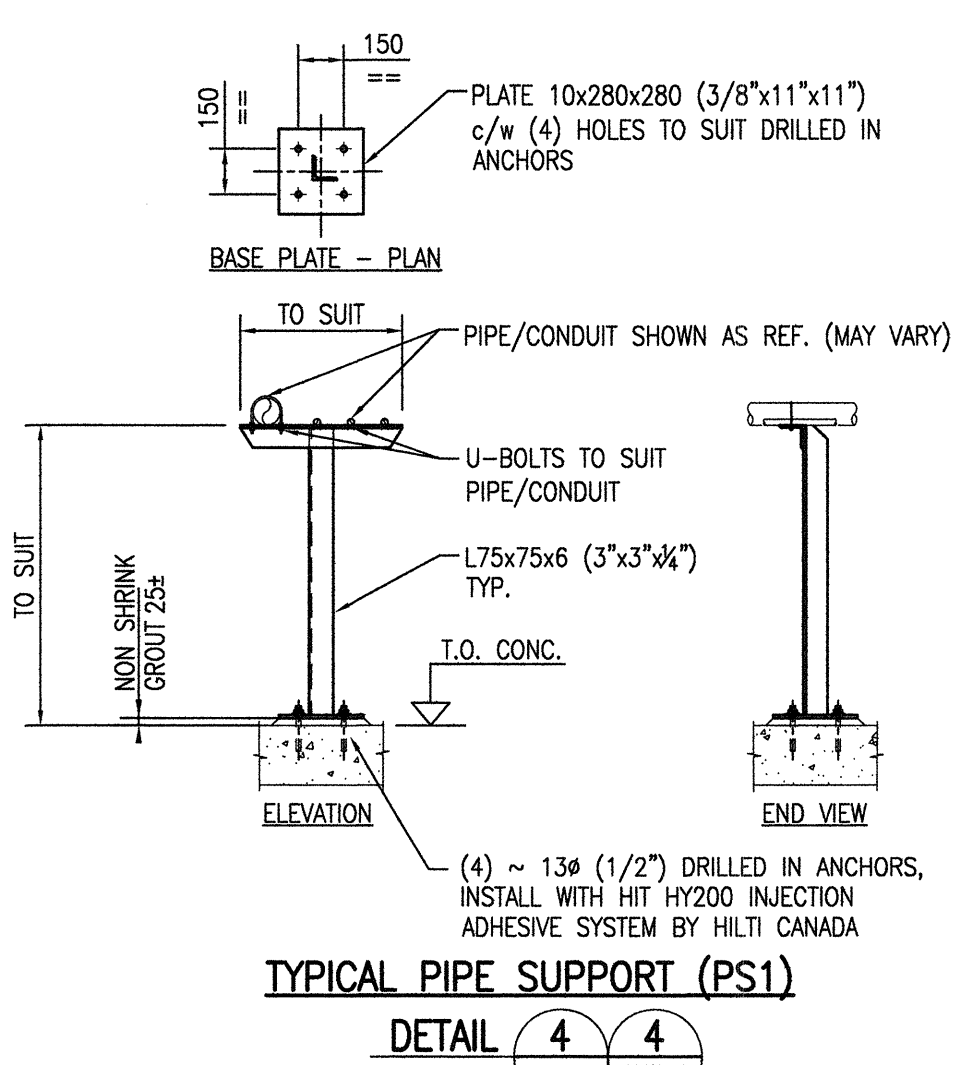
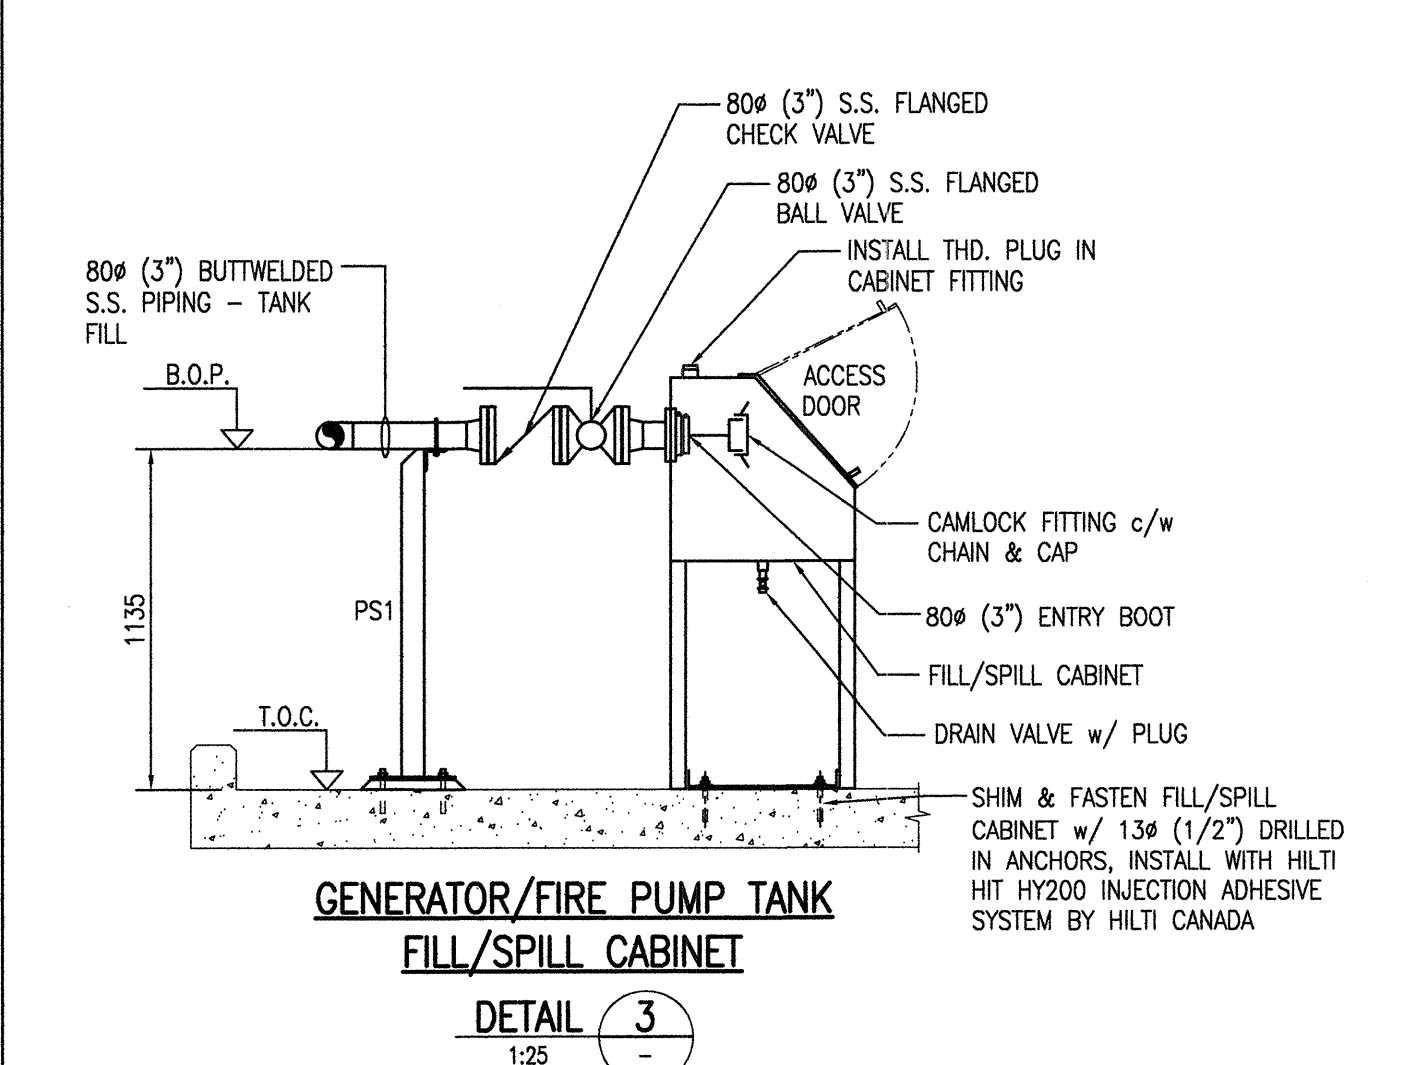
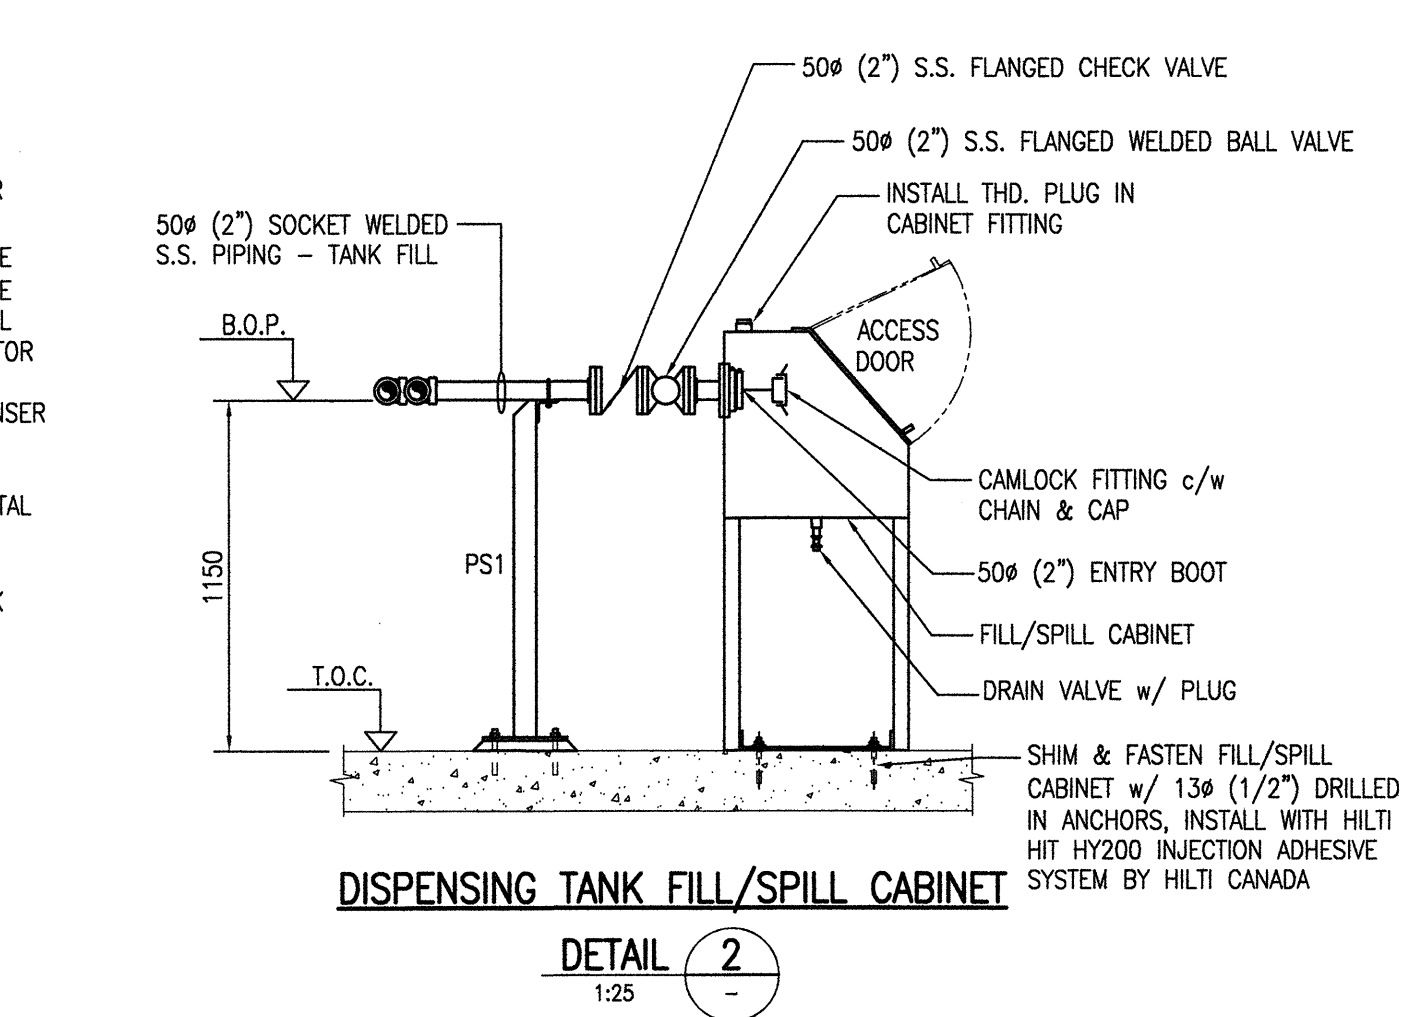
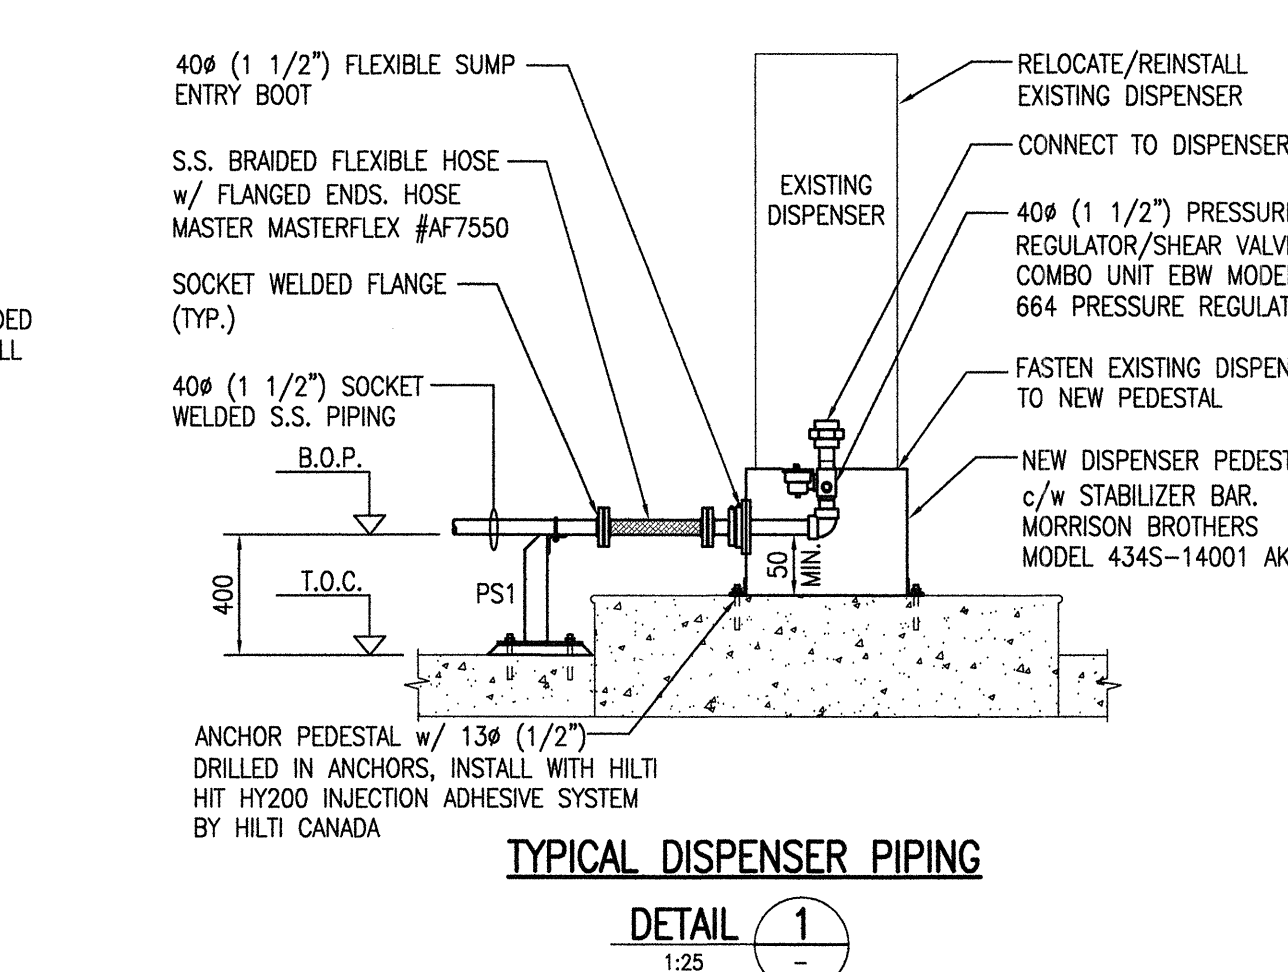
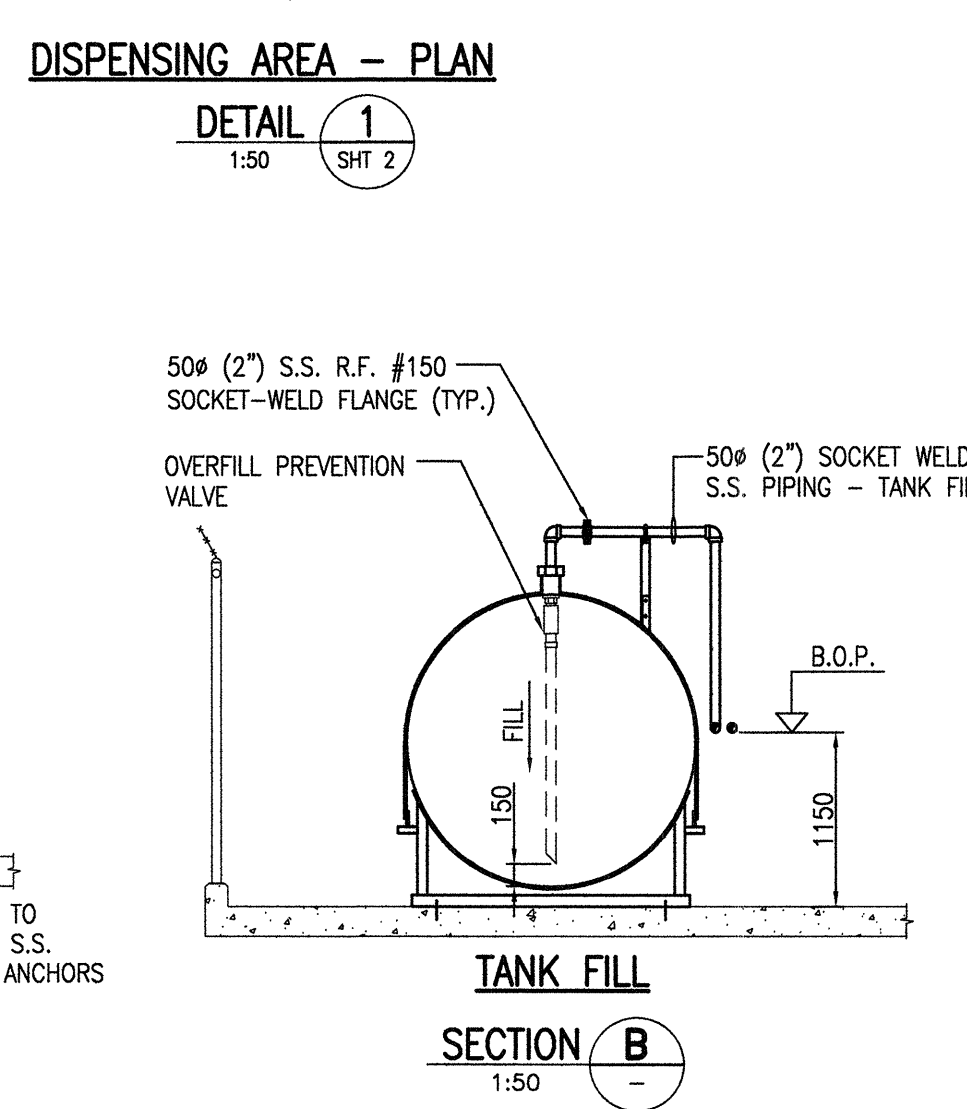


NEW SPLIT COMPARTMENT GASOLINE/DIESEL STORAGE TANK FITTING SCHEDULE

20,000L SPLIT COMPARTMENT STORAGE TANK (12,500L GASOLINE/7,500L DIESEL)
1915#x7172 LG. (75.375#x282.375" LG.)
ULC-S601 (DOUBLE-WALL VACUUM MONITORED)

1A/1B	50# (2") FNPT FITTING c/w 50#x25# (2"x1") DOUBLE TAPPED BUSHING, 25# (1") DROP PIPE, 25# (1") NIPPLE, TIGHT FILL CONNECTION AND DUST CAP (KAMLOK OR EQUAL) - WATER DRAW OFF
2A/2B	40# (1 1/2") FNPT FITTING c/w 40# (1 1/2") TIGHT FILL CONNECTION & DUST CAP (KAMLOK OR EQUAL) - DIPPING PORT
3A/3B	40# (1 1/2") FNPT FITTING c/w DRAIN VALVE - SPRING LOADED PLUNGER TYPE
4A/4B	50# (2") FNPT FITTING c/w 50#x40# (2"x1 1/2") D.T. BUSHING, 40# (1 1/2") DROP PIPE - DISPENSER SUPPLY
5A/5B	100# (4") FNPT FITTING c/w 100#x100mm LG. (4"x4" LG.) NIPPLE AND 50# (2") OVERFILL PREVENTION VALVE, MORRISON BROTHERS FIG. 9095A, SET @ 95% OF TANK CAPACITY - TANK FILL
6A/6B	100# (4") FNPT FITTING - LEVEL PROBE
7A/7B	100# (4") FNPT FITTING - SPARE
8A/8B	EMERGENCY VENT (SIZED AS PER ULC STANDARD)
9A/9B	50# (2") FNPT FITTING - VENT PIPE AND OPEN VAPOUR VENT WITH RAIN HOOD
10A	VACUUM MONITOR c/w GAUGE & SWITCH (SEE DETAIL 7)

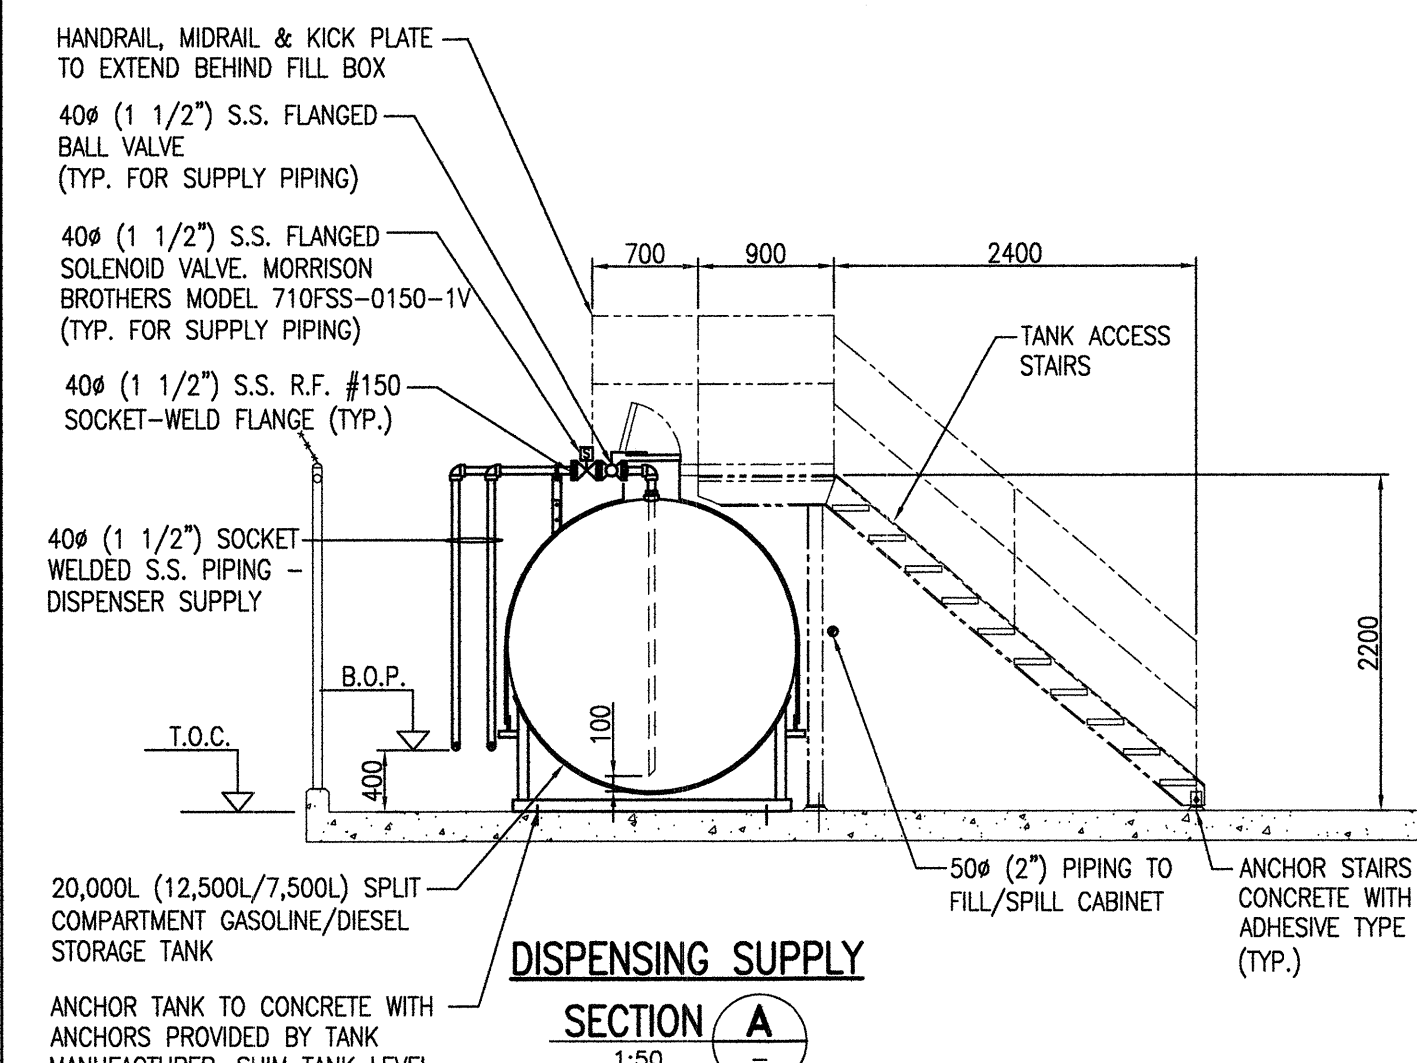

Revision/Section	Description/Description	Date/Date
P3	ISSUED FOR TENDER	NOV 23/16
PE	REVISED AS PER PVGSC COMMENTS	NOV 4/16
P1	ISSUED FOR REVIEW	OCT 4/16

Client/client

CORRECTIONAL SERVICE CANADA

Project Title/Titre du projet
AGASSIZ, BC
4732 CEMETARY ROAD

CSC KENT INSTITUTION PETROLEUM STORAGE TANK SYSTEMS REPLACEMENT

Consultant Signature Only
M.V.

Designed by/Concept par
D.D.

Drawn by/Dessiné par
C.K.

PWGSC Project Manager/Administrateur de Projet
TFSGC
DARYL SINCLAIR

Regional Manager, Architectural and Engineering Services
Gestionnaire régional, Services d'architecture et de génie, TFSGC
PREETIPAL PAUL

Drawing Title/Titre du dessin
DISPENSING AREA MECHANICAL PLAN, SECTIONS & DETAILS

Project No./No. du projet	Sheet/Feuille	Revision no./Révision no.
R.082450.001	5	P3

