


VULILEM #116 POLYURETHANE SEALANT (SUPPLIED WITH TRANSFLEX) TO BE PLACED ON EACH SIDE OF JOINT & BETWEEN TONGUE & GROOVE SECTION

1/2" Ø-13NC X 31.75 MM LG BOLTS WITH FLAT & LOCK WASHERS (CADMIUM PLATED) SEE NOTE


-TORQUE TO 55 FT. LBS.
-RETORQUE IN 4-24 HRS.

JOINT GAP VARIES - SEE TABLE

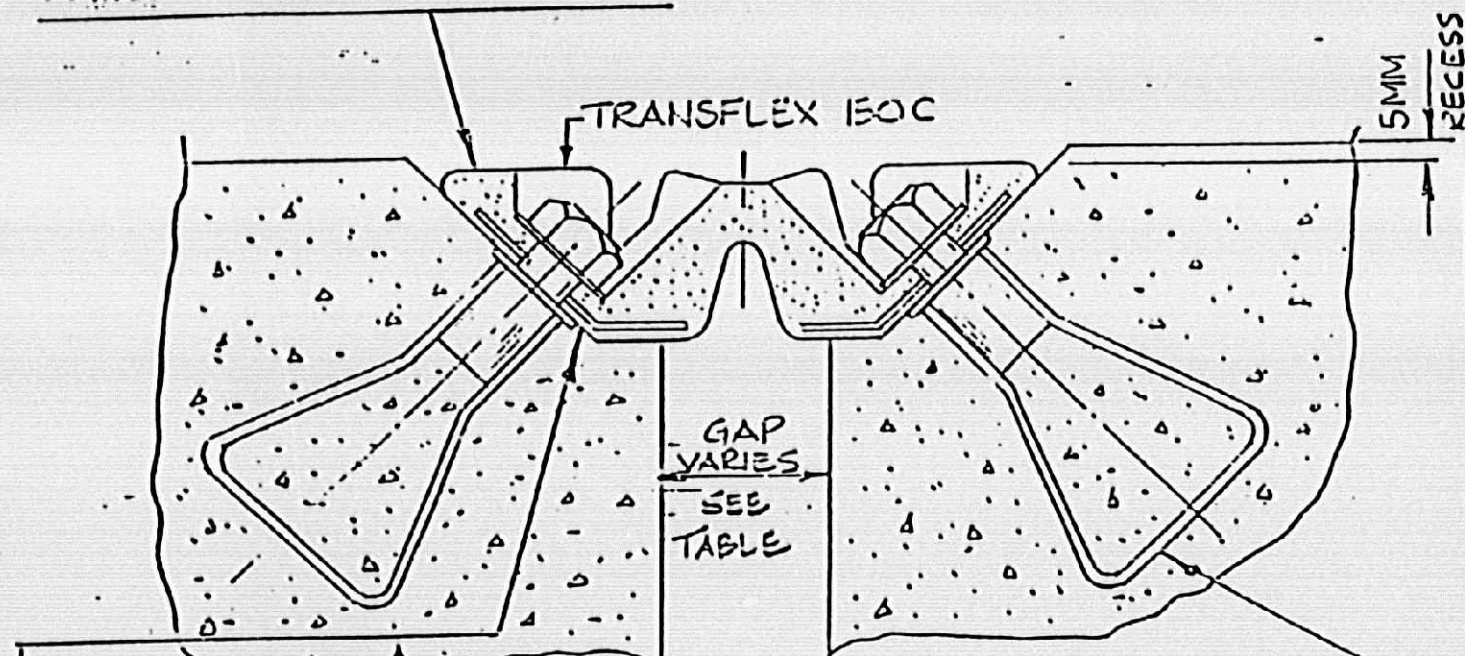

-BLOCKOUT FACE MUST BE SOUND, FREE OF VOIDS, SKIPS & SPALLS.
-CORRECT WITH AN EPOXY GEL SUCH AS CONCRESSIVE #1411 OR #1433 (SUPPLIED BY OTHERS)


LFW TYPE - INSERT (CADMIUM PLATED) SEE NOTE

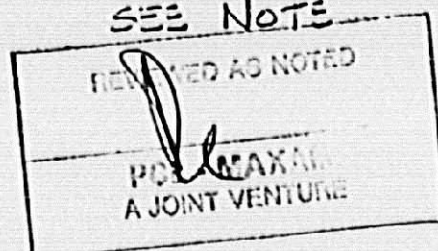

-TYPICAL CROSS SECTION-

-GAP TABLE-

TEMPERATURE	+5°C	0°C	-5°C	ADJUSTMENT EACH 50°C VARIATION
FIXED JOINT	40MM	40MM	40MM	0.0 MM
EXPANSION JOINTS	39MM	40MM	41MM	1.0MM

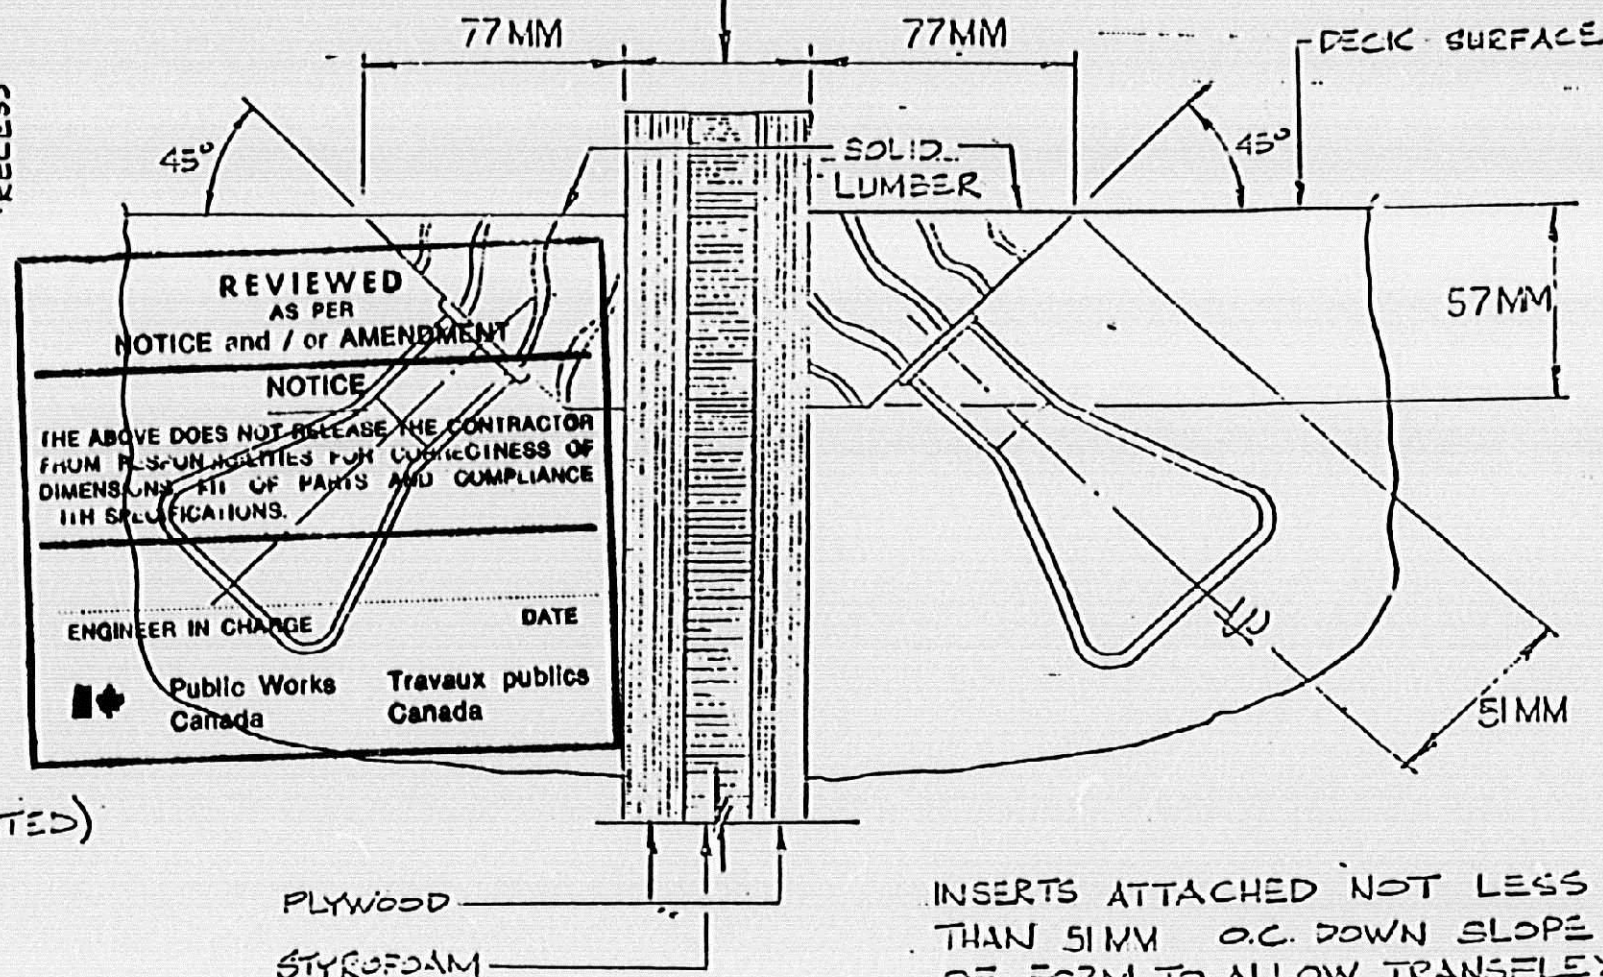

-TYPICAL CROSS SECTION @ 0°C TEMPERATURE -
-FORMING DETAIL FOR ANCHORS -

NOTE: CADMIUM PLATING TO ASTM-A-165-20 COATING TYPE T5

18.41.83
MICROFILMED

P.W.C. 800361
CORAL CK. BRIDGE - BANFF

SCALE: NTS
DATE: 8-86

APPROVED BY

DRAWN BY

TRANSFLEX 150 C EXPANSION JOINT

TERRY CONSTRUCTION SPECIALTIES
NORTH VANCOUVER

DRAWING NUMBER
TWO OF TWO