


NOTE:
ALL DIMENSIONS ARE TO
BE VERIFIED BY GENERAL
CONTRACTOR ON SITE.

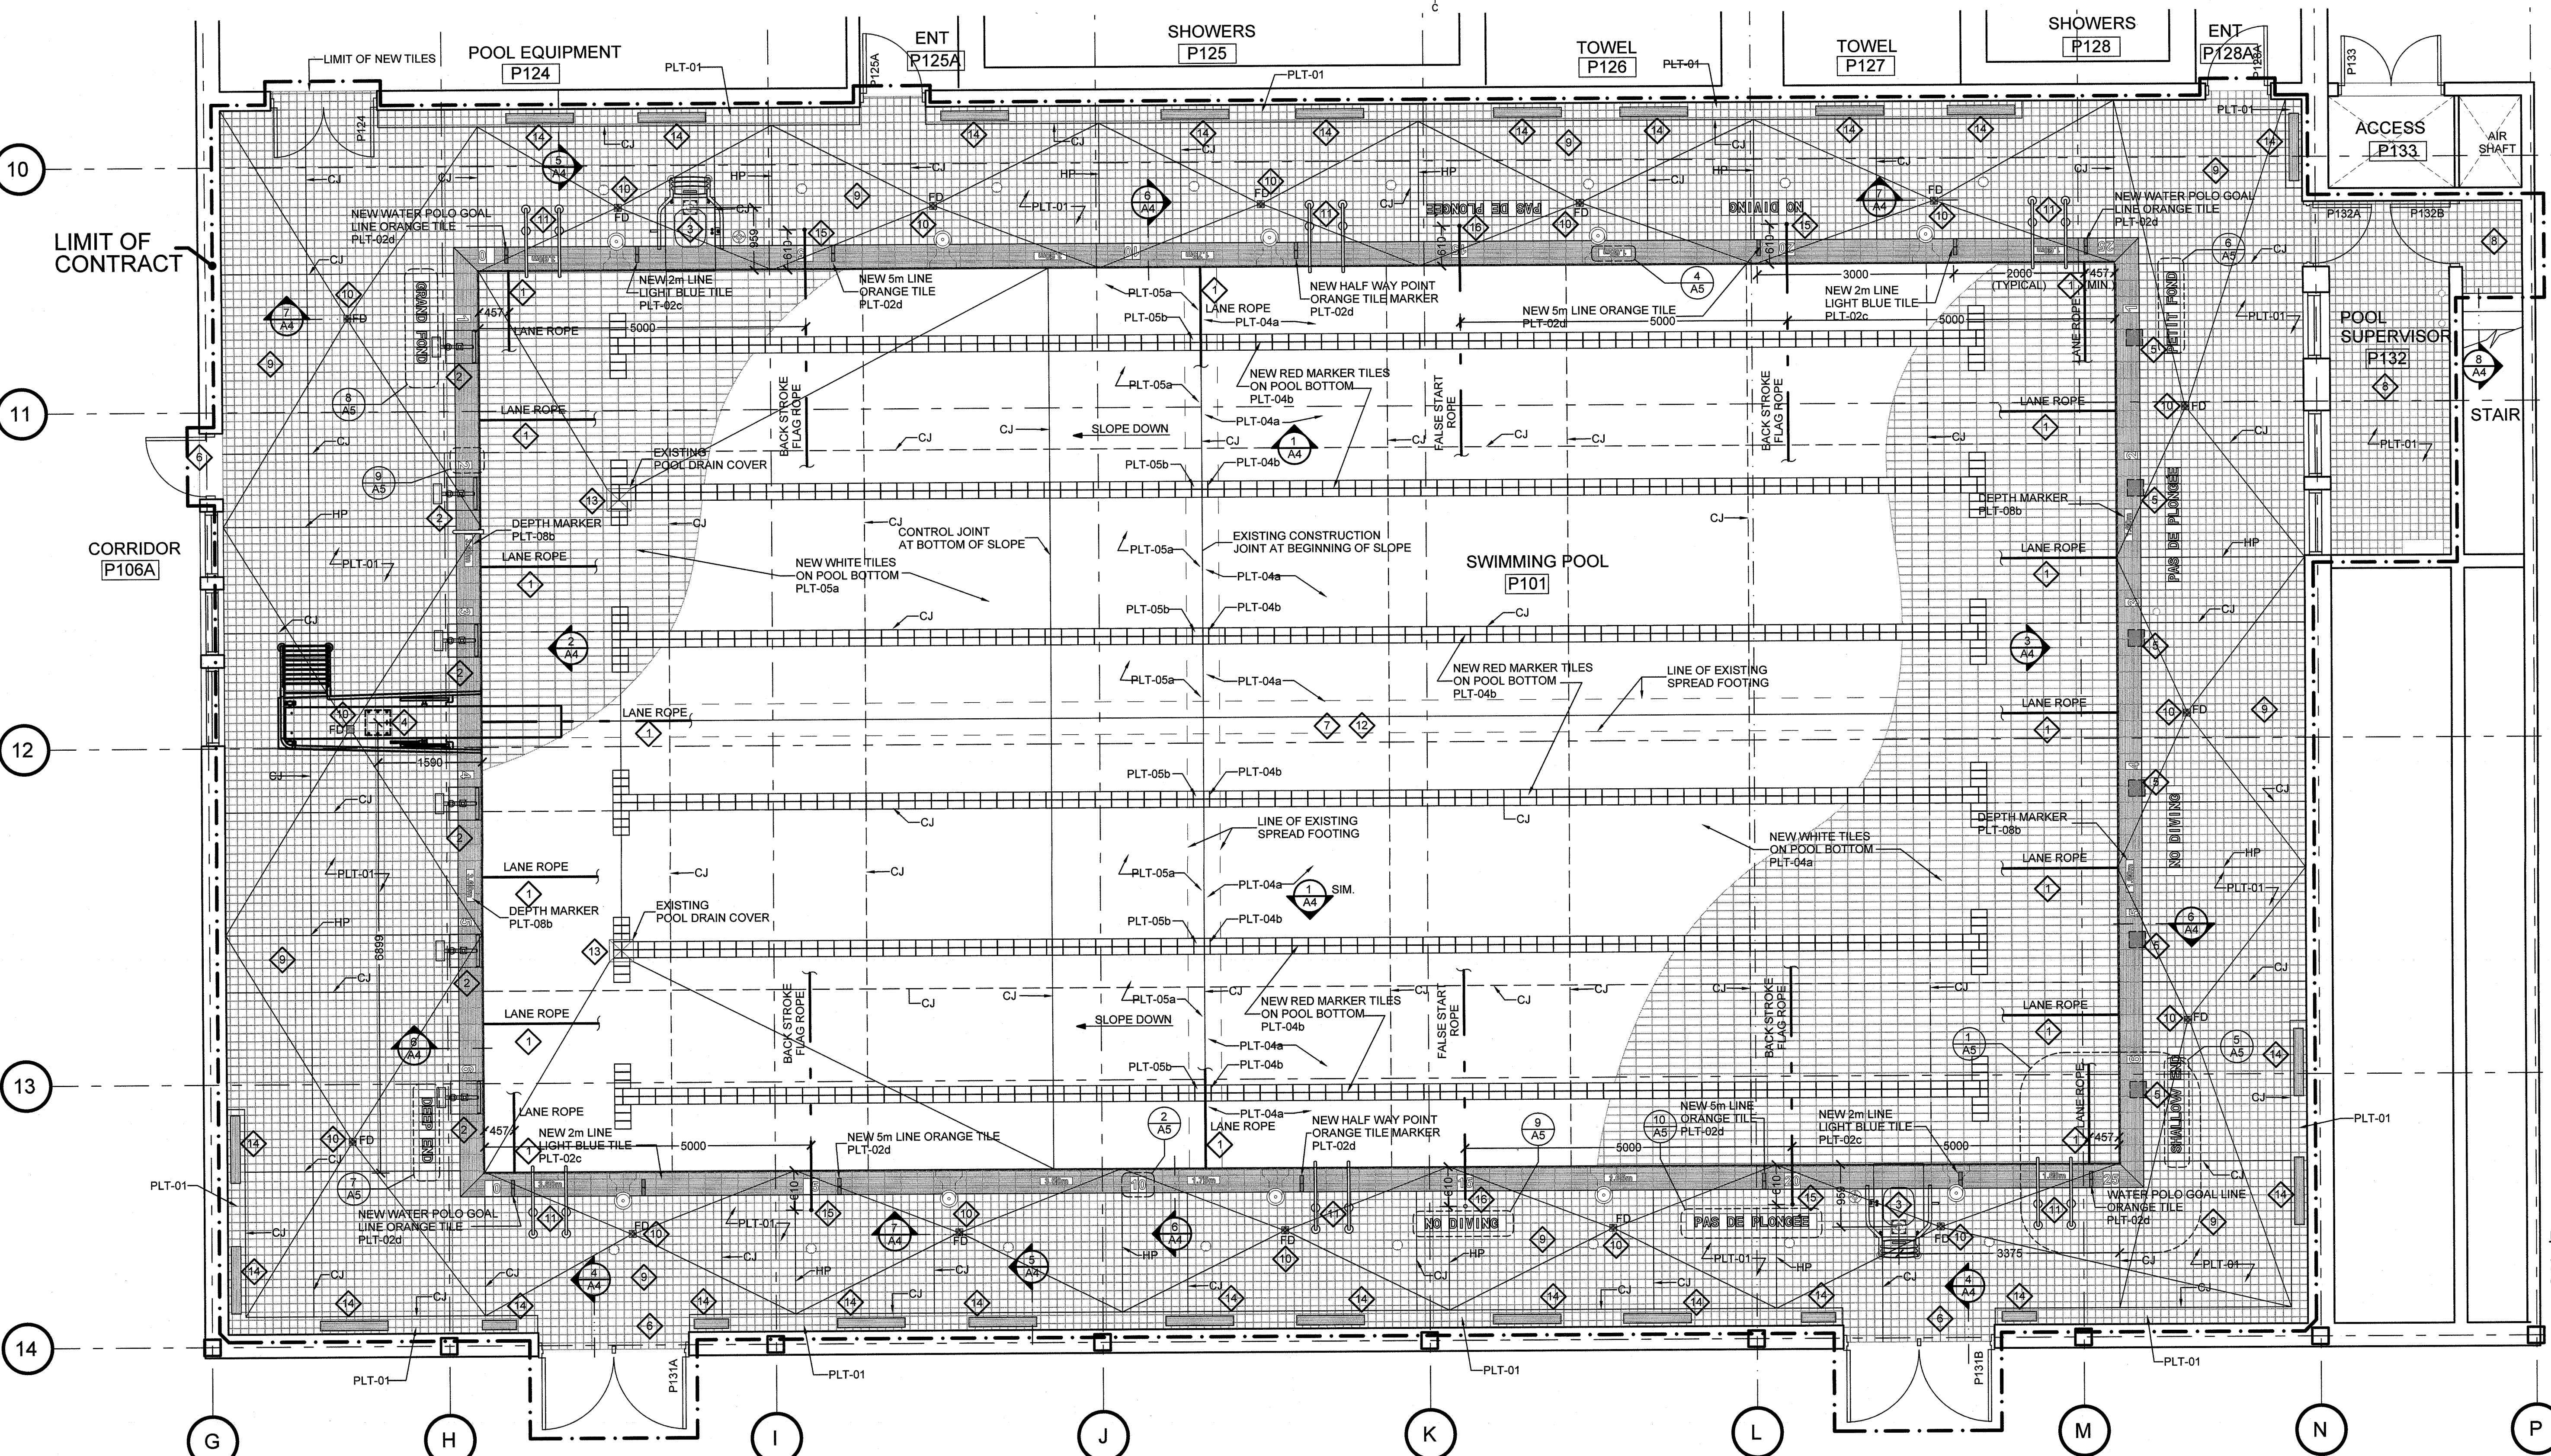

1
A3 RENOVATION PARTIAL FLOOR PLAN - SWIMMING POOL
SCALE: 1:50
0m 1m 2m 3m 4m 5m

RENOVATION NOTES

- CORE DRILL EXISTING POOL TANK WALL TO ACCOMMODATE THE INSTALLATION OF NEW LANE ROPE ANCHORS. NEW ANCHORS TO BE GROUNDED TO EXISTING GROUNDING SYSTEM. SEE STRUCTURAL AND ELECTRICAL DRAWINGS.
- CORE DRILL EXISTING SUSPENDED CONCRETE DECK SLAB TO ACCOMMODATE THE INSTALLATION OF THE EXISTING RELOCATED STARTING BLOCKS. SEE STRUCTURAL DRAWINGS.
- CORE DRILL EXISTING SUSPENDED CONCRETE DECK SLAB AS REQUIRED TO ACCOMMODATE THE INSTALLATION OF NEW LIFE GUARD STAND. REFINISH EXISTING EMERGENCY ALARM BUTTON SUPPORT POST AND RE-INSTATE ADJACENT TO NEW LIFE GUARD STAND.
- CORE DRILL EXISTING SUSPENDED CONCRETE DECK SLAB AS REQUIRED TO ACCOMMODATE THE INSTALLATION OF THE NEW 3m DIVING PLATFORM. SEE STRUCTURAL DRAWINGS.
- SUPPLY AND INSTALL NEW CONCRETE INFILL AT EXISTING HOLES WHERE STARTING BLOCKS WERE LOCATED AT SHALLOW END OF POOL.
- INSTALL NEW THRESHOLDS AT EXISTING INTERIOR AND EXTERIOR DOORS AS PER SCHEDULE.
- PRESSURE WASH/LIGHT SAND BLAST WALLS AND FLOORS OF EXISTING POOL TANK. EPOXY INJECT ALL VISIBLE CRACKS IN THE CEMENT SURFACE. FILL POOL TANK WITH TEMPERED WATER TO 150mm BELOW TOP OF POOL DECK. LET WATER SIT FOR 24 HOURS. IF WATER HOLDS, DRAIN TANK AND DRY CEMENT SURFACE. INSTALL SPECIFIED WATER PROOFING ON TANK FLOOR AND WALLS. FILL POOL TANK WITH TEMPERED WATER TO 150mm BELOW TOP OF POOL DECK. LET SIT FOR 24 HOURS. DRAIN POOL AND PREPARE FOR TILE INSTALLATION. SUPPLY AND INSTALL NEW PORCELAIN TILE FINISH AT POOL TANK BOTTOM, WALLS AND EDGE c/w SPECIALTY TILE AS NOTED. INSTALL MOVEMENT JOINTS AT MAXIMUM 3048mm O.C. IN FIELD TILE APPLICATION AND AT INTERIOR CORNERS. SEE FINISH SCHEDULE.
- SUPPLY AND INSTALL NEW PORCELAIN TILE FINISH IN POOL SUPERIOR OFFICE P132 AND STAIR P134. EXTEND TILE IN STAIR P134 TO EDGE OF TOP LANDING AND TERMINATE WITH TRIM AS SPECIFIED. SEE FINISH SCHEDULE.
- SUPPLY AND INSTALL NEW PORCELAIN TILE FINISH ON POOL DECK AND MECHANICAL HEATING CURBS c/w SPECIALTY TILES AS NOTED. INSTALL MOVEMENT JOINT AS NOTED. SEE FINISH SCHEDULE.
- SUPPLY AND INSTALL NEW REPLACEMENT FLOOR DRAINS AT EXISTING FLOOR DRAIN LOCATIONS. SEE DETAILS.
- REINSTATE EXISTING POOL ACCESS LADDER RAILING c/w ESCUTCHEONS.
- RE-FILL THE POOL TANK WITH TEMPERED WATER AND RE-INSTALL LANE ROPES. CONTRACTOR TO SUBMIT A PLAN FOR FILLING OF TANK.
- REINSTATE POOL DRAIN COVERS
- REINSTATE EXISTING VENTILATION HEATING GRILLES IN CURBS.
- SUPPLY AND INSTALL NEW BACK STROKE FLAGS, STANCHIONS AND ANCHOR SOCKETS AS SPECIFIED. UNIT TO BE COMPLETED WITH WEDGE ASSEMBLY AND GROUNDED. SEE STRUCTURAL AND ELECTRICAL DRAWINGS.
- SUPPLY AND INSTALL NEW FALSE START (RECALL) ROPE, STANCHIONS AND ANCHOR SOCKETS AS SPECIFIED. UNIT TO BE COMPLETED WITH WEDGE ASSEMBLY AND GROUNDED. SEE STRUCTURAL AND ELECTRICAL DRAWINGS.

POOL
RENOVATION PROJECT
CANADIAN COAST
GUARD COLLEGE
NOVA SCOTIA

RENOVATION
PARTIAL FLOOR PLAN
- SWIMMING POOL

designed	D.E.M.	conçu	
date	18 NOVEMBER 2016		
drawn	S.M.	dessiné	
date	25 JANUARY 2017		
approved		approuvé	
date			
Tender		Scummission	
PWSC Project Manager	Administrateur de projets TPSC		
project number	R.065476.610		
drawing no.	A3	no. du dessin	