

PORCELAIN TILE

PLT-01 FIELD TILE POOL DECK, OFFICE AND STAIR
SIZE: 119mm x 119mm x 14mm
FINISH: ANTI SLIP - NATURAL, UNGLAZED
COLOUR: ACIKER GREY

PLT-02 WALL BASE, WATER POLO MARKER TILES
SIZE: 119mm x 244mm x 8.5mm
FINISH: NATURAL, GLAZED
COLOUR: (a) DARK BLUE
(b) ACIKER GREY
(c) PALE BLUE
(d) ORANGE

PLT-03 FIELD TILE AT POOL TANK EDGE (TWO ROWS)
SIZE: 119mm x 224mm x 14mm
FINISH: ANTI SLIP - GROOVED
COLOUR: DARK BLUE


PLT-04 FIELD TILE AT POOL TANK ENDS (800mm BELOW WATER LINE)
SIZE: 119mm x 224mm x 14mm
FINISH: ANTI SLIP - RAISED CELLS / DIAMOND GRID
COLOUR: (a) OFF WHITE / IVORY
(b) RED

PLT-05 FIELD TILE AT POOL TANK FLOOR (DEEP END)
AND POOL TANK WALLS
SIZE: 119mm x 224mm x 14mm
FINISH: GLAZED
COLOUR: (a) OFF WHITE / IVORY
(b) RED


PLT-06 SPECIAL SHAPE EDGE TILE WITH FINGER GRIP
AT POOL TANK PERIMETER
SIZE: 119mm x 224mm x 35mm (60mm AT FINGER GRIP) MITRE AT TANK CORNER
FINISH: GROOVED
COLOUR: DARK BLUE

PLT-07 PRINTED TILE: LINE MARKING, SAFETY TEXT AND LANE LENGTH
SIZE: 119mm x 224mm x 14mm (VERTICAL)
FINISH: MATT
COLOUR: (a) ACIKER GREY WITH DARK BLUE TEXT AT POOL DECK
(b) OFF WHITE / IVORY WITH DARK BLUE TEXT AT POOL TANK WALLS
(c) OFF WHITE / IVORY WITH BLACK DOT


PLT-08 PRINTED TILE: POOL DEPTH
SIZE: 119mm x 224mm x 14mm (HORIZONTAL)
FINISH: MATT
COLOUR: (a) ACIKER GREY WITH DARK BLUE TEXT AT POOL DECK
(b) OFF WHITE / IVORY WITH DARK BLUE TEXT AT POOL TANK WALLS

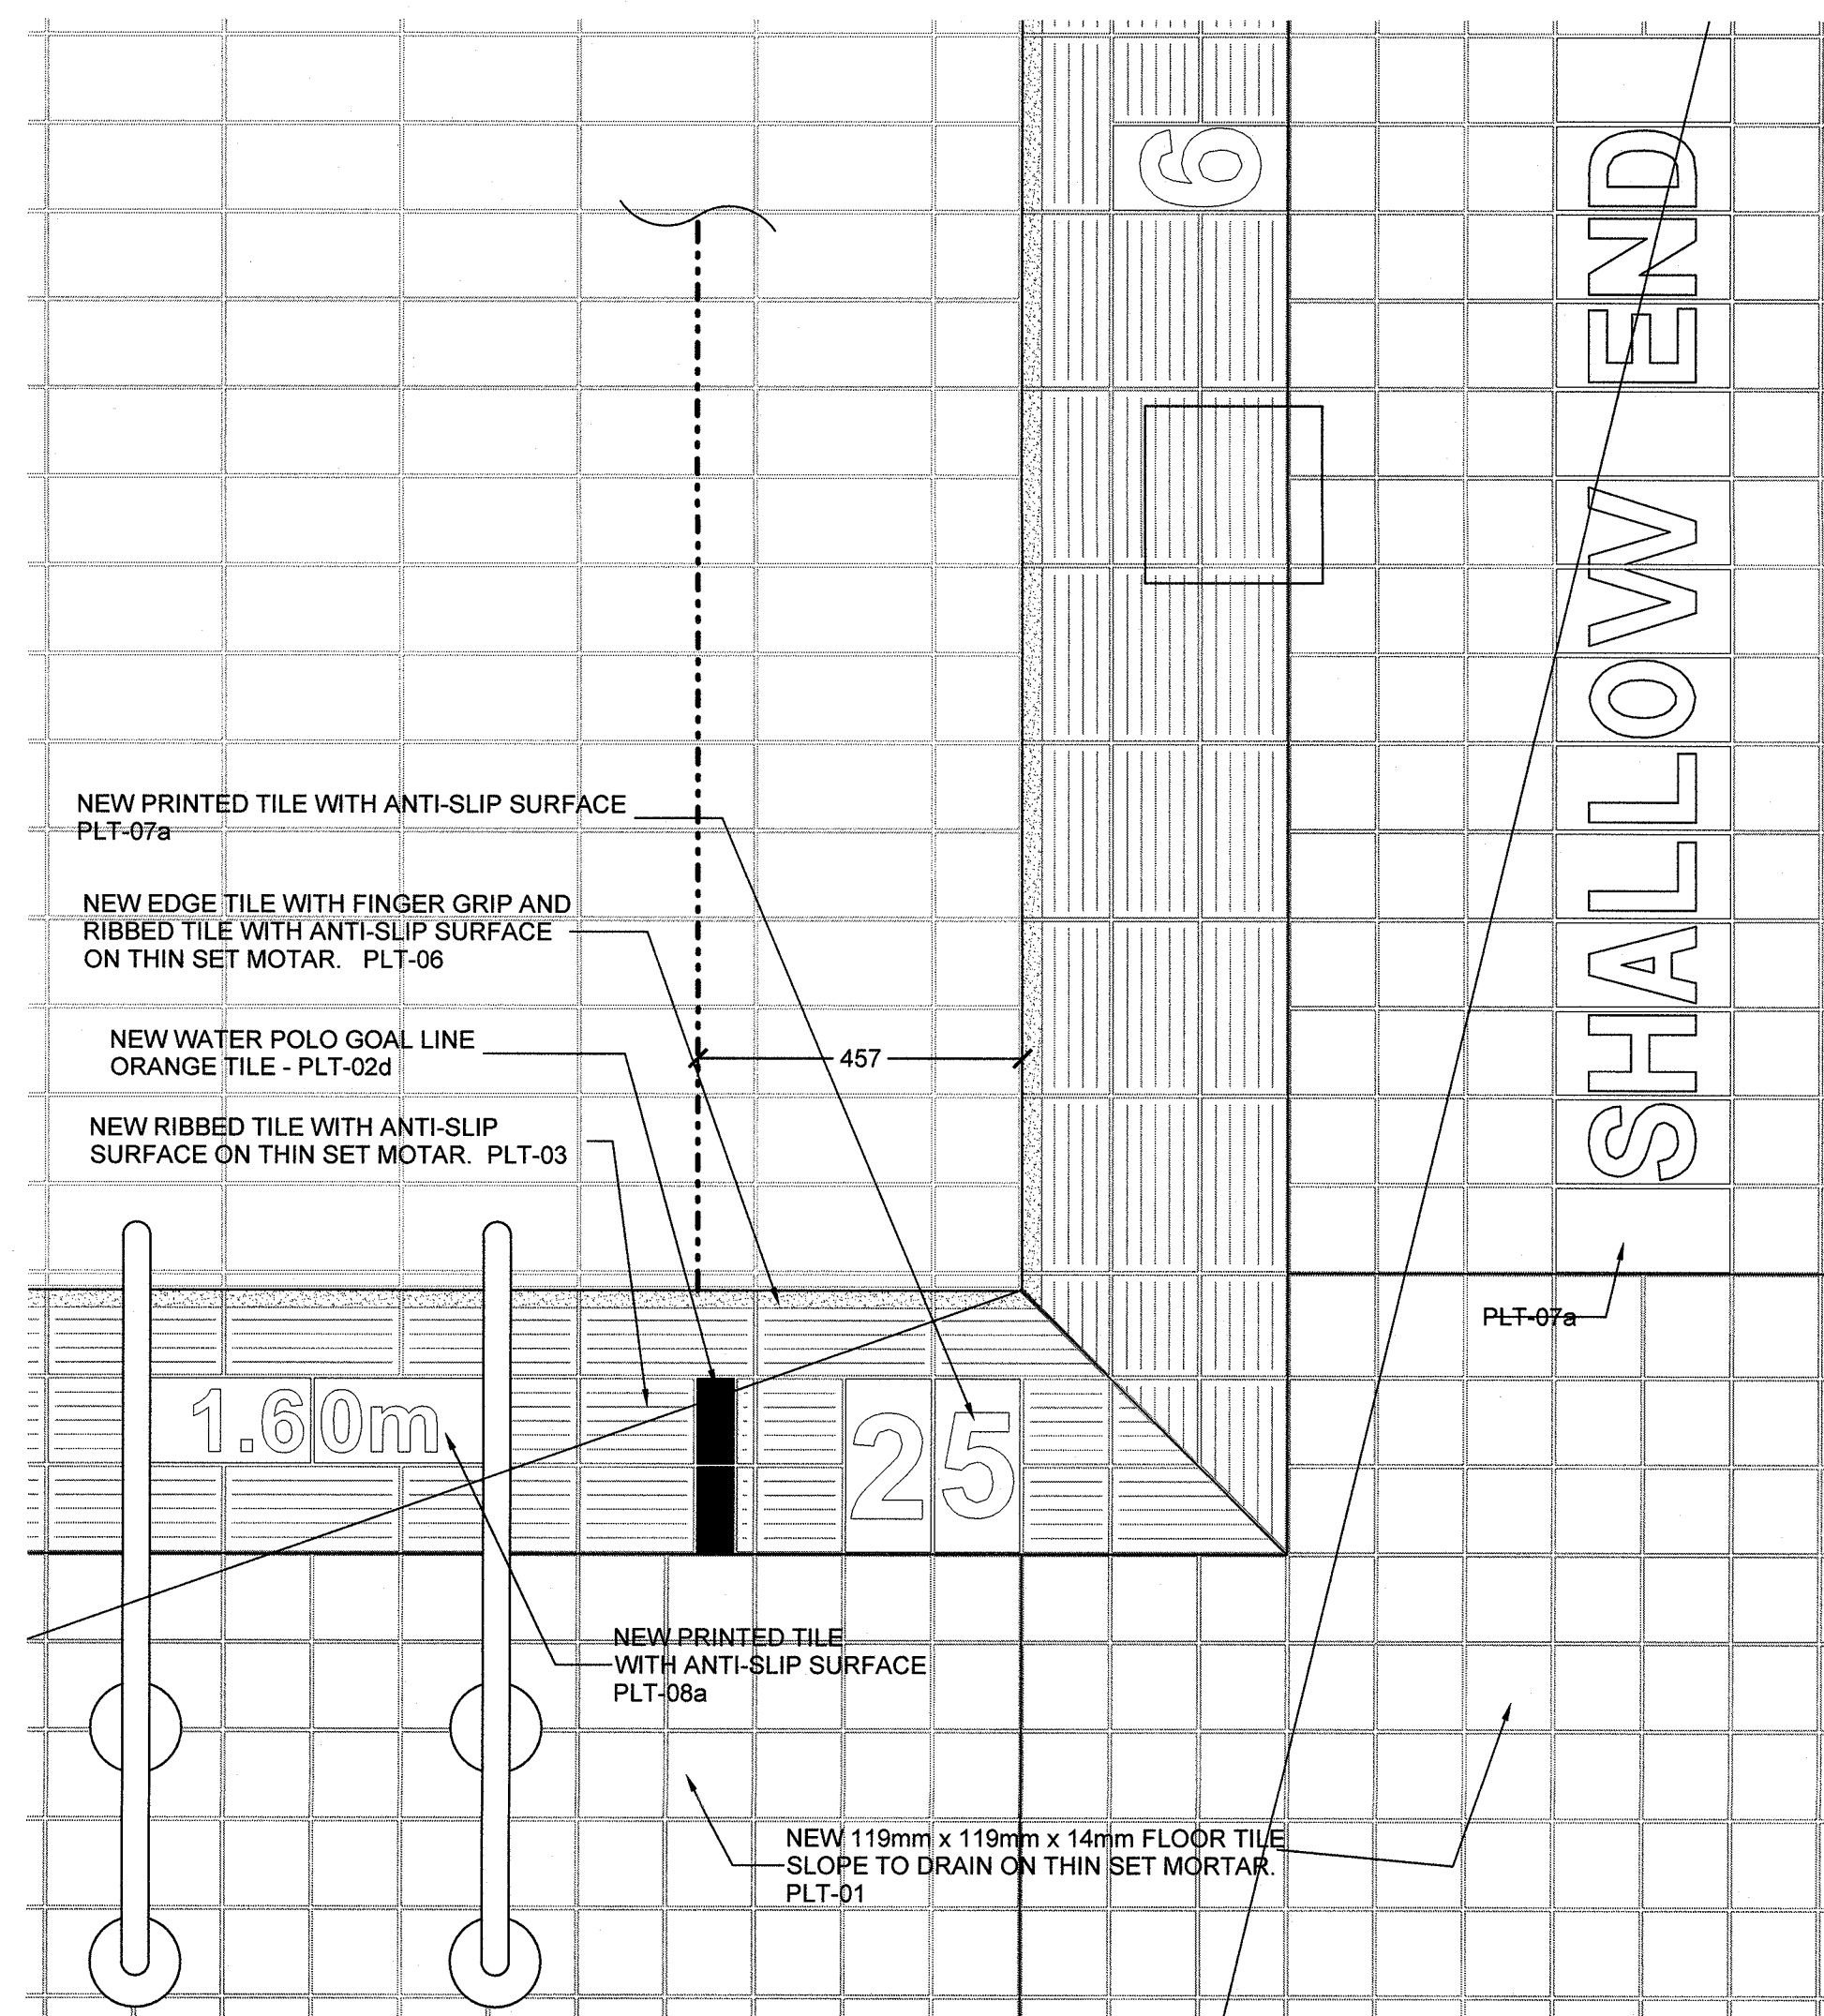


1 PLAN DETAIL
A5
SCALE: 1:10

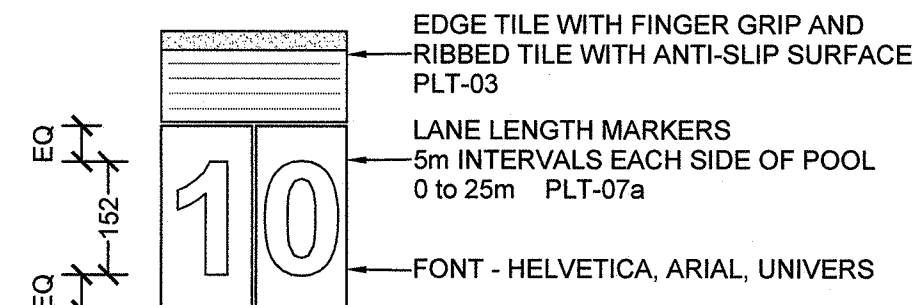


2 PLAN DETAIL
A5
SCALE: 1:10

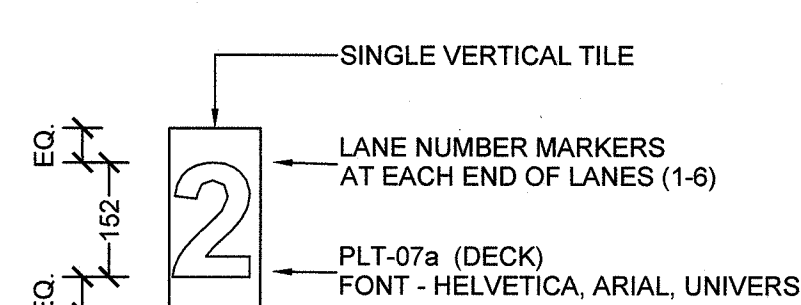


3 PLAN DETAIL
A5
SCALE: 1:10

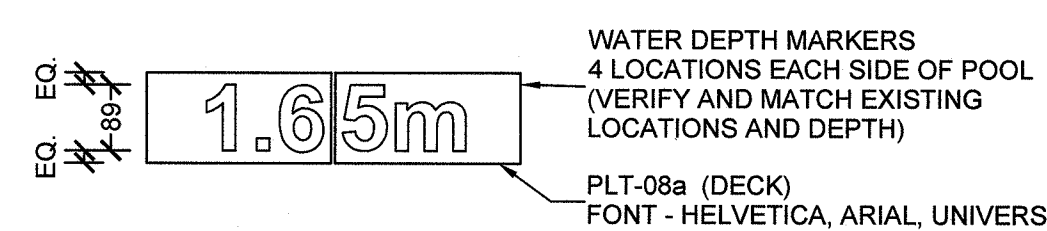


4 PLAN DETAIL
A5
SCALE: 1:10

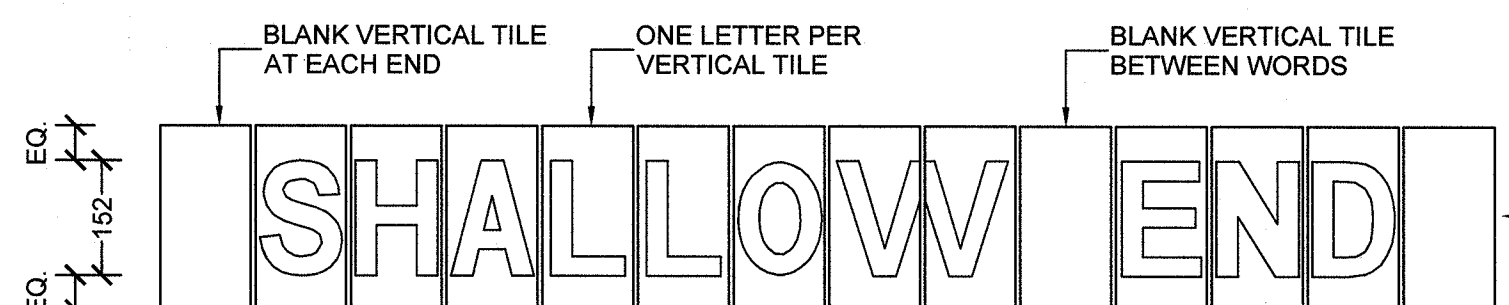


5 PLAN DETAIL
A5
SCALE: 1:10

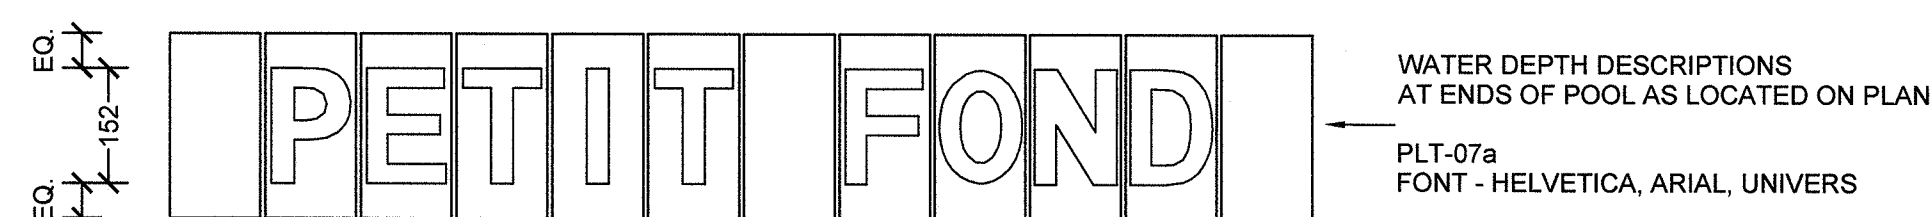

6 PLAN DETAIL
A5
SCALE: 1:10

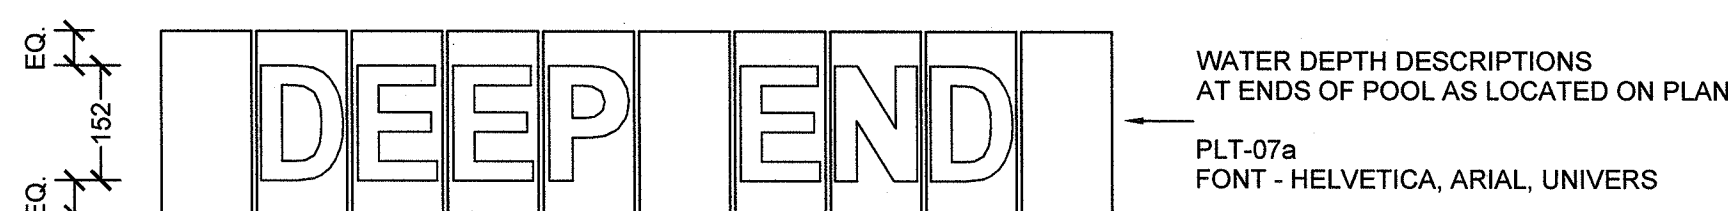


7 PLAN DETAIL
A5
SCALE: 1:10

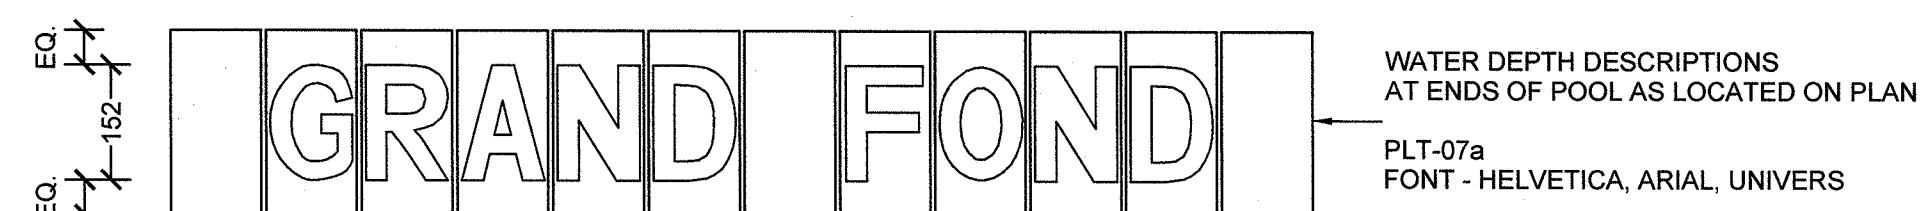

8 PLAN DETAIL
A5
SCALE: 1:10



9 PLAN DETAIL
A5
SCALE: 1:10

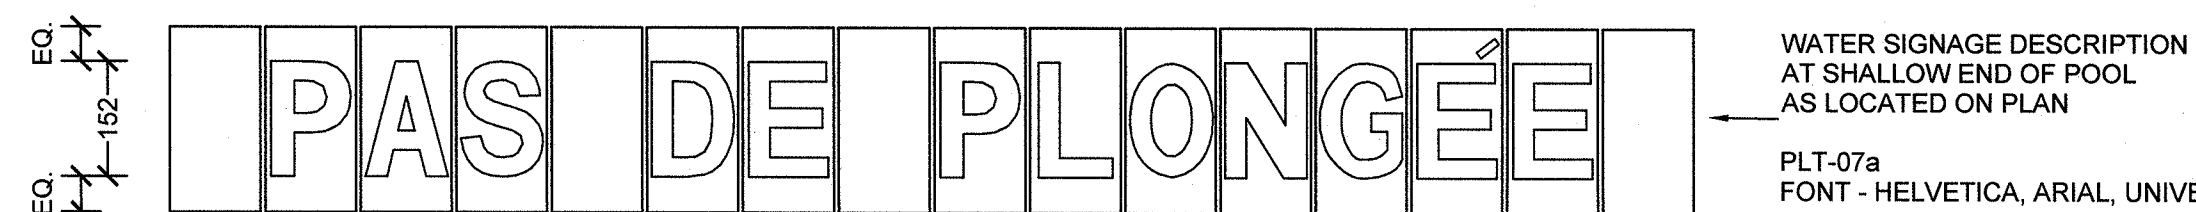

10 PLAN DETAIL
A5
SCALE: 1:10

1	Issued for Tender	
revisions	date	
project	project	
POOL RENOVATION PROJECT CANADIAN COAST GUARD COLLEGE NOVA SCOTIA		
drawing	dessin	
POOL PLAN DETAILS		
designed	D.E.M.	conçu
date	18 NOVEMBER 2016	
drawn	S.M.	dessiné
date	25 JANUARY 2017	
approved		approuvé
Tender		Soumission
PWOSC Project Manager	Administrateur de projets TPSCC	
project number	no. du projet	
R.065476.610		
drawing no.	no. du dessin	
A5		