



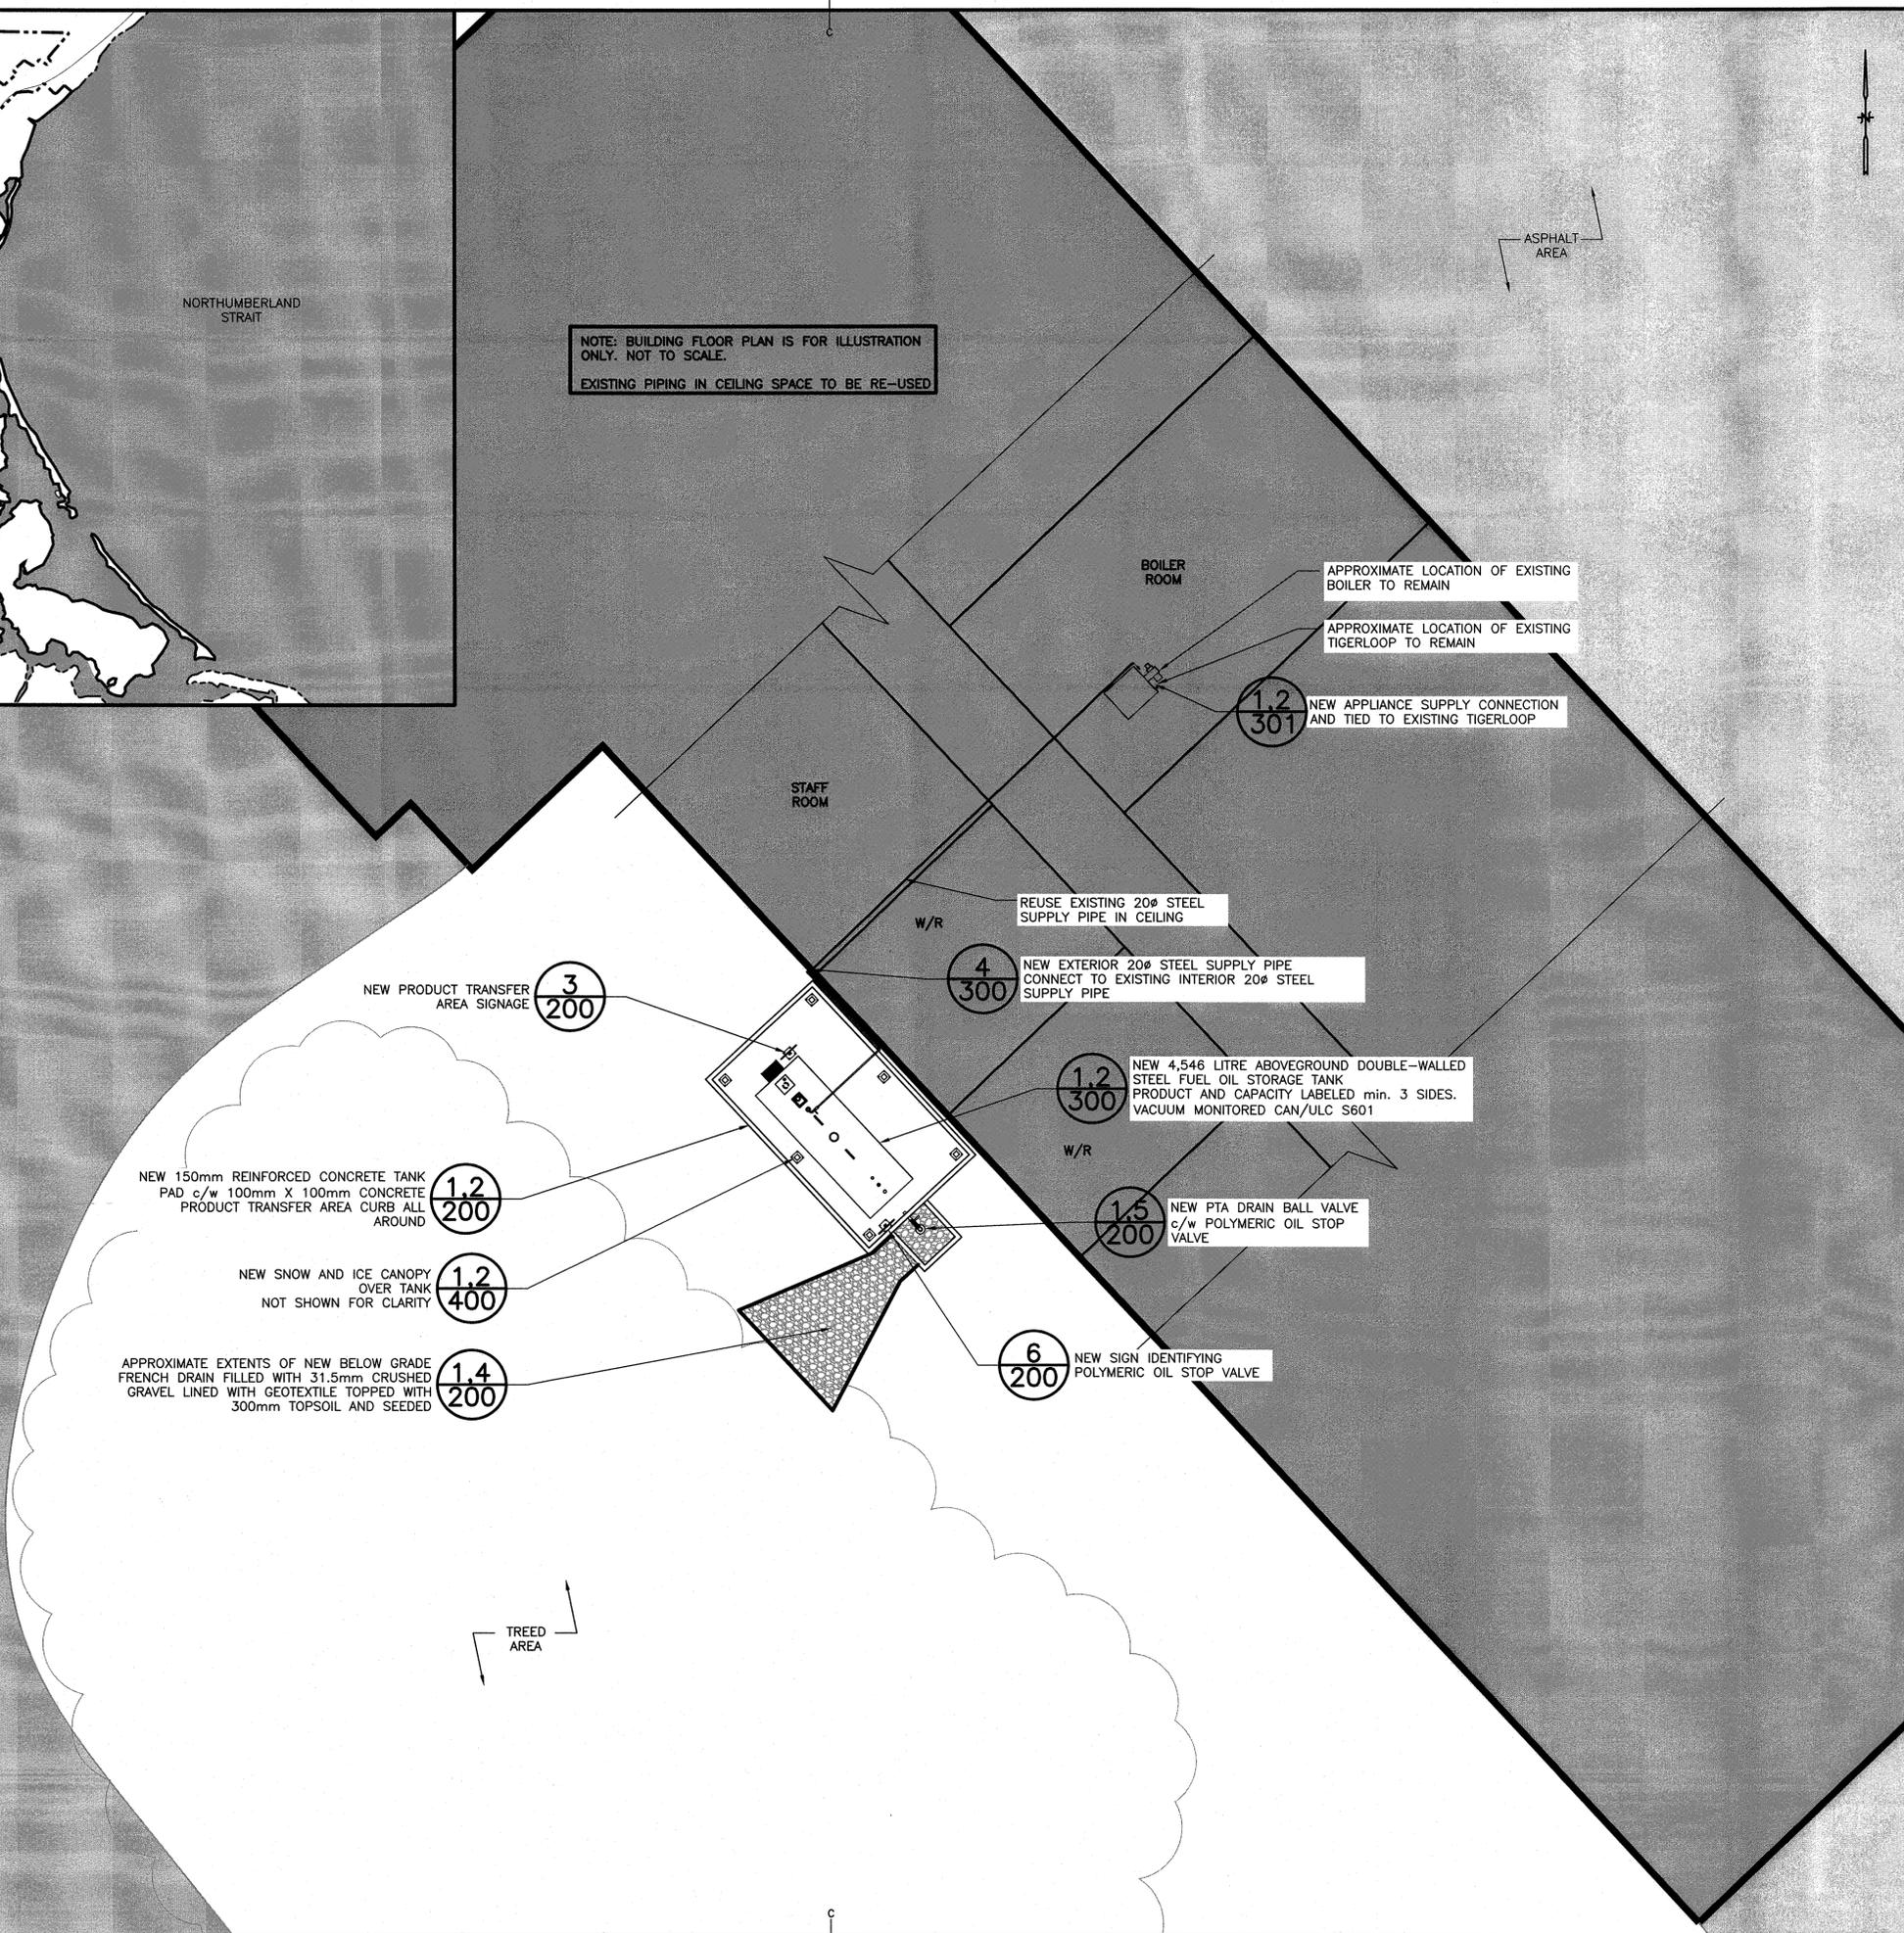

NOTE: BUILDING FLOOR PLAN IS FOR ILLUSTRATION ONLY. NOT TO SCALE.
EXISTING PIPING IN CEILING SPACE TO BE RE-USED

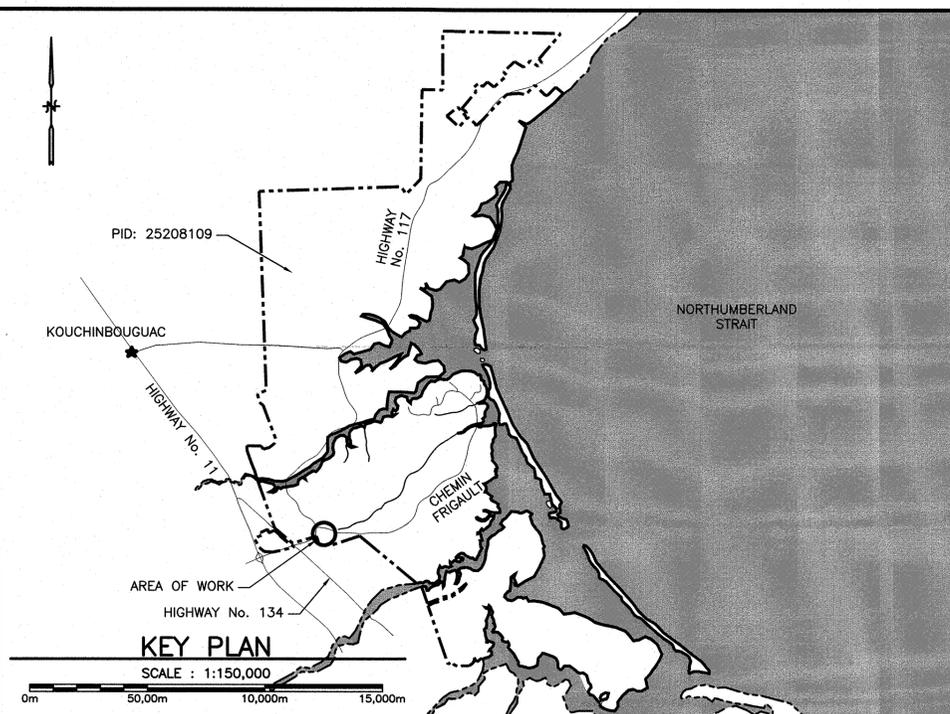

- NEW PRODUCT TRANSFER AREA SIGNAGE (3/200)
- NEW 150mm REINFORCED CONCRETE TANK PAD c/w 100mm X 100mm CONCRETE PRODUCT TRANSFER AREA CURB ALL AROUND (1.2/200)
- NEW SNOW AND ICE CANOPY OVER TANK NOT SHOWN FOR CLARITY (1.2/400)
- APPROXIMATE EXTENTS OF NEW BELOW GRADE FRENCH DRAIN FILLED WITH 31.5mm CRUSHED GRAVEL LINED WITH GEOTEXTILE TOPPED WITH 300mm TOPSOIL AND SEEDS (1.4/200)

- BOILER ROOM
- STAFF ROOM
- W/R
- REUSE EXISTING 20# STEEL SUPPLY PIPE IN CEILING (4/300)
- NEW EXTERIOR 20# STEEL SUPPLY PIPE CONNECT TO EXISTING INTERIOR 20# STEEL SUPPLY PIPE (1.2/300)
- NEW 4,546 LITRE ABOVEGROUND DOUBLE-WALLED STEEL FUEL OIL STORAGE TANK PRODUCT AND CAPACITY LABELED min. 3 SIDES. VACUUM MONITORED CAN/U/LC S601 (1.5/200)
- NEW PTA DRAIN BALL VALVE c/w POLYMERIC OIL STOP VALVE (6/200)
- NEW SIGN IDENTIFYING POLYMERIC OIL STOP VALVE (1.2/301)
- APPROXIMATE LOCATION OF EXISTING BOILER TO REMAIN
- APPROXIMATE LOCATION OF EXISTING TIGERLOOP TO REMAIN
- NEW APPLIANCE SUPPLY CONNECTION AND TIED TO EXISTING TIGERLOOP

B	ISSUED FOR TENDER	01/24/2017
A	ISSUED FOR 99% REVIEW	01/12/2017
revisions		date

project **FUEL OIL SYSTEM REPLACEMENT WORKS COMPOUND MAINTENANCE BUILDING KOUCHIBOUGUAC NATIONAL PARK, NB**

drawing **NEW SITE PLAN**

designed	J. BURRY	conçu
date	2017-01-03	
drawn	M. CLARK	dessiné
date	2017-01-03	
approved	E. FINNAMORE	approuvé
date	2017-01-03	

Tender *Rom Clapp* 2017-02-02
PWGSC Project Manager / Administrateur de projets TPSCC

project number **R.080258.005** no. du projet

drawing no. **101** no. du dessin