




VAV TERMINAL ACOUSTIC INSULATION
SCALE: N.T.S.

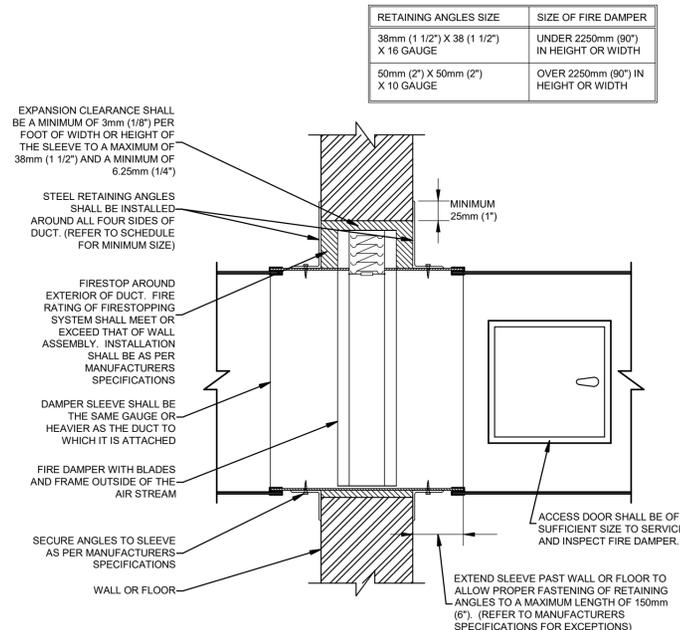


FIRE DAMPER - FUSIBLE LINK
SCALE: N.T.S.



REINFORCED 'S' STRIP (BAR SLIP)



DRIVE SLIP JOINT



'T' JOINT


LOW PRESSURE DUCT

MAX. SIDE "	GAUGE	MAX. LENGTH	TRANSVERSE JOINT	BRACING ANGLE
UP TO 12"	26	94"	REINF. 'S' & DRIVE SLIP	NONE
13" TO 24"	24	94"	REINF. 'S' & DRIVE SLIP	NONE
25" TO 30"	24	45"	1 1/8" 'T'	NONE
31" TO 40"	22	45"	1 1/8" 'T'	NONE
41" TO 60"	22	44"	1 5/8" 'T'	NONE
61" TO 90"	20	44"	1 5/8" 'T'	1 1/2" x 1 1/2" x 1/8"
91" & WIDER	18	44"	1 5/8" 'T'	1 1/2" x 1 1/2" x 1/8"


- BRACING ANGLE IRON BETWEEN JOINTS

LOW PRESSURE DUCTWORK GAUGE SCHEDULE


SCALE: N.T.S.

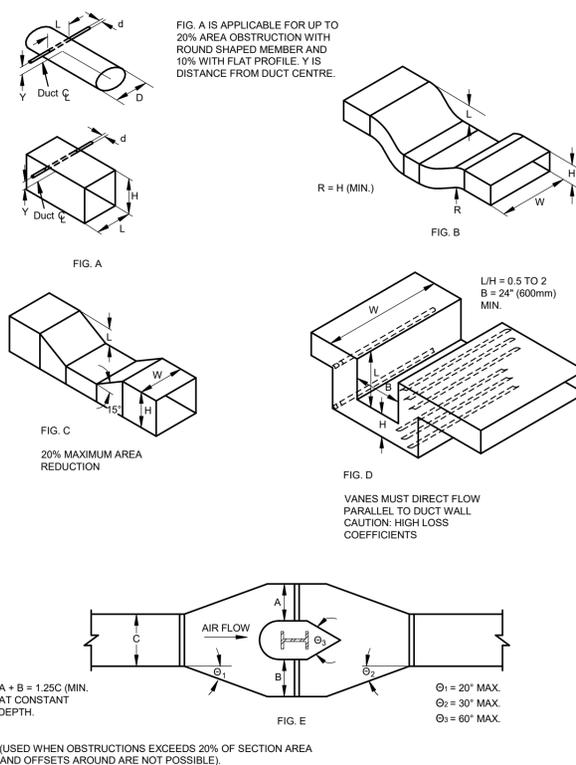

OBSTRUCTIONS
SCALE: N.T.S.

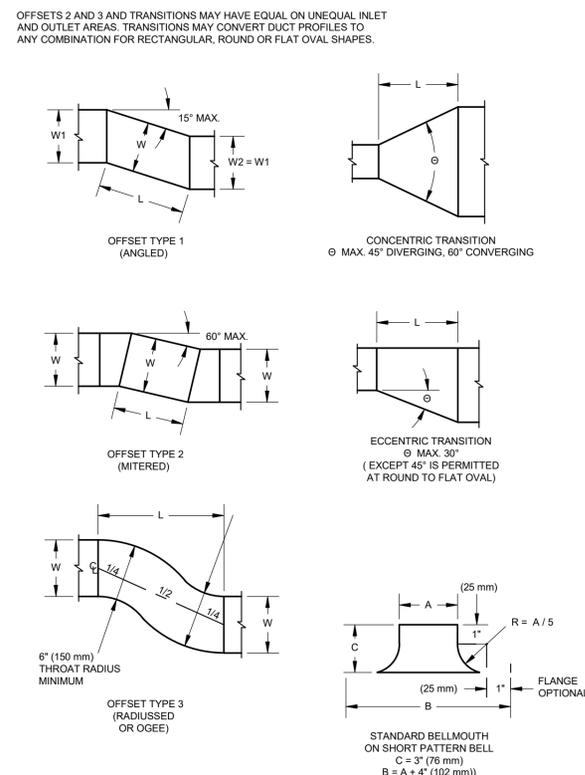


OFFSETS AND TRANSITIONS
SCALE: N.T.S.

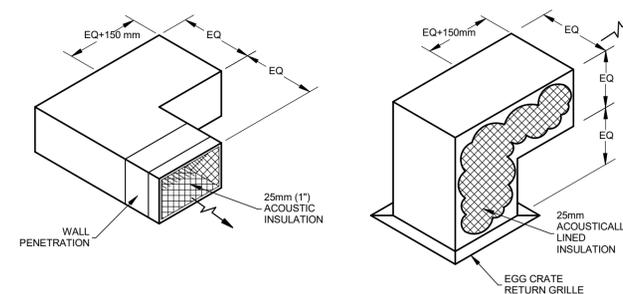

ACOUSTIC ELBOW DETAIL
SCALE: N.T.S.

NOTE: FLEX DUCT SHALL NOT BE USED IN ELBOWS

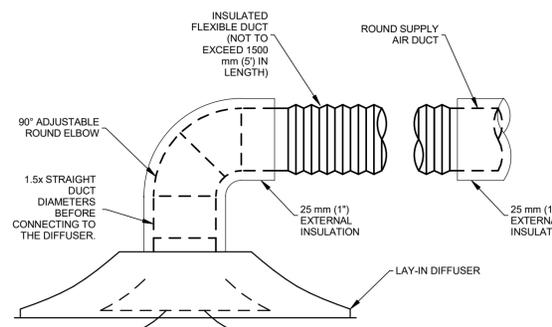

SQUARE DIFFUSER INSTALLATION DETAIL
SCALE: N.T.S.