





1 TRAINING RM 207 NORTH
A4.5 Scale: 1:50

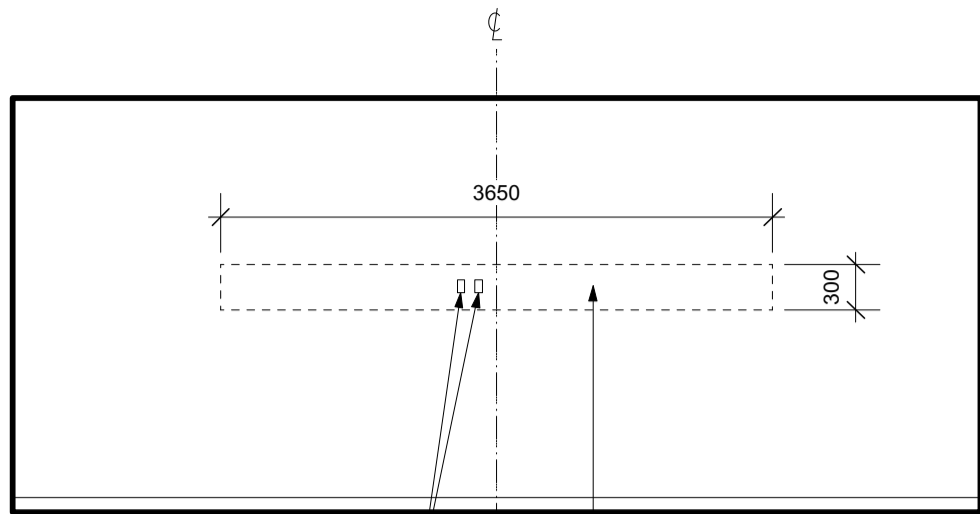


COORDINATE DATA/OUTLET LOCATIONS WITH ELECTRICAL. CONFIRM MOUNTING HEIGHT AND LOCATION WITH DEPARTMENTAL REPRESENTATIVE PRIOR TO INSTALLATION.

PROVIDE 19mm PLYWOOD BLOCKING. CONFIRM MOUNTING HEIGHT WITH DEPARTMENTAL REPRESENTATIVE.

2 TRAINING RM 207 WEST
A4.5 Scale: 1:50

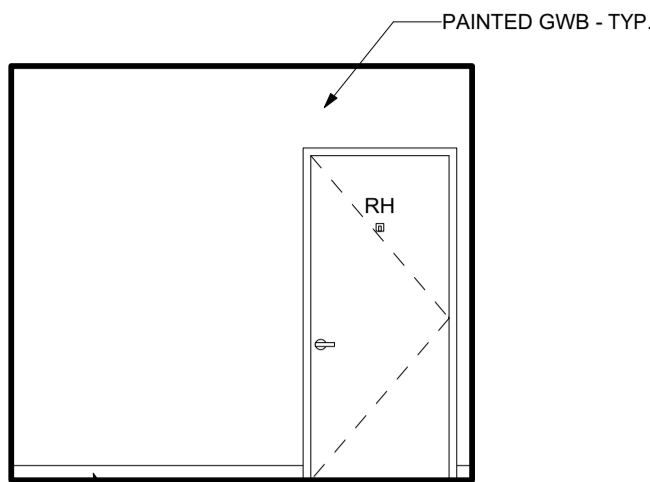

3 OFFICE (209) NORTH
A4.5 Scale: 1:50

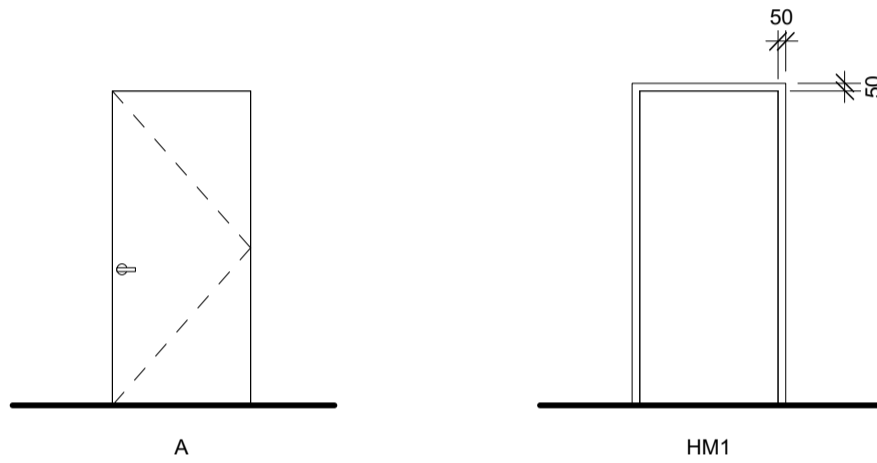

DOOR AND FRAME TYPES
Scale: 1:50

DOOR SCHEDULE			DOOR				FRAME			STC		ULC		HOWE		NOTES
REV.	NO.	NOM. SIZE	TYPE	MAT.	CORE	FIN.	TYPE	MAT.	FIN.	RATING	RATING	GROUP				
	Main Floor															
	D324A	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	1	1, 2, 3, 4, 5 CLASSROOM FUNCTION			
	D324B	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	1	1, 2, 3, 4, 5 CLASSROOM FUNCTION			
	D324C	2 X 600 x 2150	B	HM	SC	PT	HM1	WM	PT	-	-	4	-			
	D120	915 x 2150	A	HM	ACOUST	PT	HM1	WM	PT	45	45 MIN.	2	1, 2, 3, 4 CLASSROOM FUNCTION			
	D121	915 x 2150	A	HM	ACOUST	PT	HM1	WM	PT	45	45 MIN.	2	1, 2, 3, 4 CLASSROOM FUNCTION			
	Second Floor															
	D204	915 x 2150	A	HM	ACOUST	PT	HM1	WM	PT	45	-	2	1, 2, 3, 4 CLASSROOM FUNCTION			
	D207	915 x 2150	A	HM	ACOUST	PT	HM1	WM	PT	45	-	2	1, 2, 3, 4 CLASSROOM FUNCTION			
	D209	915 x 2150	A	HM	ACOUST	PT	HM1	WM	PT	45	-	3	1, 2, 3, 4 OFFICE FUNCTION			
	D211	915 x 2150	A	HM	ACOUST	PT	HM1	WM	PT	45	-	3	1, 2, 3, 4 OFFICE FUNCTION			
	D1-T1	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	EX	5			
	D2-409A	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	EX	5			
	D2-409B	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	EX	5			
	D2-608A	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	EX	5			
	D2-608B	EX	EX	HM-EX	EX	PT	HM1	WM-EX	PT	EX	-	EX	5			

NOTES


1. PROVIDE ACOUSTIC PERIMETER SEAL, TO BE FITTED AND FASTENED TO JAMBS AND HEAD BY INSTALLER ON SITE.
2. ACOUSTIC PERIMETER BULB SEAL TO BE FITTED AND FASTENED TO JAMBS AND HEAD BY INSTALLER ON SITE.
3. 5mm HIGH FLAT ACOUSTIC THRESHOLD 125mm WIDTH, TO BE INSTALLED ON FINISHED FLOOR.
4. PROVIDE A FLOOR MOUNTED DOOR STOP. REFER TO HARDWARE GROUP.
5. EXISTING DOOR AND FRAMES TO BE RE-PAINTED.

GENERAL NOTES

1. ALL DOORS TO BE 44 mm THICKNESS UNLESS OTHERWISE INDICATED.
2. STC RATING LISTED IS THE MINIMUM REQUIREMENT
3. ALL FRAMES TO BE PRESSED STEEL ACOUSTIC FRAME

LEGEND

- EX Existing
- HM Hollow Metal
- HM-EX Hollow Metal, Existing
- ACOUST Acoustic core construction
- SC Solid Core
- PT Paint
- WM Welded steel frame
- WM-EX Welded steel frame, Existing

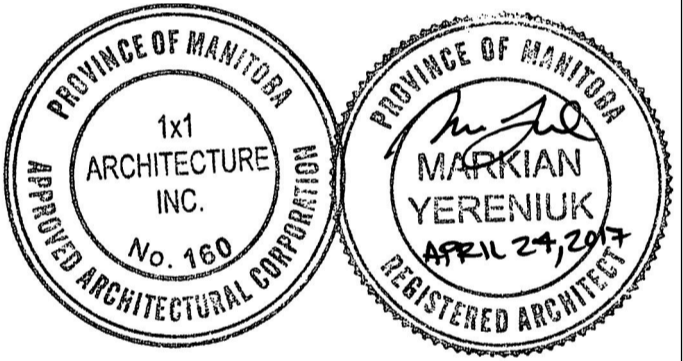

4		
3		
2		
1		
0	ISSUED FOR CONSTRUCTION	17-04-24
Revision	Description	Date
Client		client

PUBLIC WORKS AND GOVERNMENT SERVICES CANADA

Project title
WINNIPEG TAX CENTRE (WTC)
66 STAPON ROAD, WINNIPEG, MANITOBA

CRA WINNIPEG TAX-CENTRE FIT-UP

Designed by MY	Conçu par
Drawn by KK	Dessiné par
Approved by	Approuvé par

PWGSC Project Manager
Jason Frezza

Administrateur de Projets TPSGC

Drawing title
ARCHITECTURAL
FIT-UP AREA AND TRAINING RM (207)
INTERIOR ELEVATIONS &
DOOR SCHEDULE

Project no./No. du projet R.078618	Drawing no./No. du dessin A4.5 OF	Revision no. 0
---------------------------------------	---	-------------------