



1 ROOF DETAIL
W-A2 1:20

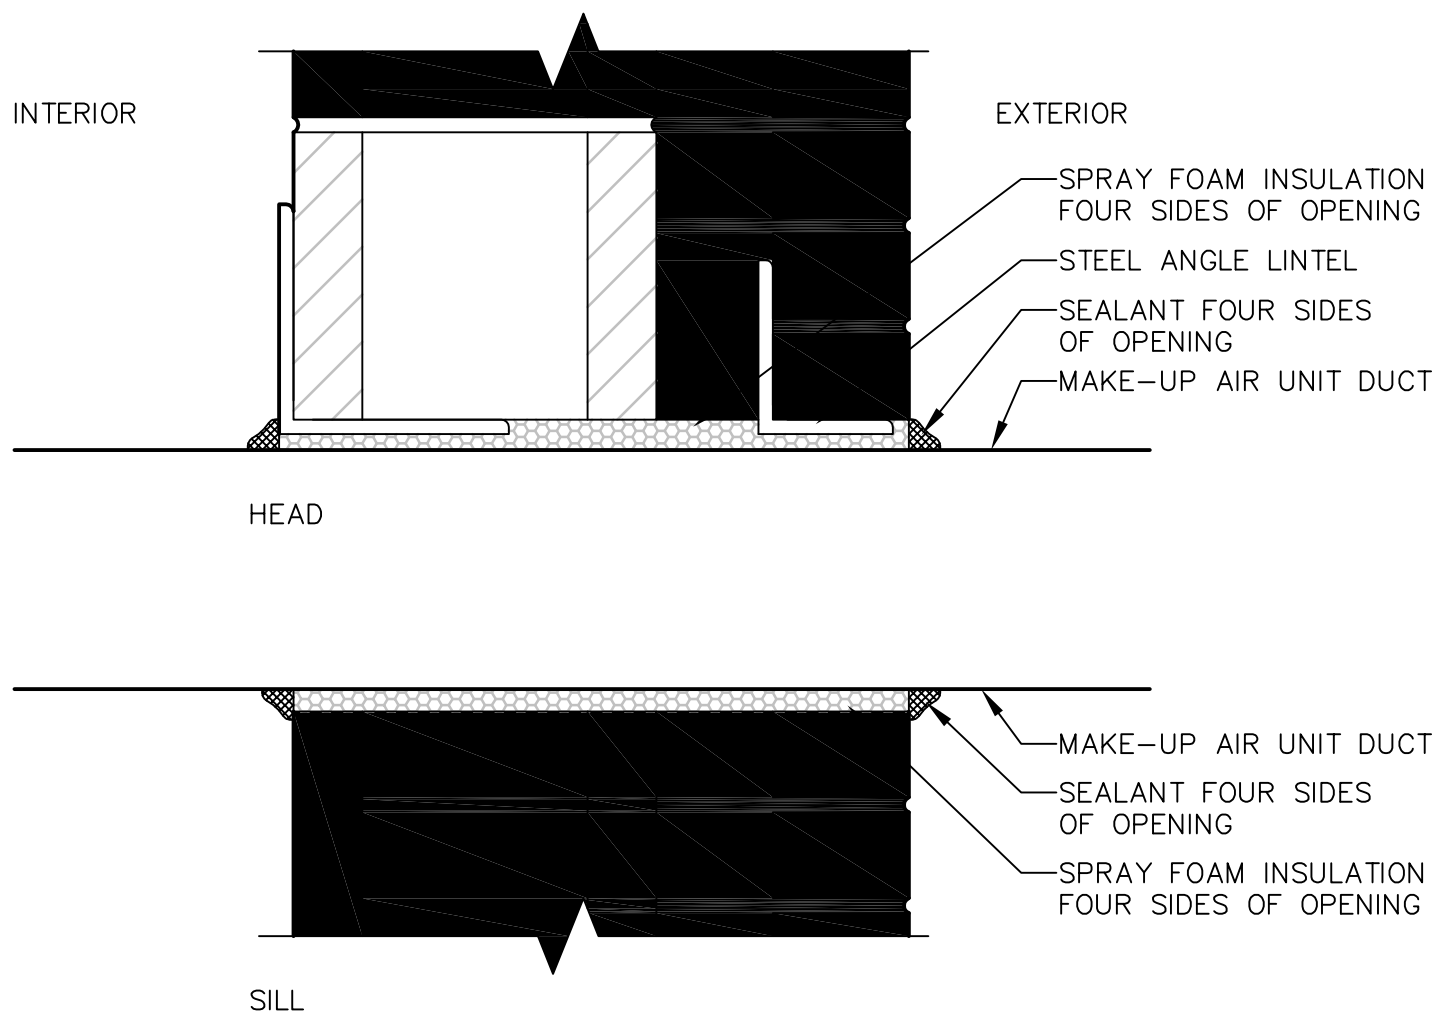

2 DUCT PENETRATION DETAL
W-A2 1:20

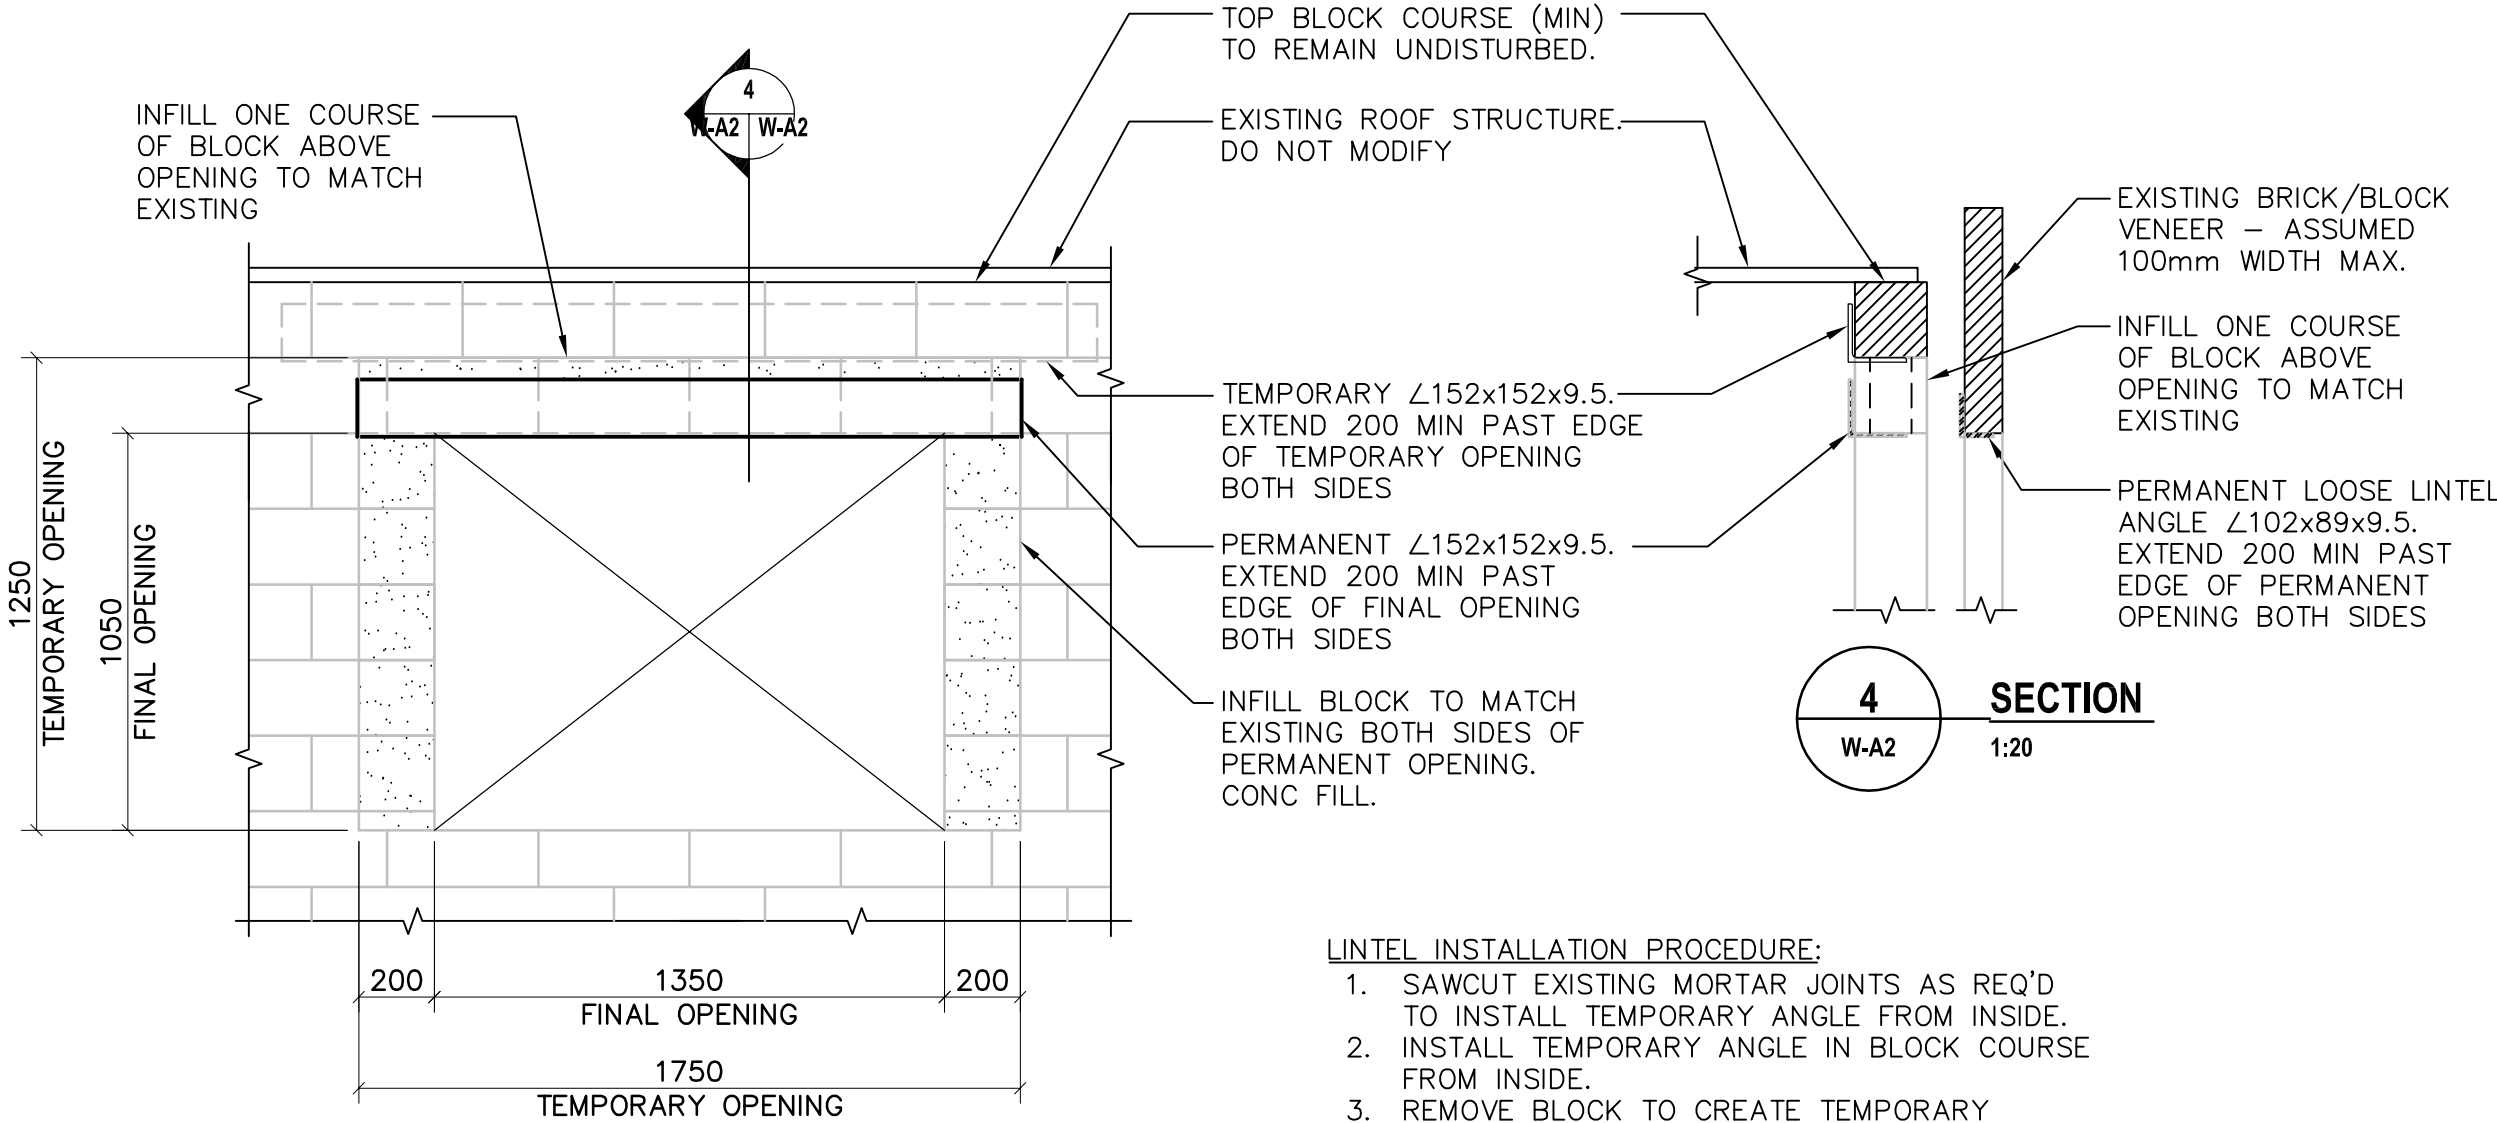

3 ELEVATION OF NEW OPENING FROM INSIDE
W-A2 1:20

- LINTEL INSTALLATION PROCEDURE:
1. SAWCUT EXISTING MORTAR JOINTS AS REQ'D TO INSTALL TEMPORARY ANGLE FROM INSIDE.
 2. INSTALL TEMPORARY ANGLE IN BLOCK COURSE FROM INSIDE.
 3. REMOVE BLOCK TO CREATE TEMPORARY OPENING.
 4. INSTALL LOOSE LINTEL ANGLE FOR BRICK/BLOCK VENEER FROM INSIDE.
 5. INSTALL INFILL BLOCK BOTH SIDES AND ABOVE TEMPORARY OPENING. SHORE AS REQUIRED.
 6. INSTALL PERMANENT ANGLE FOR BLOCK SUPPORT FROM INSIDE.
 7. REMOVE TEMPORARY ANGLE, AND FILL MORTAR JOINT TO MATCH EXISTING.

4 SECTION
W-A2 1:20



STANTEC Consulting Ltd.
100 - 75 24th Street East
Saskatoon, SK. S7K 0K3
Tel. 306.667.2500
www.stantec.com
STANTEC JOB NO. 113300840



DO NOT SCALE DRAWINGS

Revision/Revision	Description/Description	Date/Date
0	ISSUED FOR TENDER	17.07.04

Client/client
Correctional Service Canada

100 - 3601 5th Avenue East
Prince Albert, SK. S6W 0A2

Project title/Titre du projet
Saskatchewan Penitentiary
Correction Service Canada (CSC)
Prince Albert SK.

Laundry C29
Ventilation Upgrade

Approved by/Approuve par
JH
Designed by/Concept par
STANTEC Consulting Ltd.
Drawn by/Dessine par
JLD
PWGSC Project Manager/Administrateur de Projets TPSGC
LK
PWGSC Architectural and Engineering Resources Manager/
Ressources Architectural et de Directeur d'Ingénierie, TPSGC
AECOE

Client/client
Correctional Service Canada

Drawing title/Titre du dessin

DETAILS
ARCHITECTURAL

Project No./No. du projet	Sheet/Feuille	Revision no./ La Révision no.
R.076925.001	W-A2 OF 2 / 2	0