


HERITAGE STANDING INC.

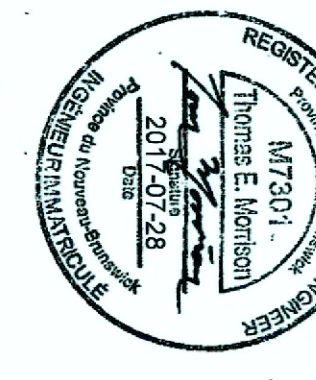

KEY NOTES

- 100% RAKE OUT AND REPOINTING OF EXPOSED STONE MASONRY ON EXTERIOR WALL IS INCLUDED. RAKE OUT JOINTS AS 1/8" (20mm). REPOINT JOINTS AS 3/8" (10mm).
- FOR ROUNDED WIDE JOINTS, IN EXCESS OF 40mm WIDE, FINISH POINT JOINTS AS PER 10/20/21.
- WHERE CORNERS OF STONE ARE LOST, SEE DETAIL 11/20/21, FOR GUIDELINE AS TO WHEN TO FINISHPOINT, AND WHEN TO INSTALL DUTCHMAN REPAIR.

LEGEND OF STRUCTURAL REPAIRS

- (F) REPAIR FRACUTURED STONE. DOWEL AND ADHERE FRACUTURED STONE. SEE 3/5/201 FOR REPAIR IN-SITU AND 4/5/201 FOR REPAIR AFTER STONE REMOVED. (EACH REPAIR UNIT = 300 LBS. (136 KG)).
- (D) REPAIR OF STONE USING DUTCHMAN REPAIR. SEE DETAIL 6 AND 9/5/201 FOR PRICING ASSUME THE FOLLOWING: (1) SMALL DUTCHMAN, AVERAGE SIZE 200x100x100 (2) MID SIZED DUTCHMAN, AVERAGE SIZE 300x200x200 (3) DEEP (0.12m) 300x200x200 (4) DEEP (0.12m) 300x400x300 (5) DEEP (0.12m) 300x600x300
- (DB) DUTCHMAN REPAIR WITH CARVED DETAIL. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (R) REMOVE EXISTING STONE AND RESET. REMOVE. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (NS) REMOVE EXISTING STONE AND REPLACE WITH NEW STONE. RESET AND ANCHOR AS FOR LEGEND NOTE R. FOR PRICING, ASSUME STONE IS 300mm AVERAGE THICK UNLESS NOTED. AVERAGE NEW STONE OF 300x1200.
- (SH) SHARD REPAIRS. SEE DETAIL 9/5/201. (EACH REPAIR UNIT = 300x200 AREA)
- (CON) CONCRETE DELAMINATION REPAIR. SEE 1/5/201.

UNIT RATE TABLE

REPAIR	SHOWN	ADDITIONAL	TOTAL
(F)	2	10	12
(D)	4	10	14
(DB)	21	5	26
(DS)	0	2	2
(DB)	0	4	4
(R)	1	4	5
(NS)	2.5 sq.m	1.0 sq.m	3.5 sq.m
(SH)	1	5	6
(CON)	0 sq.m	2 sq.m	2 sq.m

LEGEND FOR MASONRY CONSERVATION REPAIRS


- (RM) RESTORATION MORTAR. SMALL CHIPS, JOINTS, ETC. EXISTING PATCHES. MINOR SPALLS IN PLACE OF STONE. REFER TO SPECIFICATIONS FOR REPAIR PROCEDURE.
- (CR) CRACK REPAIR. REFER TO SPECIFICATIONS. (EACH REPAIR UNIT = 300x120)
- (P) REMOVE EXISTING STEEL INSERT AND REPAIR AS PER TO SPECIFICATIONS.
- (BS) RESCUING. REMOVE LOOSE PORTIONS OF MASONRY. RESURFACING OF COMPLETE STONE BY TOOLING OR CONSOLIDATION. UNIT BROKEN OUT BY STONE AS DEFINED UNDER (C).
- (EF) EFFLORESCENCE. NO ACTION EXCEPT WASH DOWN. MASONRY AT COMPLETION OF CONSERVATION WORK.
- (PR) PREVIOUS REPAIR NO WORK REQUIRED.
- (CS) CONSOLIDATION REPAIRS. SEE SPECIFICATIONS.

UNIT RATE TABLE


REPAIR	SHOWN	ADDITIONAL	TOTAL
(RM)	0	10	10
(CR)	1	10	11
(P)	0	12	12
(BS)	0	4	4
(CS)	0	5 sq.m	5 sq.m

LEGEND

- C#1 CONTROL JOINT IN SHOT CRETE
- MC#1 NEW MORTAR CONTROL JOINT

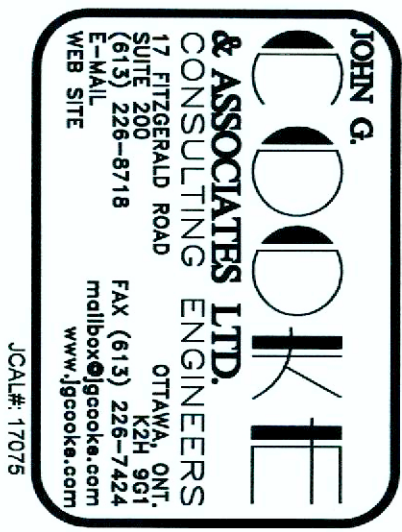

HERITAGE STANDING INC.

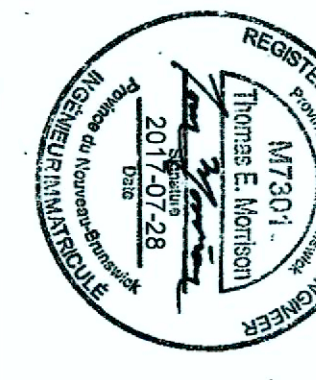

KEY NOTES

- 100% RAKE OUT AND REPOINTING OF EXPOSED STONE MASONRY ON EXTERIOR WALL IS INCLUDED. RAKE OUT JOINTS AS 1/8" (20mm). REPOINT JOINTS AS 3/8" (10mm).
- FOR ROUNDED WIDE JOINTS, IN EXCESS OF 40mm WIDE, FINISH POINT JOINTS AS PER 10/20/21.
- WHERE CORNERS OF STONE ARE LOST, SEE DETAIL 11/20/21, FOR GUIDELINE AS TO WHEN TO FINISHPOINT, AND WHEN TO INSTALL DUTCHMAN REPAIR.

LEGEND OF STRUCTURAL REPAIRS

- (F) REPAIR FRACUTURED STONE. DOWEL AND ADHERE FRACUTURED STONE. SEE 3/5/201 FOR REPAIR IN-SITU AND 4/5/201 FOR REPAIR AFTER STONE REMOVED. (EACH REPAIR UNIT = 300 LBS. (136 KG)).
- (D) REPAIR OF STONE USING DUTCHMAN REPAIR. SEE DETAIL 6 AND 9/5/201 FOR PRICING ASSUME THE FOLLOWING: (1) SMALL DUTCHMAN, AVERAGE SIZE 200x100x100 (2) MID SIZED DUTCHMAN, AVERAGE SIZE 300x200x200 (3) DEEP (0.12m) 300x200x200 (4) DEEP (0.12m) 300x400x300 (5) DEEP (0.12m) 300x600x300
- (DB) DUTCHMAN REPAIR WITH CARVED DETAIL. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (R) REMOVE EXISTING STONE AND RESET. REMOVE. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (NS) REMOVE EXISTING STONE AND REPLACE WITH NEW STONE. RESET AND ANCHOR AS FOR LEGEND NOTE R. FOR PRICING, ASSUME STONE IS 300mm AVERAGE THICK UNLESS NOTED. AVERAGE NEW STONE OF 300x1200.
- (SH) SHARD REPAIRS. SEE DETAIL 9/5/201. (EACH REPAIR UNIT = 300x200 AREA)
- (CON) CONCRETE DELAMINATION REPAIR. SEE 1/5/201.

UNIT RATE TABLE

REPAIR	SHOWN	ADDITIONAL	TOTAL
(F)	2	10	12
(D)	4	10	14
(DB)	21	5	26
(DS)	0	2	2
(DB)	0	4	4
(R)	1	4	5
(NS)	2.5 sq.m	1.0 sq.m	3.5 sq.m
(SH)	1	5	6
(CON)	0 sq.m	2 sq.m	2 sq.m

LEGEND FOR MASONRY CONSERVATION REPAIRS


- (RM) RESTORATION MORTAR. SMALL CHIPS, JOINTS, ETC. EXISTING PATCHES. MINOR SPALLS IN PLACE OF STONE. REFER TO SPECIFICATIONS FOR REPAIR PROCEDURE.
- (CR) CRACK REPAIR. REFER TO SPECIFICATIONS. (EACH REPAIR UNIT = 300x120)
- (P) REMOVE EXISTING STEEL INSERT AND REPAIR AS PER TO SPECIFICATIONS.
- (BS) RESCUING. REMOVE LOOSE PORTIONS OF MASONRY. RESURFACING OF COMPLETE STONE BY TOOLING OR CONSOLIDATION. UNIT BROKEN OUT BY STONE AS DEFINED UNDER (C).
- (EF) EFFLORESCENCE. NO ACTION EXCEPT WASH DOWN. MASONRY AT COMPLETION OF CONSERVATION WORK.
- (PR) PREVIOUS REPAIR NO WORK REQUIRED.
- (CS) CONSOLIDATION REPAIRS. SEE SPECIFICATIONS.

UNIT RATE TABLE


REPAIR	SHOWN	ADDITIONAL	TOTAL
(RM)	0	10	10
(CR)	1	10	11
(P)	0	12	12
(BS)	0	4	4
(CS)	0	5 sq.m	5 sq.m

LEGEND

- C#1 CONTROL JOINT IN SHOT CRETE
- MC#1 NEW MORTAR CONTROL JOINT

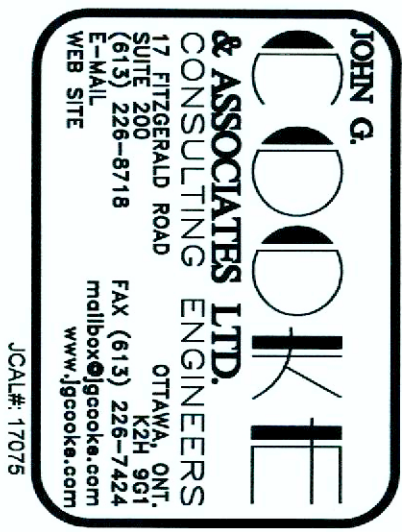

HERITAGE STANDING INC.

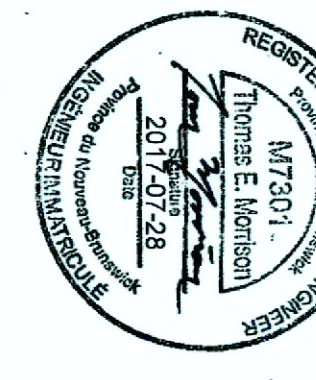

KEY NOTES

- 100% RAKE OUT AND REPOINTING OF EXPOSED STONE MASONRY ON EXTERIOR WALL IS INCLUDED. RAKE OUT JOINTS AS 1/8" (20mm). REPOINT JOINTS AS 3/8" (10mm).
- FOR ROUNDED WIDE JOINTS, IN EXCESS OF 40mm WIDE, FINISH POINT JOINTS AS PER 10/20/21.
- WHERE CORNERS OF STONE ARE LOST, SEE DETAIL 11/20/21, FOR GUIDELINE AS TO WHEN TO FINISHPOINT, AND WHEN TO INSTALL DUTCHMAN REPAIR.

LEGEND OF STRUCTURAL REPAIRS

- (F) REPAIR FRACUTURED STONE. DOWEL AND ADHERE FRACUTURED STONE. SEE 3/5/201 FOR REPAIR IN-SITU AND 4/5/201 FOR REPAIR AFTER STONE REMOVED. (EACH REPAIR UNIT = 300 LBS. (136 KG)).
- (D) REPAIR OF STONE USING DUTCHMAN REPAIR. SEE DETAIL 6 AND 9/5/201 FOR PRICING ASSUME THE FOLLOWING: (1) SMALL DUTCHMAN, AVERAGE SIZE 200x100x100 (2) MID SIZED DUTCHMAN, AVERAGE SIZE 300x200x200 (3) DEEP (0.12m) 300x200x200 (4) DEEP (0.12m) 300x400x300 (5) DEEP (0.12m) 300x600x300
- (DB) DUTCHMAN REPAIR WITH CARVED DETAIL. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (R) REMOVE EXISTING STONE AND RESET. REMOVE. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (NS) REMOVE EXISTING STONE AND REPLACE WITH NEW STONE. RESET AND ANCHOR AS FOR LEGEND NOTE R. FOR PRICING, ASSUME STONE IS 300mm AVERAGE THICK UNLESS NOTED. AVERAGE NEW STONE OF 300x1200.
- (SH) SHARD REPAIRS. SEE DETAIL 9/5/201. (EACH REPAIR UNIT = 300x200 AREA)
- (CON) CONCRETE DELAMINATION REPAIR. SEE 1/5/201.

UNIT RATE TABLE

REPAIR	SHOWN	ADDITIONAL	TOTAL
(F)	2	10	12
(D)	4	10	14
(DB)	21	5	26
(DS)	0	2	2
(DB)	0	4	4
(R)	1	4	5
(NS)	2.5 sq.m	1.0 sq.m	3.5 sq.m
(SH)	1	5	6
(CON)	0 sq.m	2 sq.m	2 sq.m

LEGEND FOR MASONRY CONSERVATION REPAIRS


- (RM) RESTORATION MORTAR. SMALL CHIPS, JOINTS, ETC. EXISTING PATCHES. MINOR SPALLS IN PLACE OF STONE. REFER TO SPECIFICATIONS FOR REPAIR PROCEDURE.
- (CR) CRACK REPAIR. REFER TO SPECIFICATIONS. (EACH REPAIR UNIT = 300x120)
- (P) REMOVE EXISTING STEEL INSERT AND REPAIR AS PER TO SPECIFICATIONS.
- (BS) RESCUING. REMOVE LOOSE PORTIONS OF MASONRY. RESURFACING OF COMPLETE STONE BY TOOLING OR CONSOLIDATION. UNIT BROKEN OUT BY STONE AS DEFINED UNDER (C).
- (EF) EFFLORESCENCE. NO ACTION EXCEPT WASH DOWN. MASONRY AT COMPLETION OF CONSERVATION WORK.
- (PR) PREVIOUS REPAIR NO WORK REQUIRED.
- (CS) CONSOLIDATION REPAIRS. SEE SPECIFICATIONS.

UNIT RATE TABLE


REPAIR	SHOWN	ADDITIONAL	TOTAL
(RM)	0	10	10
(CR)	1	10	11
(P)	0	12	12
(BS)	0	4	4
(CS)	0	5 sq.m	5 sq.m

LEGEND

- C#1 CONTROL JOINT IN SHOT CRETE
- MC#1 NEW MORTAR CONTROL JOINT

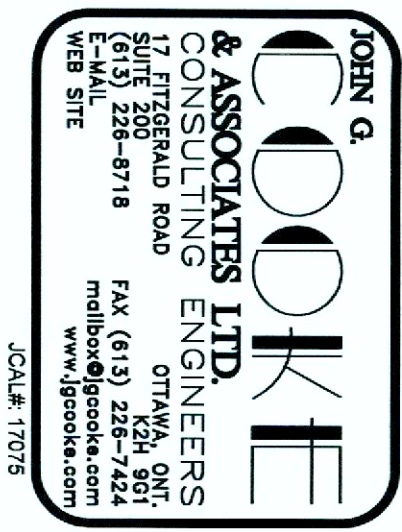

HERITAGE STANDING INC.

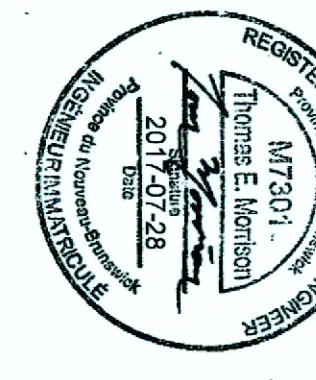

KEY NOTES

- 100% RAKE OUT AND REPOINTING OF EXPOSED STONE MASONRY ON EXTERIOR WALL IS INCLUDED. RAKE OUT JOINTS AS 1/8" (20mm). REPOINT JOINTS AS 3/8" (10mm).
- FOR ROUNDED WIDE JOINTS, IN EXCESS OF 40mm WIDE, FINISH POINT JOINTS AS PER 10/20/21.
- WHERE CORNERS OF STONE ARE LOST, SEE DETAIL 11/20/21, FOR GUIDELINE AS TO WHEN TO FINISHPOINT, AND WHEN TO INSTALL DUTCHMAN REPAIR.

LEGEND OF STRUCTURAL REPAIRS

- (F) REPAIR FRACUTURED STONE. DOWEL AND ADHERE FRACUTURED STONE. SEE 3/5/201 FOR REPAIR IN-SITU AND 4/5/201 FOR REPAIR AFTER STONE REMOVED. (EACH REPAIR UNIT = 300 LBS. (136 KG)).
- (D) REPAIR OF STONE USING DUTCHMAN REPAIR. SEE DETAIL 6 AND 9/5/201 FOR PRICING ASSUME THE FOLLOWING: (1) SMALL DUTCHMAN, AVERAGE SIZE 200x100x100 (2) MID SIZED DUTCHMAN, AVERAGE SIZE 300x200x200 (3) DEEP (0.12m) 300x200x200 (4) DEEP (0.12m) 300x400x300 (5) DEEP (0.12m) 300x600x300
- (DB) DUTCHMAN REPAIR WITH CARVED DETAIL. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (R) REMOVE EXISTING STONE AND RESET. REMOVE. REPAIR AS FOR LEGEND NOTE (D). FINISH SURFACE TO MATCH SURROUNDING STONE. DETAIL AVERAGE SIZE AS PER MID-SIZED DUTCHMAN.
- (NS) REMOVE EXISTING STONE AND REPLACE WITH NEW STONE. RESET AND ANCHOR AS FOR LEGEND NOTE R. FOR PRICING, ASSUME STONE IS 300mm AVERAGE THICK UNLESS NOTED. AVERAGE NEW STONE OF 300x1200.
- (SH) SHARD REPAIRS. SEE DETAIL 9/5/201. (EACH REPAIR UNIT = 300x200 AREA)
- (CON) CONCRETE DELAMINATION REPAIR. SEE 1/5/201.

UNIT RATE TABLE

REPAIR	SHOWN	ADDITIONAL	TOTAL
(F)	2	10	12
(D)	4	10	14
(DB)	21	5	26
(DS)	0	2	2
(DB)	0	4	4
(R)	1	4	5
(NS)	2.5 sq.m	1.0 sq.m	3.5 sq.m
(SH)	1	5	6
(CON)	0 sq.m	2 sq.m	2 sq.m

LEGEND FOR MASONRY CONSERVATION REPAIRS

- (RM) RESTORATION MORTAR. SMALL CHIPS, JOINTS, ETC. EXISTING PATCHES. MINOR SPALLS IN PLACE OF STONE. REFER TO SPECIFICATIONS FOR REPAIR PROCEDURE.
- (CR) CRACK REPAIR. REFER TO SPECIFICATIONS. (EACH REPAIR UNIT = 300x120)
- (P) REMOVE EXISTING STEEL INSERT AND REPAIR AS PER TO SPECIFICATIONS.
- (BS) RESCUING. REMOVE LOOSE PORTIONS OF MASONRY. RESURFACING OF COMPLETE STONE BY TOOLING OR CONSOLIDATION. UNIT BROKEN OUT BY STONE AS DEFINED UNDER (C).
- (EF) EFFLORESCENCE. NO ACTION EXCEPT WASH DOWN. MASONRY AT COMPLETION OF CONSERVATION WORK.
- (PR) PREVIOUS REPAIR NO WORK REQUIRED.
- (CS) CONSOLIDATION REPAIRS. SEE SPECIFICATIONS.

UNIT RATE TABLE

REPAIR	SHOWN	ADDITIONAL	TOTAL
(RM)	0	10	10
(CR)	1	10	11
(P)	0	12	12
(BS)	0	4	4
(CS)	0	5 sq.m	5 sq.m

LEGEND

- C#1 CONTROL JOINT IN SHOT CRETE
- MC#1 NEW MORTAR CONTROL JOINT