



REFERENCE PLANS:		
No.	Dwg No.	DESCRIPTION


FOR GENERAL NOTES, SEE SHEET 1.

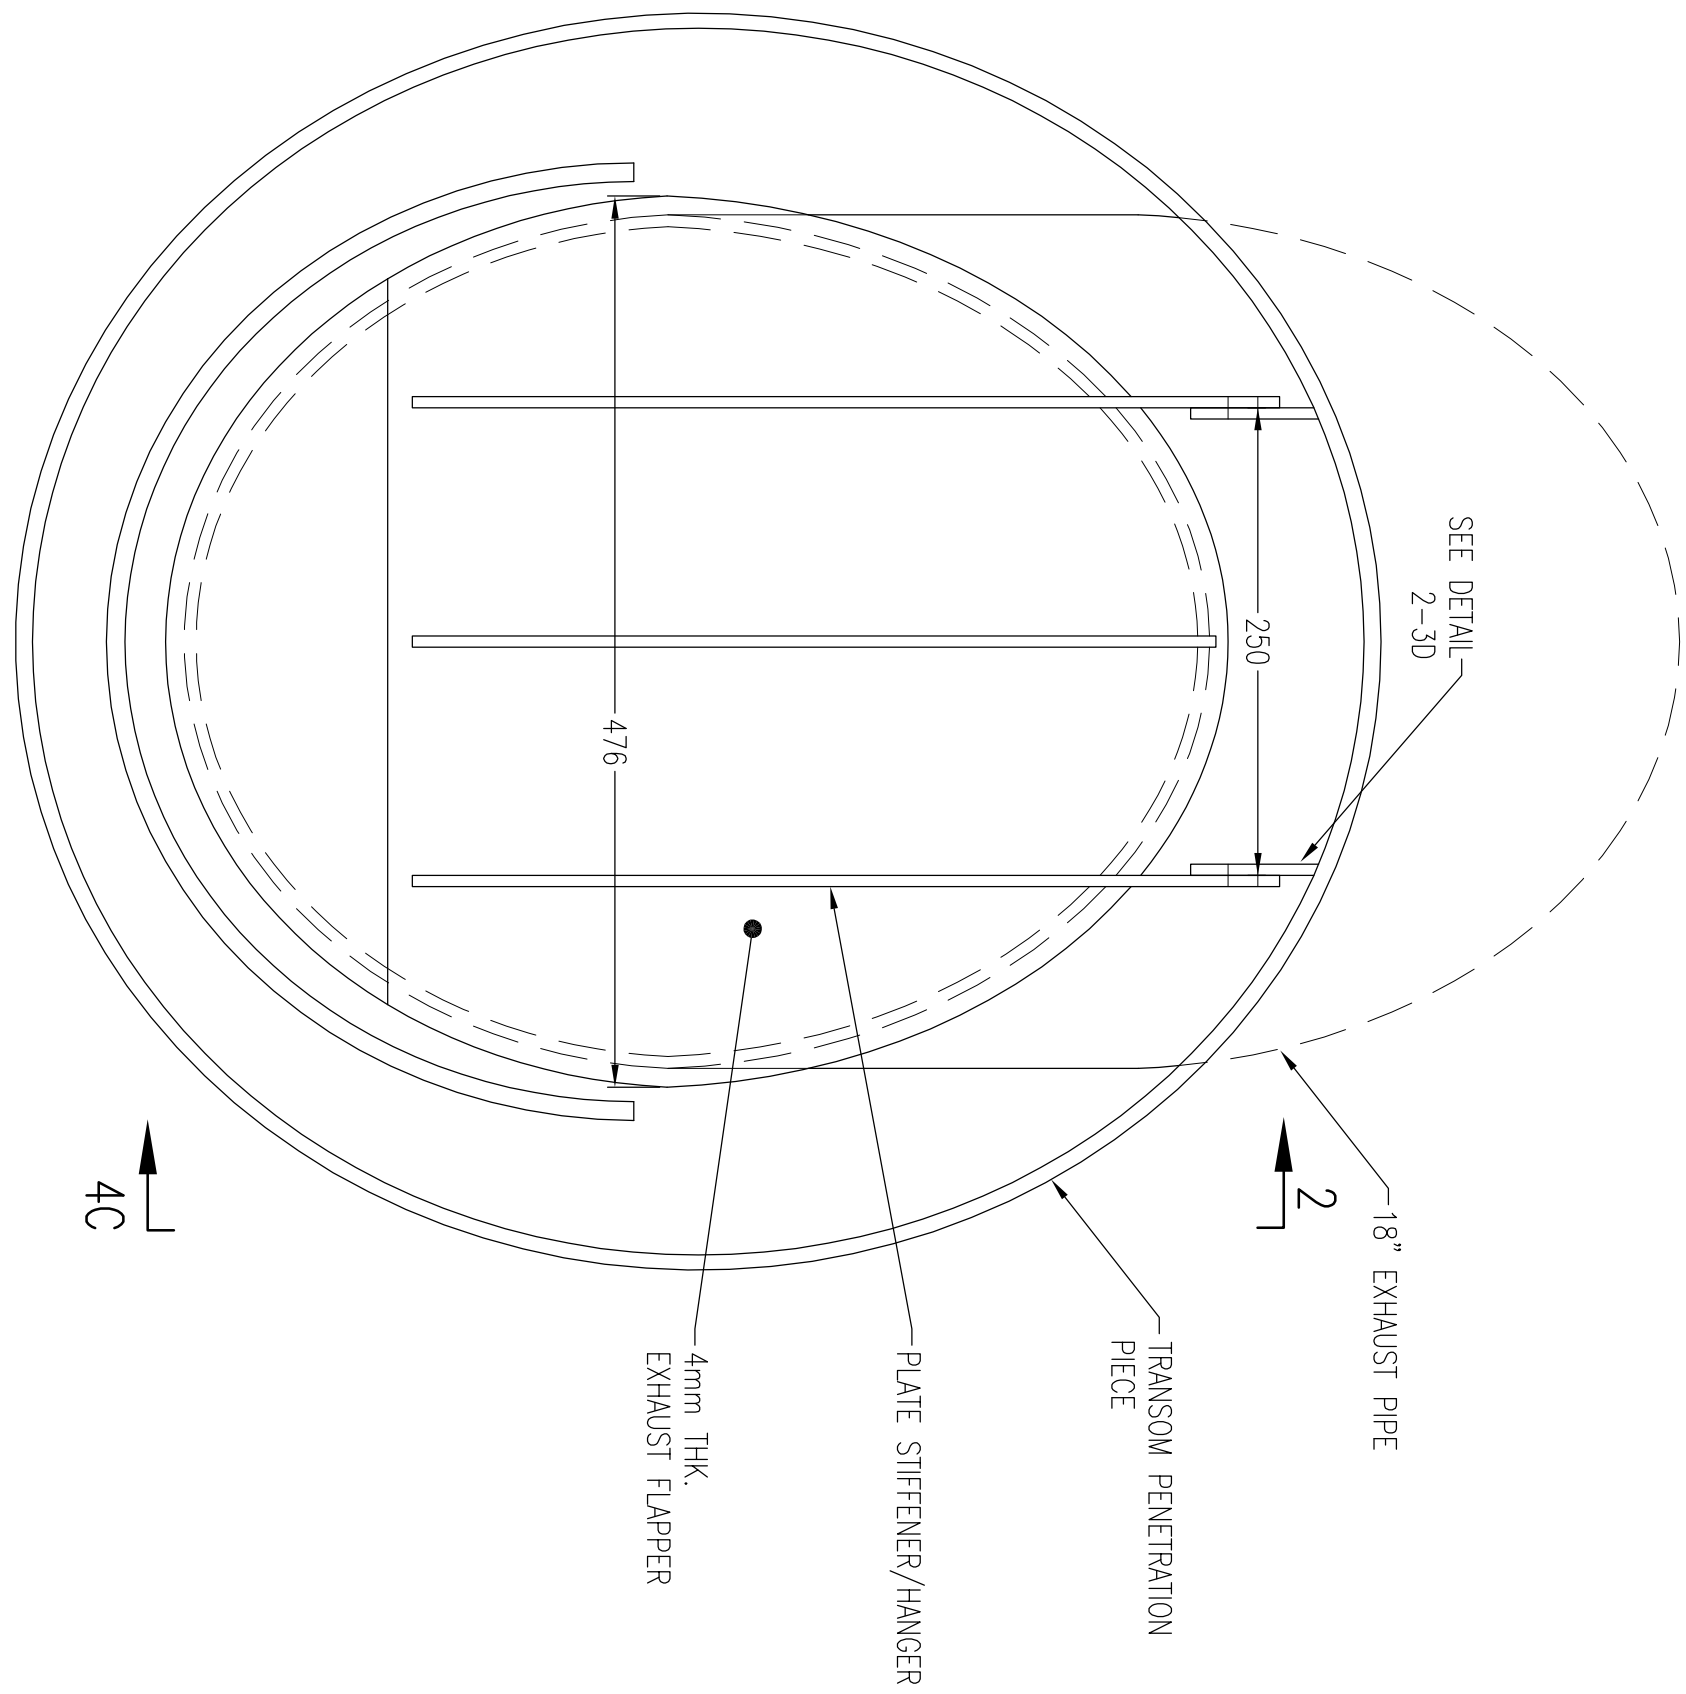


DETAIL 2-7C
MAIN ENGINE EXHAUST OUTLET - FLAPPER
SCALE 1:4

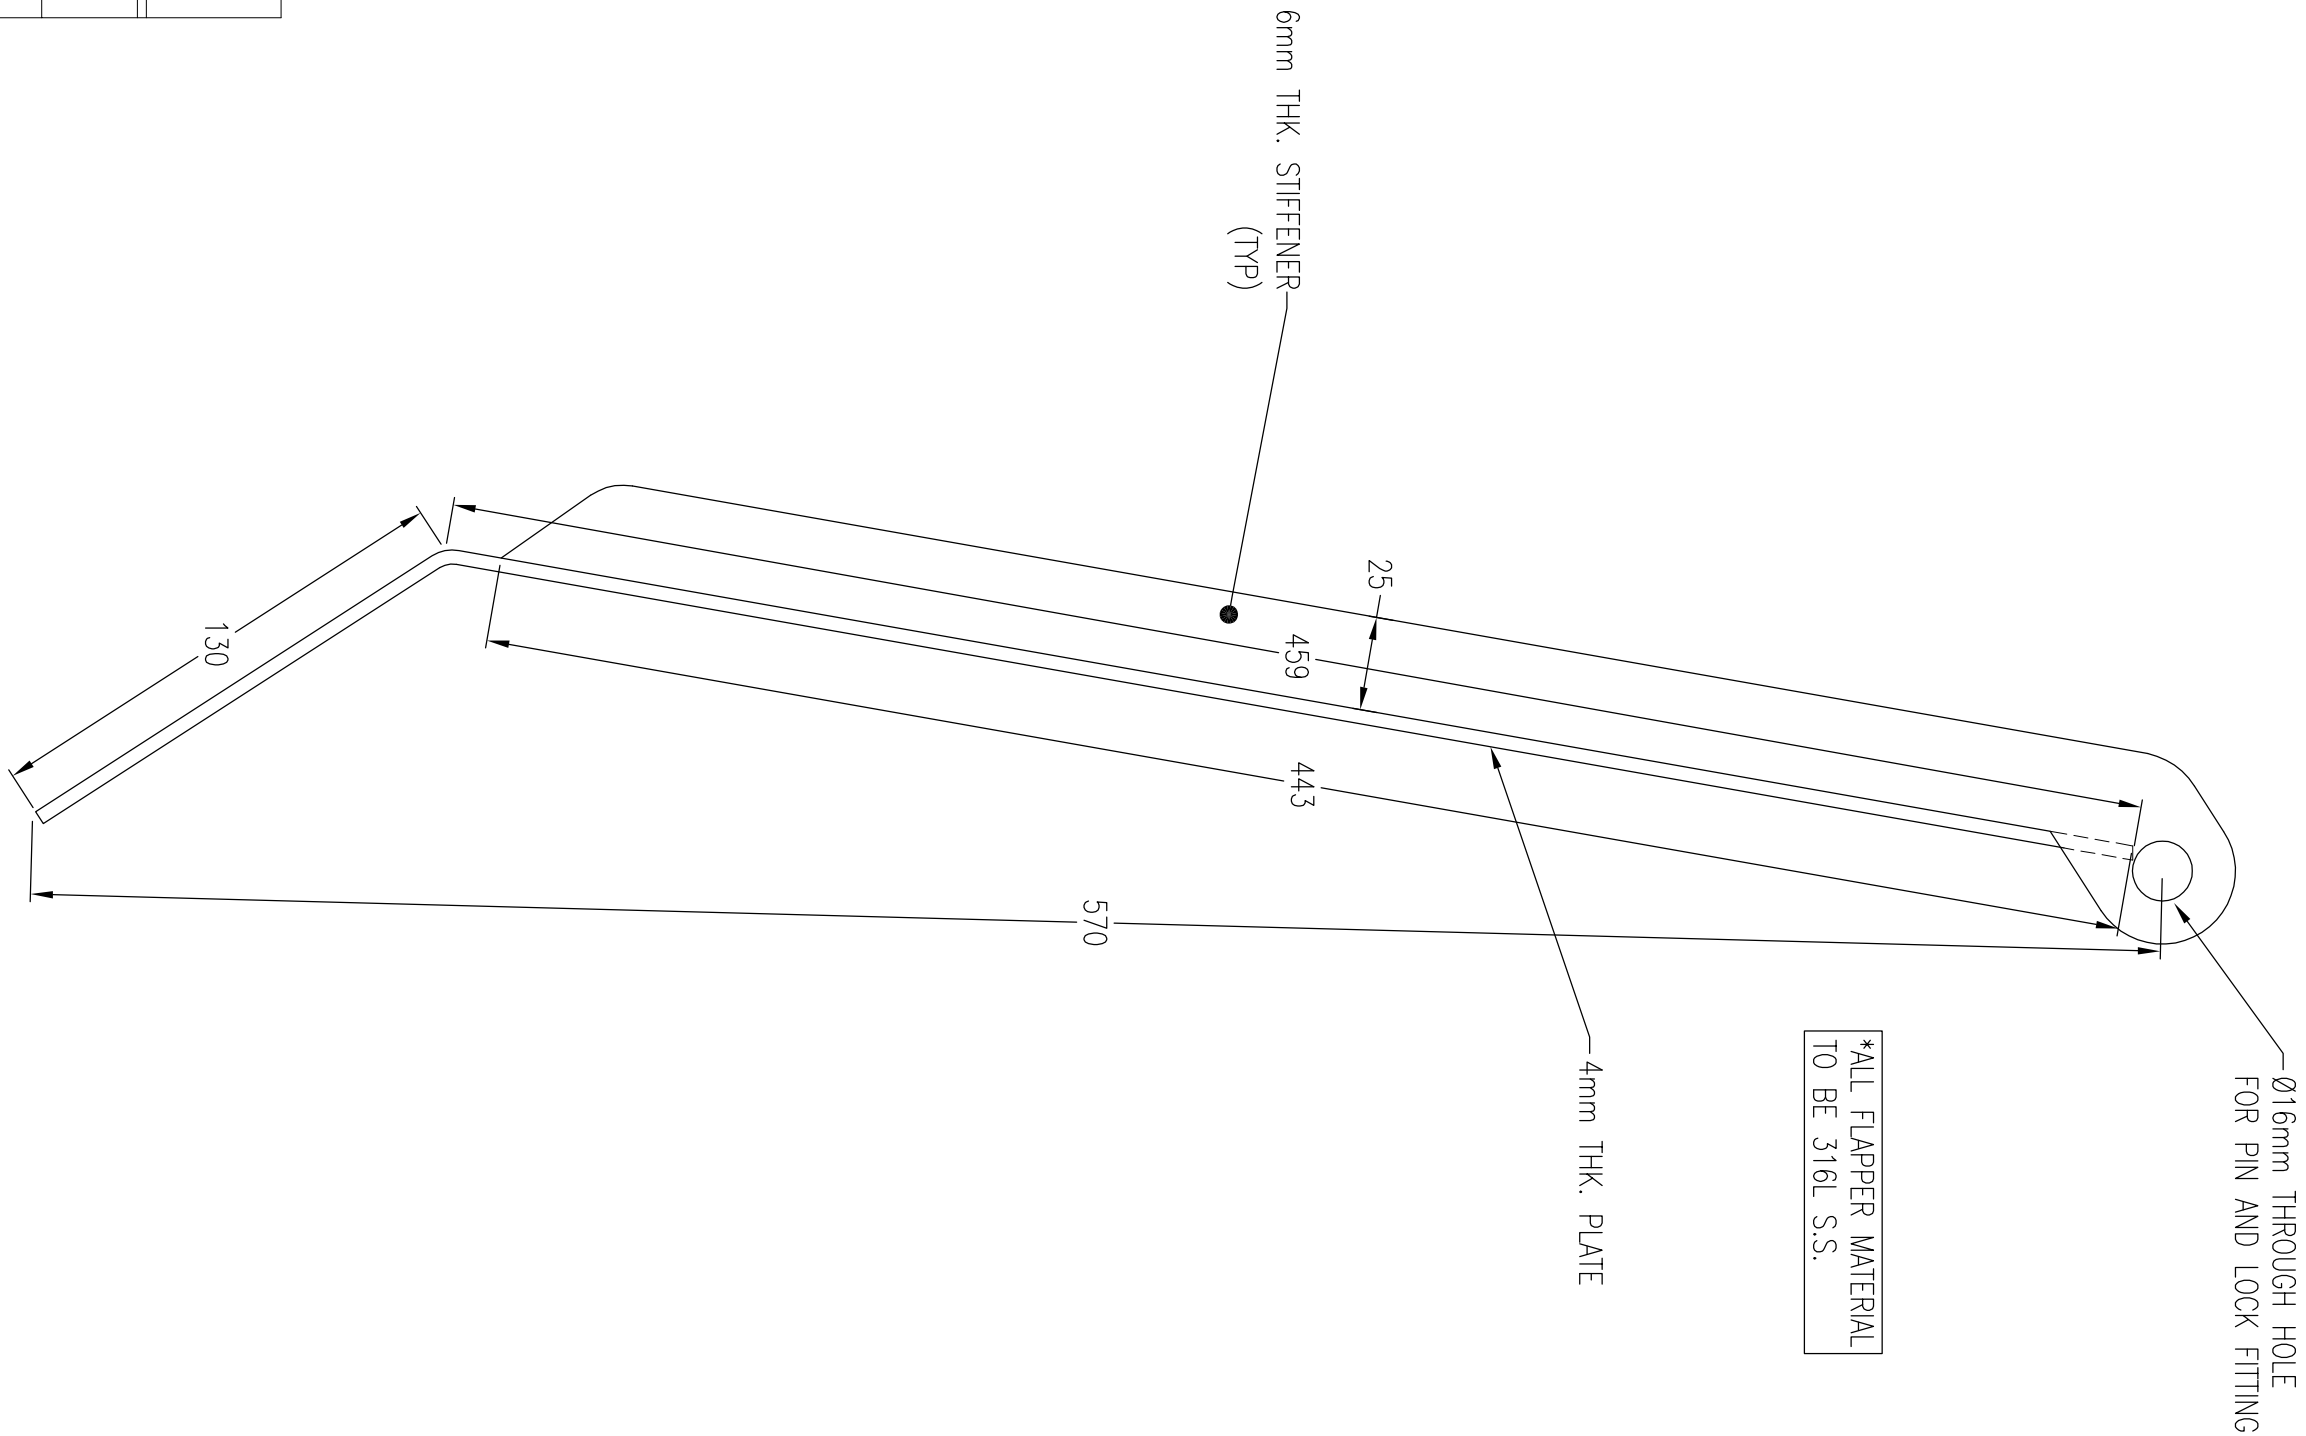


DETAIL 2-4C
EXHAUST FLAPPER
SCALE 1:2

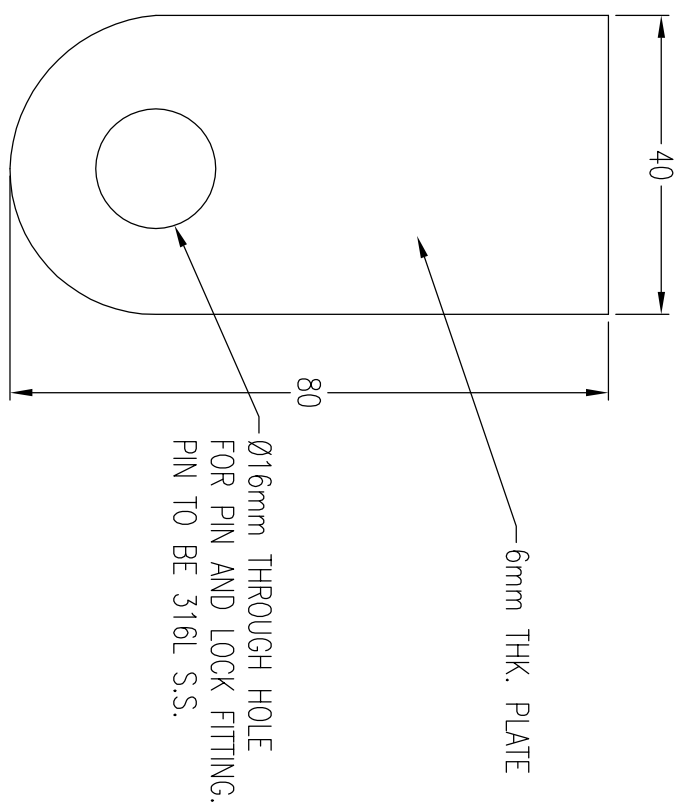


DETAIL 2-3D
MAIN ENGINE EXHAUST FLAPPER SUPPORT (2 OFF PER EXHAUST)
SCALE 1:5

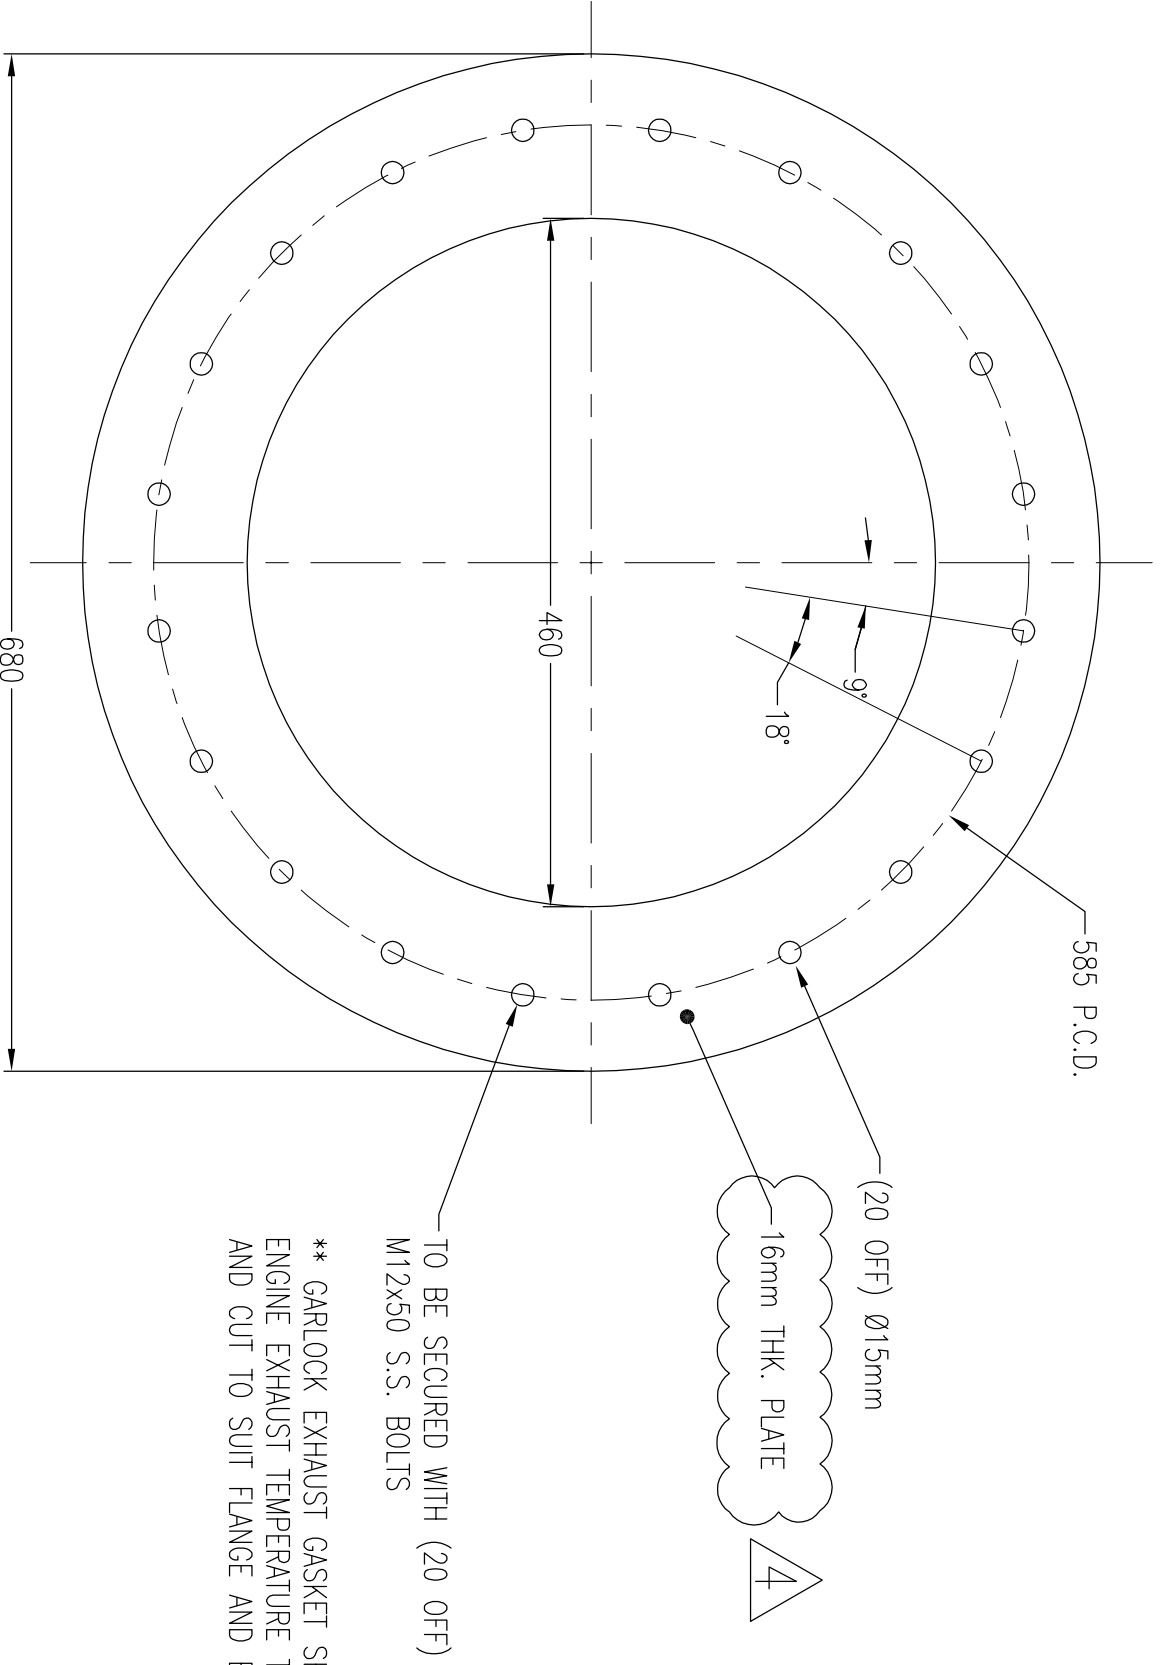

DETAIL 2-2B
EXHAUST PENETRATION CONNECTING FLANGE
SCALE 1:5

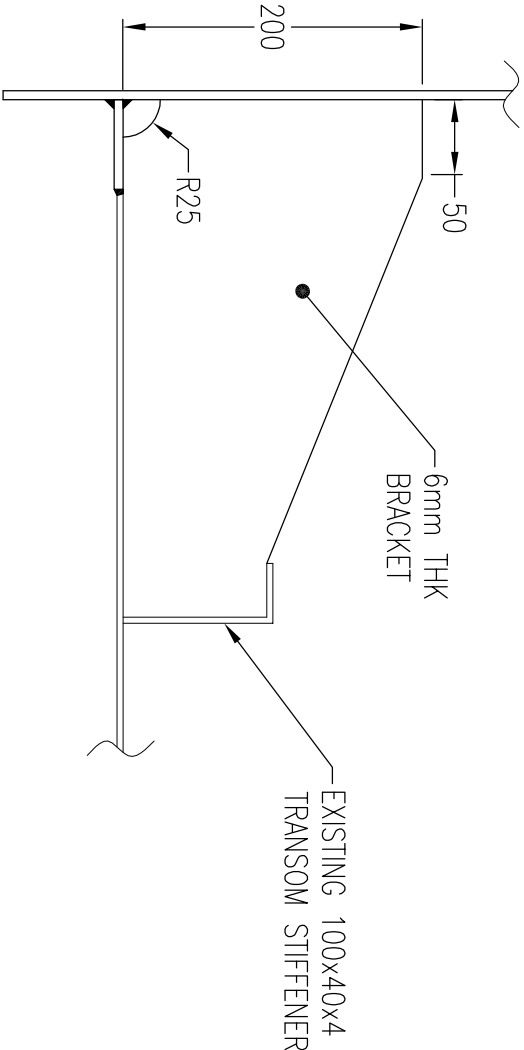


DETAIL 2-4A
EXHAUST PENETRATION SUPPORTS
SCALE 1:5

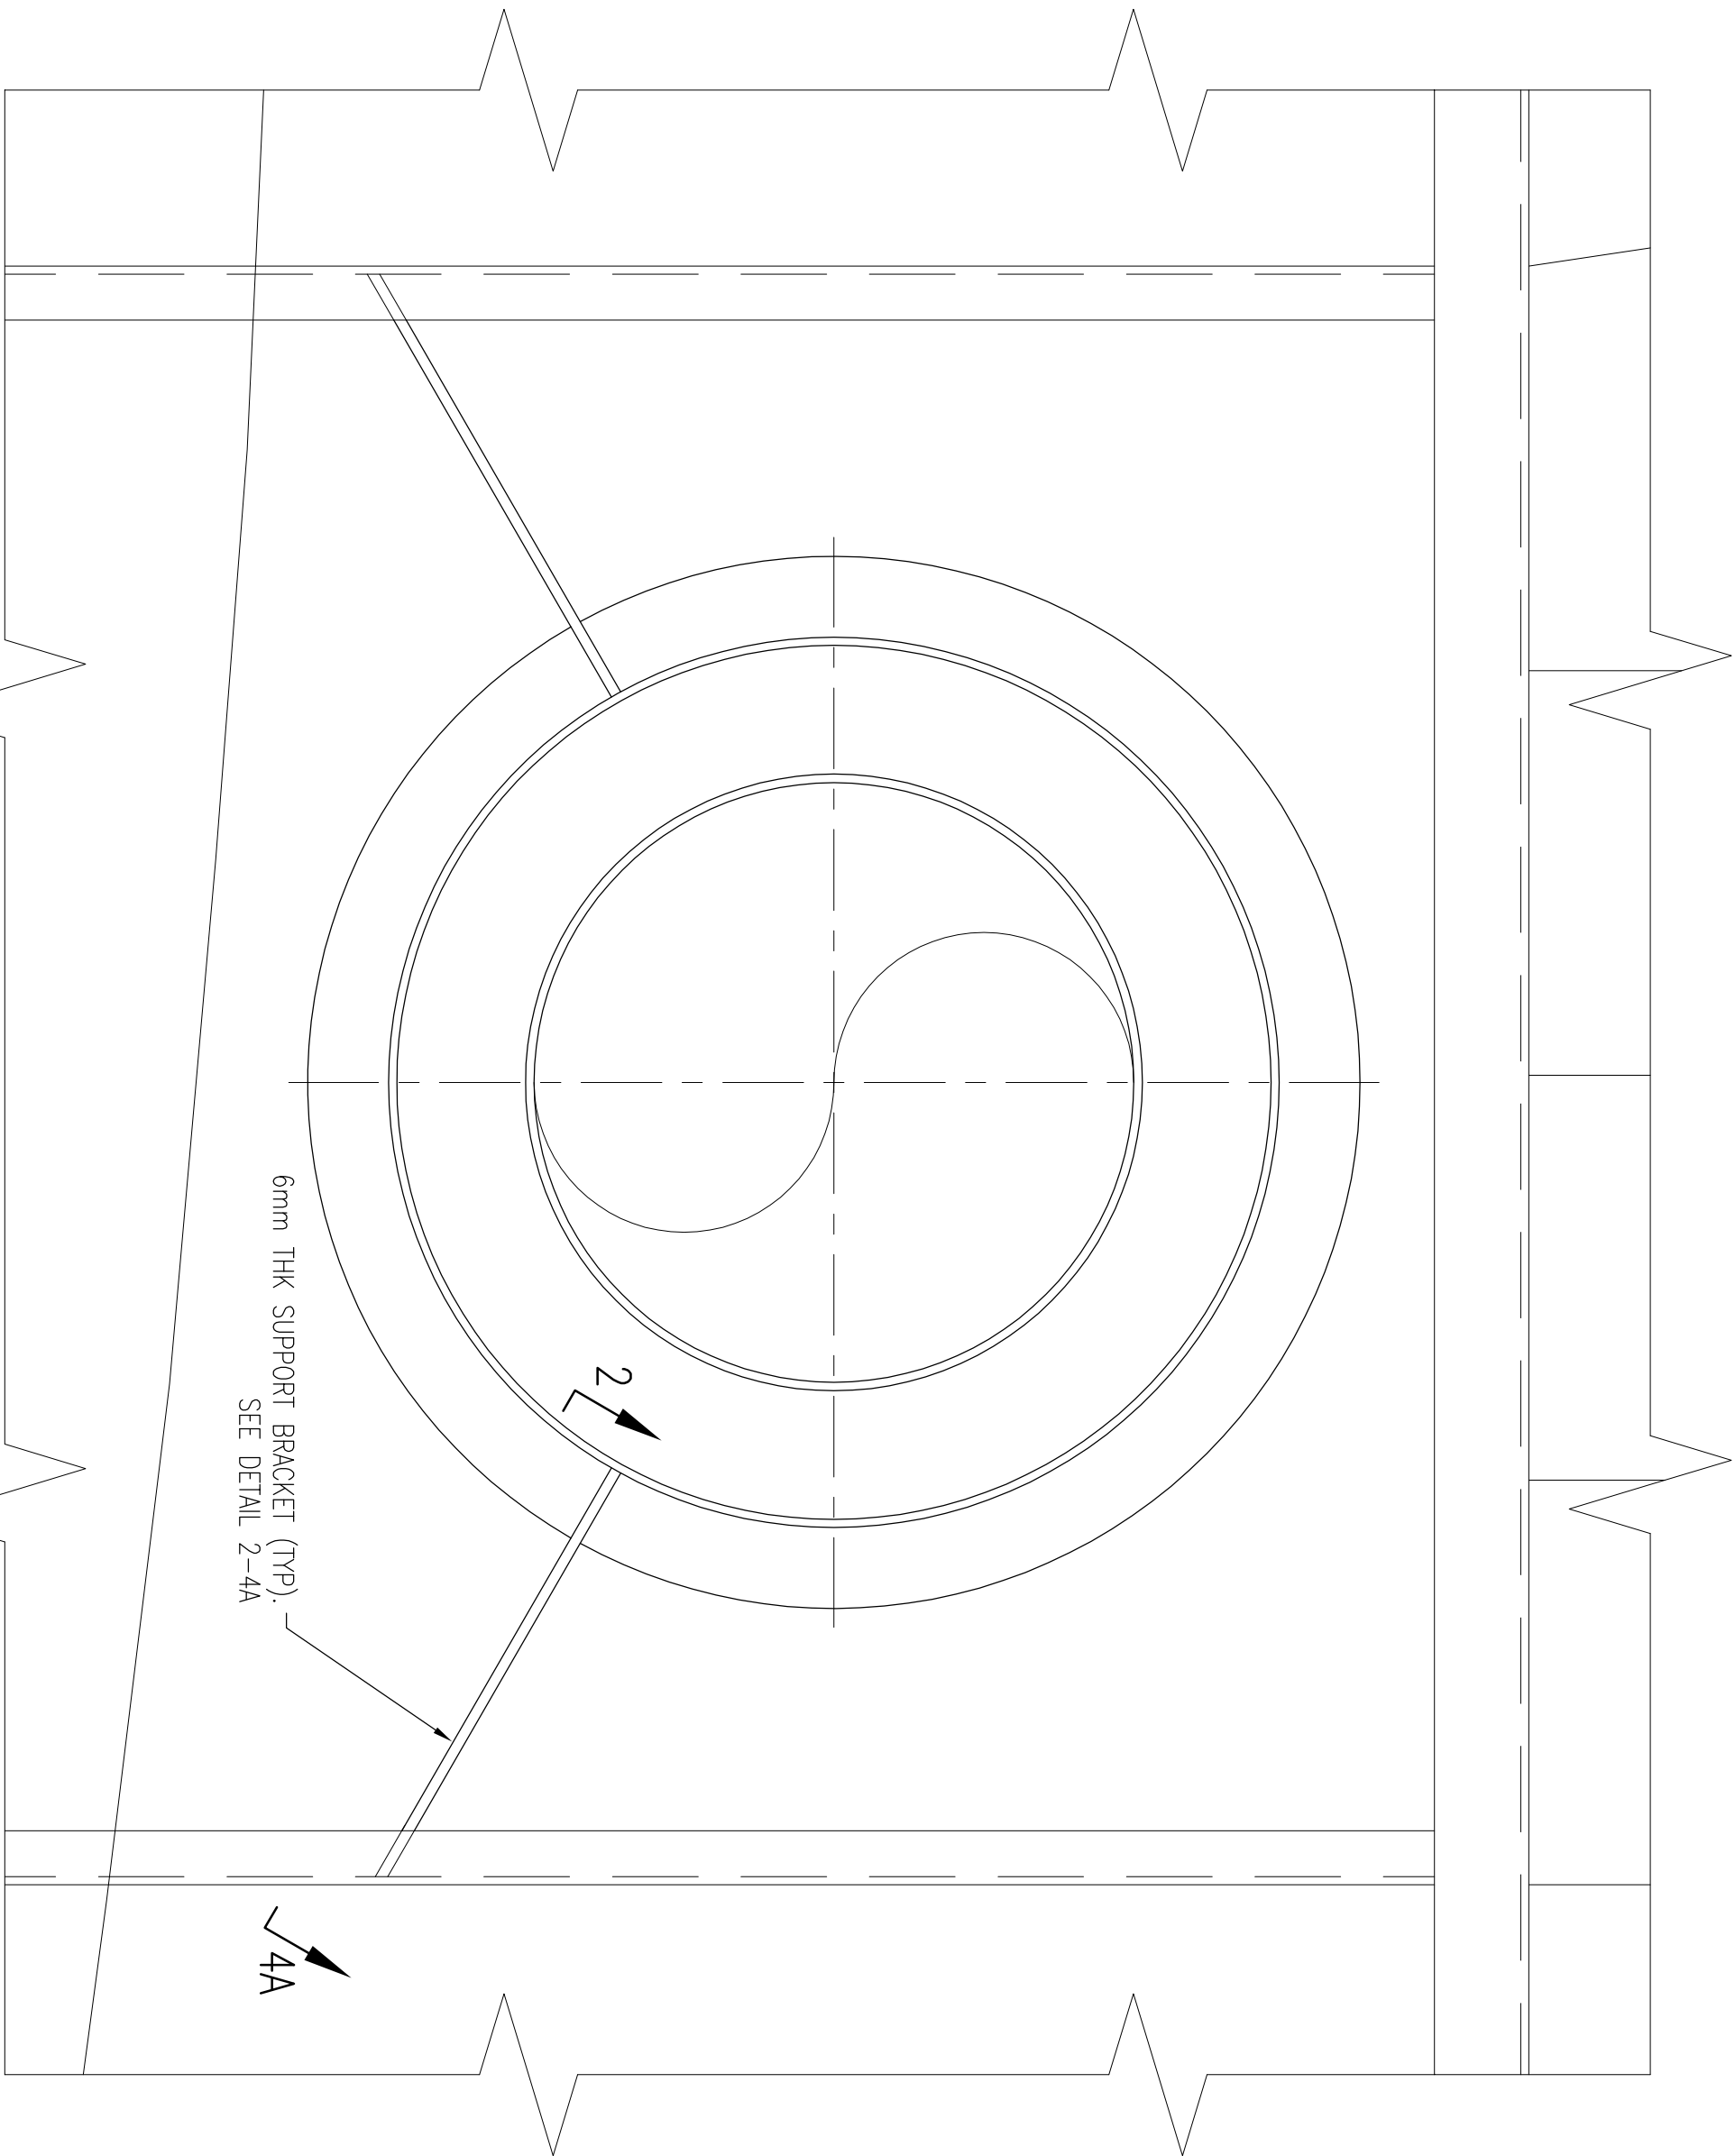

DETAIL 2-7A

MAIN ENGINE EXHAUST PENETRATION SUPPORTS
SCALE 1:5

Client: DFO-CCG		Title: CCG HERO CLASS VESSELS NEW MAIN ENGINE EXHAUST OUTLETS	
Drawn By: D.O.R.	Date: 31/03/16	Checked By: D.C.	Scale: AS SHOWN
Approval/Rev	DWG NO: J15073-M01	Rev: 4	
Client Class			
Flag			

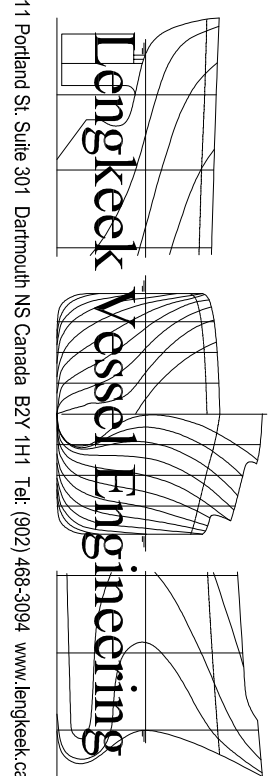

Rev	Date	By	Remarks
4	08/10/16	D.O.R.	MATERIAL CHANGED TO 316L S.S. D.O.R. CONNECTION FLANGE THK TO 16mm

THIS DRAWING, DESIGN CONCEPT AND SPECIFICATIONS ARE THE PROPERTY OF LENCREEK VESSEL ENGINEERING INC. AND SHALL NOT BE COPIED IN ANY MANNER USED FOR MANUFACTURE, SOLD, TRANSFERRED, COMMUNICATED TO A THIRD PARTY, OR USED FOR ANY PURPOSE OTHER THAN THAT AUTHORIZED BY LENCREEK VESSEL ENGINEERING. CONSENT OF LENCREEK VESSEL ENGINEERING.

** GARLOCK EXHAUST GASKET SHEET SUITABLE FOR ENGINE EXHAUST TEMPERATURE TO BE SUPPLIED AND CUT TO SUIT FLANGE AND BOLT HOLE PATTERN

TO BE SECURED WITH (20 OFF) M12x50 S.S. BOLTS

(20 OFF) Ø15mm 16mm THK. PLATE