



NAVIGATING BRIDGE DECK.

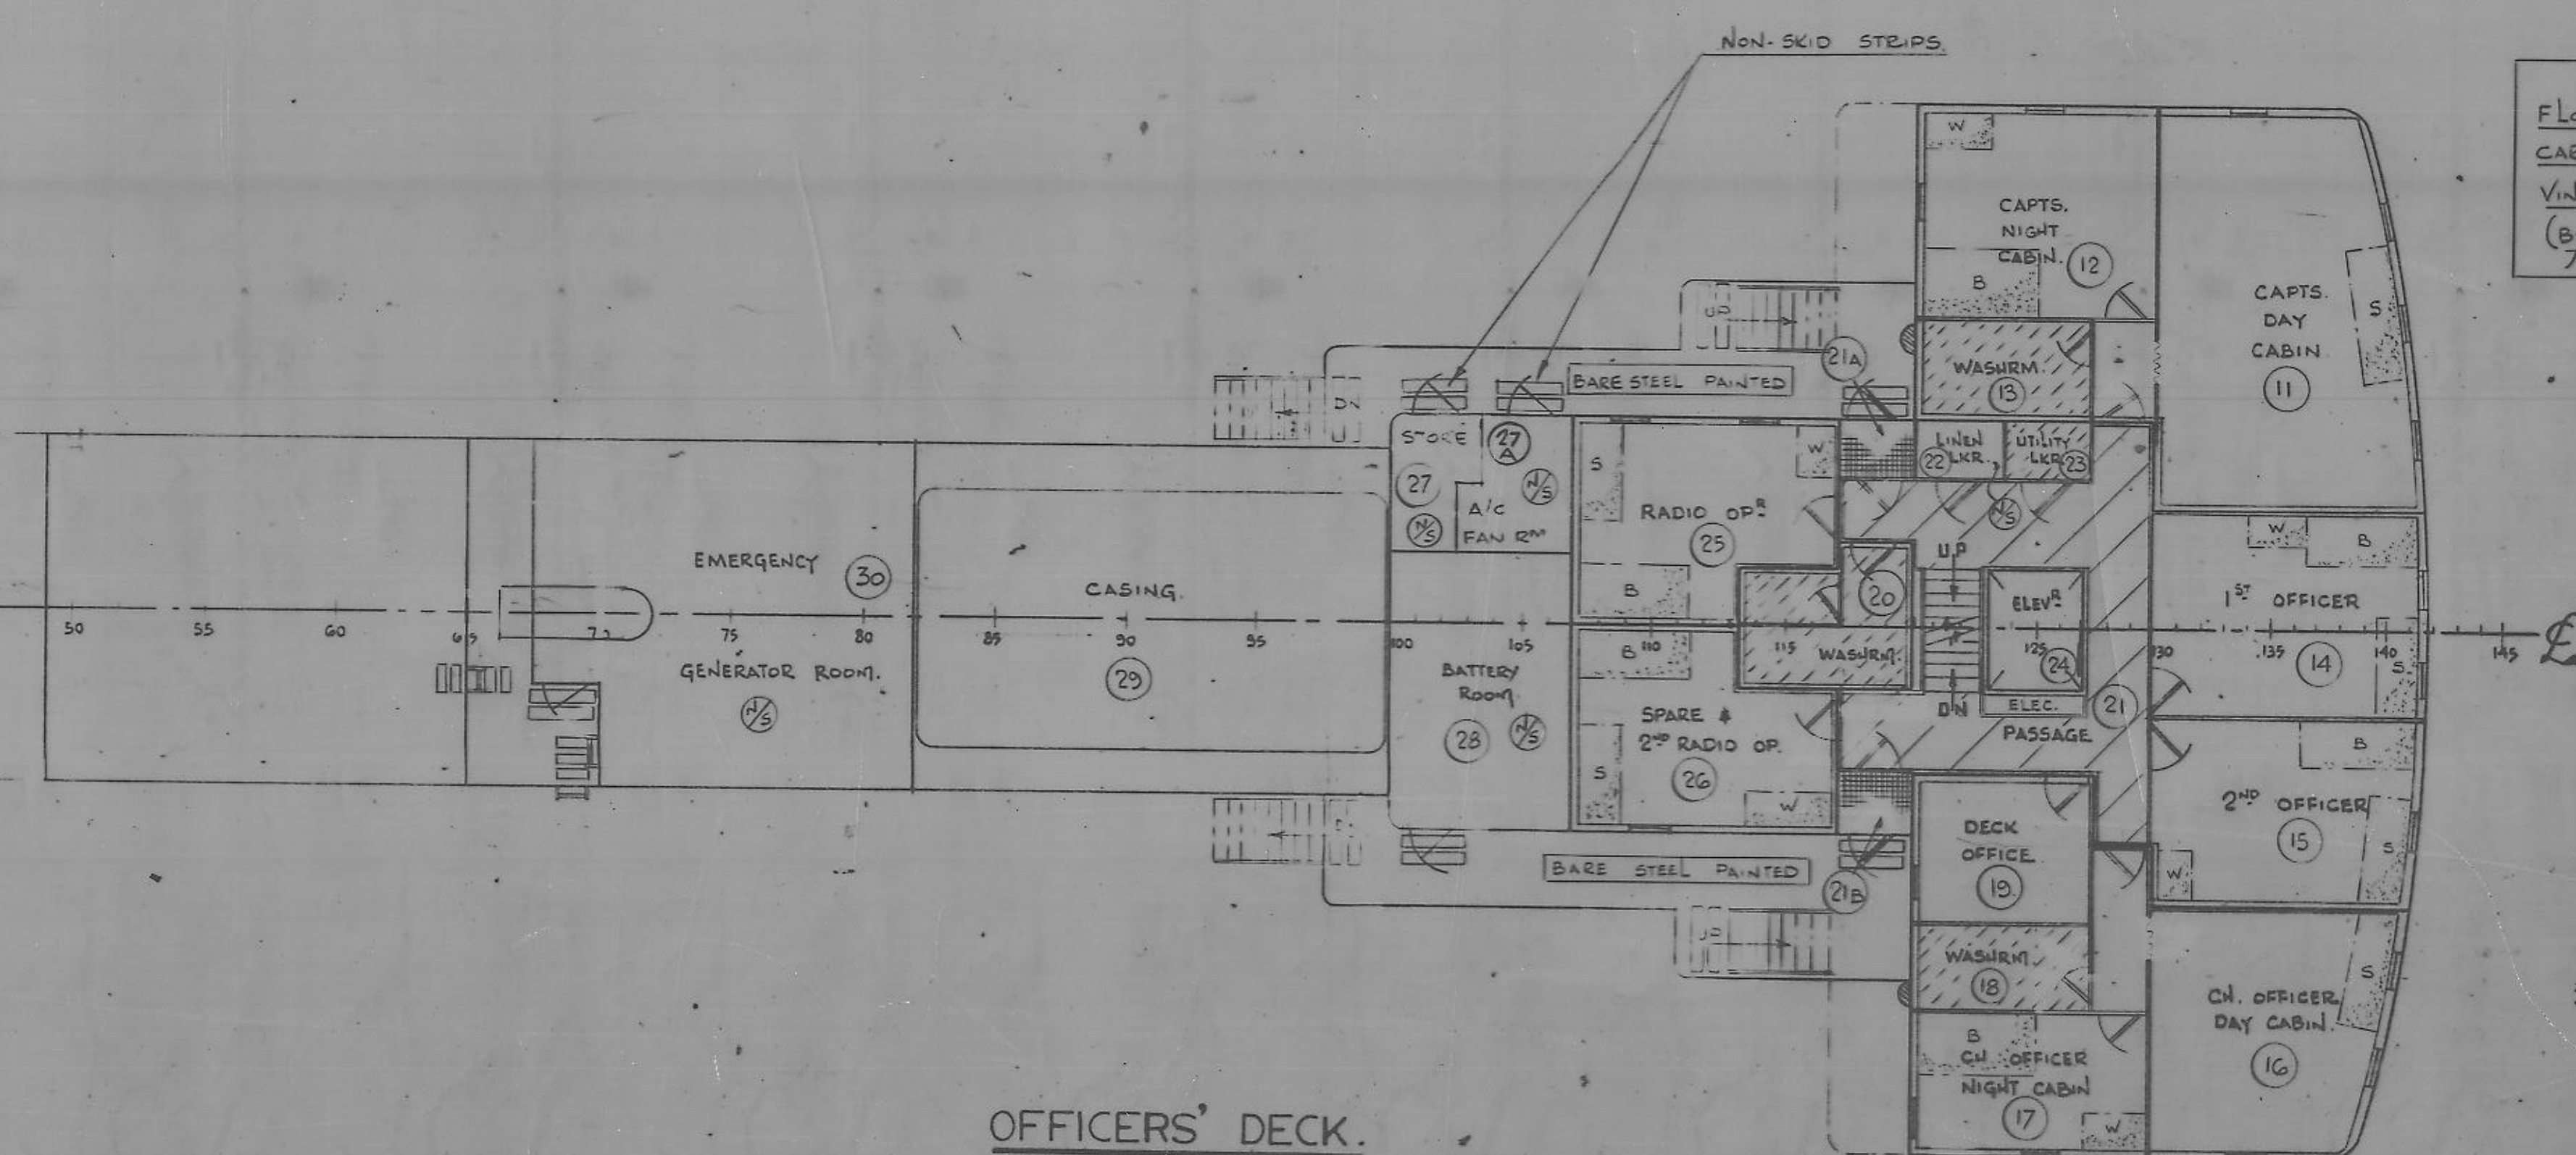

OFFICERS' DECK.

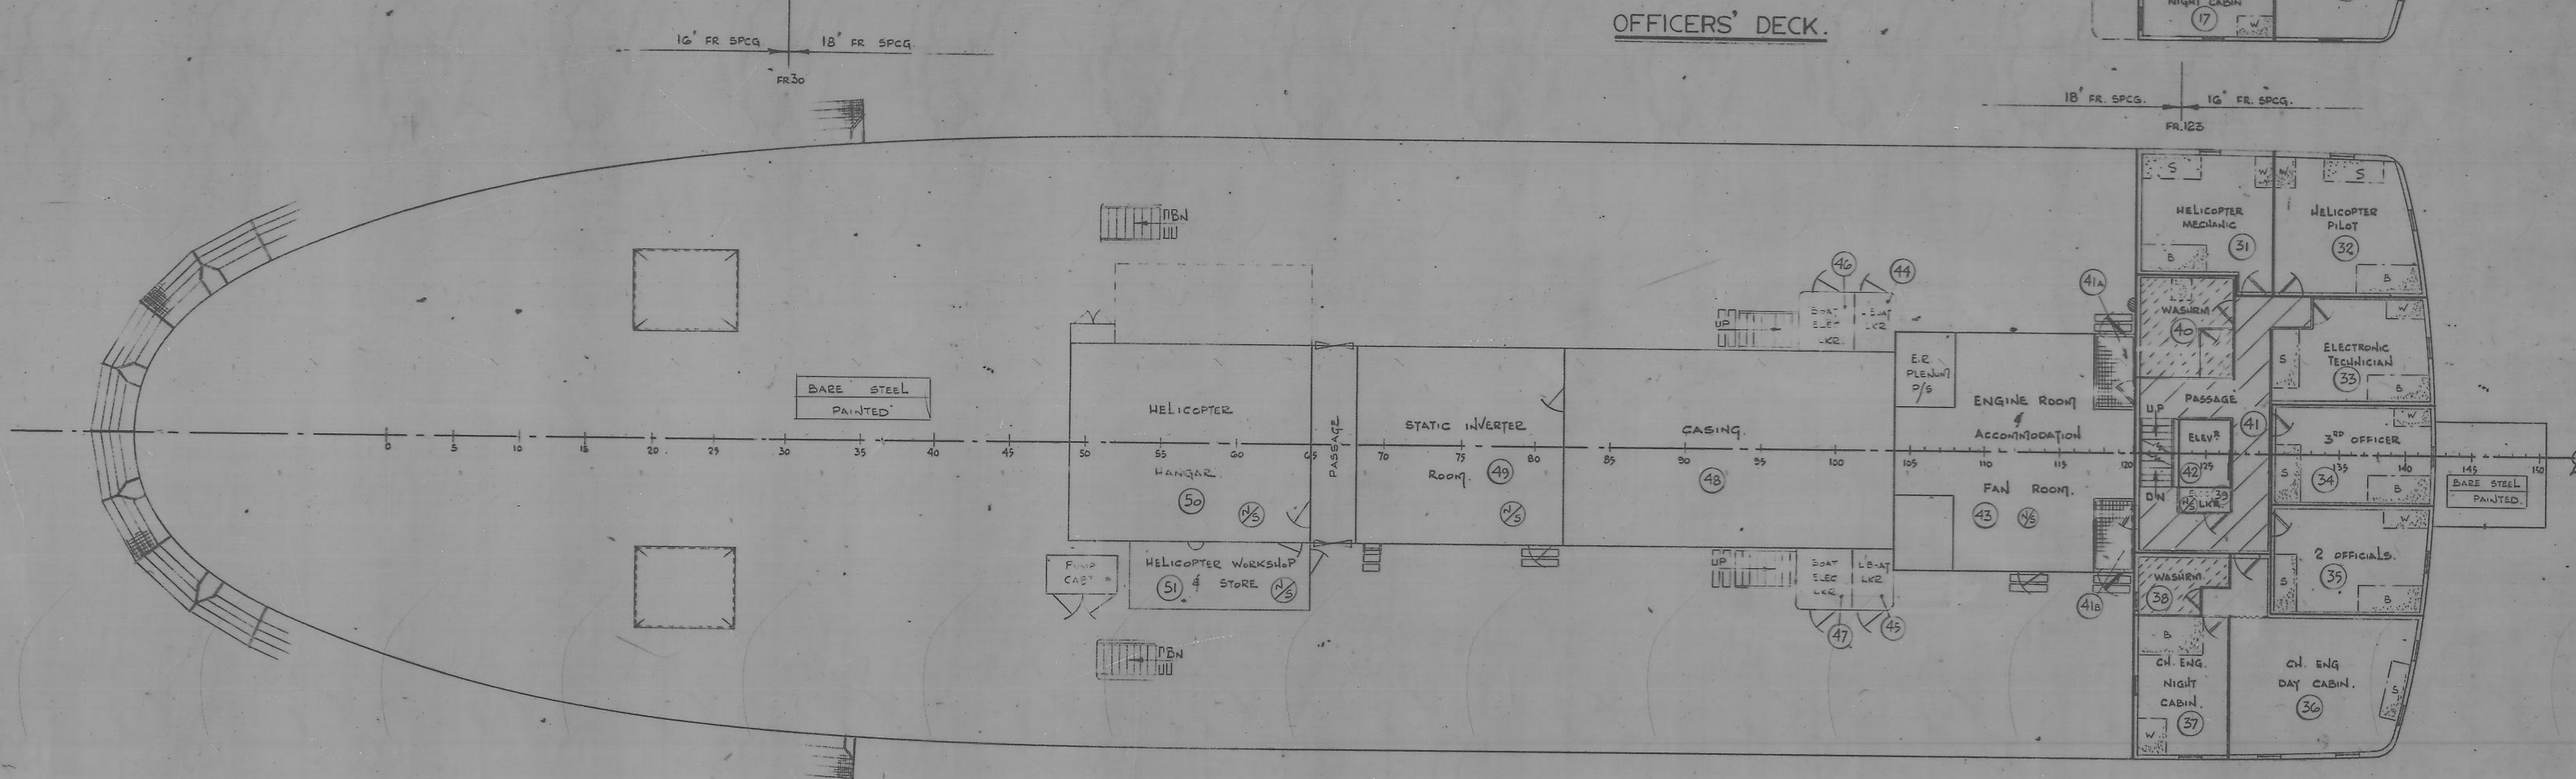

FLIGHT AND BOAT DECK.

REFERENCE DRAWINGS-	
NO	TITLE
221- H - 66	EXT STAIRWAYS & VERTICAL LADDERS
- H - 67	INTERIOR STAIRWAYS
- H - 68	INSULATION PLAN .
- H - 81	LIVING PLAN
- H - 82	KITCHEN & INSULATION DETAILS
- H - 83	PAINTING SCHEDULE.
- H - 84	Sanitary FIXTURES
- H - 85	FURNITURE DETAILS
- H - 84	REFRIG. CARGO SPACE
- H - 85	DOMESTIC COLD STORAGE SPACE

MARINE UNDERLAYMENT.

DECK-2 "ST" SURKOTE "1" to BE APPLIED $\frac{3}{8}$ " MIN THICKNESS TO ALL ACCOMMODATION STEEL DECKES WHERE CARPET, VINYL TILING OR QUARTZITE IS TO BE FITTED. THESE ARE AREAS WHERE THERMOBRASS BLOCK DECK INSULATION IS FITTED, OR 1" THK SURKOTE "1" FITTED. DECK-2 "ST" "222" to BE APPLIED $\frac{3}{8}$ " MIN THICKNESS ONLY ON STEEL DECK OVER THERMOBRASS BLOCK DECK INSULATION (MAIN DECK FEE 30-165) WHERE CARPET, VINYL TILING OR QUARTZITE IS FITTED.

DECK-2 THERMOBRASS BLOCK $\frac{3}{8}$ " THK to BE LND ON STEEL DECK OVER TPO (2) COATS OF THERMOBRASS COMPOUND "KORAL" or equal. INSULATION BLOCK to BE overlaid with 15" x 15" x 1" FIBREGLASS FIBRE REINFORCED PLATE. CARPET OR VINYL TILING TO BE LND ON METAL LATH TO BE SECURED TO DECK W/ST STEEL WIRELESS PINS. CARPET TO BE PAVED 12" IN ROWS G/ APART EXCEPT AT PRE-TESTED - P-TAINED G/ 3" ROWS. W/SPACERS OR SPACERS TO BE FITTED ON PINS TO HOLD LATH AWAY FROM BLOCK WITH DECK-2 "ST" "222" HAS BEEN APPLIED.

DEX-O-TEX SUBKOTE #1

IS FITTED IN THE FOLLOWING SPACES ONLY: CREW'S WASHROOM *134; ENG'S WASH #
CHANGE ROOM *160; CREW'S WASHROOM *178; GALLEY *193; LAUNDRY *211. - AND WHERE VINYL
TILE IS FITTED IN LAUNDRY LOCKER *236.

FITTED CARPET
"HARDING quality 15060" To

CARPET TO BE OF SYNTHETIC FIBER "ACELAN 2000" OR EQUAL, TUBED TYPE AND 1/4
ACCORDANCE WITH REQUIREMENTS OF CGSB 4-TP-123P "PROVISIONAL STANDARDS FOR
CARPETS, CONFIDENTIAL".

CARPET TO BE OF A "WIED" PATTERN THROUGHOUT, AND ENTIRELY SUITABLE FOR HEAVY-
TRAFFIC, AND 1/4 REQUIREMENT.

UNDERLAYS REQUIRE LUMBER, TO BE FULLY Laid IN CAPTAIN'S & CLERKS CUBICLES, AND
SENIOR OFFICERS' CHAMBERS.

CARPET TO BE OF "ARTISAN NYLON" WITH REINFORCED STAIN CURE, HALF TUBED TYPE
AND IN ACCORDANCE WITH REQUIREMENTS OF CGSB 4-TP-123P.

ALUMINUM EDGE STRIP, OF APPROVED SHAPE, TO BE INSTALLED WHERE NECESSARY FOR PROTECTION OF CARPET EDGES, ETC.

VINYL ASBESTOS TILE

VINYL ASBESTOS TILING TO BE CEMENTED DIRECTLY TO DEX-O-TEX MARBLE UNDERLAYMENT.
TILES TO HAVE PATTERN AND COLOUR THROUGHOUT AND Laid IN REGULAR COURSEING.
ALL TO BE Laid WITH GRANT PATTERN ROLLING ATTACHMENTS.
COVERING TO BE 2 1/2" CONTINUOUS RUBBER GIVE BASE.

NOTE FOR DETAILS OF DECK COVERINGS IN CONJUNCTION WITH

STEEL BULKHEADS, JOINER BHDS. AND LININGS, DOORSILLS,
BUILT-IN UNITS ETC. SEE "JOINER & INSULATION DETAILS"
DWG. NO. 221 - H - 82.

QUARTZITE :

QUARTITANE SEAMLESS FLOORING TO BE APPLIED DIRECTLY TO DEV-O-TEX MARBLE UNDERLAYMENT.
FLOORING TO BE COVED AT EDGES AND IN WAY OF BUILT-IN FURNISHINGS; TO BE EFFICIENTLY
SCUPEED AND SLANE TOWARDS DRAINS AS REQUIRED.
DIVIDING STRIPS OF METAL OR SOLVENT-PROOF PLASTIC TO BE FITTED WHERE NECESSARY.
ALL TO BE FINISHED AS RECOMMENDED BY MANUFACTURER TO GIVE A NON-SLIP SURFACE
SUITABLE FOR CONTINUOUSLY WET AREAS - AND TO ENSURE A DIRT RESISTANT
DECORATIVE FINISH FOR EASY MAINTENANCE.

(NOTE! STEEL INSERT PIECES TO BE FITTED ON GALLEY FLOOR UNDER OVEN DOOR RESTS, IF LATTER ARE FITTED ON RANGE.)

RUBBER MATS :

IN ADDITION TO THOSE AREAS SHOWN IN TABLE, NON-SLIP RUBBER MATS TO BE FITTED IN ALL SHOWER STALLS.

NON-SKID STRIPS -

IN ADDITION TO THESE AREAS SHOWN IN TABLE, TWO (2) NON-SKID STRIPS OF "SANDCLOTH" TO BE GLUED TO DECK AT TOP AND BOTTOM OF EACH LADDER OR STAIRWAY LANDING ON EXPOSED DECKS, AND OUTSIDE OF ENTRANCE DOORS. (SEE DWG "221-H 66" EXTERIOR STAIRWAYS AND VERTICAL LADDERS.)

WOOD DECKING :

WEATHERING TO BE 2"x THICK NO. 1 GRADE B.C. FR. EDGE GRN PLANK 5" WIDE, WITH A 5" x 2" THICK MARQN PLANK AT THE ENDS OF ALL BEAMS AND ELSEWHERE AS NECESSARY, THE INBOARD EDGE OF THE MARQN BEING CHAMFERED. DECKES TO BE CHECKED FOR FAIRNESS PRIOR TO LAYING WOOD DECK. ALL PLANKING TO BE LAD EDGE GRN AND WILL FITTED TO STEEL DECK, PLAINED STRAIGHT & TRUE ON UPPER AND LOWER SIDES, WITH EDGES CHAMFERED TO MAKE A PROPER SEAM FOR CAULKING.

AFTER FINAL PLANNING TO BE INSPECTED AND DEFECTIVE OR BLEMISHED PLANNING
* REVISED AND NEW PLANNING TO BE OWNERS' APPROVAL
PLANNES TO BE Laid IN APPROVED BUTYL RUBBER COMPOUND AND SEMTS CAULKED WITH
TREMCO J.S. 709 TO MANUFACTURERS RECOMMENDATIONS AND OWNERS' APPROVAL.
DECIDING TO BE FASTENED WITH 3/8" DA GALVA WILDED STDS. WITH 4 WASHERS CAREFULLY
* GRANTMISTED AND COVERED WITH TIGHT WELDED BEDDED IN BUTYL RUBBER COMPOUND
DOWNELS TO BE FITTED CAREFULLY TO AVOID CROSS GRAIN.
THE WOOD DECK TO BE SANDED AND CLED UPON COMPLETION.

D	AS FITTED -221-	BDD	MAR 78
A	REVISED GENERALLY TO DATE	H.D.O	JAN 9/79
B	REVISED GENERALLY TO DATE AND TO SUT D.S.S. FINAL APPEAL OF NOV 29/76	H.D.O.	JAN 11/76
A	REVISED GENERALLY TO DATE AND TO SUT D.S.S. APPEALED PRINTS OF 25/3/76.	H.D.O.	SEP 25/76
No.	REVISION	BY	DATE

DISTRIBUTION			
DEPARTMENT	QTY.	DEPARTMENT	QTY.
Owners	1 7/27	Yard Manager	
Classification		New Const. Supt.	1 2/27
Steamship Inspection		Outfit Supt.	
		Repair Supt.	
		Steel Supt.	
		PLANNED	✓
Hull D.O.	2		
Machinery D.O.	1	Lash	
Electrical D.O.	1	Piers	
Welding Equipment		Water	
		Shipsight	3 7/27
		Rigger	
		Joiner	2
		Pipe Fitter	
		Machine Shop	
		Patternmaker	
		Blacksmith	
		Sheet Metal	1
		Electric Shop	1
		Paint Shop	✓




BURRARD DRY DOCK CO. LTD.
SHIPBUILDERS • SHIP REPAIRERS • GENERAL ENGINEERS
NORTH VANCOUVER, B.C., CANADA

DIVISION	HULL	HULL 221/2	JOB No. 240
HULL		OWNERS MINISTRY OF TRANSPORT	

DECK COVERINGS AT SUPERSTRUCTURE DECKS.

	REPRESENTS	DATE	DRAWN	A-g.c.
D.S.S.	T.K.	25.3.70	CHECKED	
D.S.S.		25.11.70	APPROVED	
			SCALE	1" = 1'-0"
			DATE	MAR 11 / 70
			WING	
			NO	1 DB-221-4-79 SHT
				REV.

0 1 2 3 4 5 6 7 8 9 10 11 12 INCHES

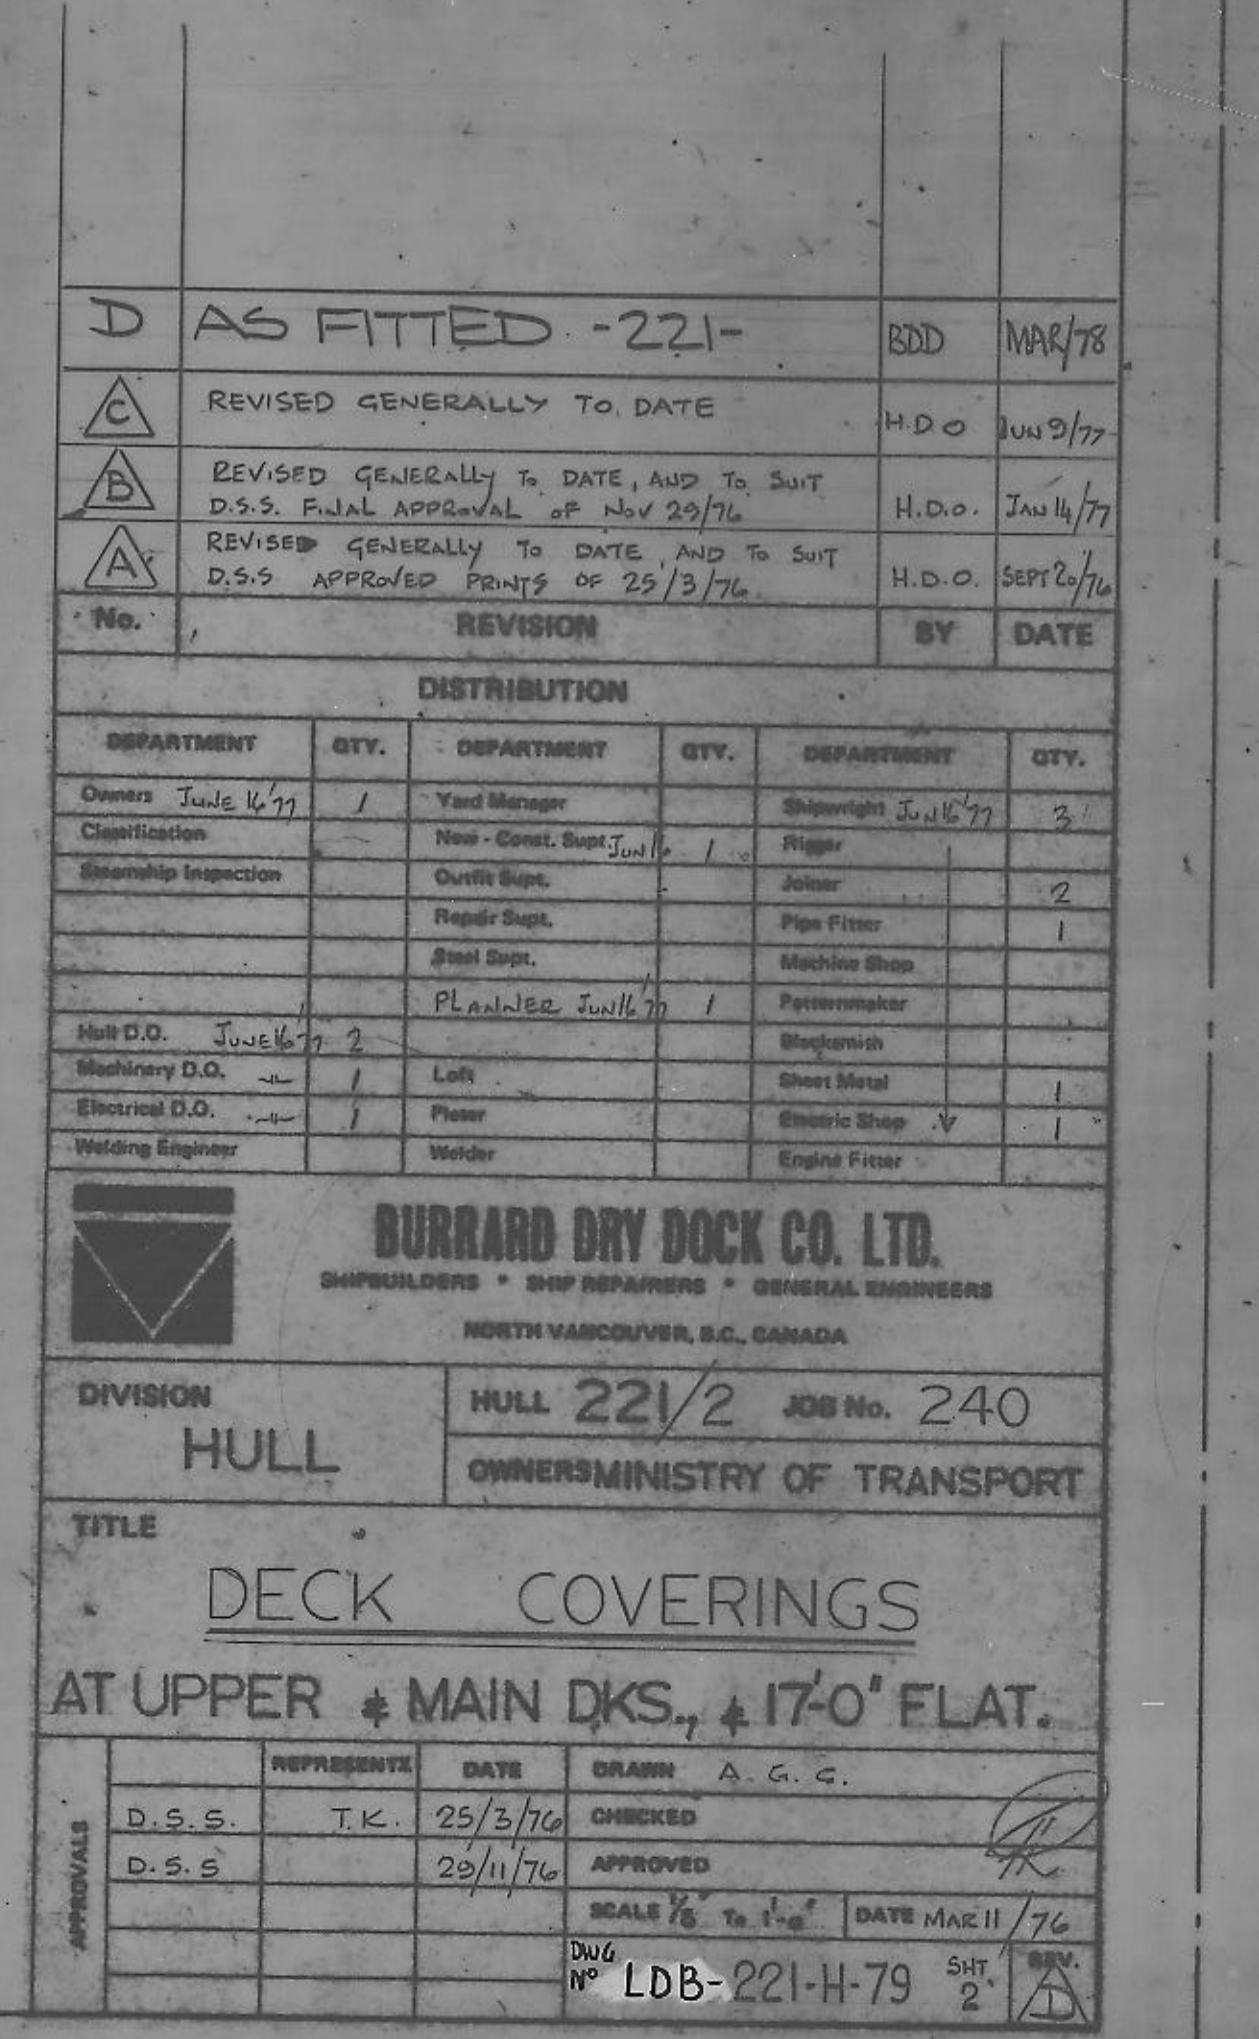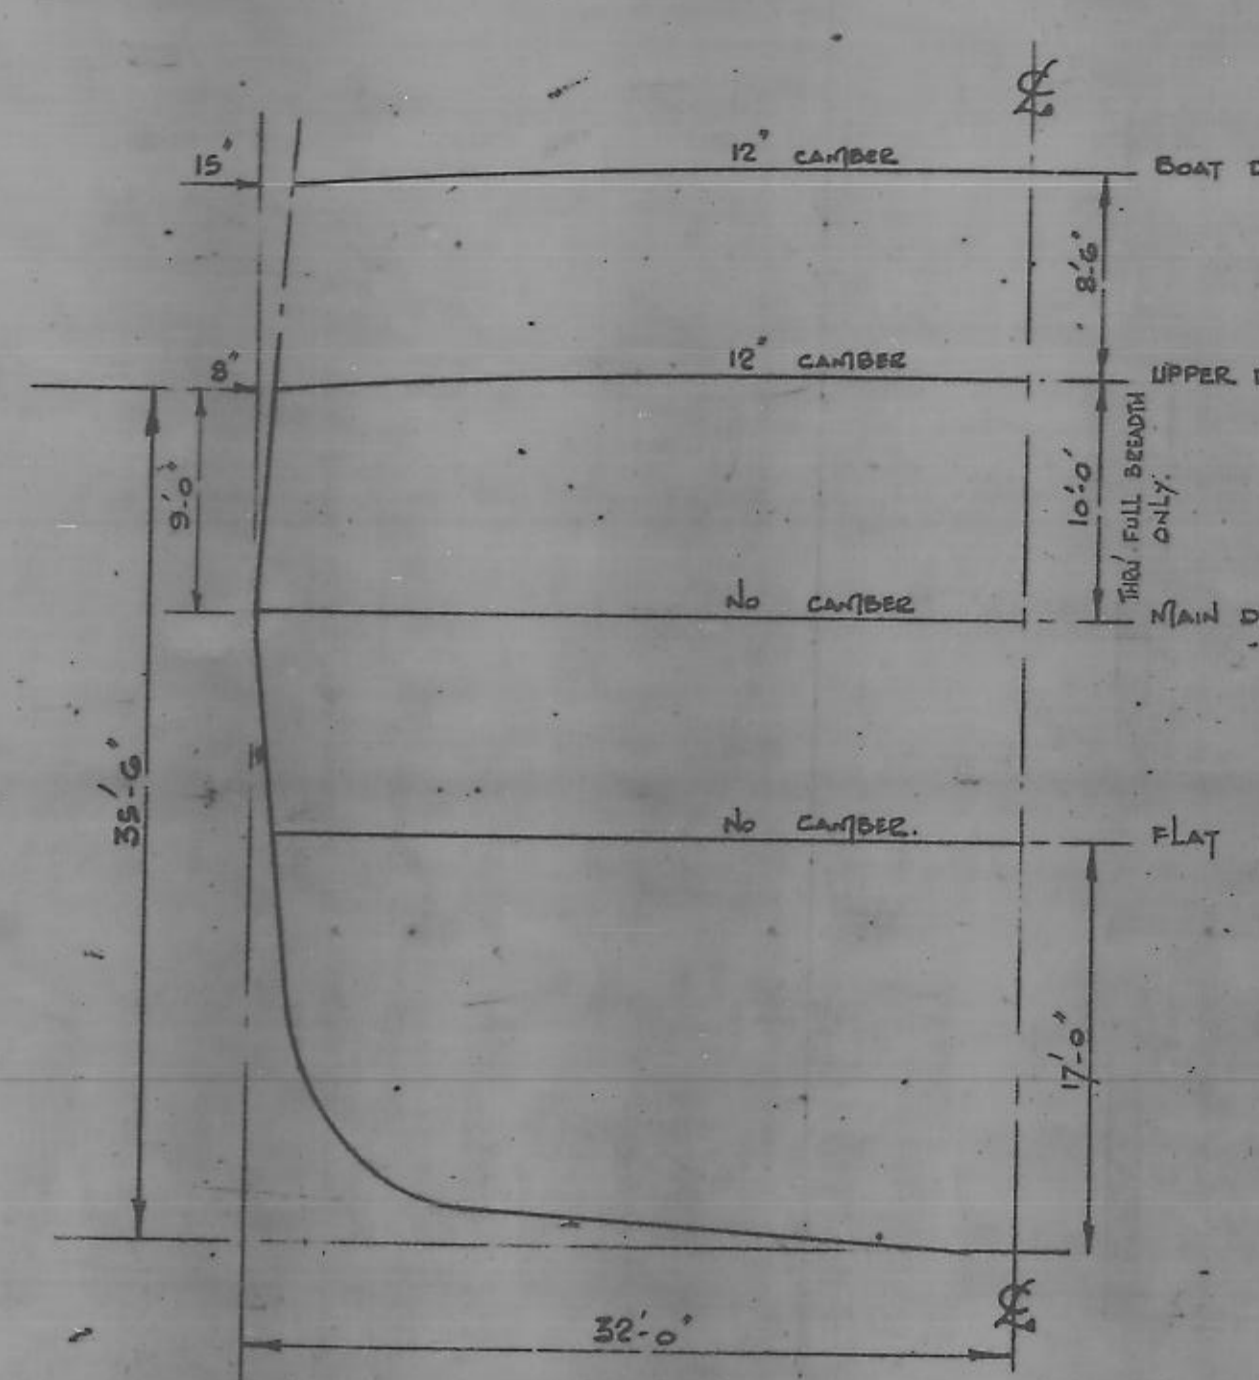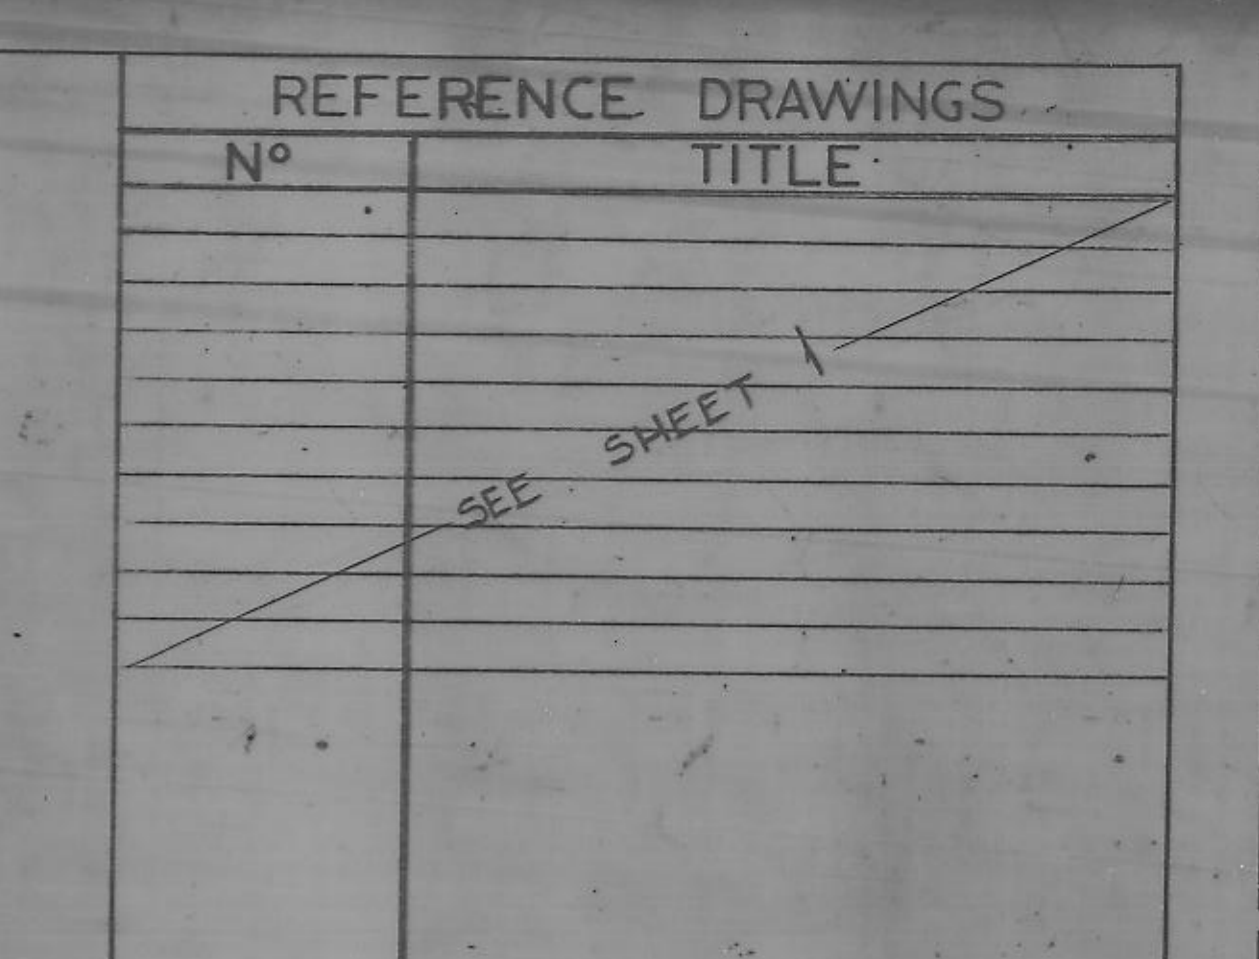

FLAT AT 17'-0" W.L.