





CEILING AT COMPUTER SERVER, INFORMATICS, AND WASHROOMS TO REMAIN

NEW 2X4 ACCOUSTING CEILING TILES AND GRID TO MATCH EXISTING HEIGHT AND LOCATION.

CEILING ACCESSORIES INCLUDING BUT NOT LIMITED TO LIGHTING, SPEAKERS, SMOKE DETECTORS AND FIRE ALARMS TO BE PROTECTED DURING CONSTRUCTION. REMOVE AND REINSTALL AFTER INSTALLATION OF NEW CEILING. REVERIFY FIRE ALARM SYSTEM AFTER CEILING INSTALLATION IS COMPLETE. TYPICAL FOR ALL.

LIGHTING AND ACCESSORIES ARE PLACED BASED ON ASSUMPTION. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS.

- LIGHTING FIXTURE
- RETURN AIR
- SUPPLY AIR

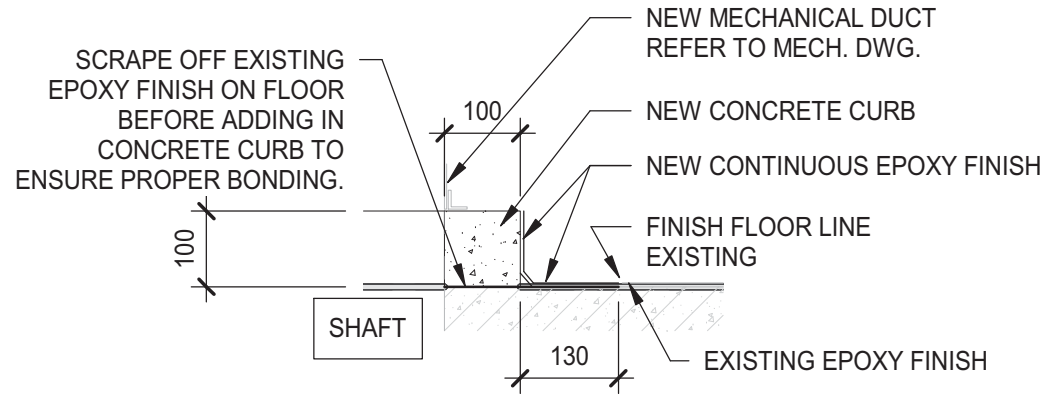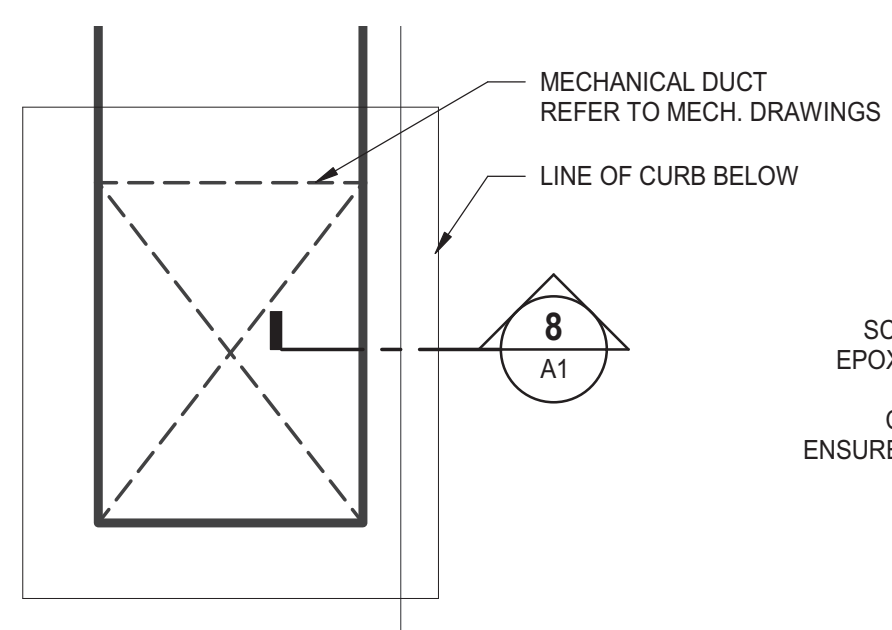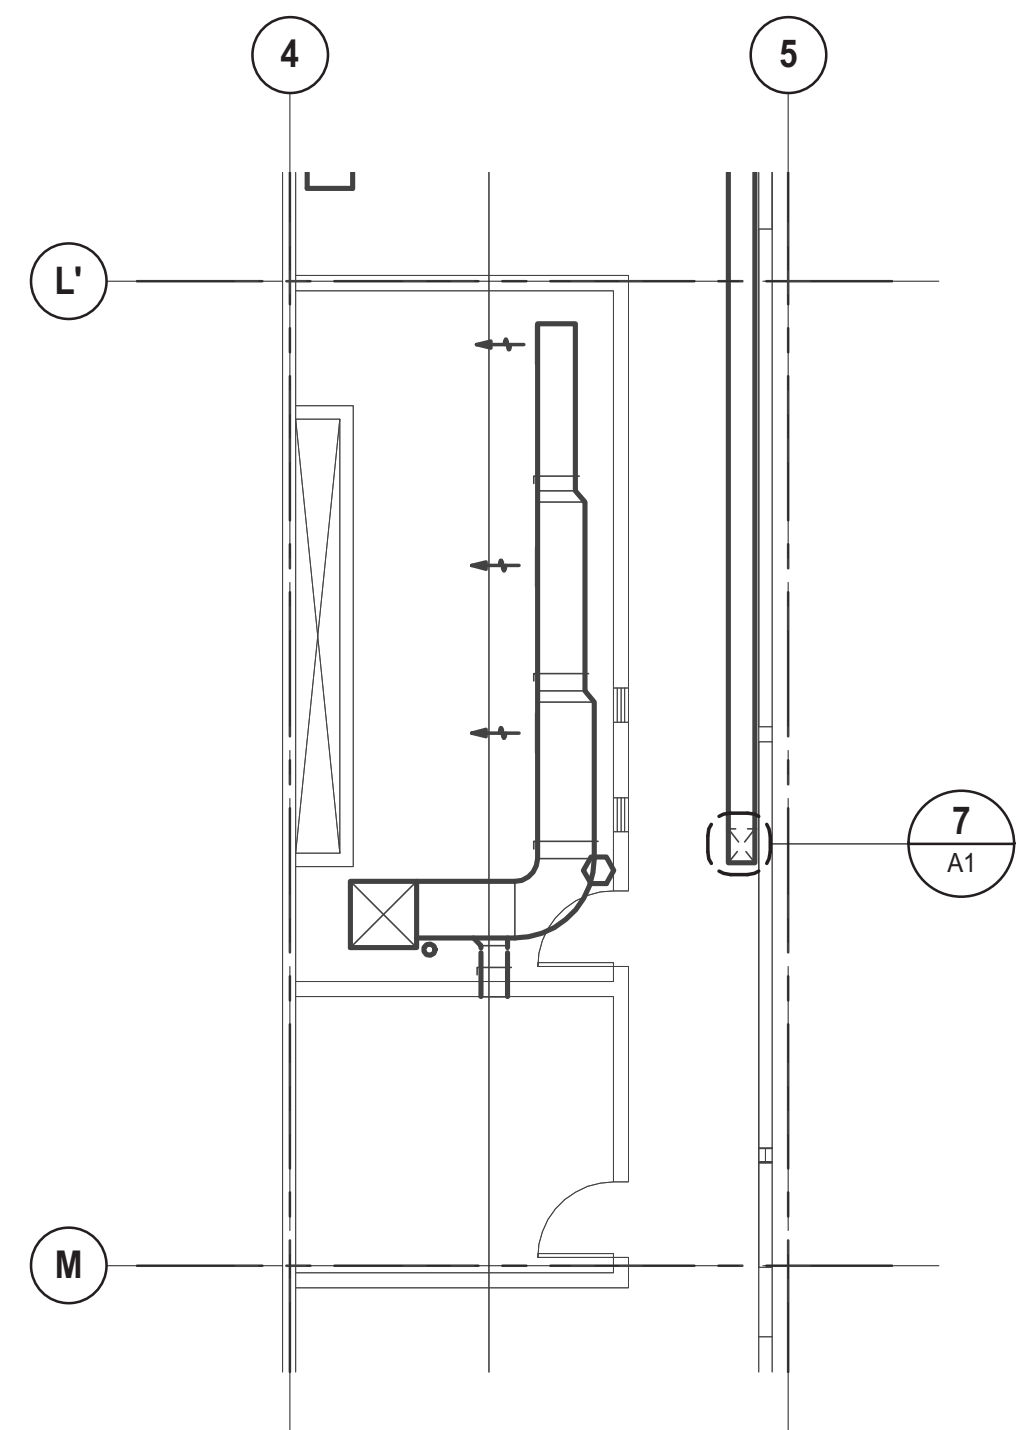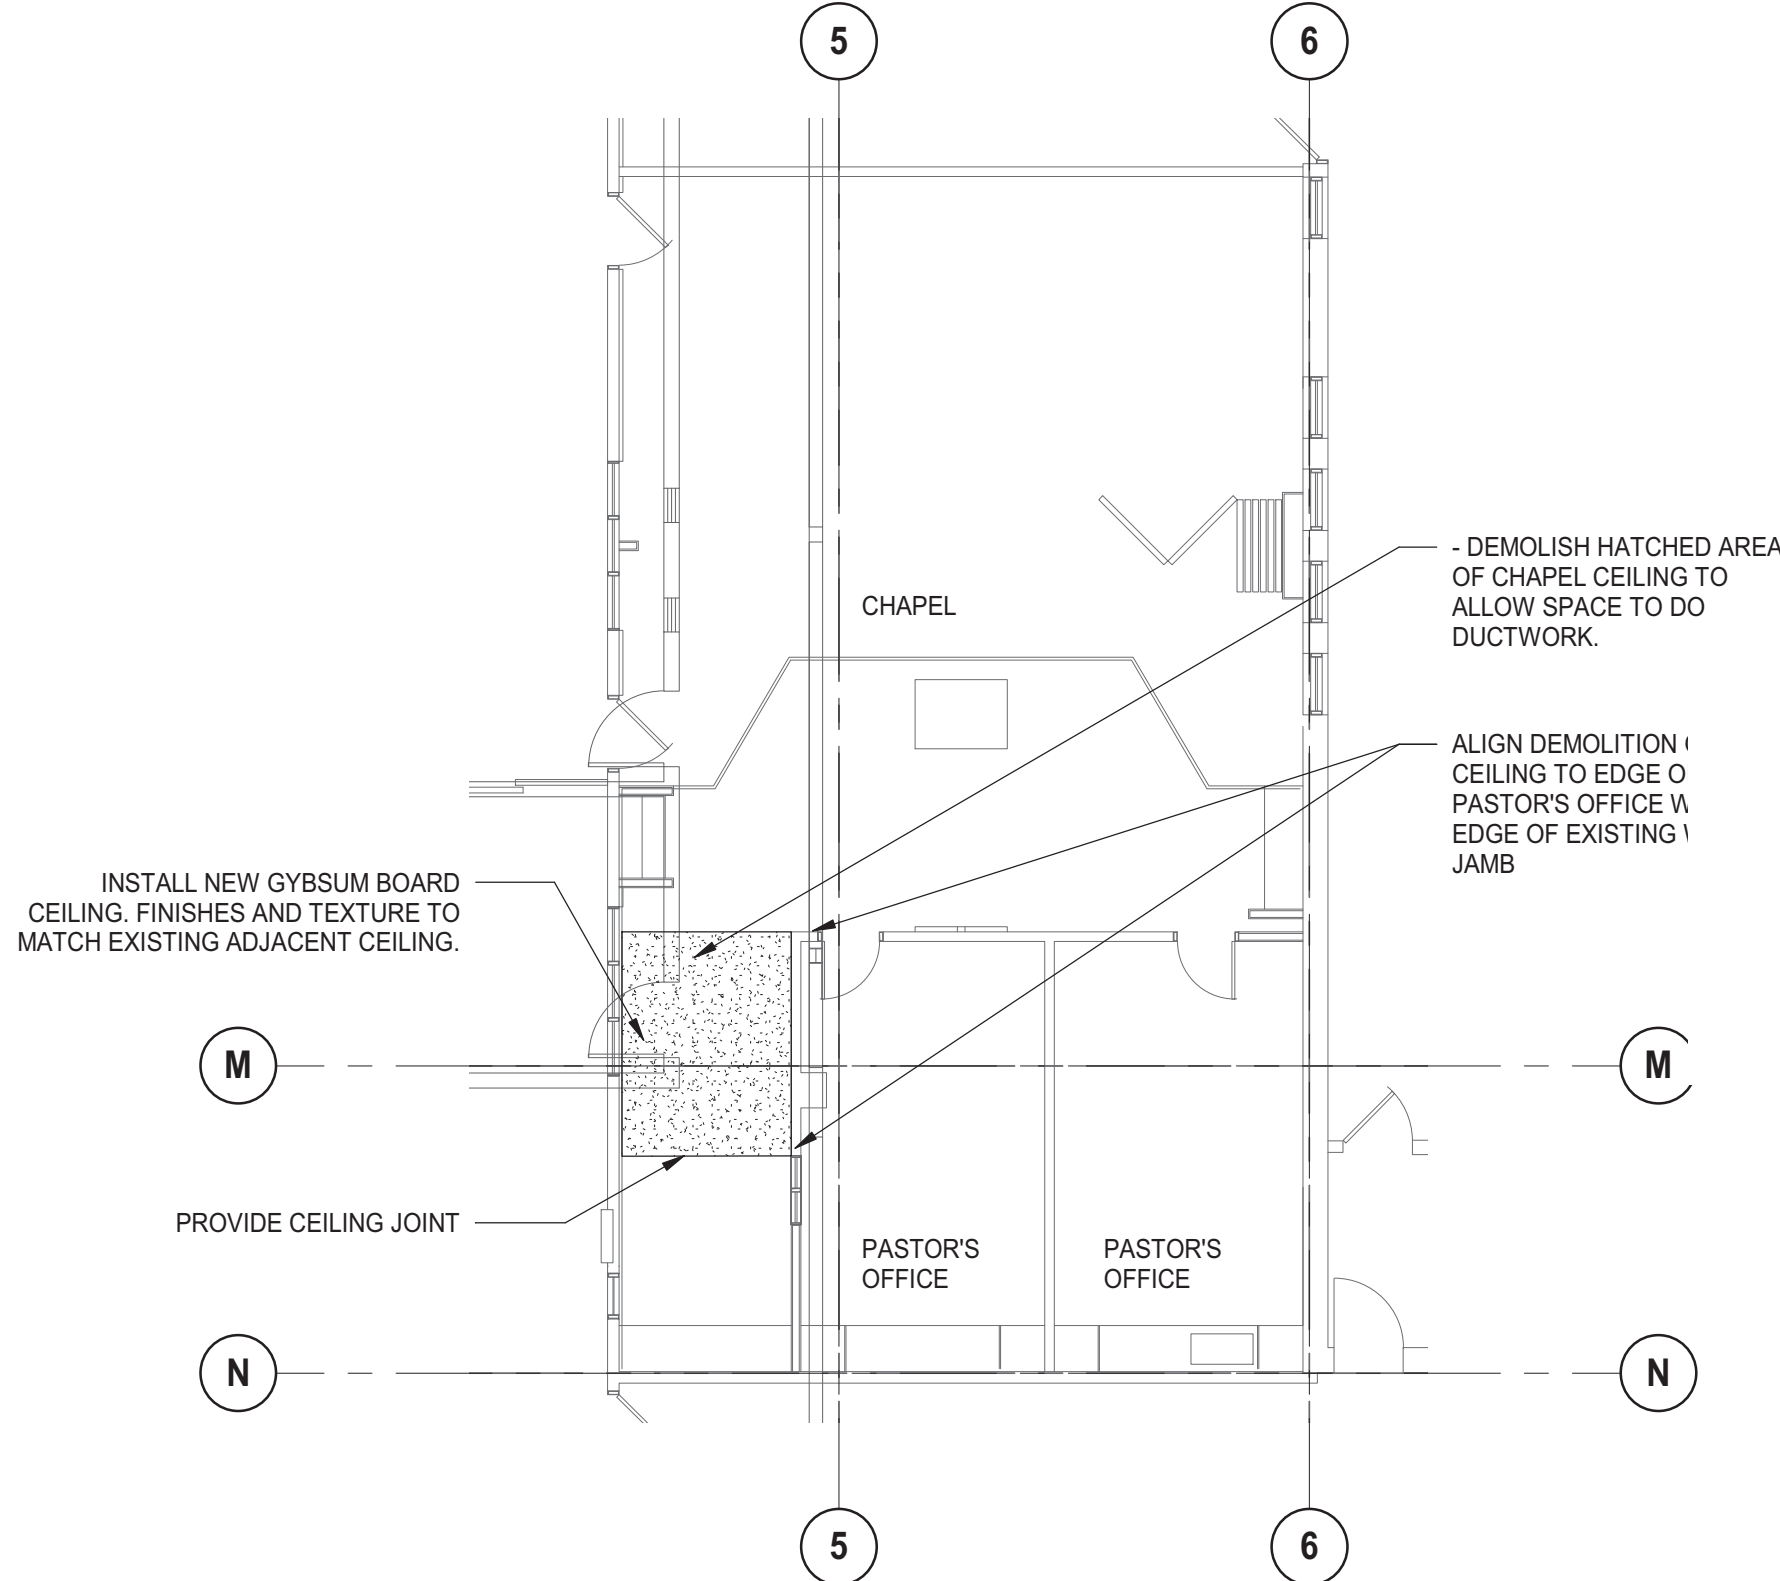

- CONSTRUCTION NOTES:**
- PATCH AND REPAIR DAMAGED WALLS, CEILINGS AND FLOORS AS A RESULT OF DEMOLITION AND CONSTRUCTION. FINISHES TO MATCH EXISTING.
  - SEAL CAVITIES AS NEEDED TO MAINTAIN FIRE PROOFING.
  - CAULK AND SEAL GAPS TO EXTERIOR CONSTRUCTION. REPLACE DAMAGED MEMBRANES AND INSULATION. SECURE AND SEAL IN PLACE.
  - TO ROOMS WITH GYPSUM BOARD CEILING REQUIRING MECHANICAL EXHAUST/RETURN AND EQUIPMENTS AS PER MECHANICAL DRAWINGS, CUT OPENING THROUGH EXISTING CEILING. REFER TO MECHANICAL DRAWINGS FOR LOCATION AND SIZE.
  - ROOF STRUCTURE MOUNTED AC AT PAROLE OFFICES - OPENING SIZE THROUGH EXISTING T-BAR CEILING IS 845X845. CONFIRM LOCATION AND SIZING WITH MECHANICAL DRAWINGS.
  - CONSTRUCTION NOTES IN REFERENCE TO MECHANICAL SHEET NUMBER M12. TO AREAS AFFECTED BY THE REMOVAL OF RADIATION ELEMENT, RADIATION CABINET AND ASSOCIATED PIPING WITHIN ROOM, PLEASE DO THE FOLLOWING:
    - WHERE THE EXISTING WALL AND FINISH AFFECTED IS PAINTED GYPSUM BOARD, PATCH AND REPAIR USING SAME MATERIALS, MAKE GOOD AND PAINT TO MATCH ADJACENT WALL.
    - TO WHERE THE EXISTING WALL FINISH AFFECTED IS VINYL, PROVIDE NEW FULL HEIGHT STRIP TO REFINISH. COLOUR TO BE CONFIRMED BY ARCHITECT.