


1 FLOOR PENETRATION DETAIL IN REFERENCE TO FIG. G1
A3 SCALE: 1:10

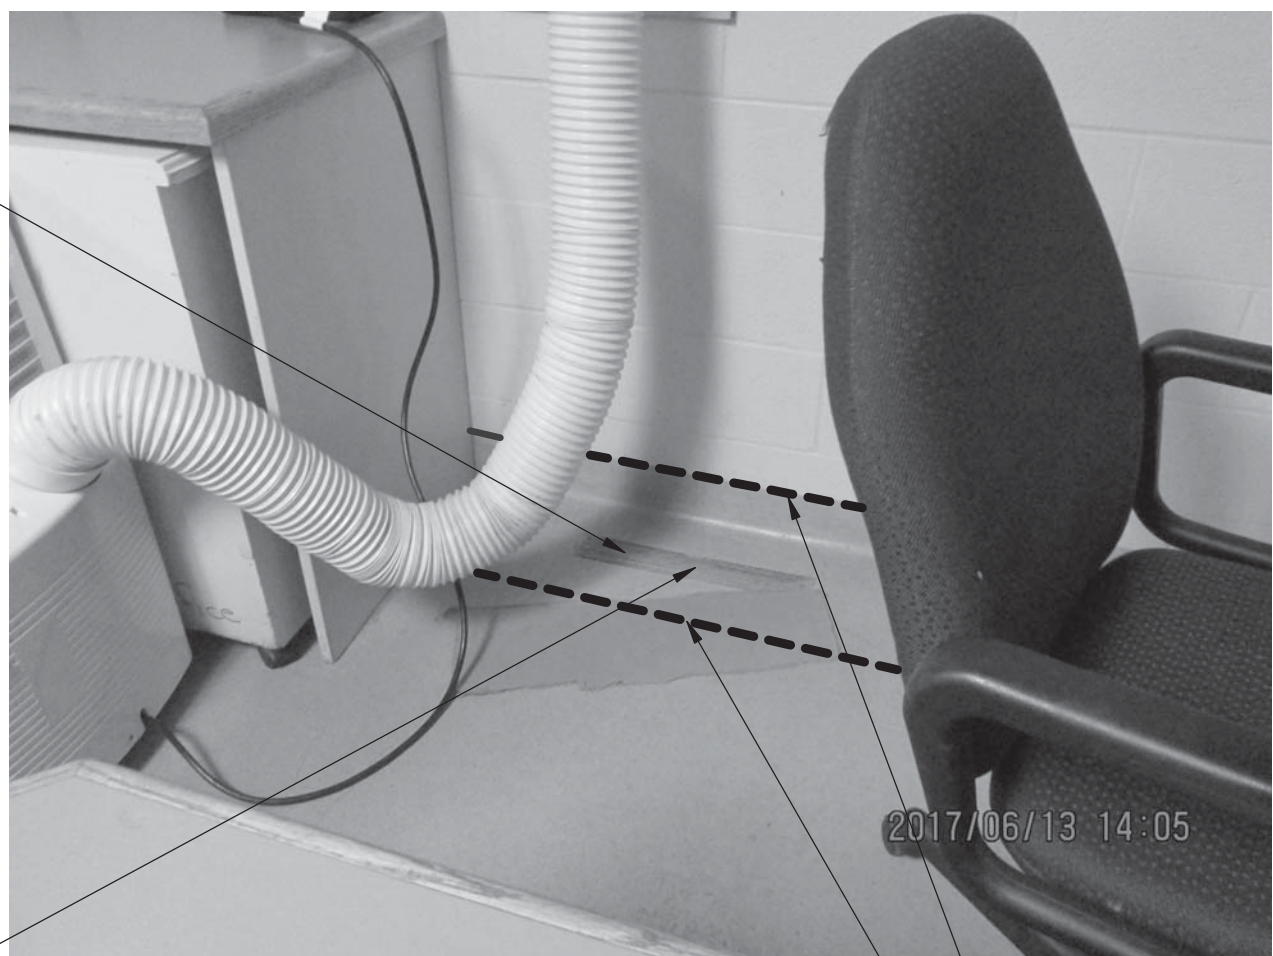

FLOOR GRILLE TO BE DEMOLISHED
AND INFILLED AS PER FLOOR PENETRATION DETAIL

NEW EPOXY FINISH TO EXTEND
AS A NEW BASE WITHIN SPECIFIED
EXTENTS. SEE "FIG. G1" BELOW.

NEW EPOXY FINISH TO EXTEND
4" FROM THE EDGE OF EXISTING
GRILLE BEING DEMOLISHED.
REFER TO "FIG. G1" FOR EXTENTS

NOTE: TO AREAS WHERE WALL
FINISH IS VINYL, REMOVE AND
REPLACE WITH NEW FULL
HEIGHT VINYL STRIP TO
REFINISH.
SELECTION WILL BE FROM
CROWN-VYCON STANDARD
WALL COVERING COLOUR
SELECTIONS.
COLOUR TO BE CONFIRMED BY
ARCHITECT.

PATCH, PAINT AND REPAIR HOLE ON
EXISTING GYPSUM BOARD AND
STUD WALLS AS A RESULT OF
REMOVAL OF RADIANT HEATERS.
REFER TO CONSTRUCTION NOTES.

3 EXISTING RADIANT PANEL DELETION
A3 SCALE: 1:10

NOTE: DETAIL IS APPLICABLE TO ALL AREAS
WHERE RADIANT HEATERS WILL BE DELETED.
REFER TO MECHANICAL DRAWINGS FOR LOCATIONS.

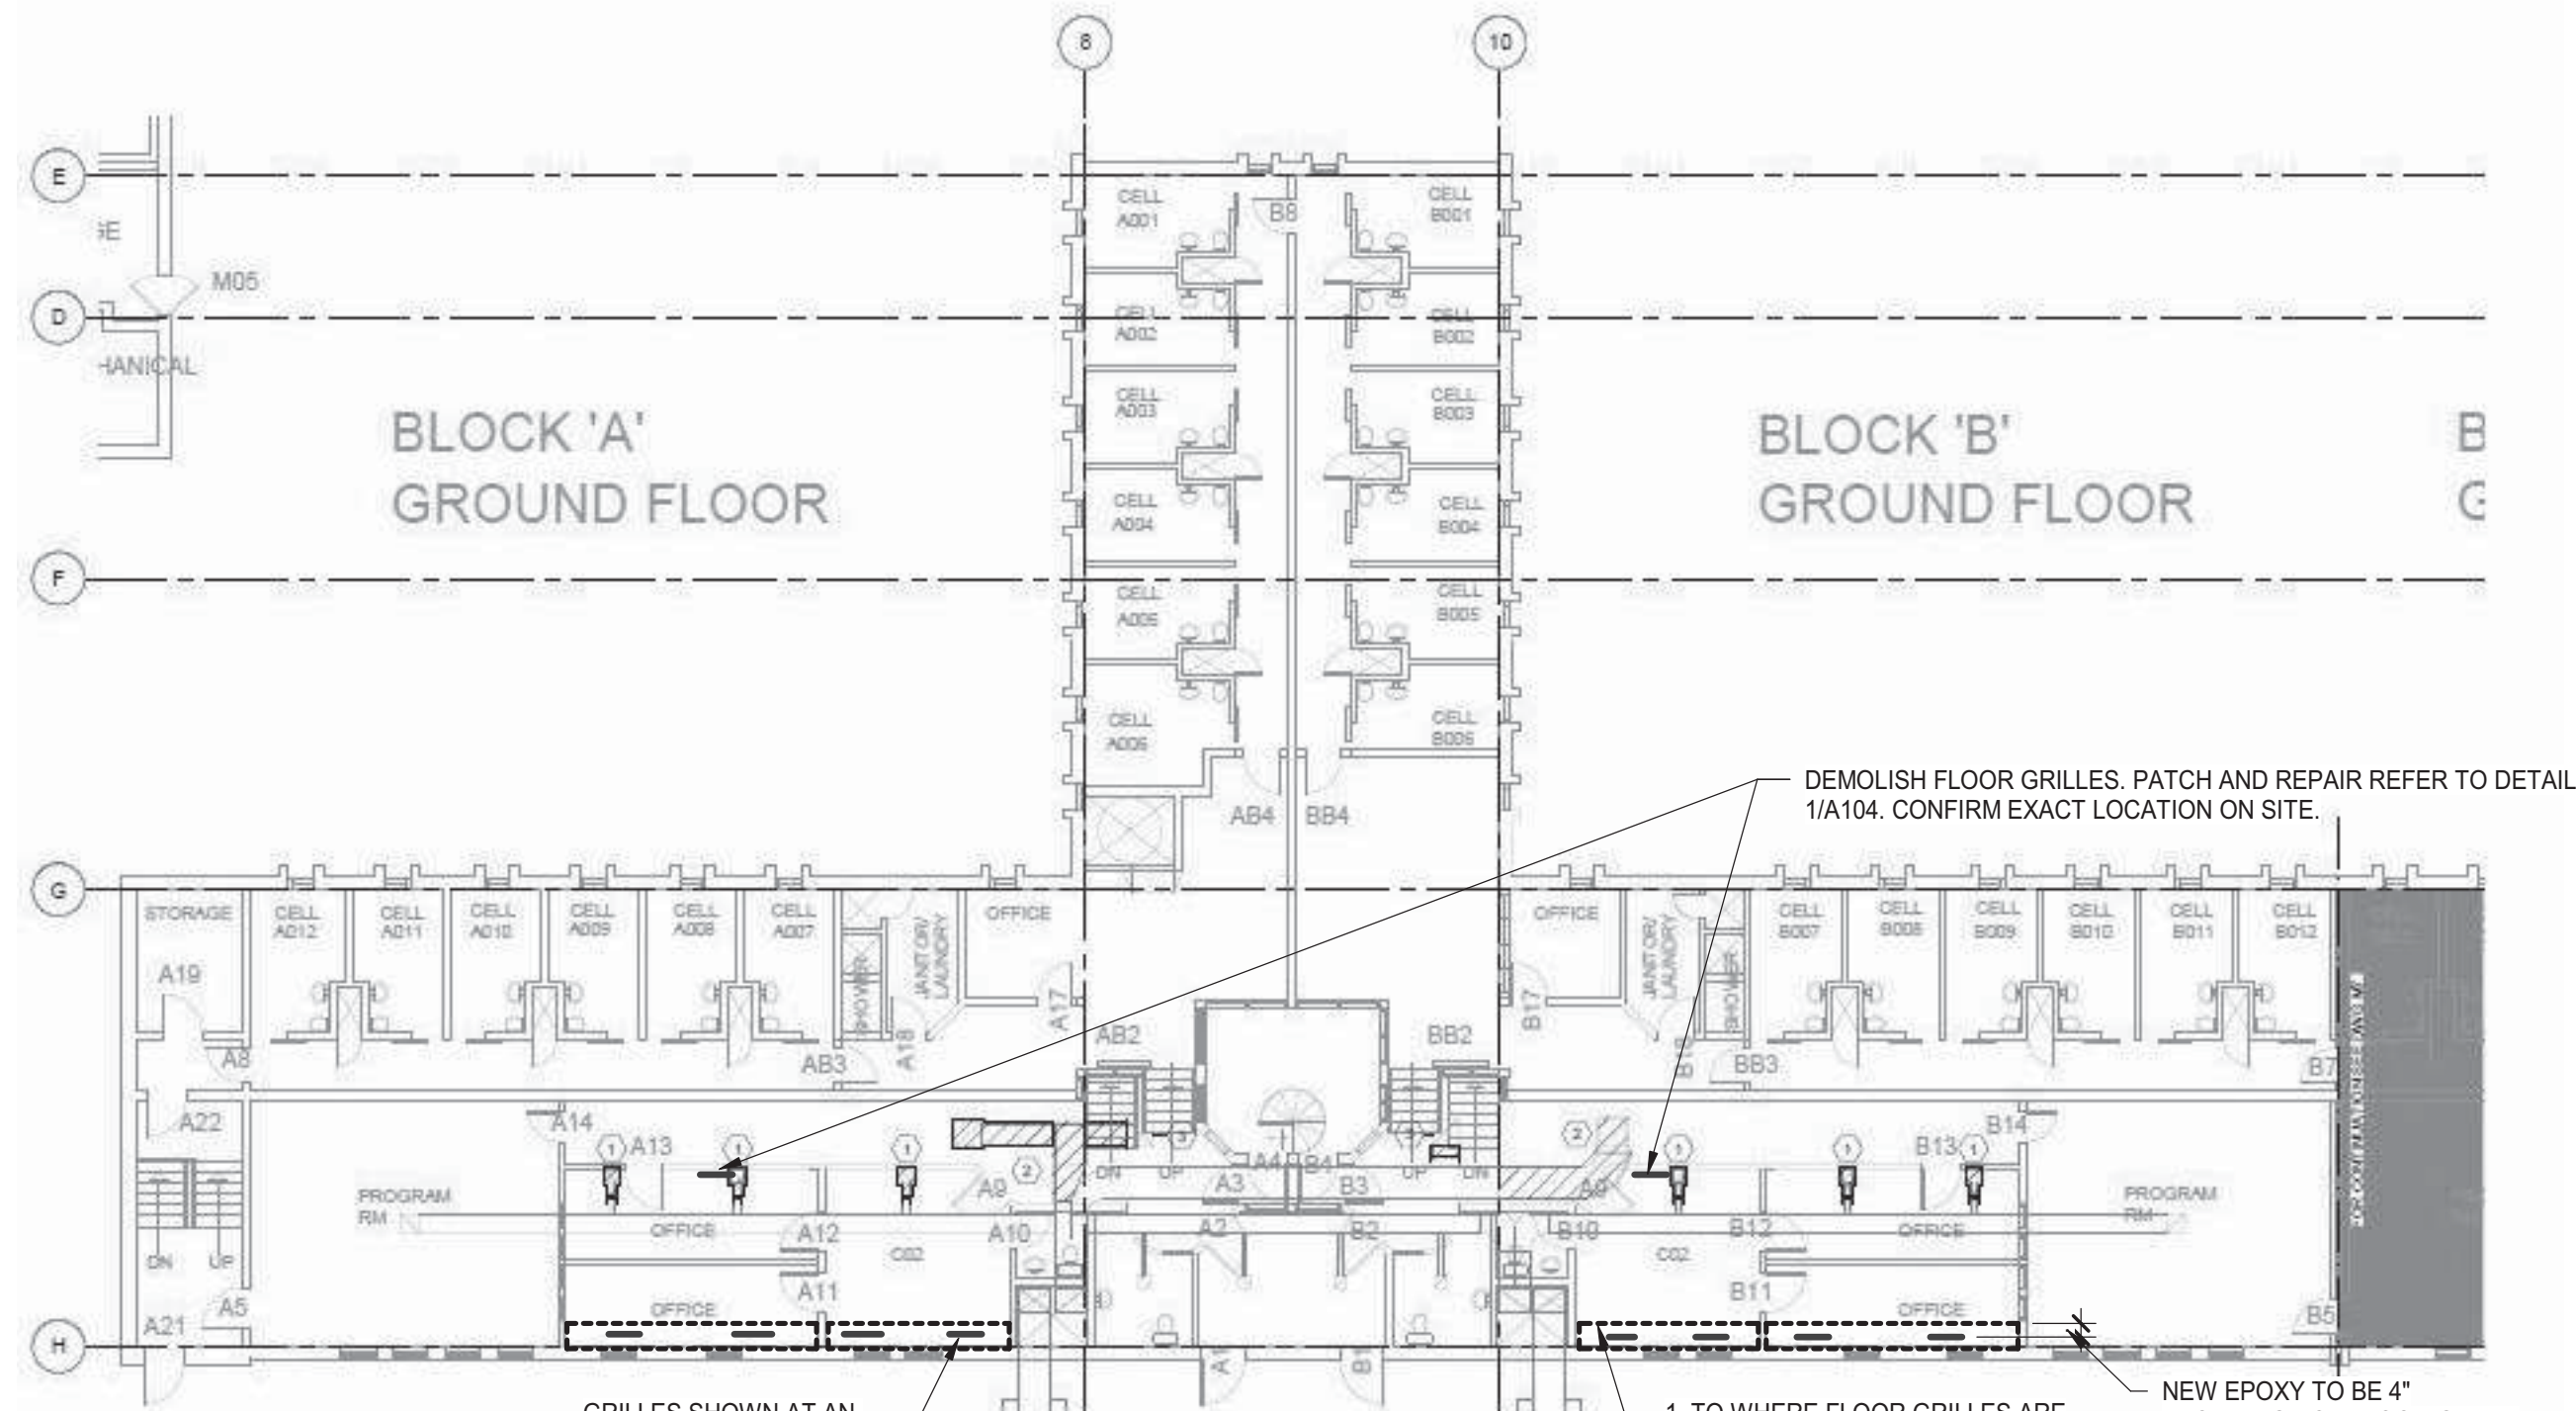




FIG. G1
(refer to sheet M6
AND SECTION
DETAIL 1/A3)

GRILLES SHOWN AT AN
APPROXIMATE LOCATION.
ALWAYS REFER TO
MECHANICAL DRAWINGS.


1. TO WHERE FLOOR GRILLES ARE
DEMOLISHED. NEW EPOXY FLOOR
FINISH SHOULD RUN ACROSS
THE ROOM AS SHOWN IN HIDDEN LINES.
2. NEW FINISH TO EXTEND 4" FROM
EXISTING GRILLE. AND UP THE WALL
TO CREATE A NEW WALL BASE WITHIN
BOUNDARY SHOWN IN HIDDEN LINES.

NEW EPOXY TO BE 4"
FROM EDGE OF FLOOR GRILLE
TYPICAL

EXISTING RADIANT HEATERS
TO BE DEMOLISHED. REFER
TO MECHANICAL DRAWINGS.

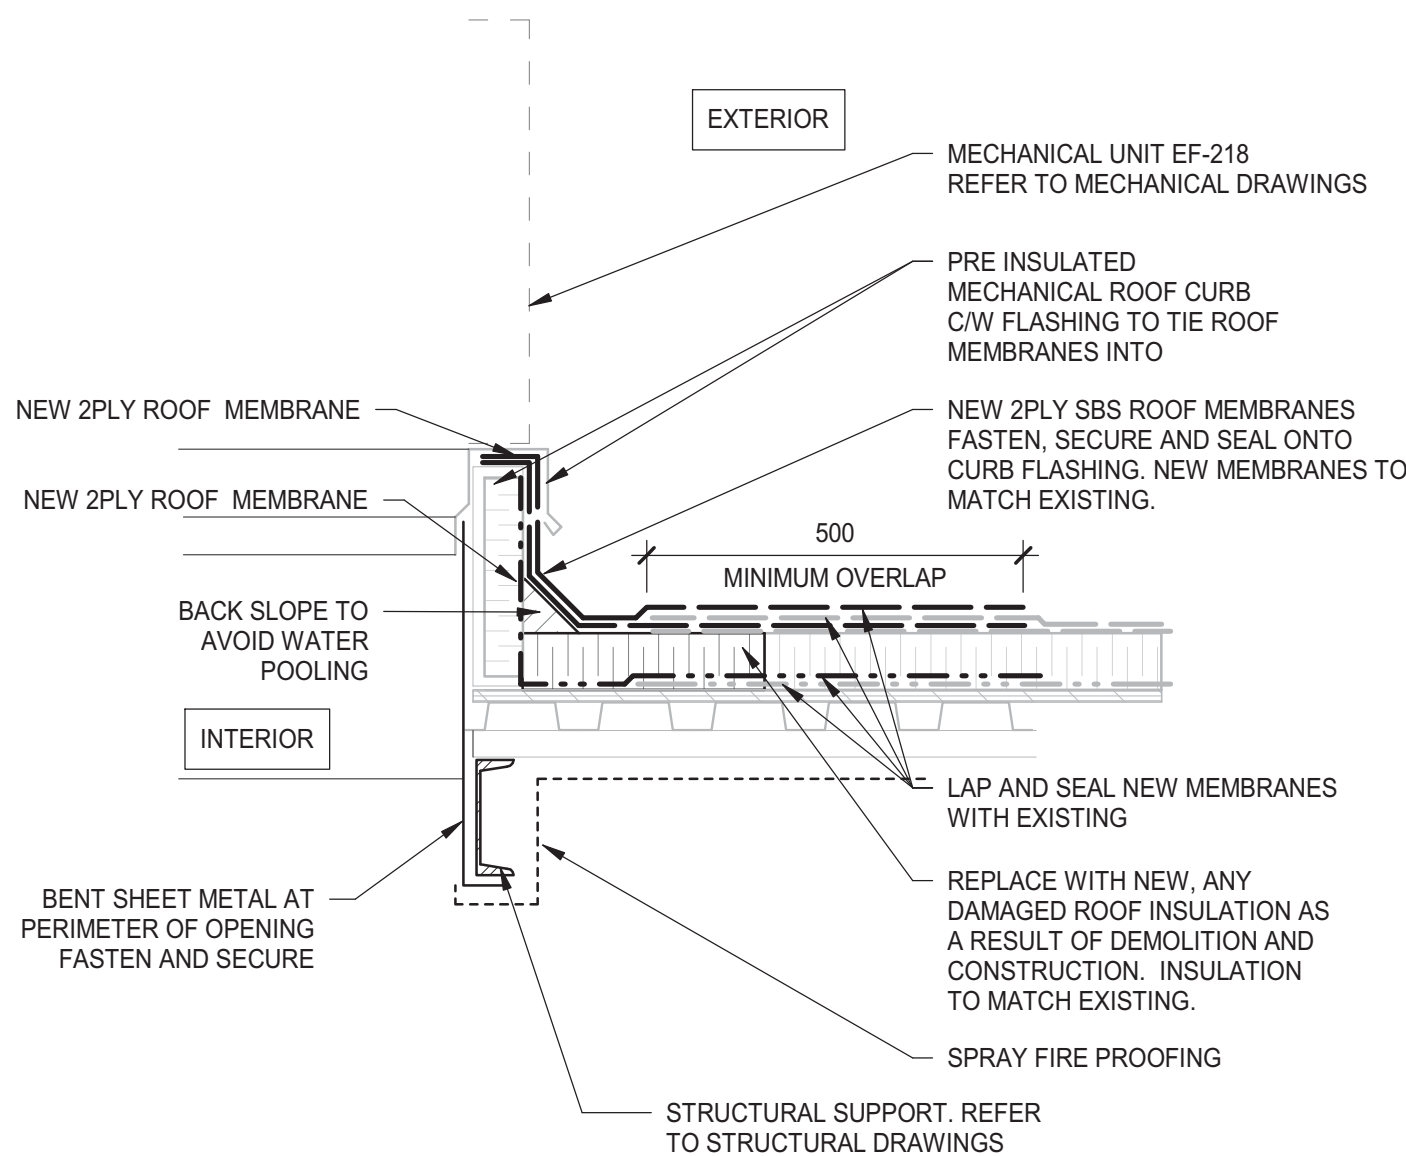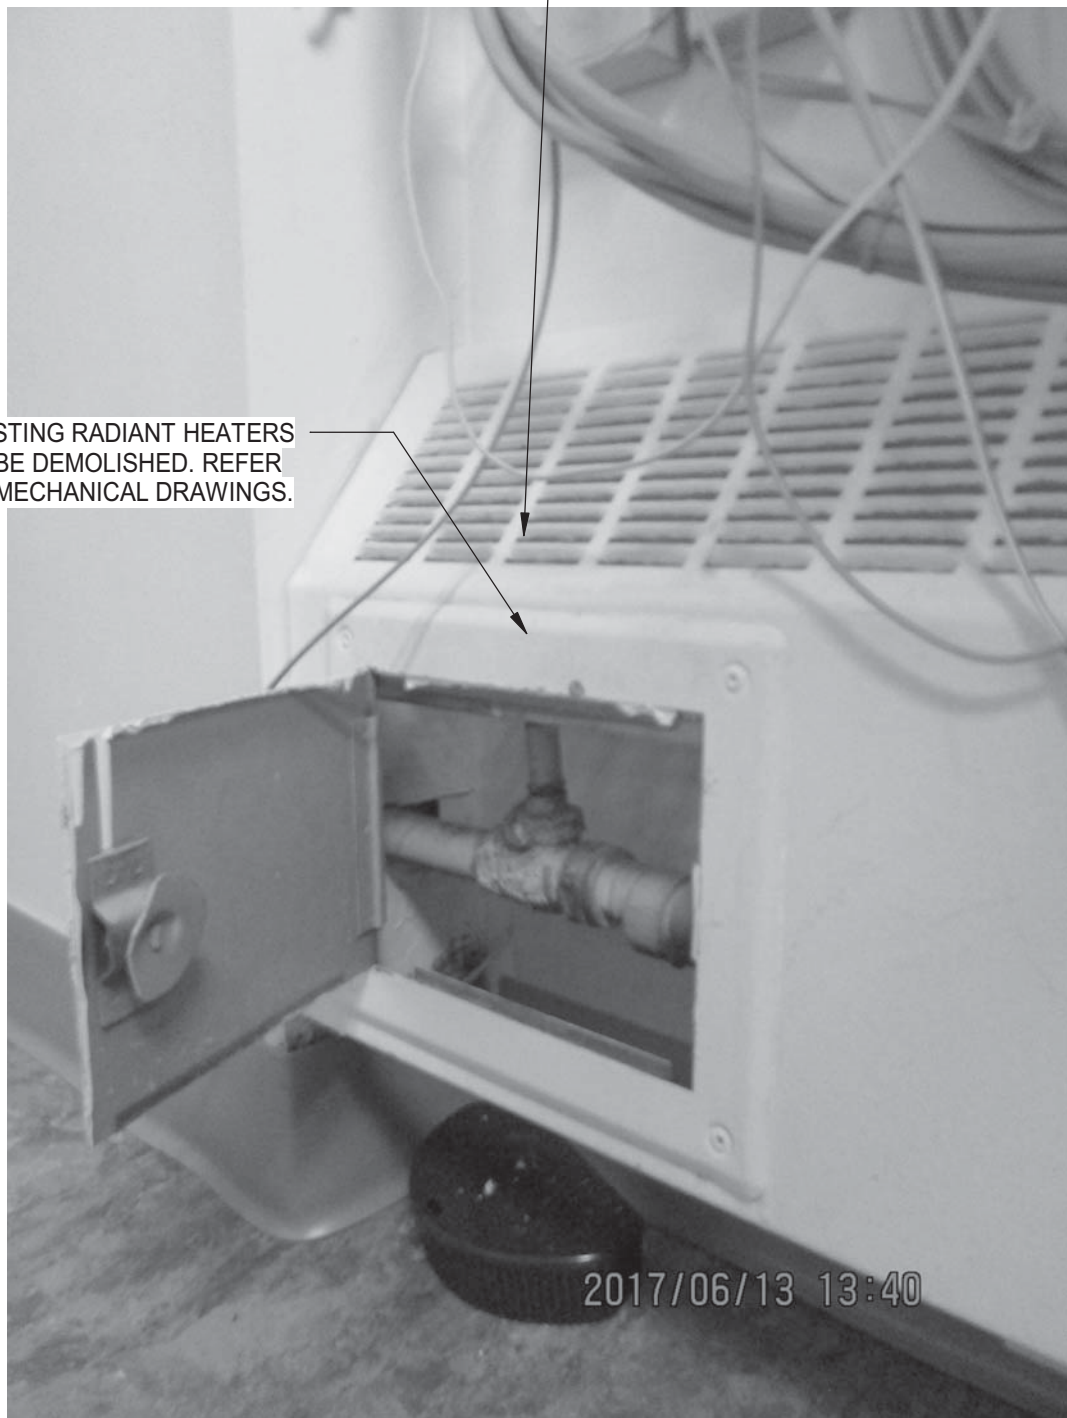

2 MECHANICAL CURB DETAIL (M20)
A3 SCALE: 1:10

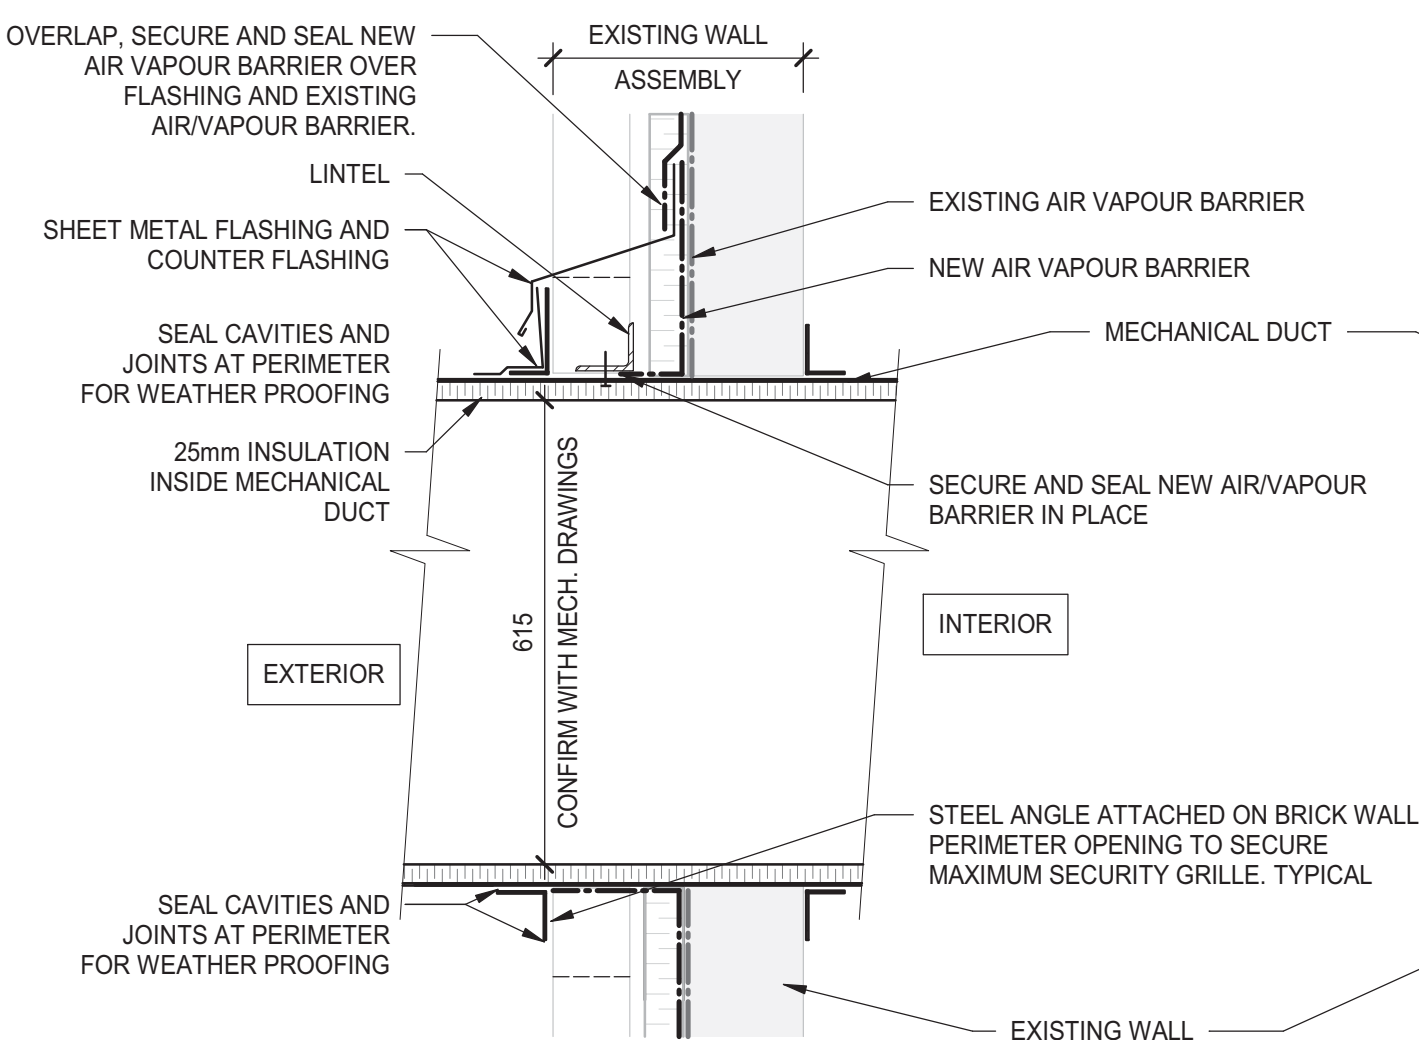

4 SECTION DETAIL - WALL OPENING AT MECHANICAL DUCT
A3 SCALE: 1:10

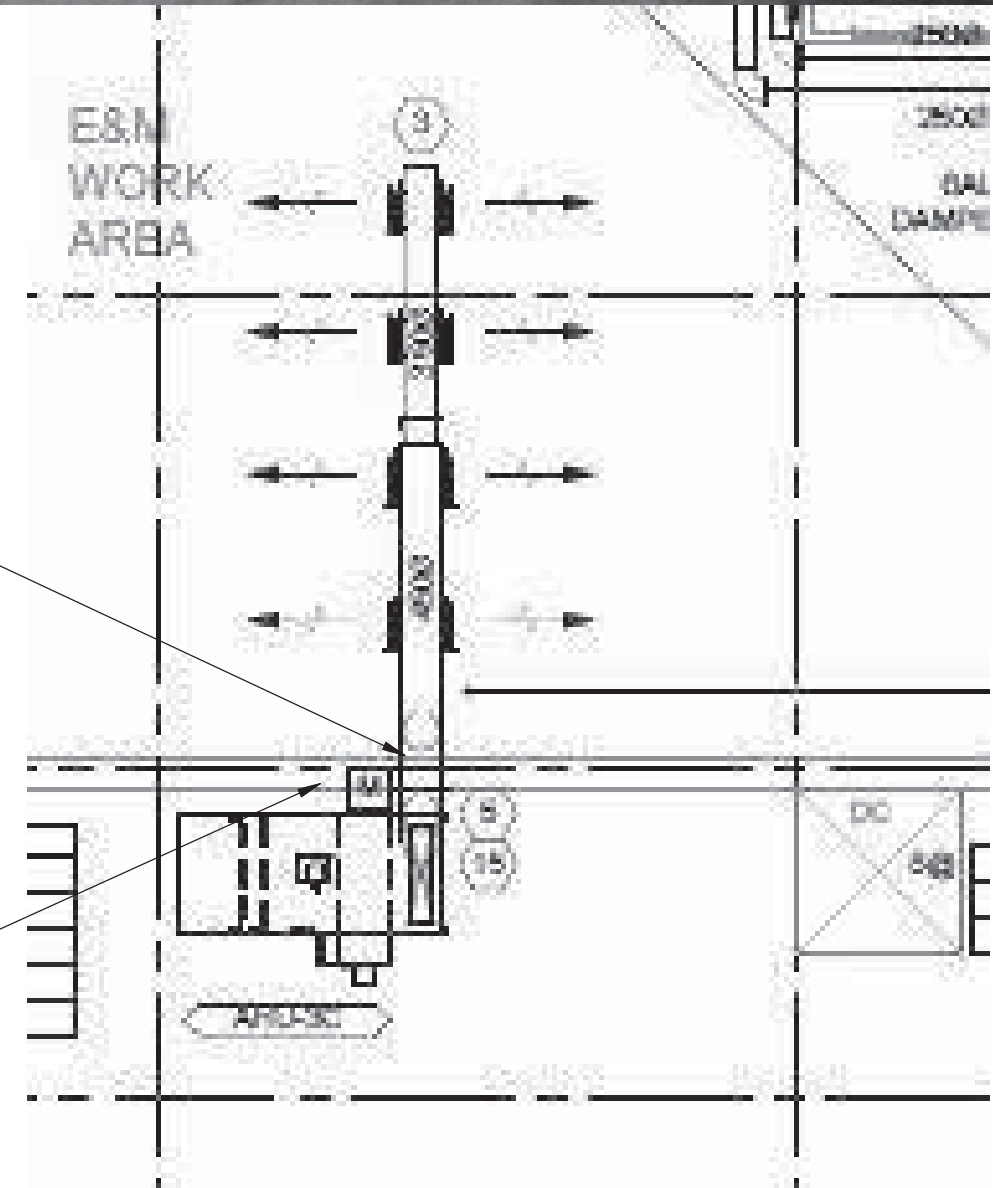


FIG. G2 (PLAN VIEW)
(refer to sheet M49)