

Air breather filter with sounding rod.

Level switch

7

Konovera Ulstein
Tunnel Thruster

MAX

MIN

ALARM

STAMPING AREA
-Art.no.
-Cert.no.
-Charge no.
-Test no.
(-Prod.no.)
(-NCR no.)

6

5


1 1/4" BSP

1 1/4" BSP

□ Indicates connection points
referred to Hydraulic System Diagram.

WEIGHT: APPROX. 55 Kg (excl.oil)

MAX = MAX OIL LEVEL = 85 LIT. (COLD OIL)
MIN = MIN OIL LEVEL = 65 LIT.
ALARM = ALARM LEVEL = 55 LIT.

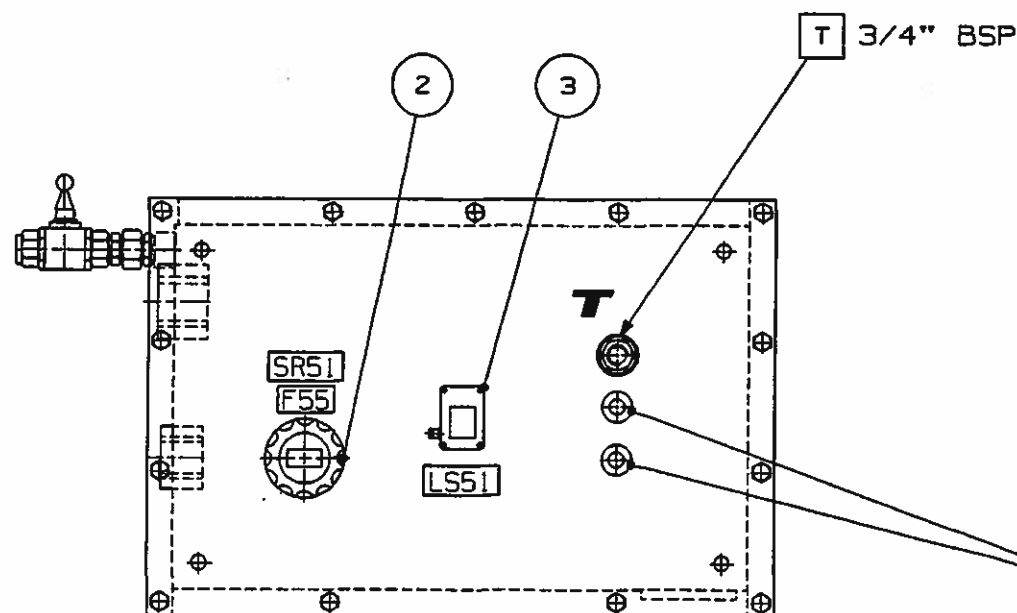

Revisions See Chg. Instr. for details		Rev/C1 Date	A37342 150801			Separate parts list	
OLJETANK OILTANK 110 L STANDARD				Scale 1:5	Drawn JOG	15.03.2001	
				Chkd. APM	20.08.01		
				Appr.			
Class code: 67701				Sheet: 1 of 1			
Drawing number: 216253				Rev.: A			
Based on: -				Mass(kg): 55			
Format: A2							
Rolls-Royce Rolls-Royce Marine AS, dep.: Propulsion - Ulstein N-6065 Ulsteinvik, Norway Tel.: +47-700-14000				This drawing is the property of ROLLS-ROYCE plc, and must not be copied or the contents thereof or any information received in conjunction thereof must not be imparted to any unauthorized third party. It must not be used for any other project than for which it was originally ordered. The receipt of the drawing implies that the conditions mentioned herein are accepted.			