
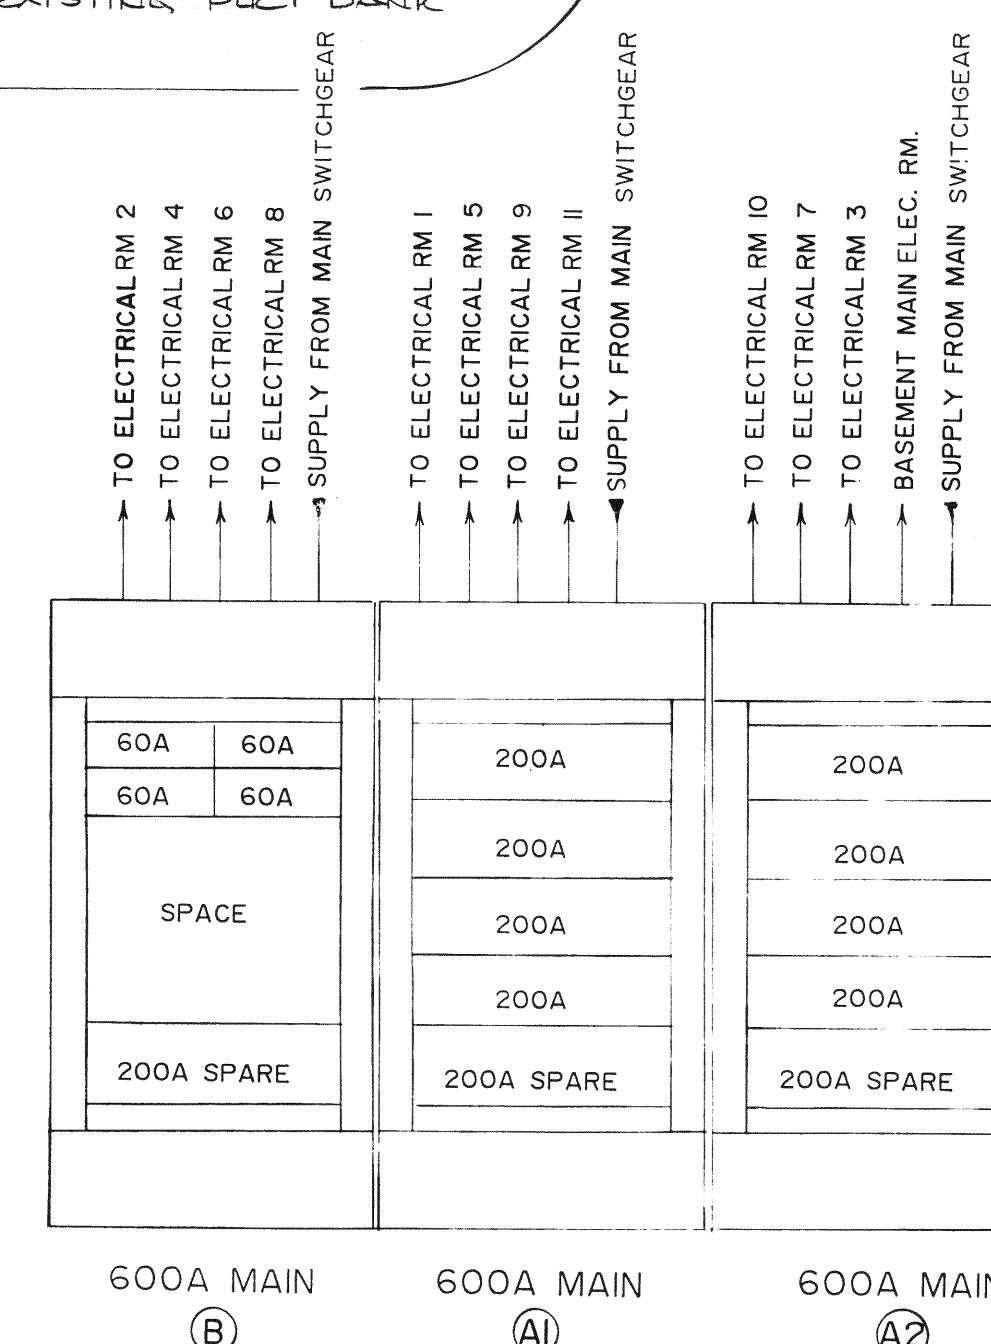
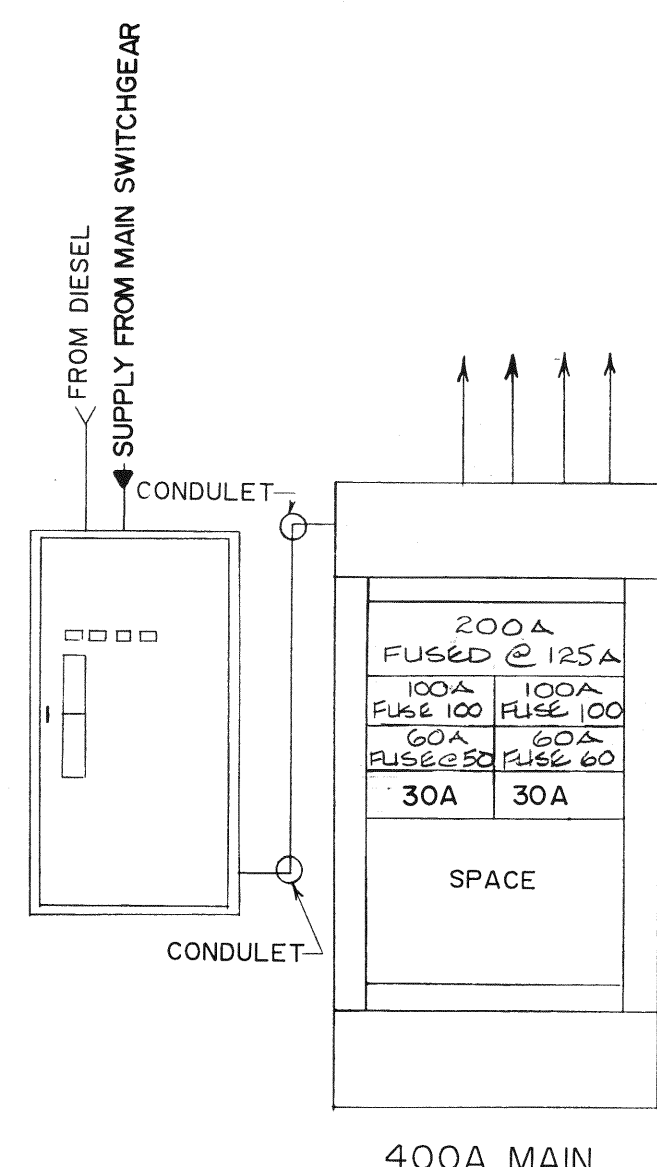
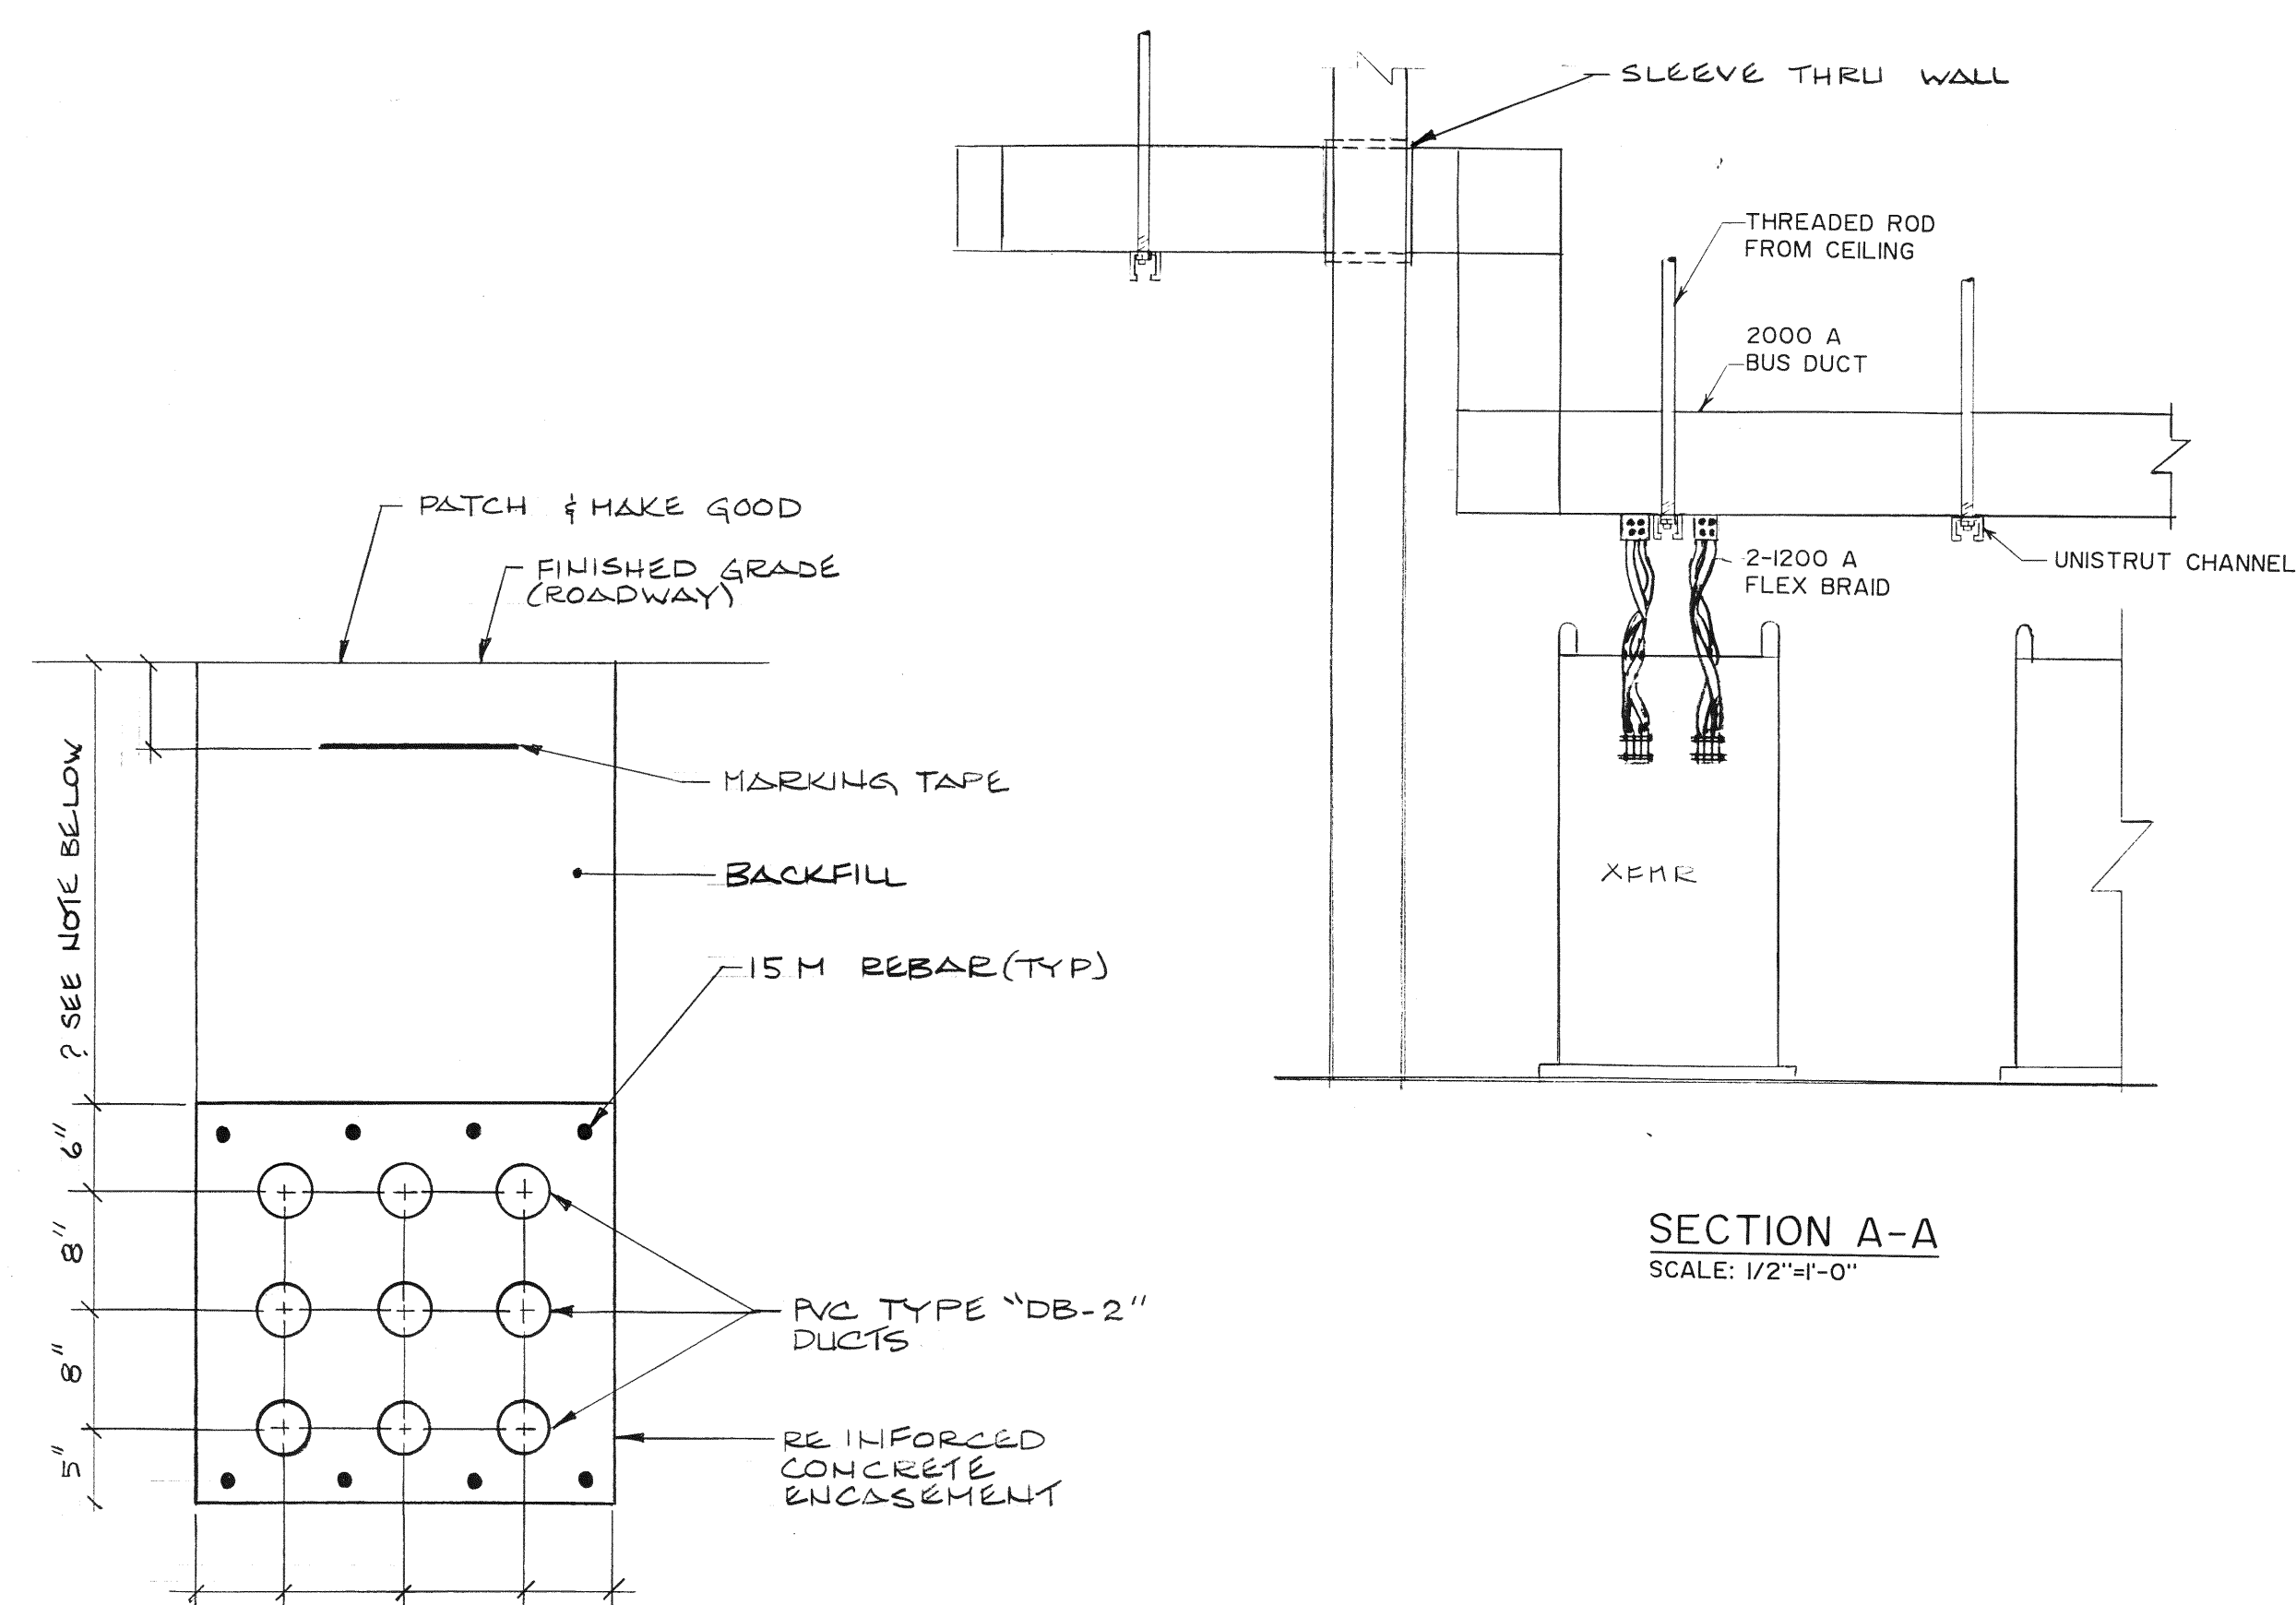


NOTES:

1. Fusible disconnect switches are to be made sprinklerproof. Re-certified to 600A, at 347/600V and cleaned, re-certify emergency switchboard to 400A; 347/600 V and cleaned.
2. All existing electrical equipment in existing vault and main electrical room to be removed at end of contract.
3. Location of existing duct bank as shown is approximate only; actual location to be determined on site.
4. Div. 16 contractor is responsible for all excavation, trenching, backfilling, cutting, patching and sealing. All aspects of this concrete encased duct bank including concrete and rebar to be the responsibility of the Div. 16 contractor.
5. The depth and configuration of the existing 9 hole duct bank to be confirmed on site. Configuration and location may vary.
6. Div. 16 contractor to coordinate fully with N.S.P.C. forces for scheduling and implementing any and all potential shut downs.
7. N.S.P.C. is responsible for the supply and installation of all cable, cable supports, 3-way high voltage switching, transformers and all high voltage connections to the above, as shown in the new electrical vault.
8. Removal of all existing cabling and equipment in the existing 4KV vault room to take place after energization of the new system is complete and to be performed by N.S.P.C. forces.
9. N.S.P.C. to supply the 'T-Y' duct fitting as shown on drawing. Fitting to be installed by Div. 16 contractor.

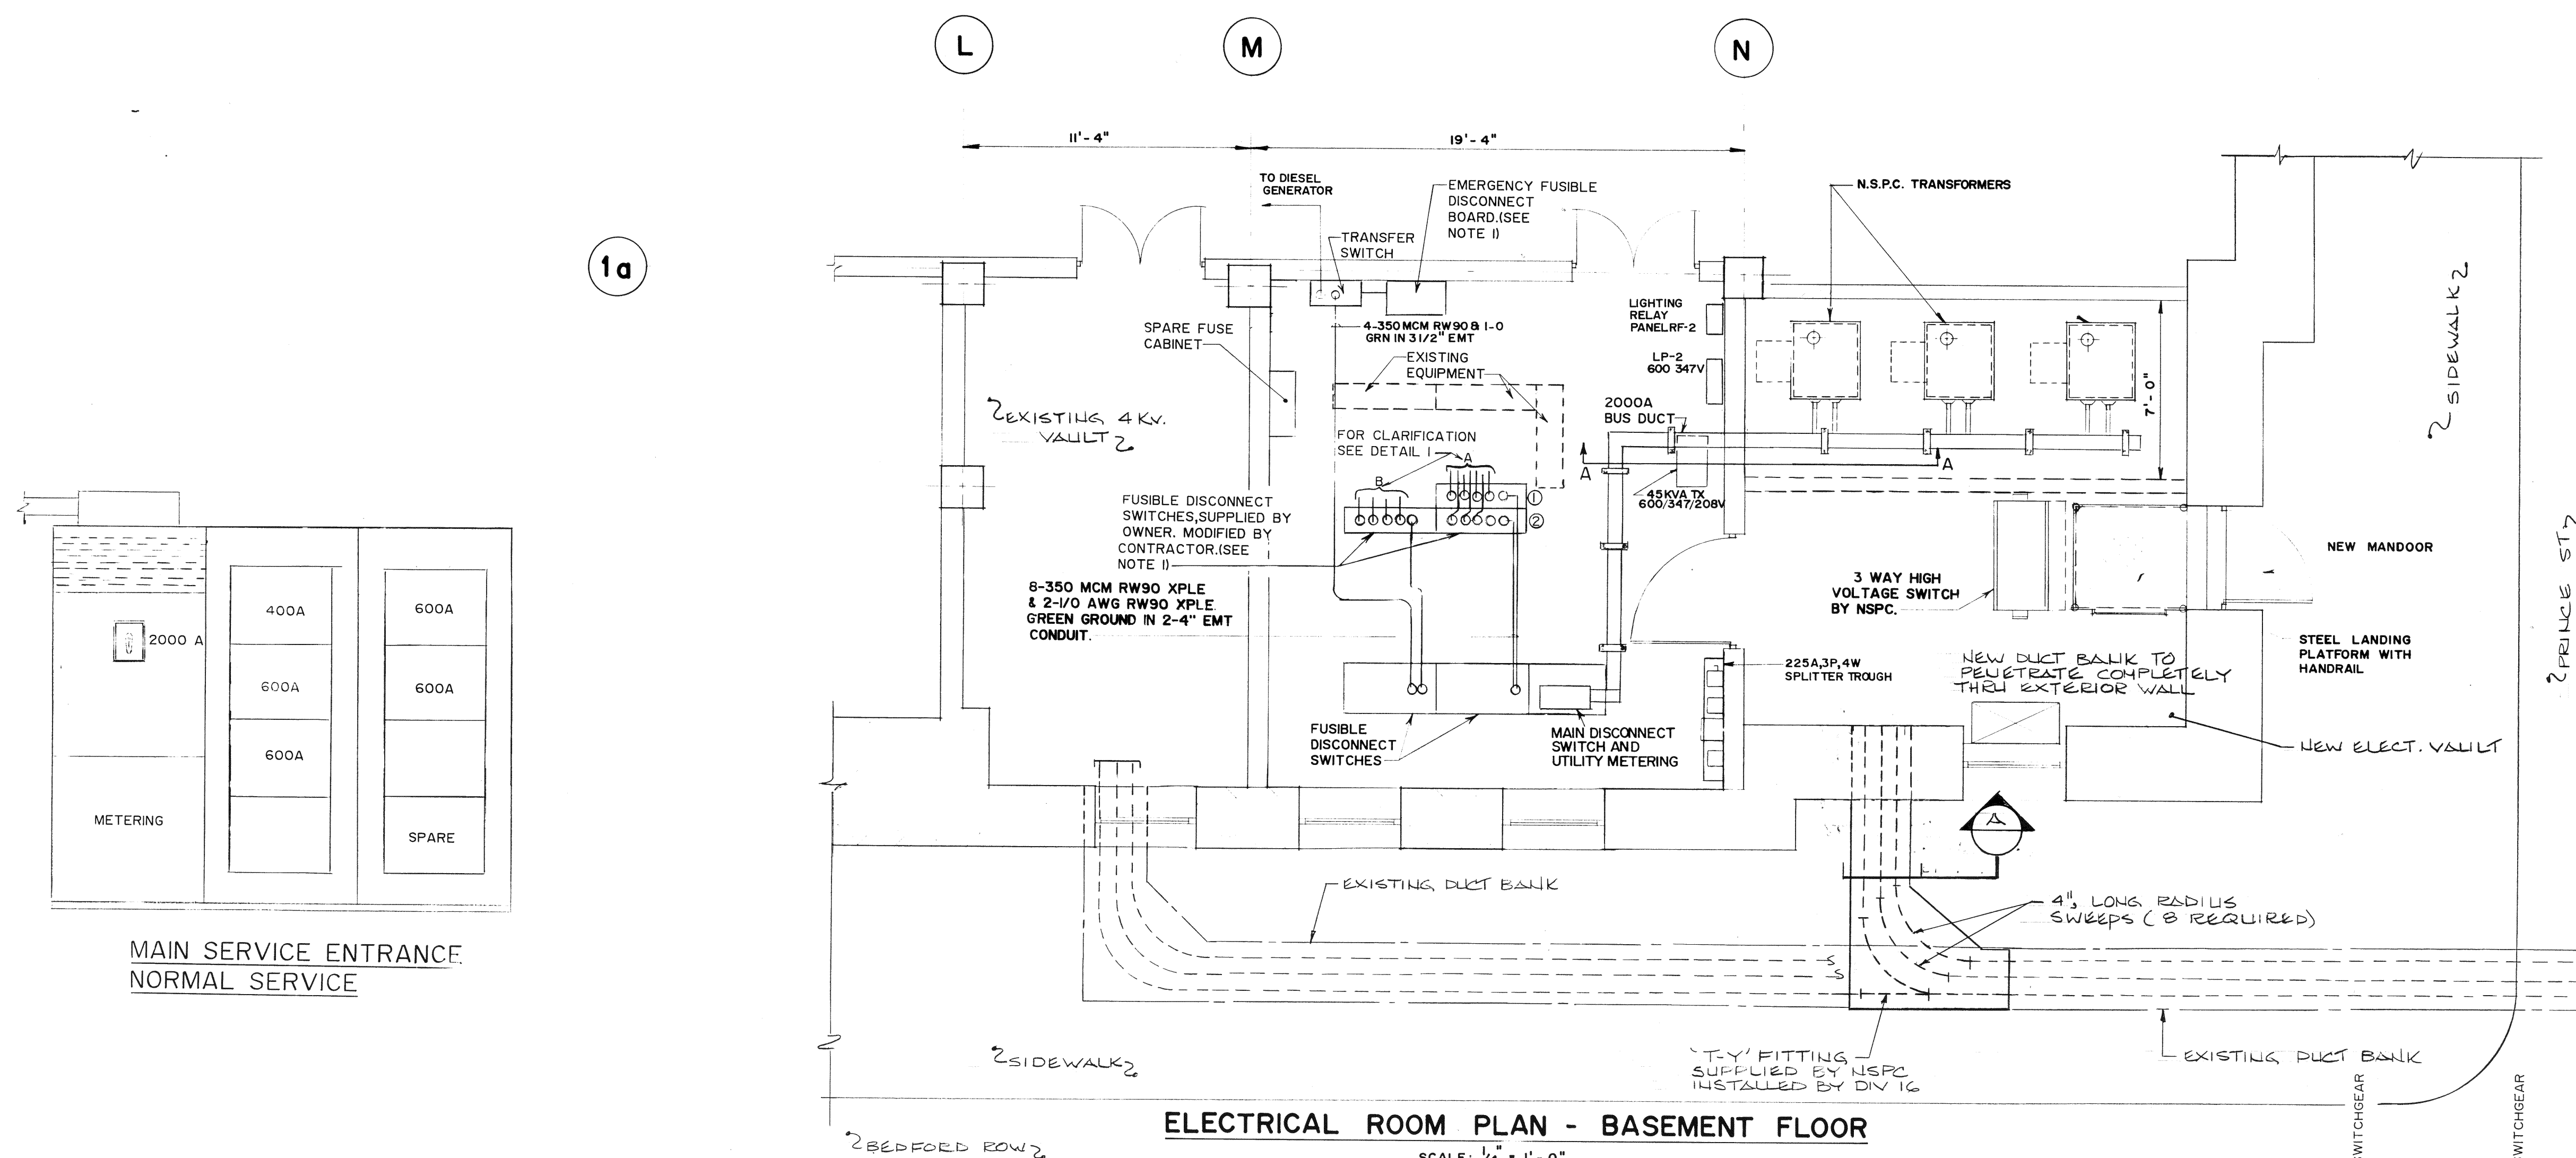

BOILER NO. 1	PUMP P.4
BOILER NO. 2	PUMP P.5
PUMP P.1	PUMP P.6
PUMP P.2	COMPRESSOR
PUMP P.3	
SPACE	SPACE

BOILER ROOM M.C.C. LAYOUT
SEE DRAWING E-11

revisions

A	A detail no. no. du détail	A
C	B location drawing no. sur dessin no.	B
	C drawing no. dessin no.	C

project
G.O.C.B. BEDFORD ROW HALIFAX, N.S.
project

drawing
ELECTRICAL ROOM AND DETAILS
dessin

ELECTRICAL

designed	S.C. HICKS	conçu
date	JAN. 5/91	
drawn	W. SZUBIELSKI	dessiné
date	JAN. 10/91	
reviewed		examiné
date	Apr. 16/91	
approved		approuvé
date		
Tender		Soumission
PWC Project Manager	Administrateur de projets IPC	
project number	614362	no. du projet