

**STATEMENT OF WORK
SIO ALARM SYSTEMS – QUEBEC REGION**

Revision	Date	Paragraph	Comment
0	2017-06	N/A	Original

1	INTRODUCTION	5
1.1	Objective	5
1.2	Overview.....	5
2	REFERENCES	5
2.1	Standards	5
3	SCOPE	5
3.1	Nature of the Work.....	5
3.2	Tasks and Activities	5
3.3	Locations of Work	6
3.4	Contractor Security Requirements	6
4	PROJECT GOVERNANCE	7
4.1	Communications.....	7
4.2	Project Performance.....	7
4.3	Project Governance.....	7
4.4	Project Initiation.....	8
5	DOCUMENTATION DELIVERABLES	8
5.1	Delivery.....	8
5.2	Design Reviews	8
5.3	Design Change Control.....	9
5.4	Progressed Schedule	10
5.5	Acceptance Test Plan.....	10
5.6	Operator Training Plan.....	10
5.7	Maintenance Training Plan	11
5.8	Milestone Acceptance	11
5.9	Final Acceptance	11
5.10	As-Built Documentation.....	11
5.11	Final Project Report.....	12
6	PROJECT DELIVERABLES	12
6.1	SIO Alarm Systems.....	12
7	WARRANTY	12
7.1	Warranty	12
APPENDIX A – SECURITY PARTITION ALARM TECHNICAL REQUIREMENTS.....		13
1	INTRODUCTION	13
1.1	Overview.....	13
1.2	Purpose	13
2	REFERENCES	13
2.1	Standards	13
3	PHYSICAL	13

3.1	Lock	13
3.2	Alarm System	13
3.3	Alarm Control Panel	13
3.4	Alarm Sensors	14
3.5	Alarm Keypad	14
3.6	Alarm Status Display	14
3.7	Environment	14
3.8	Interference	14
3.9	Reliability	15
4	INSTALLATION	15
4.1	Installation	15
4.2	Installation – Medium and Higher Security Locations	15
4.3	Installation – Minimum Security and Community Correctional Center Locations	16
5	OPERATIONAL	16
5.1	Alarms	16
6	INTERFACE	16
6.1	System Power	16
	APPENDIX B - WIRING TECHNICAL REQUIREMENTS	17
7	INSTALLATION	17
7.1	All Cabling	17
7.2	Low Voltage Cabling (less than 50V AC or DC)	17
7.3	Power Cabling	18
7.4	Connections	18
7.5	Termination Blocks	18
7.6	Labelling	19
7.7	Conduits and Cable Trays	19
7.8	Cable Dressing	20
7.9	Outdoor Enclosures	20
7.10	Restoration	20
	APPENDIX C - INSTALLATION STANDARDS	21
8	INSTALLATION	21
8.1	Tools, Equipment, and Materials	21
8.2	Redundant Electronics	21
	APPENDIX D - CONTRACTOR SAFETY REGULATIONS	21
1	COMPLIANCE	21
1.1	Acts and Regulations	21
2	PROCESS	22
2.1	Safety Plan	22

APPENDIX E - LOCATION PLANS.....	23
Archambault Institution, medium unit.....	23
Archambault Institution, minimum unit.....	26
Cowansville Institution	29
Donnacona Institution	33
Federal Training Centre, multi-level unit.....	36
Federal Training Centre, minimum unit.....	40
Joliette Institution	45
Laferrière CCC.....	49
La Macaza Institution	52
Marcel-Caron CCC.....	57
Port Cartier Institution	60
Regional Reception Centre	63

1 INTRODUCTION

1.1 Objective

- .1 Correctional Service Canada intends to contract a qualified firm to provide Security Intelligence Officer (SIO) Alarm Systems at various Quebec region institutions.

1.2 Overview

- .1 The SIO Alarm systems will make the SIO office(s) into security partitions and remove the requirement for the large DASCO cabinets to store their SINet access cryptographic hardware.
- .2 The SIO offices will be equipped with alarm controllers with keypads, door contacts and dual technology motion detection sensors to provide continuous observation.
- .3 The SIO alarm systems will report the system's arm and alarm states to a 24-hour post. The post in medium and higher security institutions will be the Main Communications and Control Post. The post at minimum security institutions and community correctional centers will report to the main administration office, usually at the reception post.
- .4 Each location will have one or more security partitions for the SIO office(s) depending on the configuration at each location.
- .5 **NOTE:** In this document, the term "partition" is used to define the area to be protected and "zone" to refer to a single input on an alarm panel. This matches the security alarm industry terminology.

2 REFERENCES

2.1 Standards

- .1 Access to non-government specifications is the responsibility of the contractor.
- .2 Any standards where the revision is not specified must be the latest revision.
- .3 Standards may include:
 - .1 relevant federal and provincial health and safety standards;
 - .2 equipment performance requirements;
 - .3 equipment installation requirements;

3 SCOPE

3.1 Nature of the Work

- .1 The Contractor must perform the Work as described in this Statement of Work.
- .2 The Work involves installing, connecting, and testing all components of the system. Sensors and contacts will be installed at identified partitions on each site. Sensor positioning will meet the specified coverage requirements.
- .3 The contractor may determine the sequencing and simultaneity of system installations.
- .4 The contractor must perform all alarm testing between 8am and 4pm local time during installation.
- .5 Site access for each institution must be coordinated with the institutional contact.

3.2 Tasks and Activities

- .1 The system installations and all other contractual activities are expected to take place within six months after contract award.
- .2 The Contractor must provide the elements described in this section, the details of which are provided throughout this document.

- .3 Each site must have one or more systems installed and tested with the following system components for each identified partition in compliance with the technical requirements in Appendix A in locations as identified in Locations of Work:
 - .1 One or more door contacts;
 - .2 One or more motion sensors;
 - .3 One or more keypads;
 - .4 One or more control panels;
 - .5 Power supplies, equipment cabinets, wiring and conduit as required;
- .4 Training classes for operators at each site must be provided. The operator course is to be offered twice per institution with a class size of up to 5 conducted in French. Class times are to be coordinated with each site's Institutional Contact. The training course must be delivered at each site. Training attendance sheets must be submitted to the Technical Authority and to each Institutional Contact within 2 days of delivering the training. The target audience includes Main Communication and Control Post operators, SIOs, and correctional managers.
- .5 Operator training classes for Archambault medium and Archambault minimum sites may be combined.
- .6 Operator training classes for Federal Training Center medium and Federal Training Center minimum sites may be combined.
- .7 Training classes for maintainers at each site must be provided. The maintenance course is to be offered once per institution with a class size of up to 5 conducted in French. Class times are to be coordinated with each site's Institutional Contact. The training courses must be delivered at each site. Training attendance sheets must be submitted to the Technical Authority and to each Institutional Contact within 2 days of delivering the training.
- .8 Maintenance training classes for Archambault medium, Archambault minimum, and Laferrière CCC sites may be combined.
- .9 Maintenance training classes for Federal Training Center medium and Federal Training Center minimum sites may be combined.
- .10 Maintenance training classes for Donnacona and Marcel-Caron CCC sites may be combined.
- .11 Documentation as identified in Deliverables must be provided to the Technical Authority by the Contractor as part of the design, installation and test activities.

3.3 Locations of Work

- .1 Any required face-to-face interactions with the Technical Authority, determined entirely at the discretion of the Technical Authority, must take place at CSC National Headquarters in the National Capital Region. Where feasible, communications between the Technical Authority and the Contractor's representative will take place by telephone, email, or teleconference.
- .2 Institutional contacts will be provided to the contractor by CSC upon contract award.
- .3 Locations and plans are in Appendix E.

3.4 Contractor Security Requirements

- .1 The Contractor must hold a valid Designation Organization Screening issued or granted by the Canadian Industrial Security Directorate of Public Service Procurement Canada.
- .2 Each candidate proposed as project personnel in support of this project must hold a valid Reliability security status issued by Canadian Industrial Security Directorate of Public Service Procurement Canada. Should the Contractor's personnel be found to be ineligible

at the time of screening, the Contractor must provide an equivalent replacement that passes the security requirement.

- .3 Delays caused by the CSC security clearance requirement must not incur any additional costs to CSC.

4 PROJECT GOVERNANCE

4.1 Communications

- .1 All meetings, telephone or teleconference discussions, email correspondence, and other communications with the Technical Authority must be conducted in English.
- .2 Verbal and written communications with all CSC sites and personnel must be in English.
- .3 All Work deliverables must be completed in English.

4.2 Project Performance

- .1 The Contractor must design and install all cabling components in accordance with the structured cabling requirements of Appendix B.
- .2 The Contractor must meet all the requirements for Contractor safety regulations in accordance with Appendix C.


4.3 Project Governance

- .1 Overall project management responsibility will lie with the Technical Authority. The Technical Authority will manage all aspects of liaison with the Contractor in terms of issue resolution, change management, project timeline management, and other delivery issues and will act as the focal point for all CSC personnel-related interfaces.
- .2 The Technical Authority is:

Mark Bottomley
Electronic Security Systems Engineer
Technical Services and Facilities
340 Laurier Avenue West
Ottawa, ON
K1A 0P9
613-996-8871
mark.bottomley@csc-scc.gc.ca
- .3 Each institution will have a designated Institutional Representative. Each Institutional Representative will provide guidance on the detailed location of the initiation points.
- .4 The Technical Authority is the only person permitted to modify partition definitions or add or remove rooms, doors contacts, and keypads.
- .5 The Contractor must designate a single qualified person as the Contract Project Manager. The Contract Project Manager must act as the focal point for all Contractor issues regarding delivery of service as well as providing a single point of contact for any items requiring contact with the Technical Authority for issue resolution, change management, timeline management, and other delivery issues.
- .6 The Contract Project Manager must be the sole resource permitted to communicate with CSC unless express permission is provided by the Technical Authority. Members of the Contractor management team must direct all communications with CSC through the Contract Project Manager.
- .7 If the Technical Authority is unable to communicate effectively with the Contract Project Manager or finds the resource is unable or unwilling to provide a satisfactory level of

service, the CSC Project Sponsor will inform the Contractor Project Executive of the impasse. The Contractor must then replace the Contract Project Manager within thirty (30) days of CSCs notification with an equally well-qualified or superior resource.

- .8 Should the need arise to escalate project issues beyond the levels of the Contract Project Manager and the Technical Authority, the personnel of both the Contractor and CSC responsible for ultimate project governance will become involved. Escalation of an issue will only occur internally in either organization. The project governance level (i.e. CSC Project Sponsor and Contractor Project Executive) of one group is not to be contacted by the project management personnel (i.e. Technical Authority and Contract Project Manager) of the other.

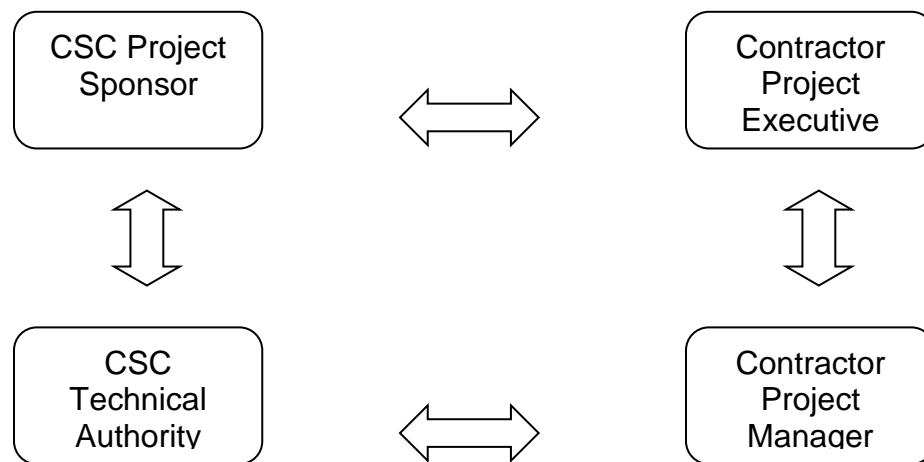

4.4 Project Initiation

- .1 The objective of the Project Initiation exercise is to set the standards, timings, and deliverables that will govern the Project throughout its life.
- .2 Within thirty (30) days following contract award, the Technical Authority and the Contractor Project Manager will meet to define the activities comprising Project Initiation. At this time, the Technical Authority and Contractor Project Manager will assign resources and set objectives and schedules for the Project. The project initiation phase must be completed no later than forty-five (45) days following contract award.

5 DOCUMENTATION DELIVERABLES

5.1 Delivery

- .1 All reports, plans, and documentation, unless otherwise noted, must be submitted electronically to the Technical Authority.

5.2 Design Reviews

- .1 The Contractor must submit a draft of the Design Report to the Technical Authority. CSC will perform a review of the report and schedule a meeting with the Contractor Project Manager within seven (7) calendar days of the submission. At that meeting, the Technical Authority will grant Design Acceptance in writing, or present the Contractor Project Manager with CSC’s feedback on the draft identifying issues based on their review that must be addressed by the Contractor in the second draft. The second report submission and review sequence will be the same as the initial draft. If the review of the second draft report is still

not acceptable, the Technical Authority will edit and provide an approved Design Report within ten (10) calendar days of the submission.

- .2 The Design Report submission must contain at a minimum:
 - .1 performance specifications of components to verify meeting system requirements;
 - .2 equipment list with quantity, manufacturer, part number and model number;
 - .3 installation drawings and instructions;
 - .4 spares plan;
 - .5 training plan;
- .3 Unless instructed by the Technical Authority in writing, ordering of equipment/material before approval of the Design Report is at the Contractor's own risk.
- .4 Design Change Control starts upon Design Acceptance.

5.3 Design Change Control

- .1 If there is a need to modify the design after the Design Reviews, then the contract must prepare and submit electronically a Design Change Request in .pdf format. Design Change Requests are categorized as Type I or Type II depending on their project impact.
- .2 Type I changes are those that affect one or more of:
 - .1 cost;
 - .2 schedule;
 - .3 reliability;
 - .4 maintainability;
 - .5 availability;
- .3 Type II changes are those that correct a design error or modify the design without affecting:
 - .1 cost;
 - .2 schedule;
 - .3 reliability;
 - .4 maintainability;
 - .5 availability;
- .4 Type I changes must be submitted to the Contracting Authority.
- .5 Type II changes must be submitted to the Technical Authority.
- .6 Change requests must include at a minimum:
 - .1 change type;
 - .2 a description of the design change;
 - .3 reason for the change;
 - .4 the specification requirement(s) being affected;
 - .5 the Design Report element(s) being changed;
 - .6 cost impact;
 - .7 schedule impact;
 - .8 reliability impact;
 - .9 maintainability impact;
 - .10 availability impact;
 - .11 any trade-off recommendations;
- .7 Changes must not be implemented until accepted in writing by the Technical Authority through the Contracting Authority.

5.4 Progressed Schedule

- .1 Upon Design Acceptance, the Contractor must provide the Technical Authority a Progressed Schedule update every two (2) weeks.
- .2 The Progressed Schedule must include at a minimum:
 - .1 date of last schedule progress update;
 - .2 identification of all updates since the previous submission;
 - .3 progress details for each milestone;
 - .4 identification of all items delayed by more than two (2) weeks from the original schedule;
 - .5 plans for preventing further schedule slippage of delayed items;
 - .6 separate entries for each alarm zone;
 - .7 separate entries for each door contact by zone;
 - .8 separate entries for each sensor installation by zone;
 - .9 separate entries for each keypad installation by zone;
 - .10 separate entries for each control panel installation by zone;
 - .11 separate entries for all report, plan, and documentation deliverables;
- .3 The schedule may be provided electronically, or alternately be made available online through a Contractor hosted project management portal.

5.5 Acceptance Test Plan

- .1 The Contractor must submit a draft of the Acceptance Test Plan to the Technical Authority. CSC will perform a review of the plan and schedule a meeting with the Contractor Program Manager within seven (7) calendar days of the submission. At that meeting, the Technical Authority will grant Test Plan Approval in writing, or present the Contractor Program Manager with CSC's feedback on the draft identifying issues based on their review that must be addressed by the Contractor in the second draft. The second plan submission and review sequence will be the same as the initial draft. If the review of the second draft plan is still not acceptable, the Technical Authority will edit and provide an approved Acceptance Test Plan within ten (10) calendar days of the submission.
- .2 The Acceptance Test Plan must contain at a minimum:
 - .1 the purpose of the test;
 - .2 step-by-step instructions for test performance;
 - .3 blank forms for recording test results;
- .3 The Acceptance Test Plan tests must include at a minimum tests that cover correct operation of all components;

5.6 Operator Training Plan

- .1 The Contractor must submit a draft of the Operator Training Plan to the Technical Authority. CSC will perform a review of the plan and schedule a meeting with the Contractor Program Manager within seven (7) calendar days of the submission. At that meeting, the Technical Authority will grant Training Approval in writing, or present the Contractor Program Manager with CSC's feedback on the draft identifying issues with the plan based on their review that must be addressed by the Contractor in the second draft. The second plan submission and review sequence will be the same as the initial draft. If the review of the second draft plan is still not acceptable, the Technical Authority will edit and provide an approved Operator Training Plan within ten (10) calendar days of the submission.

- .2 The Operator Training Plan must contain at a minimum:
 - .1 course goals;
 - .2 course agenda with topics and durations;
 - .3 hands-on operation of the installed system in the SIO office(s) and on the MCCP console;
 - .4 printed materials to be retained by each student;

5.7 Maintenance Training Plan

- .1 The Contractor must submit a draft of the Maintenance Training Plan to the Technical Authority. CSC will perform a review of the plan and schedule a meeting with the Contractor Program Manager within seven (7) calendar days of the submission. At that meeting, the Technical Authority will grant Training Approval in writing, or present the Contractor Program Manager with CSC's feedback on the draft identifying issues with the plan based on their review that must be addressed by the Contractor in the second draft. The second plan submission and review sequence will be the same as the initial draft. If the review of the second draft plan is still not acceptable, the Technical Authority will edit and provide an approved Maintenance Training Plan within ten (10) calendar days of the submission.
- .2 The Maintenance Training Plan must contain at a minimum:
 - .1 course goals;
 - .2 course agenda with topics and durations;
 - .3 hands-on examination of the installed system;
 - .4 practical fault isolation;
 - .5 printed materials to be retained by each student;

5.8 Milestone Acceptance

- .1 Each location will be considered a separate milestone.
- .2 Installation and training activities at the site must be completed by the Contractor prior to any performance of any acceptance testing.
- .3 Upon completion of the SIO Alarm System(s) at each site, including all training, testing and commissioning activities, CSC will review the results and accompanying documentation to ensure that all deliverables have been met and that all issues identified by the Technical Authority have been addressed. If those conditions have been met, CSC will grant Milestone Acceptance for the relevant milestone.

5.9 Final Acceptance

- .1 Once all of the sites have been granted Milestone Acceptance, CSC will review the project. The goal of this activity is to ensure that all tasks and deliverables have been met by the Contractor, including training, As-Built Documentation and the Warranty, and that all issues identified by the Technical Authority have been addressed. If those conditions have been met, and the Technical Authority has approved the Contractor's Final Project Report, CSC will grant Final Acceptance, closing the project.

5.10 As-Built Documentation

- .1 The Contractor must provide as-built documentation. All drawings must be submitted in AutoCAD 2013 or later format in addition to .pdf format. The full documentation package must be provided to the Technical Authority and the National Maintenance Contractor for each site. The documentation must not contain any hand-written content except for signatures and signing dates.

- .2 The Contractor as-built documentation must include at a minimum site and building plans with:
 - .1 individual cable runs;
 - .2 conduit sizes;
 - .3 new and re-used conduits;
 - .4 equipment boxes;
 - .5 riser diagrams;
 - .6 cable identification numbers;
 - .7 installed equipment serial numbers;

5.11 Final Project Report

- .1 The Contractor's final project report must include at a minimum copies of:
 - .1 completed, successful acceptance tests;
 - .2 operator training course attendance sheets;
 - .3 maintenance training course attendance sheets;

6 PROJECT DELIVERABLES

6.1 SIO Alarm Systems

- .1 The Contractor must:
 - .1 supply Incident Alarm systems at locations specified in Appendix E that meet the technical requirements of Appendices A, B, and C.
 - .2 provide for each site all the reports, plans, and documentation identified in Documentation Deliverables;
 - .3 provide operator training in accordance with the approved Operator Training Plan to each site's National Maintenance Contractor personnel;
 - .4 provide maintenance training in accordance with the approved Maintenance Training Plan to each site's National Maintenance Contractor personnel;
 - .5 perform a successful Acceptance Test at each site witnessed and signed-off by the Technical Authority or delegate;

7 WARRANTY

7.1 Warranty

- .1 The Contractor must provide a written twelve (12) month system warranty that covers all materials and labour required to correct any system problems occurring during the warranty period.
- .2 The separate warranty period for each site is deemed to have started at the earliest of acceptance of the system by the Technical Authority or delegate; or placing the system into service by CSC.

APPENDIX A – SECURITY PARTITION ALARM TECHNICAL REQUIREMENTS

1 INTRODUCTION

1.1 Overview

- .1 This defines the requirements of Correctional Service Canada for a system to make an office/suite a designated security partition for use at federal correctional institutions. There may be multiple partitions where there are separate requirements.

1.2 Purpose

- .1 The systems are for deployment in locations with requirements to be a security partition as defined by G1-026 Guide to the Application of Physical Security Zones.
- .2 Security Zone:

Definition	"An area to which access is limited to authorized personnel and to authorized and properly escorted visitors".
Examples	"An area where secret information is processed or stored".
Perimeter	"Must be indicated by a recognizable perimeter or a secure perimeter as indicated by the TRA".
Monitoring	Monitored continuously **, i.e., 24 hours a day and 7 days a week.

**** Monitored continuously** - to confirm on a continuous basis that there has not been a breach of security. Examples include electronic intrusion detection systems or someone guarding a particular point on a constant basis.

- .3 The target locations are preventative security intelligence staff areas where they require access to the Protected C information on SINet.
- .4 **NOTE:** The G1-026 Guide uses the term "zone" for the area to be protected; however this document will use "partition" to define the area to be protected and "zone" to refer to a single input on an alarm panel. This matches the security alarm industry terminology.

2 REFERENCES

2.1 Standards

- .1 Access to non-government specifications is the responsibility of the contractor.
- .2 Any standards where the revision is not specified must be the latest revision.

3 PHYSICAL

3.1 Lock

- .1 The partition perimeter doors must be lockable. This is outside the scope of Electronic Security Systems, but is assumed to exist.

3.2 Alarm System

- .1 Alarm system connectivity must be wired only, wireless connections are not permitted.

3.3 Alarm Control Panel

- .1 The alarm control panel must:
 - .1 be able to arm/disarm the system with a code of at least 4 digits from a connected alarm keypad;
 - .2 have a minimum of four spare zone inputs after system acceptance;

- .3 provide two dry contact outputs for arm and alarm states for each partition connected to the panel;
 - .4 include an internal backup battery with a minimum of sixty minutes battery operation time for the panel and connected devices;
 - .5 be enclosed in a locked, metal box;
- .2 All alarm control panels on the same site must be keyed alike.

3.4 Alarm Sensors

- .1 Each room within the partition must include one or more area coverage, dual technology (passive infrared and microwave) motion sensing devices.
- .2 Each door on the perimeter of the security zone must have a door contact.
- .3 The door contacts must:
 - .1 be triple bias (e.g. GE Sentrol 2700 series) high security contacts; **or**
 - .2 be rated UL 634 Connectors and Switches for Use with Burglar-Alarm Systems security level 1 or better (e.g. Magnasphere HS L1.5 series);
- .4 be powered from the Alarm Control Panel;

3.5 Alarm Keypad

- .1 The alarm keypad must:
 - .1 include an illuminated numeric keypad;
 - .2 include a continuous visible indication of the current arm state;
 - .3 provide an audible and visible indication when the system is in alarm;
 - .4 provide an audible and visible indication when the system is in the arm/disarm delay period;
 - .5 display the zone(s) in alarm when in the alarm state;
 - .6 be powered from the Alarm Control Panel;

3.6 Alarm Status Display

- .1 The alarm status display must:
 - .1 include a continuous visible indication of the current arm state;
 - .2 provide an audible and visible indication when the system is in alarm;
 - .3 display the zone(s) in alarm when in the alarm state;
 - .4 be powered from the Alarm Control Panel or an equivalent duration backup power supply;
- .2 The alarm status display must **NOT** be able to arm/disarm the system.

3.7 Environment

- .1 Any indoor equipment must:
 - .1 be capable of continuous operation;
 - .2 start and operate from 0°C to 50°C;
 - .3 start and operate from 20% to 90% non-condensing humidity;

3.8 Interference

- .1 All electronics must:

- .1 be certified compliant with IEC EN55022 or IEC EN 55032 (IEC EN55022 – International Electrotechnical Commission Information technology equipment – Radio disturbance characteristics – Limits and methods of measurement) (IEC EN55032 – International Electrotechnical Commission Electromagnetic compatibility of multimedia equipment – Emission requirements (Replacing IEC EN55022));
- .2 be certified compliant with IEC EN 55024 (IEC EN55024 – International Electrotechnical Commission Information technology equipment – Immunity characteristics – Limits and methods of measurement);

3.9 Reliability

- .1 All components must:
 - .1 have a Mean Time Between Failures of at least 75,000 hours;

4 INSTALLATION

4.1 Installation

- .1 The system installation must be installed by a manufacturer certified technician.
- .2 Each sensor must be individually “home run” wired to the alarm control panel.
- .3 Each sensor must be connected to a separate zone in the alarm control panel(s).
- .4 All sensor wiring must be Station ‘Z’ 22 AWG or heavier solid conductor wire with a GREY jacket.
- .5 Door contacts must be located and installed on the security partition perimeter doors as identified in Appendix E.
- .6 Door contacts must be recessed inside the door frame or mounted on the secured side of the door.
- .7 Motion sensors must be mounted on the ceiling or at least seven feet up on a wall.
- .8 The motion sensor(s) in each room must cover at least 90% of the open floor area. The open floor area is the floor area not covered by cabinets and furniture, excluding chairs.
- .9 Alarm keypad(s) must be located and installed within the security partition as identified in Appendix E.
- .10 The only location permitted to arm/disarm the system is the alarm keypad within the partition.
- .11 Alarm control panel(s) power must be provided using 18 AWG or heavier wire.
- .12 Alarm control panel(s) must be located and installed
 - .1 in the room indicated in appendix E;
 - .2 such that they are serviceable from floor level without the use of a ladder;
 - .3 in an Electronic Security Systems rack if rack mountable;
- .13 Alarm Control Panels located in Terminal Equipment Rooms or Security Partitions will have access to fiber optic connections or Electronic Security Systems network switches for connection of outputs to the Central Equipment Room.
- .14 The system must **NOT** be configured for automatic arm/disarm on a schedule.

4.2 Installation – Medium and Higher Security Locations

- .1 The system must be integrated into the Main Communications and Control Post’s Facilities Alarm Annunciation System to display for each partition:
 - .1 armed/bypassed status.
 - .2 alarm/clear status;

- .2 All arm and alarm status changes and Facilities Alarm Annunciation System acknowledgements must be logged in the central data logger with the system, event, location, and time/date.

4.3 Installation – Minimum Security and Community Correctional Center Locations

- .1 The system must have an alarm status panel in the identified location.

5 OPERATIONAL

5.1 Alarms

- .1 The system must:
 - .1 retain its configuration over a power cycle;
 - .2 **not** generate spurious alarms on start-up;
 - .3 resume normal operation without operator intervention;
- .2 Alarms must be reported within one second of detection.
- .3 Sensor processing must detect and alarm for sensor cable open circuits.

6 INTERFACE

6.1 System Power

- .1 Any powered indoor components **not** using DC power inputs must:
 - .1 accept power from a 120VAC circuit;
 - .2 **not** require more than 15A during start-up and operation;
- .2 The system must:
 - .1 be connected to a circuit supplied by the institution's backup generator;
 - .2 be connected to an Uninterruptible power Supply that can maintain system operation for at least sixty minutes; **or**
 - .3 have an internal battery backup that can maintain system operation for at least sixty minutes;

APPENDIX B - WIRING TECHNICAL REQUIREMENTS

7 INSTALLATION

7.1 All Cabling

- .1 Low voltage cabling (less than 50V AC or DC) must be run in separate conduits or cable trays from power cabling.
- .2 All cable infrastructure must be protected from or entirely free from burrs and other sharp edges.
- .3 All new cable runs must be continuous without splices.
- .4 All cable must have sufficient slack to allow a minimum of three (3) reconnections with new connectors.
- .5 All cables in junction boxes must have a maximum of a single loop of slack (not folded).
- .6 Electrical tape, masking tape, or its equivalent must NOT be used on cables or any installed equipment.
- .7 Upon identification by the Technical Authority or delegate all redundant cables, and conduit must be removed and disposed of in accordance with any applicable federal or provincial regulations.
- .8 Upon determination by the Technical Authority or delegate, any damage to remaining or new cables, conduits, or equipment caused by the removal of redundant cables and conduit must be repaired or replaced at the contractor's expense.

7.2 Low Voltage Cabling (less than 50V AC or DC)

- .1 All low voltage cabling must be installed and tested in accordance with a structured cabling standard compliant with TIA/EIA-568 version B or later.
- .2 All low voltage cables must be FT4 fire rated.
- .3 All installed low voltage cables must be run through conduit and/or in cable trays. An installed cable is a cable that runs farther than the adjacent equipment rack. Equipment racks must be abutting, without side panels to be considered adjacent.
- .4 All premise low voltage cables must be terminated at a patch panel in the equipment racks.
- .5 All new and reused existing network cabling must be tested with a certified cable analyzer and the test results must include:
 - .1 origin and destination of the cable;
 - .2 wire map – pass/fail;
 - .3 propagation delay – pass/fail;
 - .4 cable length – length in metres and pass/fail;
 - .5 insertion loss – dB loss and pass/fail;
 - .6 return loss – dB loss and pass/fail;
 - .7 NEXT (Near End Crosstalk) – pass/fail;
 - .8 ELFEXT (Equal Level Far-End Crosstalk) – pass/fail;
- .6 All new network cabling must be Category 6 or better.
- .7 All network patch cables must be stranded cable.
- .8 All network premises cables must be solid conductor.
- .9 All network camera connections must NOT use patch cables.
- .10 All network camera connections must be terminated directly on the premises cables with:
 - .1 solid conductor Category 6 rated RJ45 connectors; or
 - .2 factory assembled stranded pigtailed with Category 6 rated RJ45 connectors;

- .11 All new (including unused fibres) and reused existing fibre optic cabling must be tested with a certified fibre optic analyzer and the test results must include:
 - .1 origin and destination of the cable;
 - .2 light loss – dB loss and pass/fail;
 - .3 cable length – length in metres and pass/fail;
- .12 If fibre optic cabling is required, all new fibre optic cabling must be OM-3 50/125µm unless otherwise specified in the Request for Proposal.
- .13 If fibre optic cabling is required, all new fibre interconnections should try to be geographically redundant (separate fibre pairs through separate conduits to different core switches) or at a minimum logically redundant (separate fibre pairs through the same conduit to different core switches).
- .14 All reused cable must be tested prior to installation of new cabling and equipment to identify any existing deficiencies.
- .15 All failed new or reused cables must be replaced as part of the project.
- .16 All network and fibre optic cabling must have a bright green jacket.
- .17 All cabling must have a warranty duration of twenty (20) or more years.

7.3 Power Cabling

- .1 All power cabling installation must be installed in accordance with CSA guidelines, and national and provincial electrical codes.
- .2 All power cabling termination blocks must have a protective guard.
- .3 Surge suppression type lightning arrestors must be installed on all cables at the building perimeter.
- .4 All ground conductor to ground rod connections must be done with thermic welding.
- .5 External, “wall wart” style AC power adapters where the electronics forms a fixed unit with the AC plug must NOT be used.

7.4 Connections

- .1 All connections, terminations, and cross connections must be made in enclosures or equipment rooms.
- .2 All joins or splices must be soldered and encased in waterproof heat shrink tubing.
- .3 Marelite type connectors must NOT be used.
- .4 All connection solder flux residue must be cleaned-up.
- .5 Acid based solder flux must NOT be used.
- .6 All cable shielding must be secured against fraying.
- .7 All connectors must be a locking type.
- .8 All connections must be in an accessible location.
- .9 Crimp connections must NOT be used with solid conductor wire.

7.5 Termination Blocks

- .1 All wires in multi-conductor cables terminating at a block must terminate on the block.
- .2 All unused wires must be grounded.
- .3 Wires must not cross the face of a block.
- .4 All power wiring must use terminal lugs with termination blocks.
- .5 All connections to screw terminals must use spade terminal lugs unless otherwise specified.
- .6 Each spade terminal lug must connect to only a single wire excluding cases where wires do not need to be disconnected for servicing.
- .7 No more than two (2) spade terminal lugs must be connected to a screw thread terminal.

- .8 No bare wire must be visible between the spade terminal lug and the wire.
- .9 All blocks must be secured to a hard surface using mechanical fasteners.
- .10 Stranded conductors must NOT be used with BIX or other Insulation displacement termination blocks.

7.6 Labelling

- .1 Labels must be applied to:
 - .1 all cables within 0.3 metres of each end;
 - .2 all cables at any access point. e.g. pull box, wall shaft opening;
 - .3 all conduit runs using bright green labels at least every 3.5m and within 0.3m of any wall penetration;
 - .4 all wires at a termination block;
 - .5 all termination blocks;
 - .6 all enclosures using bright green labels;
 - .7 all racks;
- .2 All wire and cable labels must be:
 - .1 machine printed;
 - .2 mounted with clear heat shrink tubing;

7.7 Conduits and Cable Trays

- .1 All metallic conduit installation must be free from burrs or sharp edges.
- .2 Cable trays must be:
 - .1 continuous;
 - .2 metal;
 - .3 equipped with covers;
- .3 Cable runs in inmate accessible areas should be minimized by using existing pipe chases and in-wall conduits.
- .4 All indoor cable runs in inmate accessible areas less than 4m from the floor or less than 4m from any balcony, must be:
 - .1 in Galvanized Rigid Conduit;
 - .2 surface mounted and strapped with two-hole mounting straps every 5 feet.
- .5 All other indoor cable runs must be in either cable trays or Electrical Metallic Tubing or better conduit.
- .6 All outdoor, above ground cable runs must:
 - .1 be in Galvanized Rigid Conduit;
 - .2 include expansion joints where the expected expansion exceeds 0.25" between two fixed points;
- .7 All underground cable runs must
 - .1 be in Rigid Nonmetallic Conduit;
 - .2 have a minimum six inch wide marker tape above it in the back fill at least 50cm above the conduit where possible.
 - .3 be encased in poured concrete when passing under a road;
- .8 Liquid-tight flexible metal conduit with a maximum length of one (1) metre may be used for edge device connections in non-inmate areas.

- .9 Outdoor non-sensor cables located on a fence must:
 - .1 be positioned within 10cm of the top rail of the fence;
 - .2 be UV-rated for outdoor use;

7.8 Cable Dressing

- .1 All cabling in equipment racks, cable trays, junction boxes, and at edge devices will be dressed using Velcro style “hook and loop” re-useable straps.
- .2 Cable straps must encircle all the cables in a given bundle.
- .3 Vertical cable runs in an equipment rack must be:
 - .1 strapped at least every thirty (30) cm;
 - .2 run in the side panel area;
- .4 If a tie-wrap is used to secure any new cable, the contractor must replace the entire cable at their expense as the conductors may have been damaged.
- .5 All cables entering from the top of the rack must be routed to the base of the rack before returning to the termination point.
- .6 All cables entering a rack must have sufficient slack to allow a connection to be made anywhere in the rack.
- .7 All cables connected to sliding rack elements must provide sufficient additional slack to allow sliding elements to be fully extended without disconnecting the cable from the equipment.

7.9 Outdoor Enclosures

- .1 Outdoor enclosures, including cable entries, must
 - .1 meet NEMA 4X or IP66 or better when installed;
 - .2 be lockable;
 - .3 be mounted at least three (3) feet above grade or floor;
 - .4 be secured to existing structures or stub pole supports;
- .2 All enclosures grouted in concrete must include a drain hole.

7.10 Restoration

- .1 Cut, opened, or damaged walls and removed conduit holes must be patched and painted to match the existing colour.
- .2 Exposed conduit in office and staff work areas must be painted to match the existing colour.

APPENDIX C - INSTALLATION STANDARDS

8 INSTALLATION

8.1 Tools, Equipment, and Materials

- .1 The contractor must be responsible for shipment and delivery of all tools, equipment, and materials to the site.
- .2 All shipment labelling must appear on a minimum of two (2) locations on each package.
- .3 All shipment labelling must include:
 - .1 “FRAGILE” where applicable;
 - .2 complete name of the institution;
 - .3 complete name of the institutional representative;
 - .4 complete shipping address;
 - .5 description of the contents;
- .4 All electronic equipment must remain in the original packaging material until the equipment is installed.
- .5 The contractor must:
 - .1 secure all tools, equipment, and materials prior to the end of each work day;
 - .2 ensure the shipment and delivery of tools, equipment, and materials to the site in good order;

8.2 Redundant Electronics

- .1 If there are any redundant electronics, the contractor must identify and provide identification of the redundant electronics to the Technical Authority or delegate at least 2 weeks prior to removal.
- .2 The Technical Authority or delegate will confirm within one week of receipt of the identified redundant equipment that the equipment may be removed.
- .3 Redundant electronics identification must as a minimum include:
 - .1 location;
 - .2 make;
 - .3 model;
 - .4 serial number;
- .4 All redundant electronics must be removed and handed over to the national electronic security systems maintenance representative in good condition.

APPENDIX D - CONTRACTOR SAFETY REGULATIONS

1 COMPLIANCE

1.1 Acts and Regulations

- .1 The Contractor must comply with the latest issue of the following specifications:
 - .1 Canadian Labour Code Part II;
 - .2 National Building Code Part VIII;
 - .3 Loi sur la santé et la sécurité du travail – Québec;
 - .4 Commission des normes, de l'équité, de la santé et de la sécurité du travail - Québec

- .2 The Contractor must comply with safety regulations and procedures that are prepared by the institution and in effect at the Work site.
- .3 In the event of conflict between any provisions of the Acts, Regulations, and safety regulations and procedures, the most stringent must apply.

2 PROCESS

2.1 Safety Plan

- .1 The Contractor must
 - .1 create and maintain a site specific safety plan for each site;
 - .2 provide the safety plan in electronic .pdf format to institutional staff, and inspectors and safety officers authorized by the Acts and Regulations upon request;
- .2 The safety plan must include at a minimum:
 - .1 compliance confirmation with the location relevant Acts and Regulations above;
 - .2 a hazard(s) assessment of hazards associated with the project site;
 - .3 controls to minimize risks by identifying safe work practices, standard operating procedures, and safety inspections;
 - .4 emergency procedures in the event of an accident or incident;
 - .5 emergency contact information for ambulance, fire department, police department, and institutional safety officer;
 - .6 a communications strategy to ensure the safety plan contents are communicated with all contractor personnel and non-CSC employees entering the project site;
- .3 The Contractor must ensure that required safety training as mandated in the Acts and Regulations above, and site specific safety regulations and procedures is received by all contractor personnel and non-CSC employees entering the project site.

APPENDIX E - LOCATION PLANS


Archambault Institution, medium unit

242 Montée Gagnon
Sainte-Anne-de-Plaines, Quebec
J0N 1H0


NOTES

One partition
One keypad
Two door contacts
Two rooms
Alarm panel in Central Equipment Room

Statement of Work – SIO Alarm Systems – Quebec Region

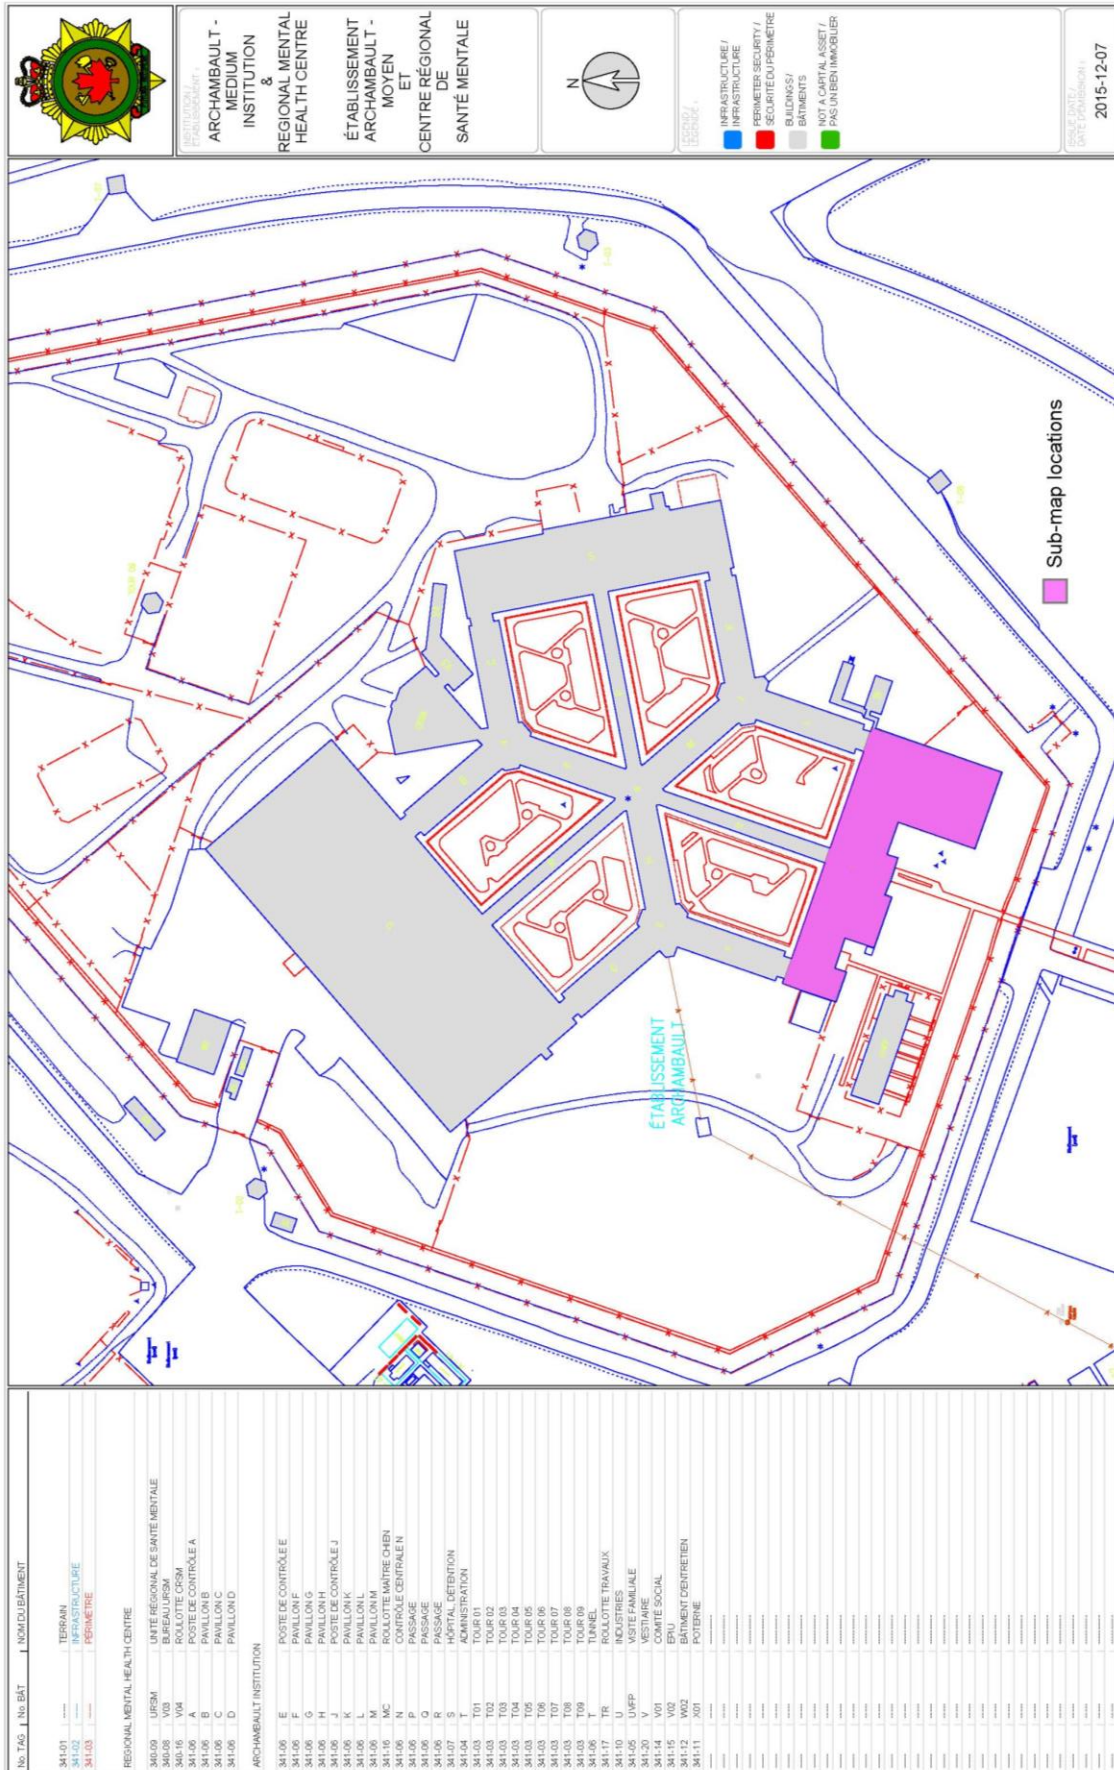


Statement of Work – SIO Alarm Systems – Quebec Region



REGION / RÉGION :
QUÉBEC

INSTITUTION /
ÉTABLISSEMENT :
ARCHAMBAULT
— MOYEN



**REAL PROPERTY
INVENTORY
BIENS IMMOBILIERS**

TAG / ÉTIQUETTE # :
341-04

BUILDING NUMBER /
NO. DE BÂTIMENT :
T


BUILDING NAME /
NOM DE BÂTIMENT :
ADMINISTRATION

FLOOR / ÉTAGE:
REZ-DE-CHAUSSÉE

AREA / SUPERFICIE
2425.92 m²

ISSUE DATE / DATE D'ÉMISSION:
2014-09-24

**SIO Office
Central Equipment Room
Main Command and Control Post**

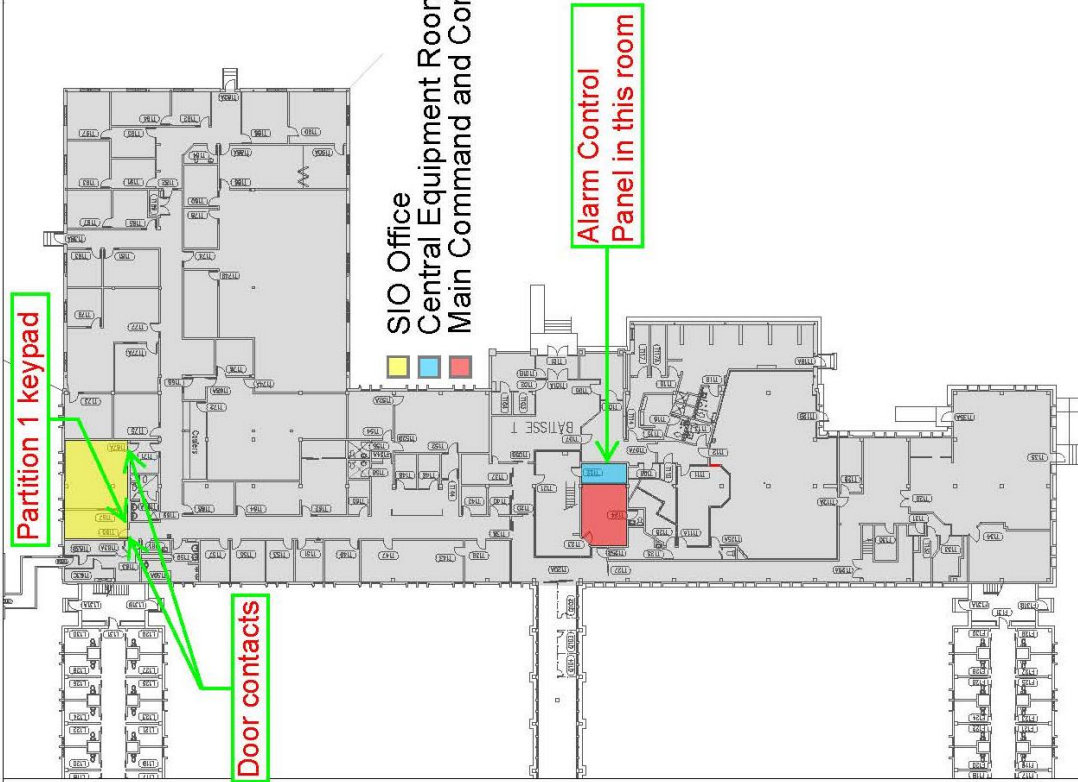

T-155	Bureau psychologue
T-156	Toilette
T-157	Bureau, infirmerie, ISME
T-158	Toilette
T-159	Toilette, hommes
T-159A	Toilette adoptée
T-160	Local d'entretien ménage
T-161	Local des évidences
T-162	Local informatique
T-163	Corridor accès roulotte TR
T-163A	Salle mécanique
T-163B	Salle mécanique
T-164	Entrepôt, informatique
T-165	Bureau sécurité préventive
T-166	Bureau surveillance, d'entretien
T-167	Bureau sécurité préventive
T-167A	Bureau sécurité préventive
T-168	Sos, bureau général
T-168A	Bureau général
T-169	Toilette, femmes
T-169A	Toilette adoptée
T-171	Bureau, agent administratifs
T-172	Local du courrier
T-173	Bureau BAO, directeur adjoint opération
T-174	Salle, commis gestion de cas
T-174A	Salle, commis gestion de cas
T-174B	Gestions des peines
T-175	Bureau, agrand. d'unité E et J
T-176	Bureau, surveillance des services adm.
T-177	Commis, Opérations correctionnelles
T-177A	Gestionnaires correctionnels
T-178	Bureau coordonnateur clinique
T-179	Bureau, coordonnateur opé. correctionnelles
T-180	Bureau coordonnateur clinique
T-181	Bureau et atelier, préparé aux équipements et à l'entretien sécuritaire
T-182	Corridor, direction
T-182A	Sortie extérieure
T-183	Bureau du préparé aux équipements et à l'entretien sécuritaire
T-184	Toilette
T-185	Bur, secrétaire, chef adm. et gestion mat.
T-186	Salle de conférence
T-186A	Salle de conférence
T-187	Bur, secrétaire, chef adm. et gestion mat.
T-188	Bureau, secrétaire du directeur
T-188	Chambre informatique
T-190	Bureau, directeur
T-190A	Salle de conférence
T-191	Bureau, secrétaire du dir. adjoint intervention
T-192	Bureau, secrétaire du sous-directeur
T-193	Bureau, directeur adjoint intervention
T-194	Bureau, sous-directeur
195	Bureau, sec. du dir. adj. services de gestion
197	Bureau, dir. adj. services de gestion

Portes bâtiment, T Rdc

T-101	Hte. générale
T-101A	Réseau
T-101B	Salle d'attente des visiteurs
T-102	Salle d'attente des visiteurs
T-103	Toilette
T-104	Toilette adoptée
T-104	Salle d'attente des visiteurs
T-105B	Salle cuisinière, corridor
T-106	Salle d'attente des visiteurs
T-107	Sanitaires et corridor, visites
T-107A	Sos, visites
T-108	Local chien
T-110	Visites non-contact
T-111	Corridors, visites
T-111A	Corridors, visites
T-112	Salle des visites
T-112A	Salle des visites
T-123B	Sortie extérieure
T-113	Toilette
T-114	Corridor, vestiaire des officiers masculins
T-115	Vestiaire, officiers féminins
T-116	Toilette
T-117	Bureau, syndicat AFC
T-117A	Bureau, Syndicat C.S.N.
T-118	Vestiaire, officiers masculins
T-118A	Sortie extérieure
T-119	Toilette
T-120	Grille cuisinière, corridor
T-120A	Grille cuisinière, corridor
T-121	Contrôle T
T-122	Coiffe-ort
T-123	Contrôle P.I.D.S.
T-124	Toilette
T-125	Faillite des détenus
T-125A	Toilette
T-125B	Corridor
T-126	Visites non contact, détenus
T-127	Grille cuisinière, corridor
T-128	Vestiaire, services alimentaires
T-129	Catégorie du personnel
T-129A	Escalier, sous-sol
T-130	Salle électrique et téléphone
T-131	Local d'entretien ménage
T-132	Toilette, hommes
T-133	Toilette, femmes
T-134	Cuisine
T-135	Sortie extérieure, caténaire du personnel
T-135A	Sortie extérieure, caténaire du personnel
T-137	Comité social, rangement
T-138	Grille cuisinière, corridor
T-138A	Sortie extérieure, corridor
T-139	Bureau, surveillants correctionnels
T-140	Bureau d'entretien
T-142	Salle d'entrées
T-143	Salle d'emploi
T-144	Sos, salle des audiences
T-146	Bureau, avocat
T-147	Salle d'emploi
T-148	Bureau maître chien
T-149	Bureau psychologue
T-151	Bureau informatique
T-152	Salle des audiences
T-152A	Salle des audiences
T-152B	Salle des audiences
T-153	Bureau psychologue
T-154	Salle de délibération


Archambault Institution, minimum unit

242 Montée Gagnon
Sainte-Anne-de-Plaines, Quebec
J0N 1H0

NOTES

One partition
One keypad
Two door contacts
One room
Alarm panel in Terminal Equipment Room
Alarm status display in Main Reception

Statement of Work – SIO Alarm Systems – Quebec Region

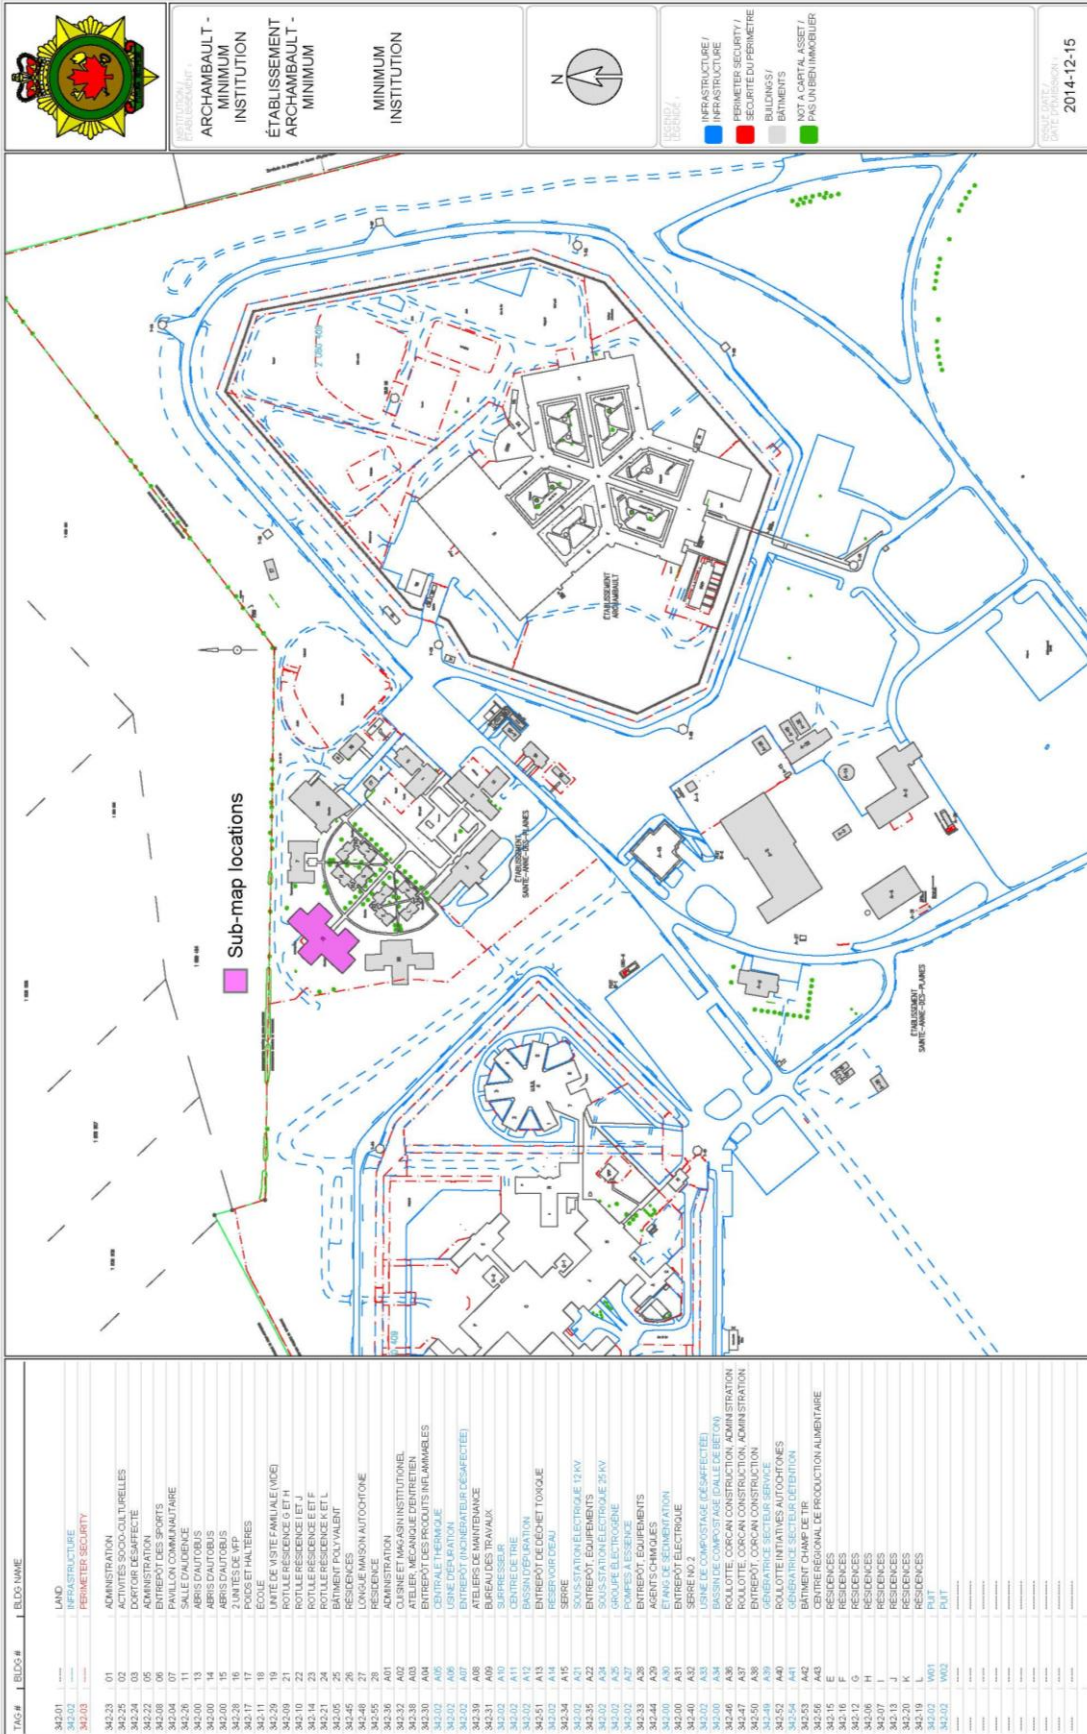



CORRECTIONAL SERVICE CANADA
SERVICE CORRECTIF CANADA

REGION / RÉGION :
QUÉBEC

INSTITUTION /
ÉTABLISSEMENT :
ARCHAMBAULT
– MINIMUM



REAL PROPERTY
INVENTORY
INVENTAIRE DES
BIENS IMMOBILIERS

TAG / ÉTIQUETTE # :
342-45

BUILDING NUMBER /
NO. DE BÂTIMENT :
26


BUILDING NAME /
NOM DE BÂTIMENT :
RÉSIDENCES

FLOOR / ÉTAGE :
REZ-DE-CHAUSSÉE

AREA / SUPERFICIE
1371.92 m²

ISSUE DATE D'ÉMISSION:
2014-11-10

Portes Rez-de-chaussée	Portes Rez-de-chaussée
P101	Escalier
P102	Escalier du sous-sol
P103	Bureau de réception et du
P104	Salles d'activités
P105	Bureau des téléphones
P106	Bureau de la
P107	Local d'entre-ten ménage
P108	Toilette
P109	Local informatique
P110	Corridor de l'île administrative
P111	Corridor de l'île administrative
P112	Archives
P113	Toilette
P114	Chambre simple
P115	Chambre simple
P116	Chambre simple
P117	Chambre simple
P118	Chambre simple
P119	Chambre simple
P120	Chambre simple
P121	Chambre simple
P122	Chambre simple
P123	Chambre simple
P124	Chambre simple
P125	Chambre simple
P126	Chambre simple
P127	Chambre simple
P128	Chambre simple
P129	Chambre simple
P130	Chambre simple
P131	Chambre simple
P132	Chambre simple
P133	Chambre simple
P134	Chambre simple
P135	Chambre simple
P136	Chambre simple
P137	Chambre simple
P138	Chambre simple
P139	Chambre simple
P140	Chambre simple
P141	Chambre simple
P142	Chambre simple
P143	Chambre simple
P144	Chambre simple
P145	Chambre simple
P146	Chambre simple
P147	Chambre simple
P148	Chambre simple
P149	Chambre simple
P150	Chambre simple
P151	Chambre simple
P152	Chambre simple
P153	Chambre simple
P154	Chambre simple
P155	Chambre simple
P156	Chambre simple
P157	Chambre simple
P158	Chambre simple
P159	Chambre simple
P160	Chambre simple
P161	Chambre simple
P162	Chambre simple
P163	Chambre simple
P164	Chambre simple
P165	Chambre simple
P166	Chambre simple
P167	Chambre simple
P168	Chambre simple
P169	Chambre simple
P170	Chambre simple
P171	Chambre simple
P172	Chambre simple
P173	Chambre simple
P174	Chambre simple
P175	Chambre simple
P176	Chambre simple
P177	Chambre simple
P178	Chambre simple
P179	Chambre simple
P180	Chambre simple
P181	Chambre simple
P182	Chambre simple
P183	Chambre simple
P184	Chambre simple
P185	Chambre simple
P186	Chambre simple
P187	Chambre simple
P188	Chambre simple
P189	Chambre simple
P190	Chambre simple
P191	Chambre simple
P192	Chambre simple
P193	Chambre simple
P194	Chambre simple
P195	Chambre simple
P196	Chambre simple
P197	Chambre simple
P198	Chambre simple
P199	Chambre simple
P200	Chambre simple
P201	Chambre simple
P202	Chambre simple
P203	Chambre simple
P204	Chambre simple
P205	Chambre simple
P206	Chambre simple
P207	Chambre simple
P208	Chambre simple
P209	Chambre simple
P210	Chambre simple
P211	Chambre simple
P212	Chambre simple
P213	Chambre simple
P214	Chambre simple
P215	Chambre simple
P216	Chambre simple
P217	Chambre simple
P218	Chambre simple
P219	Chambre simple
P220	Chambre simple
P221	Chambre simple
P222	Chambre simple
P223	Chambre simple
P224	Chambre simple
P225	Chambre simple
P226	Chambre simple
P227	Chambre simple
P228	Chambre simple
P229	Chambre simple
P230	Chambre simple
P231	Chambre simple
P232	Chambre simple
P233	Chambre simple
P234	Chambre simple
P235	Chambre simple
P236	Chambre simple
P237	Chambre simple
P238	Chambre simple
P239	Chambre simple
P240	Chambre simple
P241	Chambre simple
P242	Chambre simple
P243	Chambre simple
P244	Chambre simple
P245	Chambre simple
P246	Chambre simple
P247	Chambre simple
P248	Chambre simple
P249	Chambre simple
P250	Chambre simple
P251	Chambre simple
P252	Chambre simple
P253	Chambre simple
P254	Chambre simple
P255	Chambre simple
P256	Chambre simple
P257	Chambre simple
P258	Chambre simple
P259	Chambre simple
P260	Chambre simple
P261	Chambre simple
P262	Chambre simple
P263	Chambre simple
P264	Chambre simple
P265	Chambre simple
P266	Chambre simple
P267	Chambre simple
P268	Chambre simple
P269	Chambre simple
P270	Chambre simple
P271	Chambre simple
P272	Chambre simple
P273	Chambre simple
P274	Chambre simple
P275	Chambre simple
P276	Chambre simple
P277	Chambre simple
P278	Chambre simple
P279	Chambre simple
P280	Chambre simple
P281	Chambre simple
P282	Chambre simple
P283	Chambre simple
P284	Chambre simple
P285	Chambre simple
P286	Chambre simple
P287	Chambre simple
P288	Chambre simple
P289	Chambre simple
P290	Chambre simple
P291	Chambre simple
P292	Chambre simple
P293	Chambre simple
P294	Chambre simple
P295	Chambre simple
P296	Chambre simple
P297	Chambre simple
P298	Chambre simple
P299	Chambre simple
P300	Chambre simple
P301	Chambre simple
P302	Chambre simple
P303	Chambre simple
P304	Chambre simple
P305	Chambre simple
P306	Chambre simple
P307	Chambre simple
P308	Chambre simple
P309	Chambre simple
P310	Chambre simple
P311	Chambre simple
P312	Chambre simple
P313	Chambre simple
P314	Chambre simple
P315	Chambre simple
P316	Chambre simple
P317	Chambre simple
P318	Chambre simple
P319	Chambre simple
P320	Chambre simple
P321	Chambre simple
P322	Chambre simple
P323	Chambre simple
P324	Chambre simple
P325	Chambre simple
P326	Chambre simple
P327	Chambre simple
P328	Chambre simple
P329	Chambre simple
P330	Chambre simple
P331	Chambre simple
P332	Chambre simple
P333	Chambre simple
P334	Chambre simple
P335	Chambre simple
P336	Chambre simple
P337	Chambre simple
P338	Chambre simple
P339	Chambre simple
P340	Chambre simple
P341	Chambre simple
P342	Chambre simple
P343	Chambre simple
P344	Chambre simple
P345	Chambre simple
P346	Chambre simple
P347	Chambre simple
P348	Chambre simple
P349	Chambre simple
P350	Chambre simple
P351	Chambre simple
P352	Chambre simple
P353	Chambre simple
P354	Chambre simple
P355	Chambre simple
P356	Chambre simple
P357	Chambre simple
P358	Chambre simple
P359	Chambre simple
P360	Chambre simple
P361	Chambre simple
P362	Chambre simple
P363	Chambre simple
P364	Chambre simple
P365	Chambre simple
P366	Chambre simple
P367	Chambre simple
P368	Chambre simple
P369	Chambre simple
P370	Chambre simple
P371	Chambre simple
P372	Chambre simple
P373	Chambre simple
P374	Chambre simple
P375	Chambre simple
P376	Chambre simple
P377	Chambre simple
P378	Chambre simple
P379	Chambre simple
P380	Chambre simple
P381	Chambre simple
P382	Chambre simple
P383	Chambre simple
P384	Chambre simple
P385	Chambre simple
P386	Chambre simple
P387	Chambre simple
P388	Chambre simple
P389	Chambre simple
P390	Chambre simple
P391	Chambre simple
P392	Chambre simple
P393	Chambre simple
P394	Chambre simple
P395	Chambre simple
P396	Chambre simple
P397	Chambre simple
P398	Chambre simple
P399	Chambre simple
P400	Chambre simple

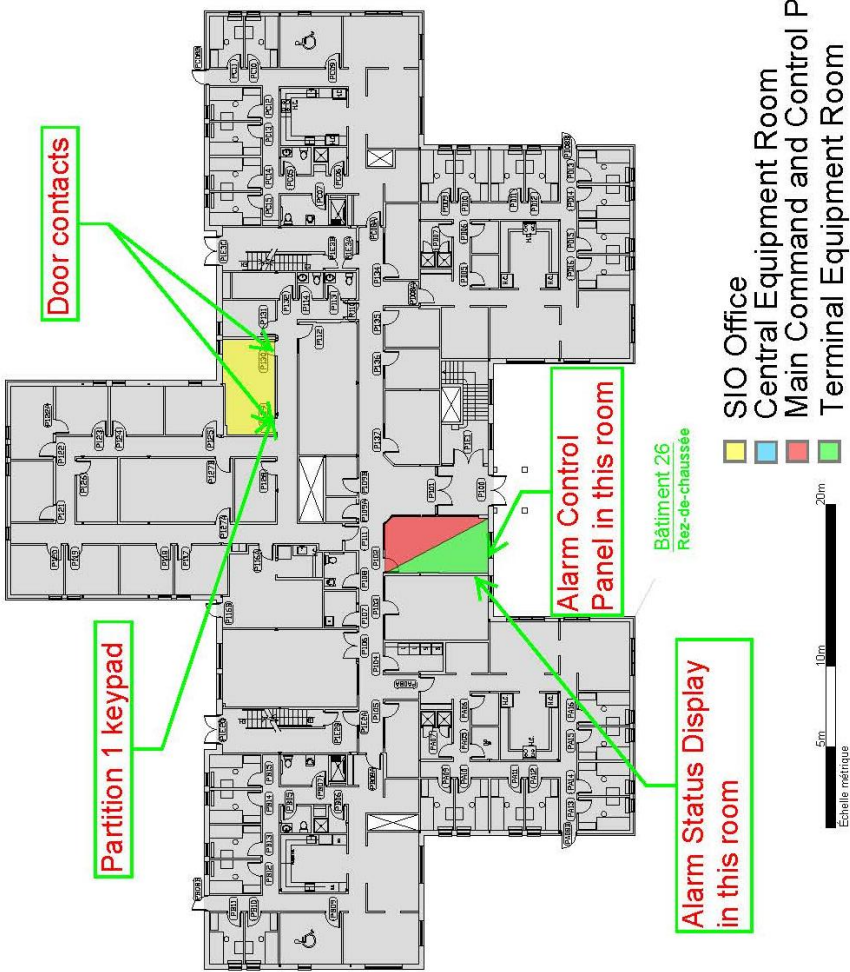


Cowansville Institution

400 Fordyce Avenue
Cowansville, Quebec
J2K 3N7


NOTES


One partition
One keypad
Two door contacts
Two rooms
Alarm panel in partition

Statement of Work – SIO Alarm Systems – Quebec Region

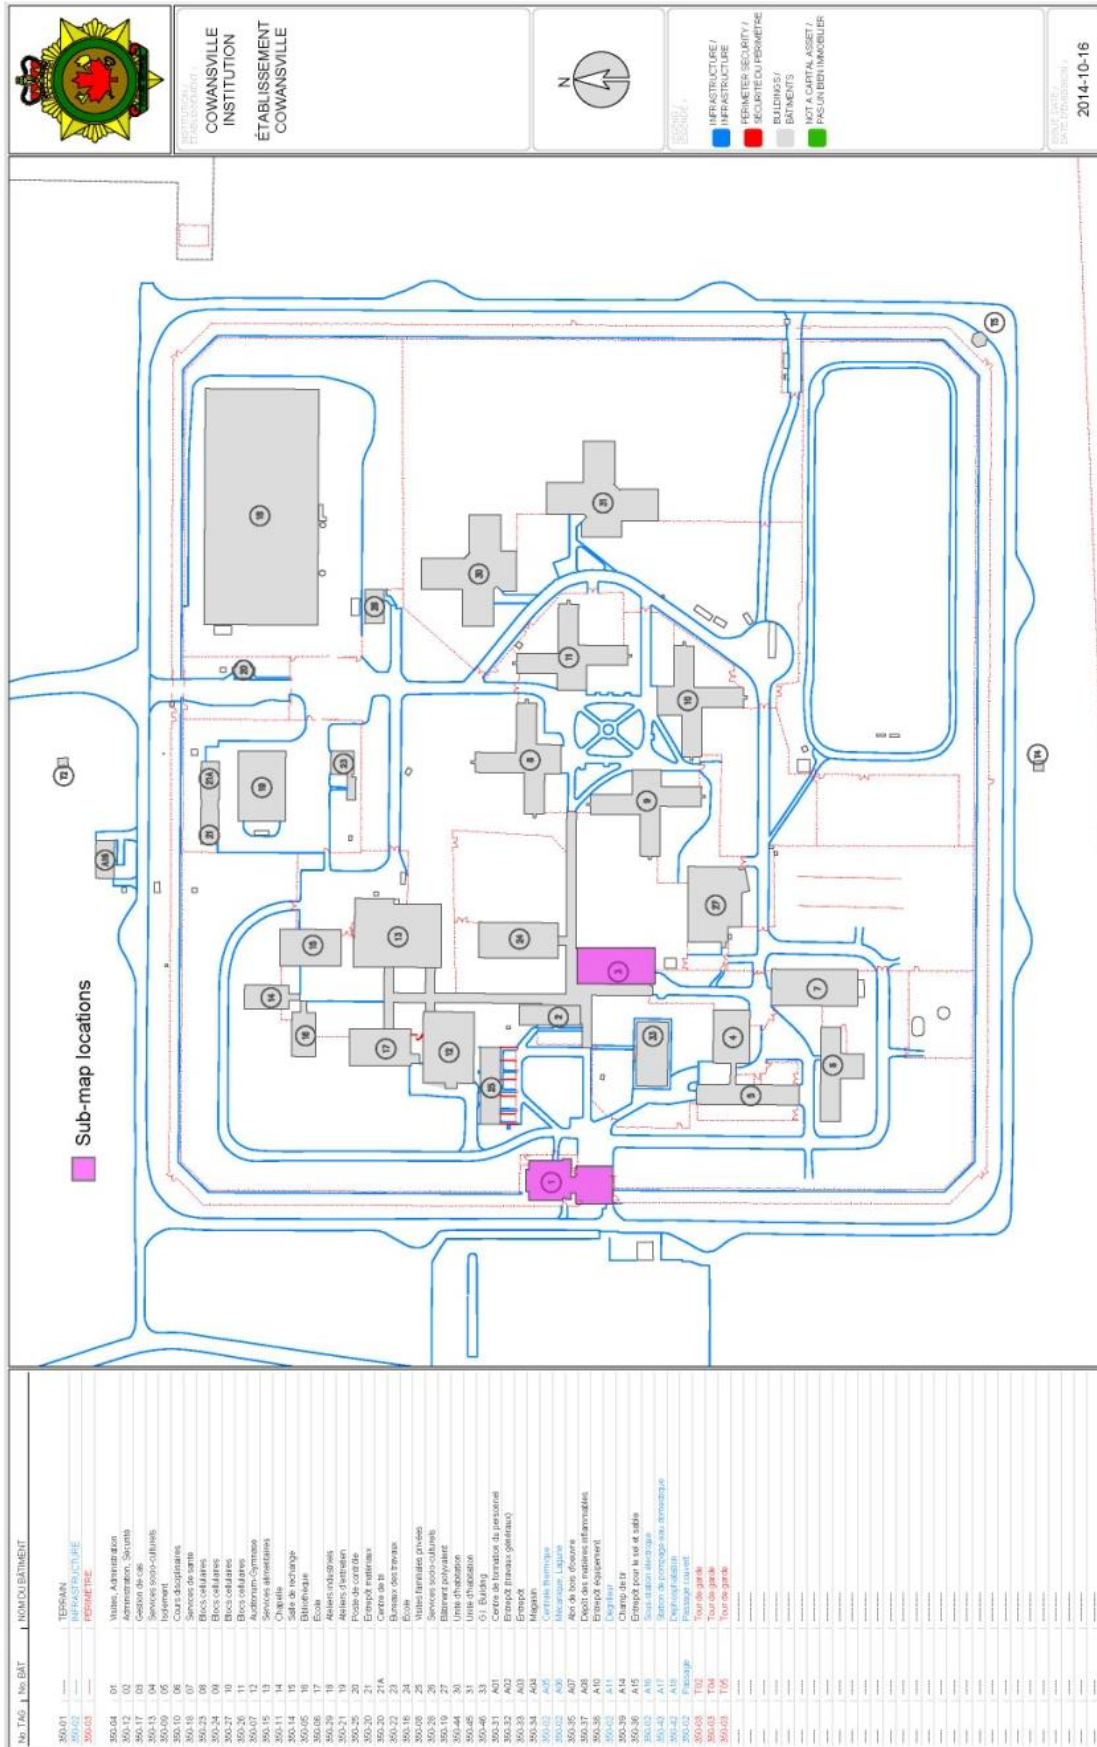

No TAG	No BAT	NOM DU BÂTIMENT
3503.01		TERMINAL
3503.02		RECEVUE
3503.03		RECEVUE
3503.04	01	Visites, Administration
3503.12	02	Administration, Sécurité
3503.13	03	Services sociaux
3503.15	04	Services socio-culturels
3503.09	05	Infirmerie
3503.10	06	Cours disciplinaires
3503.18	07	Services de santé
3503.19	08	Services de santé
3503.24	09	Blocs cellulaires
3503.27	10	Blocs cellulaires
3503.26	11	Blocs cellulaires
3503.17	12	Auditorium / Gymnase
3503.15	13	Auditorium / Gymnase
3503.11	14	Chapelle
3503.14	15	Salle de recharge
3503.05	16	Bibliothèque
3503.02	17	Recevoir
3503.02	18	Recevoir
3503.29	19	Ateliers d'artisanat
3503.25	20	Poste de garde
3503.20	21	Équipement
3503.21	22	Centre de B
3503.22	23	Centre de B
3503.16	24	Équipement
3503.08	25	Visites terminales privées
3503.26	26	Services socio-culturels
3503.26	27	Services socio-culturels
3503.26	28	Services socio-culturels
3503.26	29	Services socio-culturels
3503.26	30	Services socio-culturels
3503.26	31	Services socio-culturels
3503.26	32	Services socio-culturels
3503.26	33	Services socio-culturels
3503.26	34	Services socio-culturels
3503.26	35	Services socio-culturels
3503.26	36	Services socio-culturels
3503.26	37	Services socio-culturels
3503.26	38	Services socio-culturels
3503.26	39	Services socio-culturels
3503.26	40	Services socio-culturels
3503.26	41	Services socio-culturels
3503.26	42	Services socio-culturels
3503.26	43	Services socio-culturels
3503.26	44	Services socio-culturels
3503.26	45	Services socio-culturels
3503.26	46	Services socio-culturels
3503.26	47	Services socio-culturels
3503.26	48	Services socio-culturels
3503.26	49	Services socio-culturels
3503.26	50	Services socio-culturels
3503.26	51	Services socio-culturels
3503.26	52	Services socio-culturels
3503.26	53	Services socio-culturels
3503.26	54	Services socio-culturels
3503.26	55	Services socio-culturels
3503.26	56	Services socio-culturels
3503.26	57	Services socio-culturels
3503.26	58	Services socio-culturels
3503.26	59	Services socio-culturels
3503.26	60	Services socio-culturels
3503.26	61	Services socio-culturels
3503.26	62	Services socio-culturels
3503.26	63	Services socio-culturels
3503.26	64	Services socio-culturels
3503.26	65	Services socio-culturels
3503.26	66	Services socio-culturels
3503.26	67	Services socio-culturels
3503.26	68	Services socio-culturels
3503.26	69	Services socio-culturels
3503.26	70	Services socio-culturels
3503.26	71	Services socio-culturels
3503.26	72	Services socio-culturels
3503.26	73	Services socio-culturels
3503.26	74	Services socio-culturels
3503.26	75	Services socio-culturels
3503.26	76	Services socio-culturels
3503.26	77	Services socio-culturels
3503.26	78	Services socio-culturels
3503.26	79	Services socio-culturels
3503.26	80	Services socio-culturels
3503.26	81	Services socio-culturels
3503.26	82	Services socio-culturels
3503.26	83	Services socio-culturels
3503.26	84	Services socio-culturels
3503.26	85	Services socio-culturels
3503.26	86	Services socio-culturels
3503.26	87	Services socio-culturels
3503.26	88	Services socio-culturels
3503.26	89	Services socio-culturels
3503.26	90	Services socio-culturels
3503.26	91	Services socio-culturels
3503.26	92	Services socio-culturels
3503.26	93	Services socio-culturels
3503.26	94	Services socio-culturels
3503.26	95	Services socio-culturels
3503.26	96	Services socio-culturels
3503.26	97	Services socio-culturels
3503.26	98	Services socio-culturels
3503.26	99	Services socio-culturels
3503.26	100	Services socio-culturels

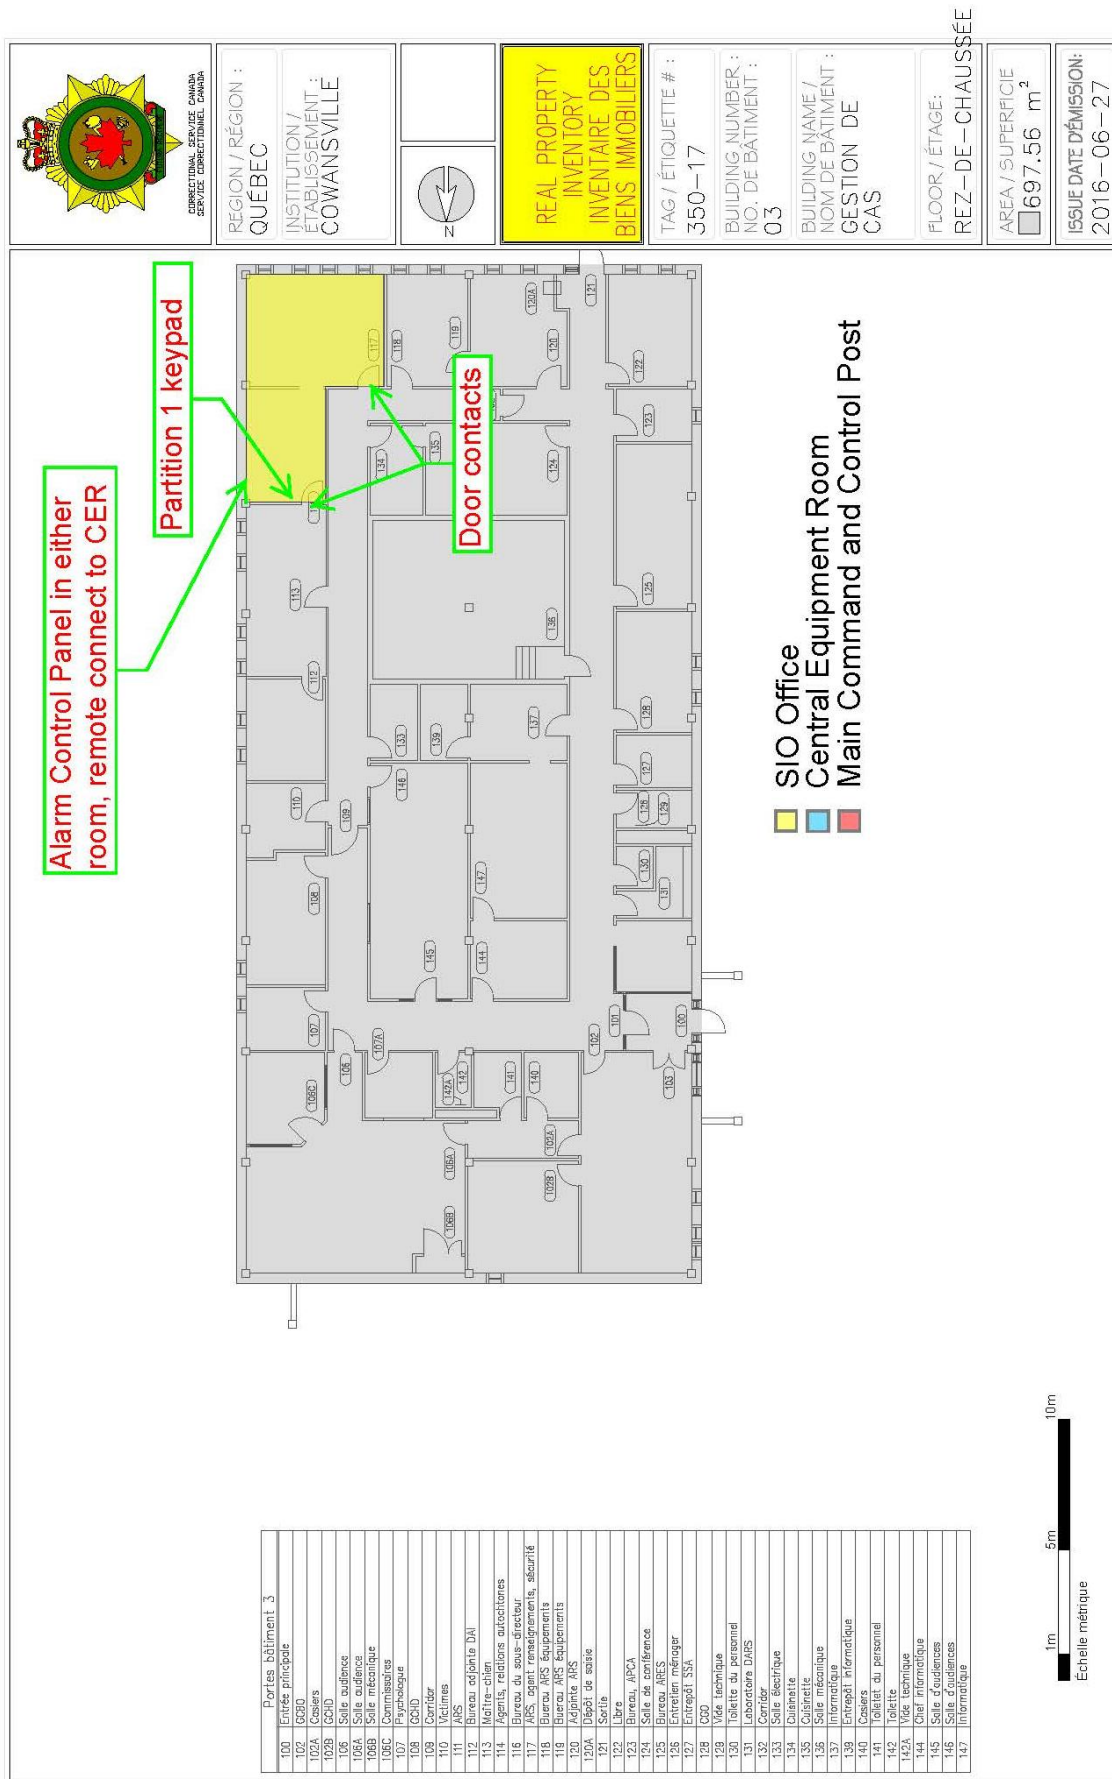

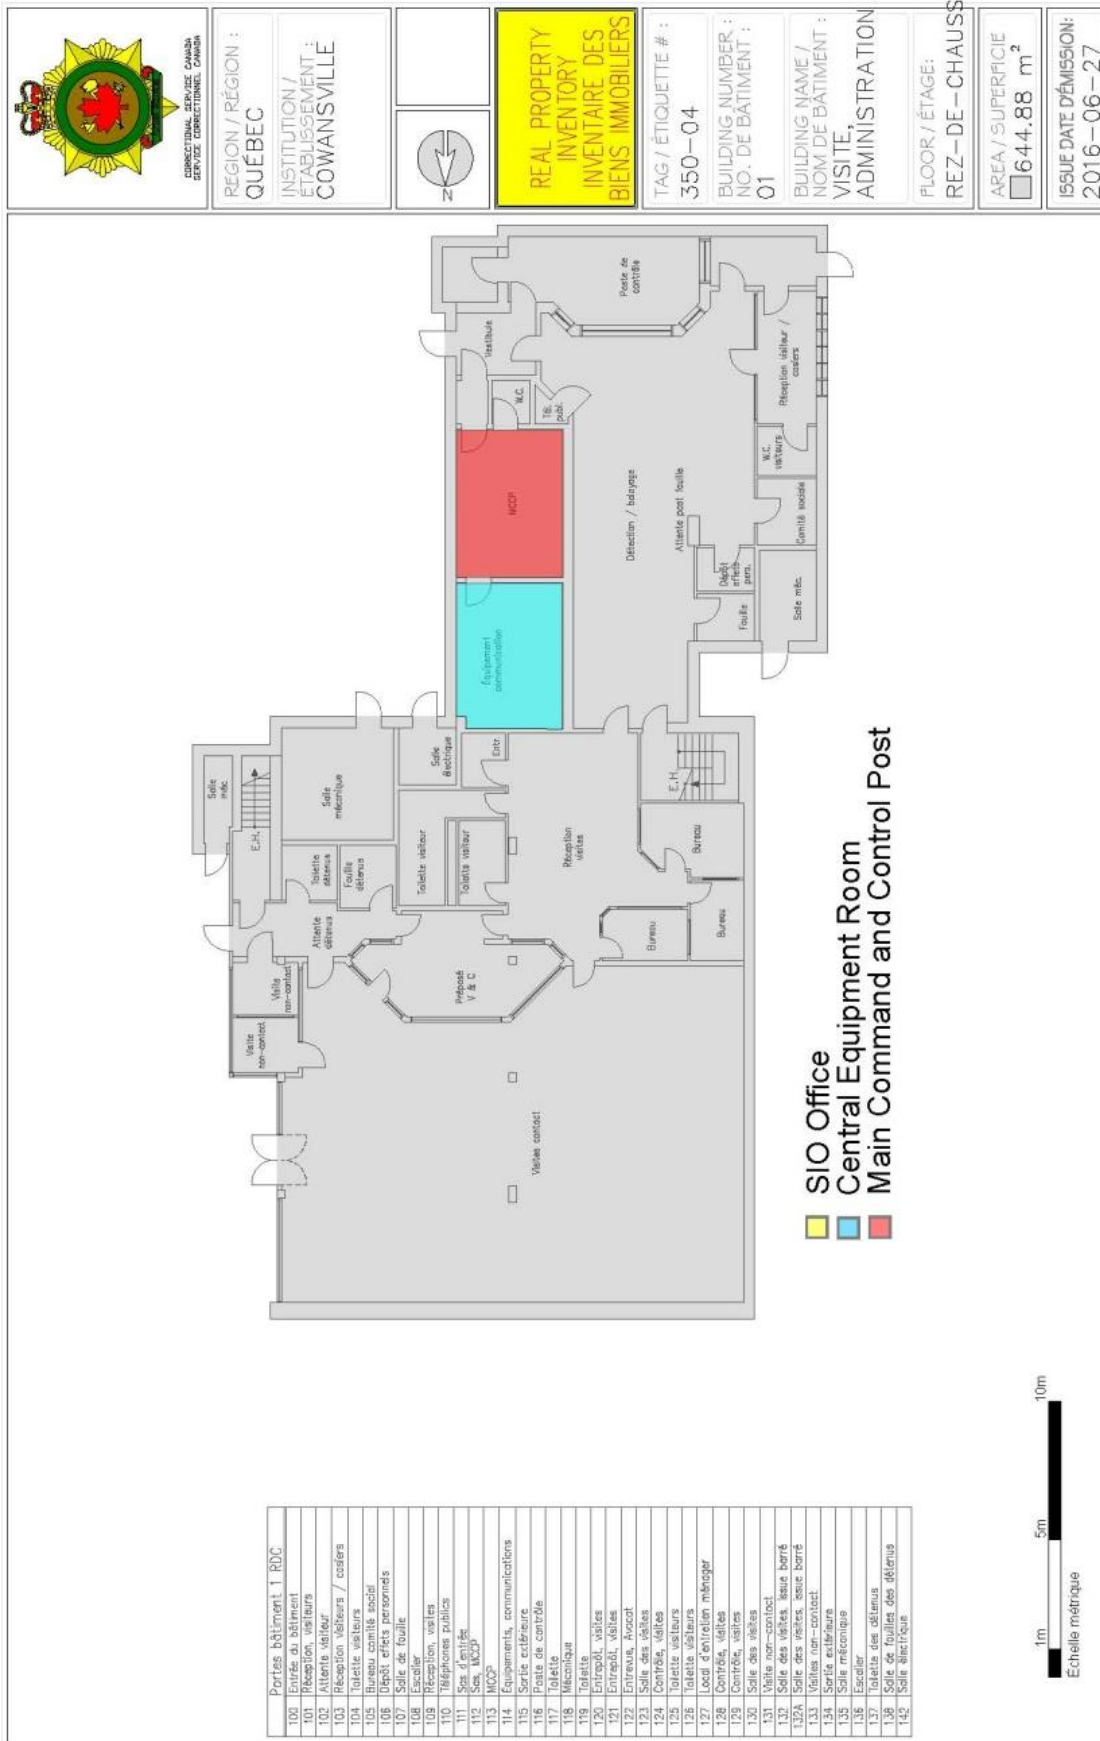


Donnacona Institution

1537 Highway 138
Donnacona, Quebec
G3M 1C9


NOTES

One partition
One keypad
One door contact
Six rooms
Alarm panel in Central Equipment Room

Statement of Work – SIO Alarm Systems – Quebec Region

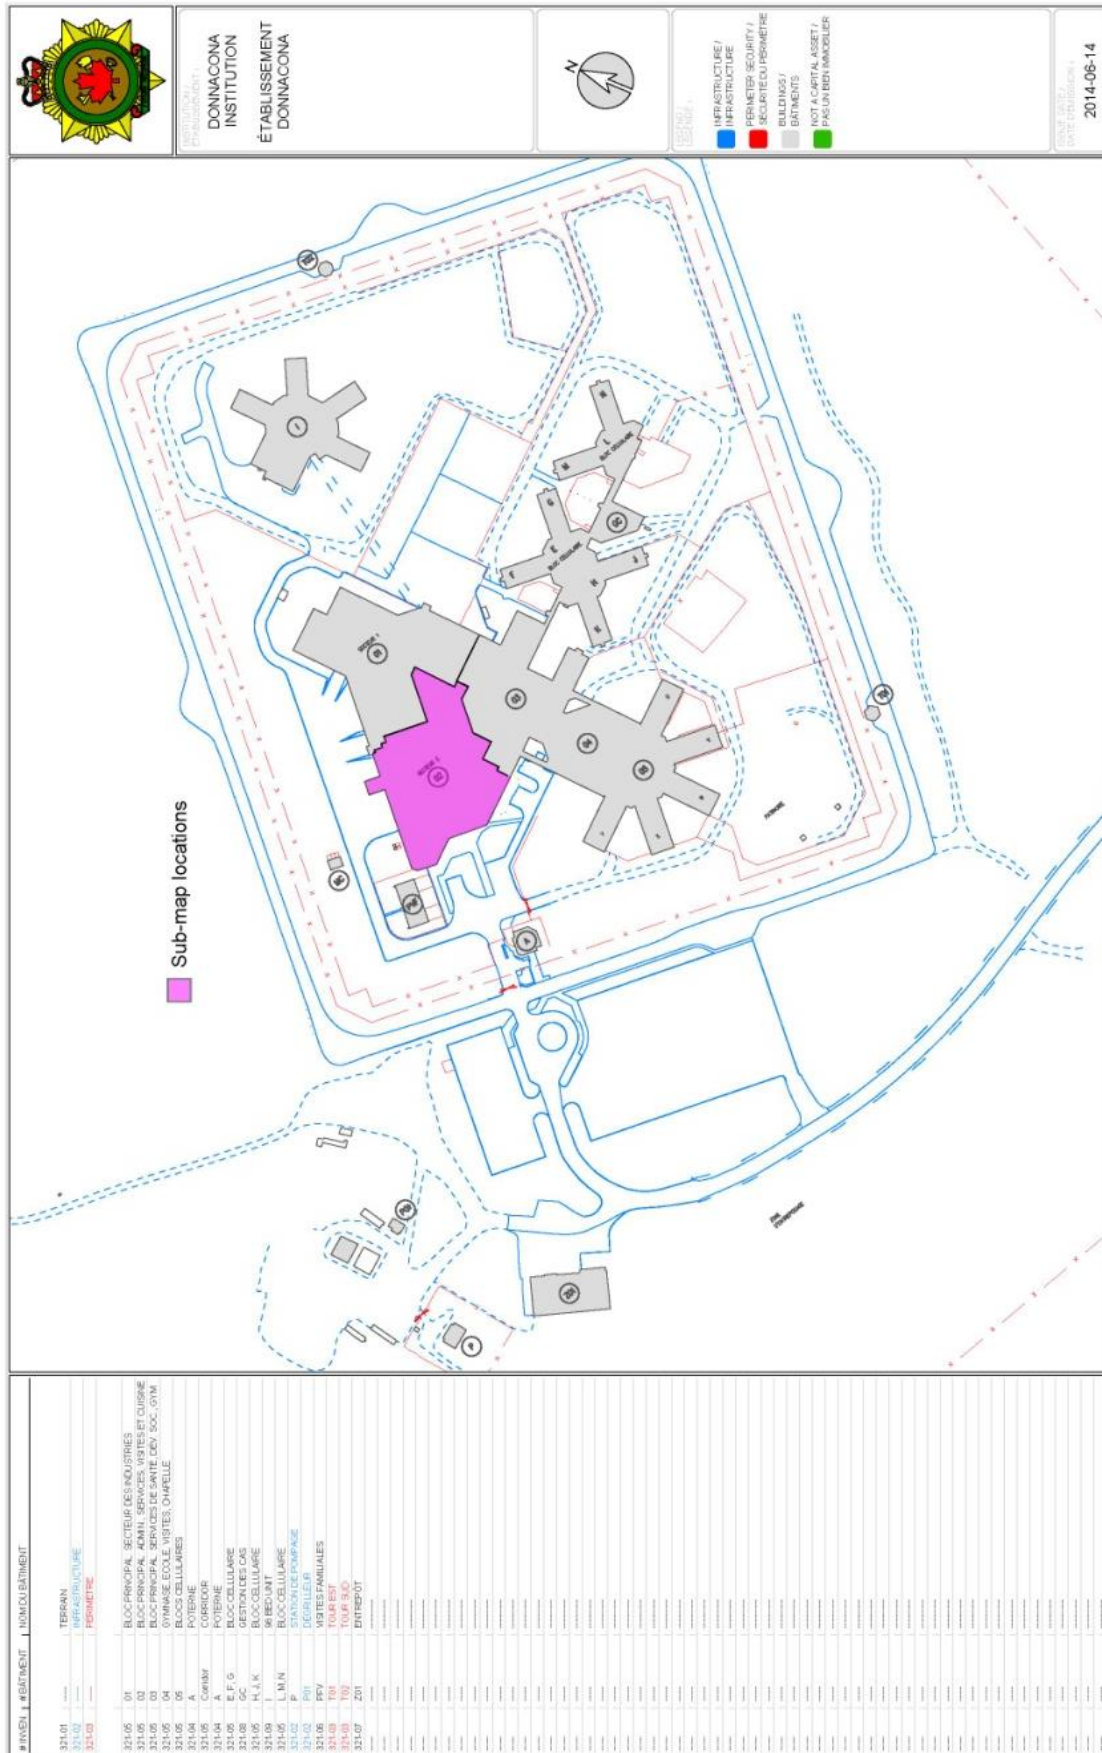

Statement of Work – SIO Alarm Systems – Quebec Region

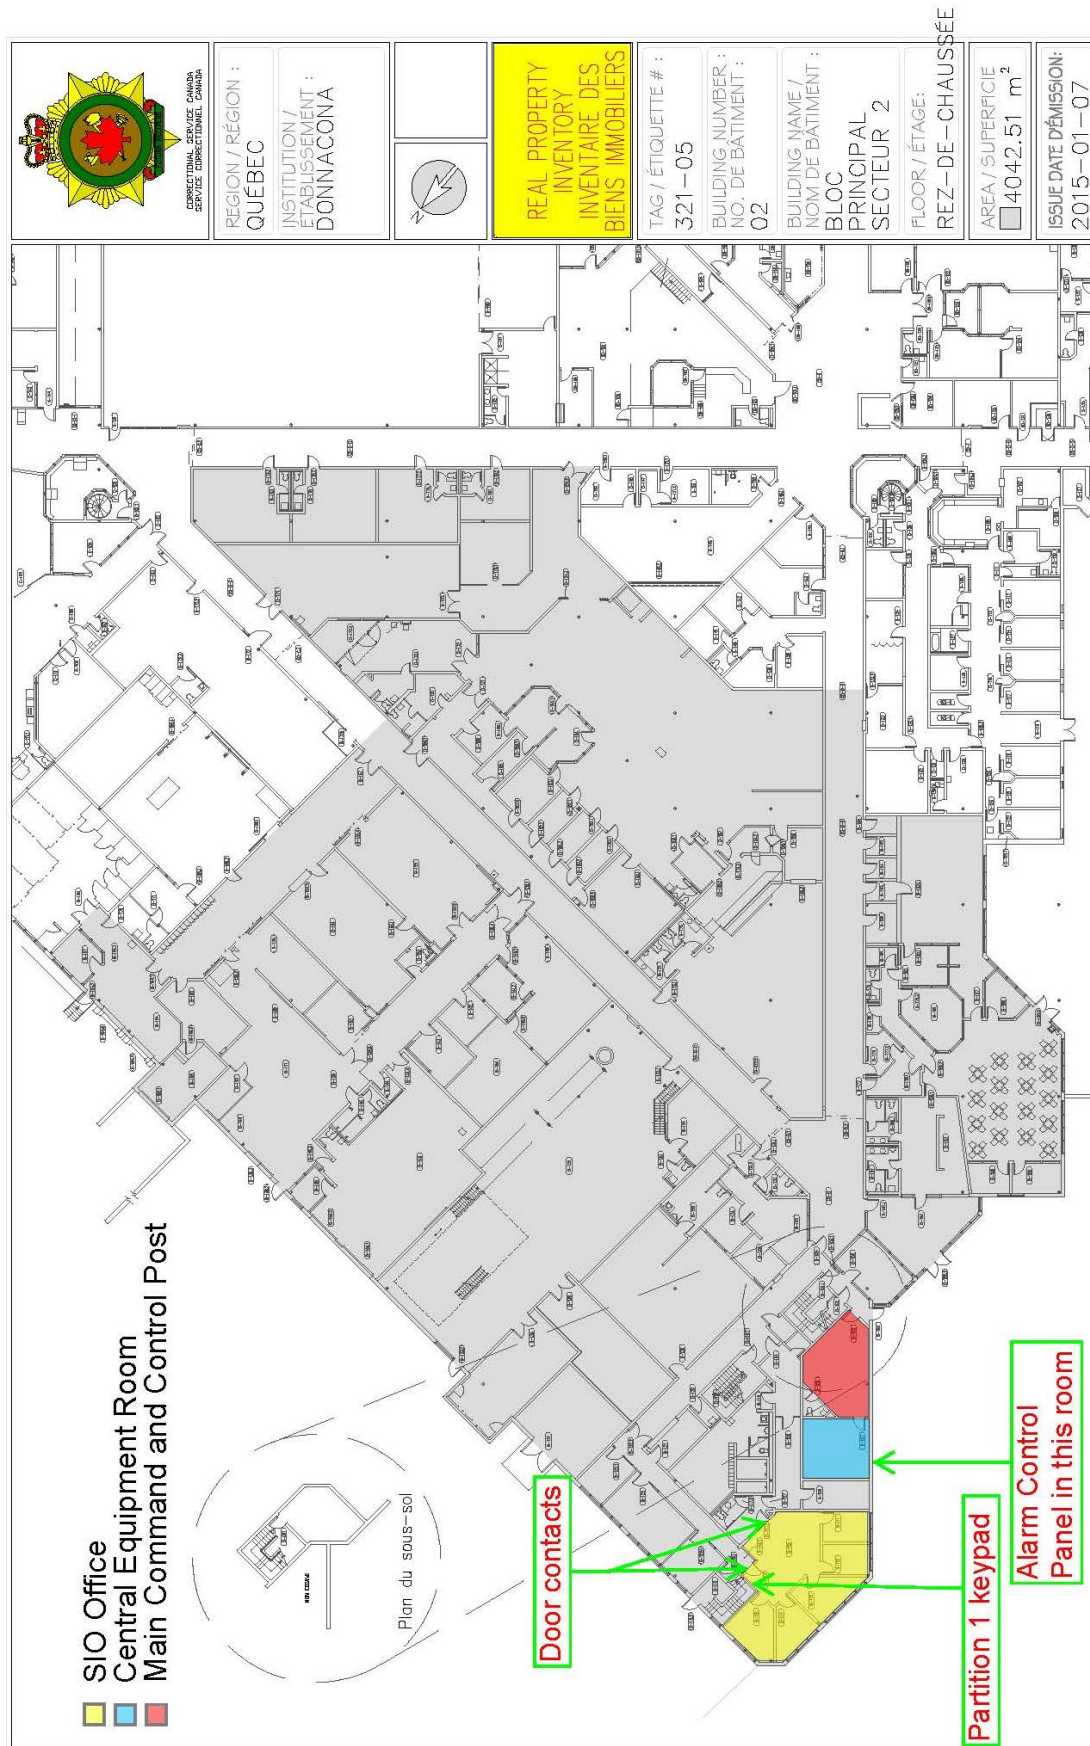


Federal Training Centre, multi-level unit

6099 Lévesque Boulevard East
Laval, Quebec
H7C 1P1


NOTES

Two partitions
Two keypads
Three door contacts
Two rooms
Alarm panel in Central Equipment Room

Statement of Work – SIO Alarm Systems – Quebec Region

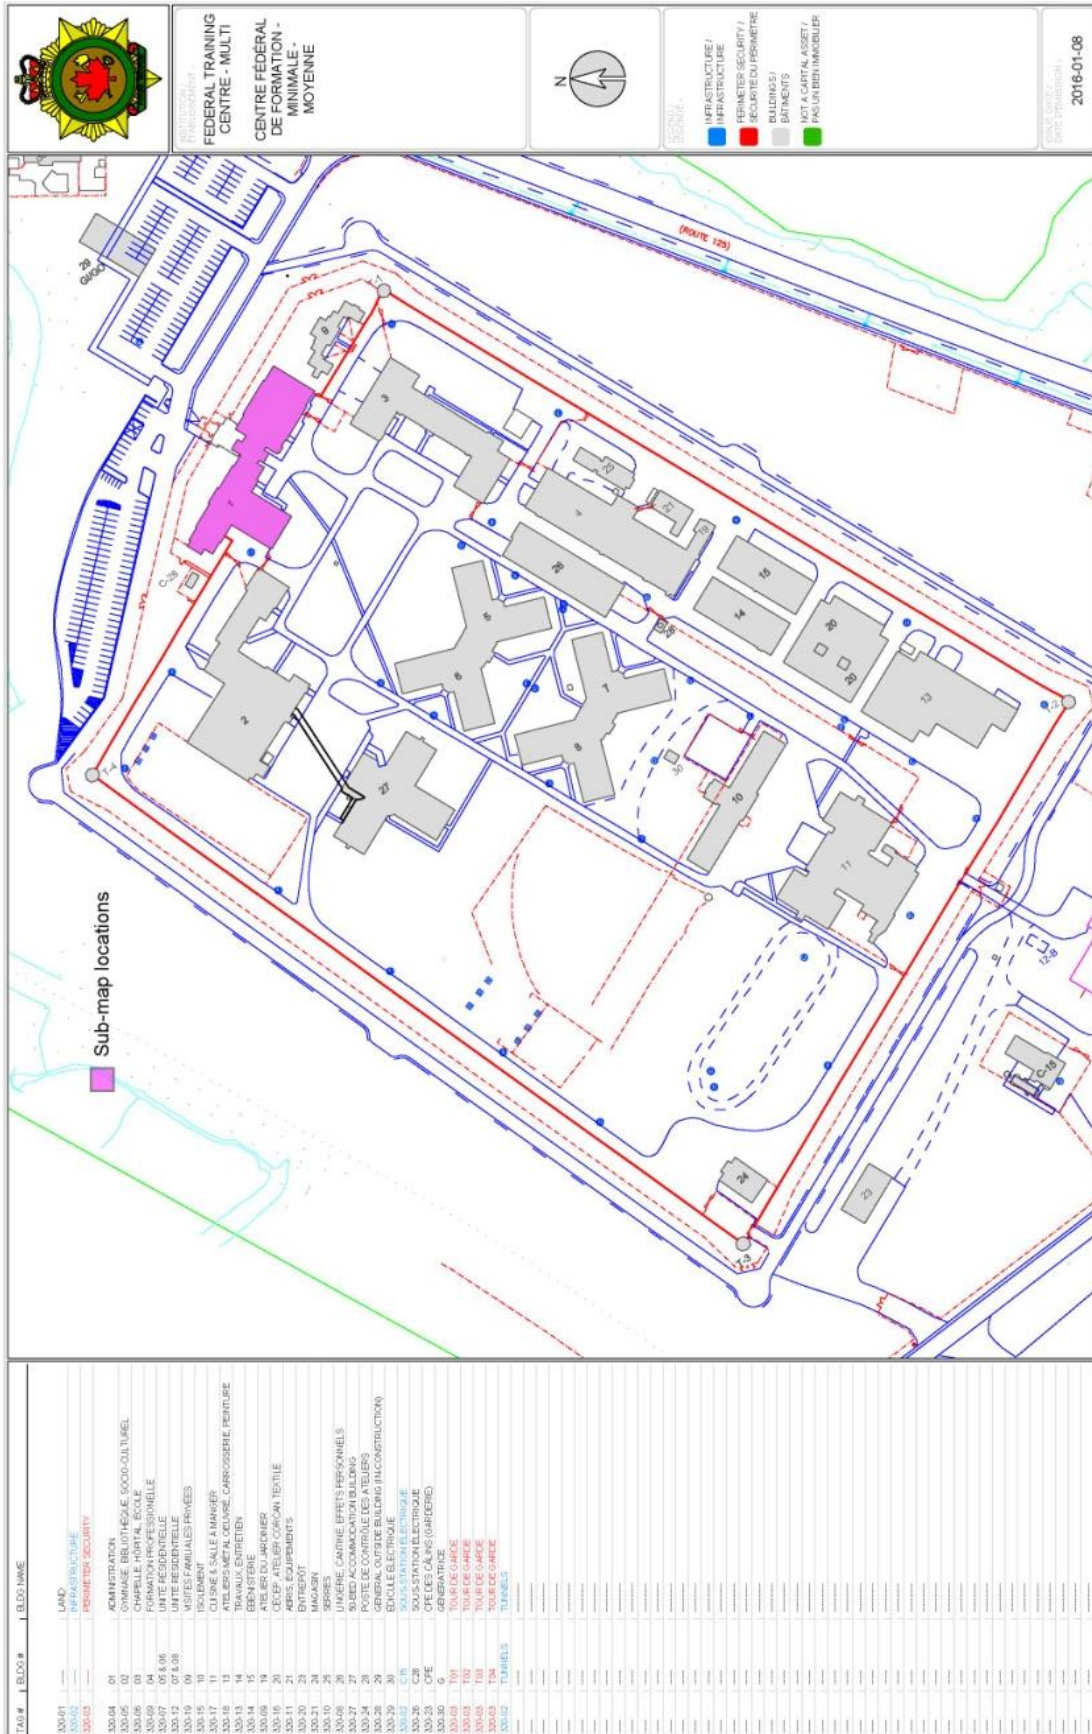

Statement of Work – SIO Alarm Systems – Quebec Region

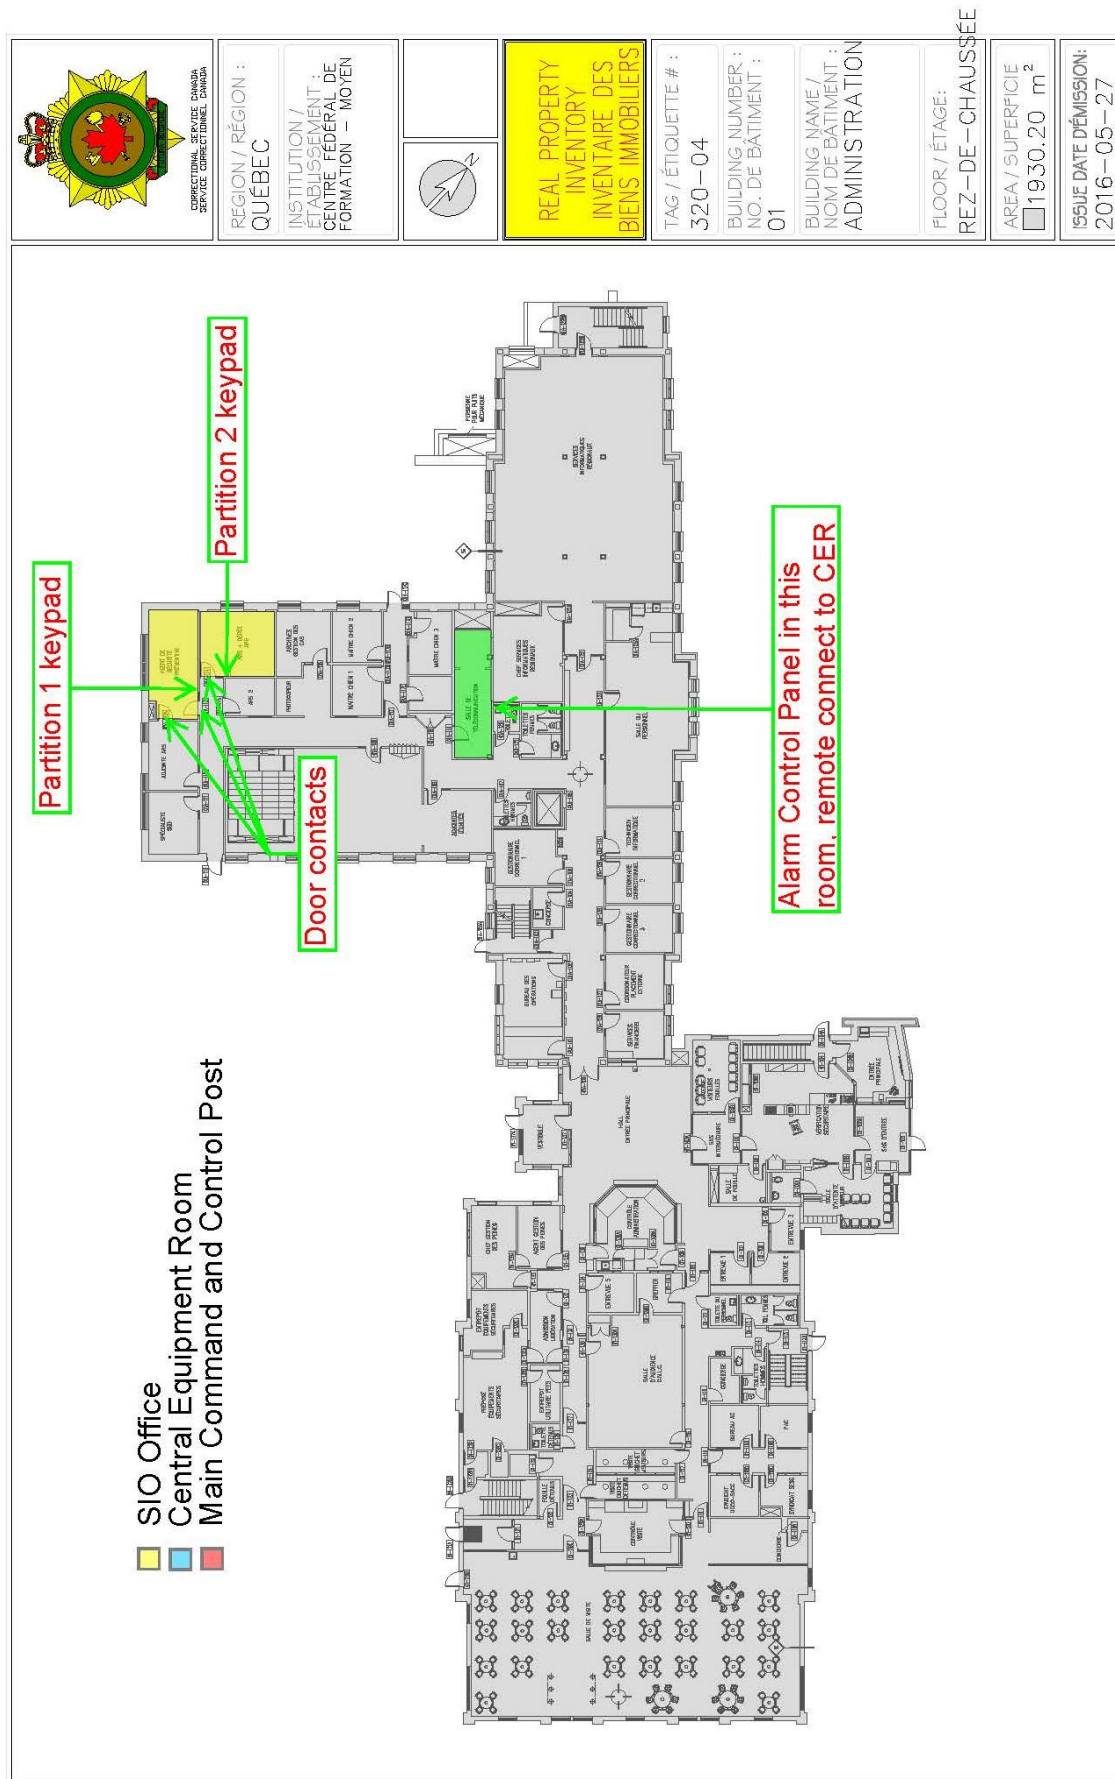

Federal Training Centre, minimum unit

600 Montée Saint-François
Laval, Quebec
H7C 1S5


NOTES


One partition
One keypad
One door contact
Two rooms
Alarm panel in Terminal Equipment Room
Alarm status display in Main Reception


Statement of Work – SIO Alarm Systems – Quebec Region



TAG #	BLDG #	BLDG NAME
312.01	01	LAND
312.02	02	INFRASTRUCTURE
312.03	03	PERIMETER SECURITY
312.04	04	ADMINISTRATION
312.05	05	ADMINISTRATION
312.06	06	CARRFOUR
312.07	07	ADMINISTRATION
312.08	08	ADMINISTRATION
312.09	09	ADMINISTRATION
312.10	10	ADMINISTRATION
312.11	11	ADMINISTRATION
312.12	12	ADMINISTRATION
312.13	13	ADMINISTRATION
312.14	14	ADMINISTRATION
312.15	15	ADMINISTRATION
312.16	16	ADMINISTRATION
312.17	17	ADMINISTRATION
312.18	18	ADMINISTRATION
312.19	19	ADMINISTRATION
312.20	20	ADMINISTRATION
312.21	21	ADMINISTRATION
312.22	22	ADMINISTRATION
312.23	23	ADMINISTRATION
312.24	24	ADMINISTRATION
312.25	25	ADMINISTRATION
312.26	26	ADMINISTRATION
312.27	27	ADMINISTRATION
312.28	28	ADMINISTRATION
312.29	29	ADMINISTRATION
312.30	30	ADMINISTRATION
312.31	31	ADMINISTRATION
312.32	32	ADMINISTRATION
312.33	33	ADMINISTRATION
312.34	34	ADMINISTRATION
312.35	35	ADMINISTRATION
312.36	36	ADMINISTRATION
312.37	37	ADMINISTRATION
312.38	38	ADMINISTRATION
312.39	39	ADMINISTRATION
312.40	40	ADMINISTRATION
312.41	41	ADMINISTRATION
312.42	42	ADMINISTRATION
312.43	43	ADMINISTRATION
312.44	44	ADMINISTRATION
312.45	45	ADMINISTRATION
312.46	46	ADMINISTRATION
312.47	47	ADMINISTRATION
312.48	48	ADMINISTRATION
312.49	49	ADMINISTRATION
312.50	50	ADMINISTRATION
312.51	51	ADMINISTRATION
312.52	52	ADMINISTRATION
312.53	53	ADMINISTRATION
312.54	54	ADMINISTRATION
312.55	55	ADMINISTRATION
312.56	56	ADMINISTRATION
312.57	57	ADMINISTRATION
312.58	58	ADMINISTRATION
312.59	59	ADMINISTRATION
312.60	60	ADMINISTRATION
312.61	61	ADMINISTRATION
312.62	62	ADMINISTRATION
312.63	63	ADMINISTRATION
312.64	64	ADMINISTRATION
312.65	65	ADMINISTRATION
312.66	66	ADMINISTRATION
312.67	67	ADMINISTRATION
312.68	68	ADMINISTRATION
312.69	69	ADMINISTRATION
312.70	70	ADMINISTRATION
312.71	71	ADMINISTRATION
312.72	72	ADMINISTRATION
312.73	73	ADMINISTRATION
312.74	74	ADMINISTRATION
312.75	75	ADMINISTRATION
312.76	76	ADMINISTRATION
312.77	77	ADMINISTRATION
312.78	78	ADMINISTRATION
312.79	79	ADMINISTRATION
312.80	80	ADMINISTRATION
312.81	81	ADMINISTRATION
312.82	82	ADMINISTRATION
312.83	83	ADMINISTRATION
312.84	84	ADMINISTRATION
312.85	85	ADMINISTRATION
312.86	86	ADMINISTRATION
312.87	87	ADMINISTRATION
312.88	88	ADMINISTRATION
312.89	89	ADMINISTRATION
312.90	90	ADMINISTRATION
312.91	91	ADMINISTRATION
312.92	92	ADMINISTRATION
312.93	93	ADMINISTRATION
312.94	94	ADMINISTRATION
312.95	95	ADMINISTRATION
312.96	96	ADMINISTRATION
312.97	97	ADMINISTRATION
312.98	98	ADMINISTRATION
312.99	99	ADMINISTRATION
313.00	00	ADMINISTRATION

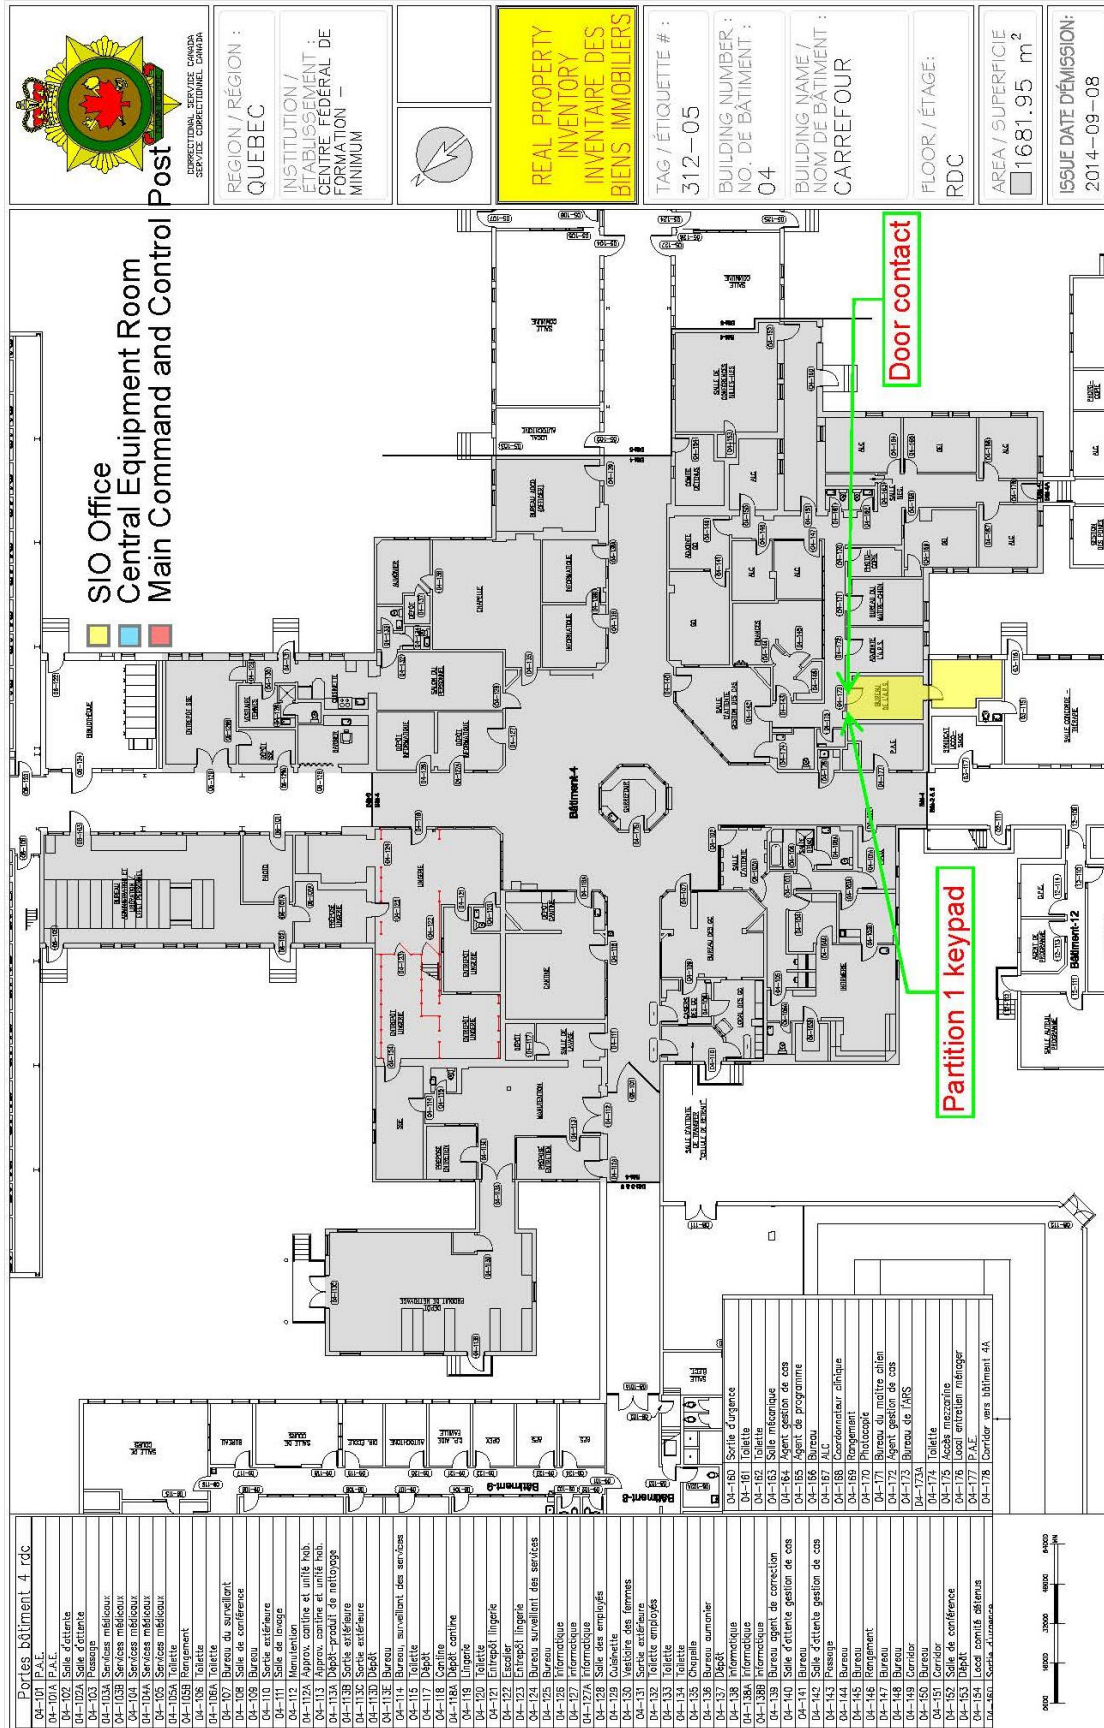

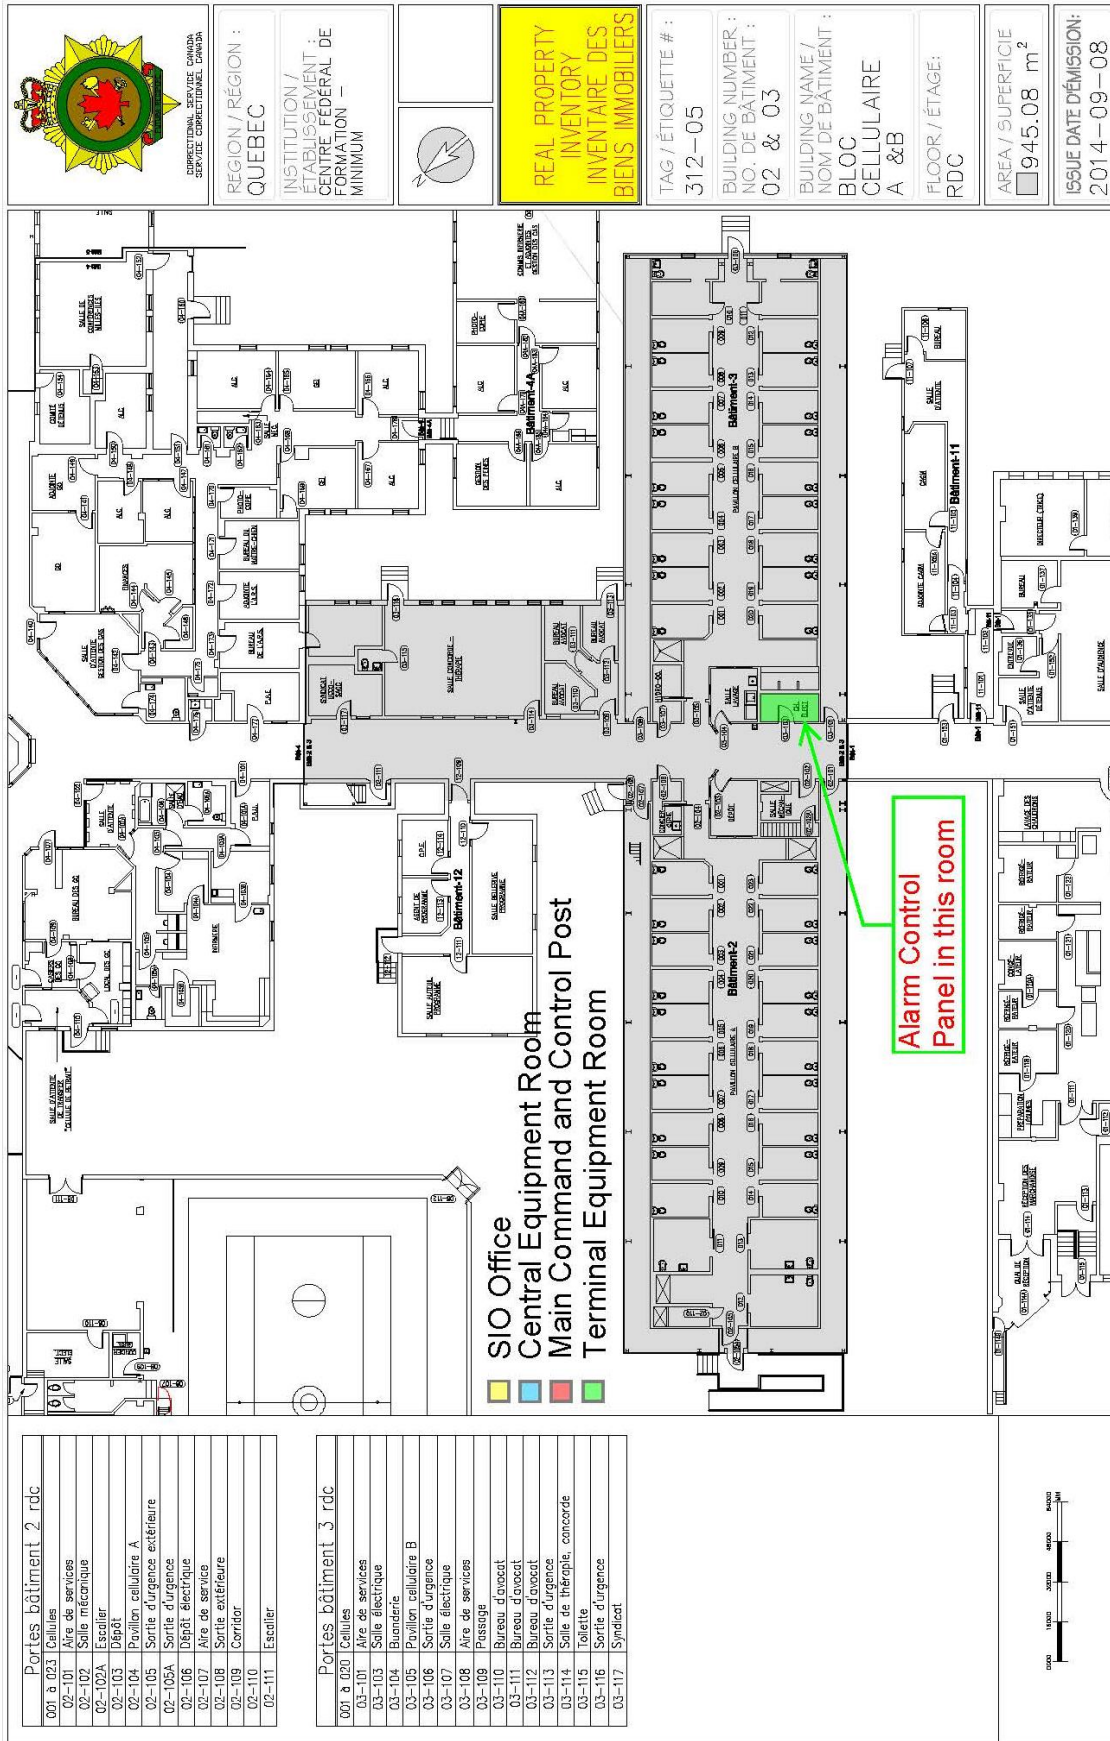

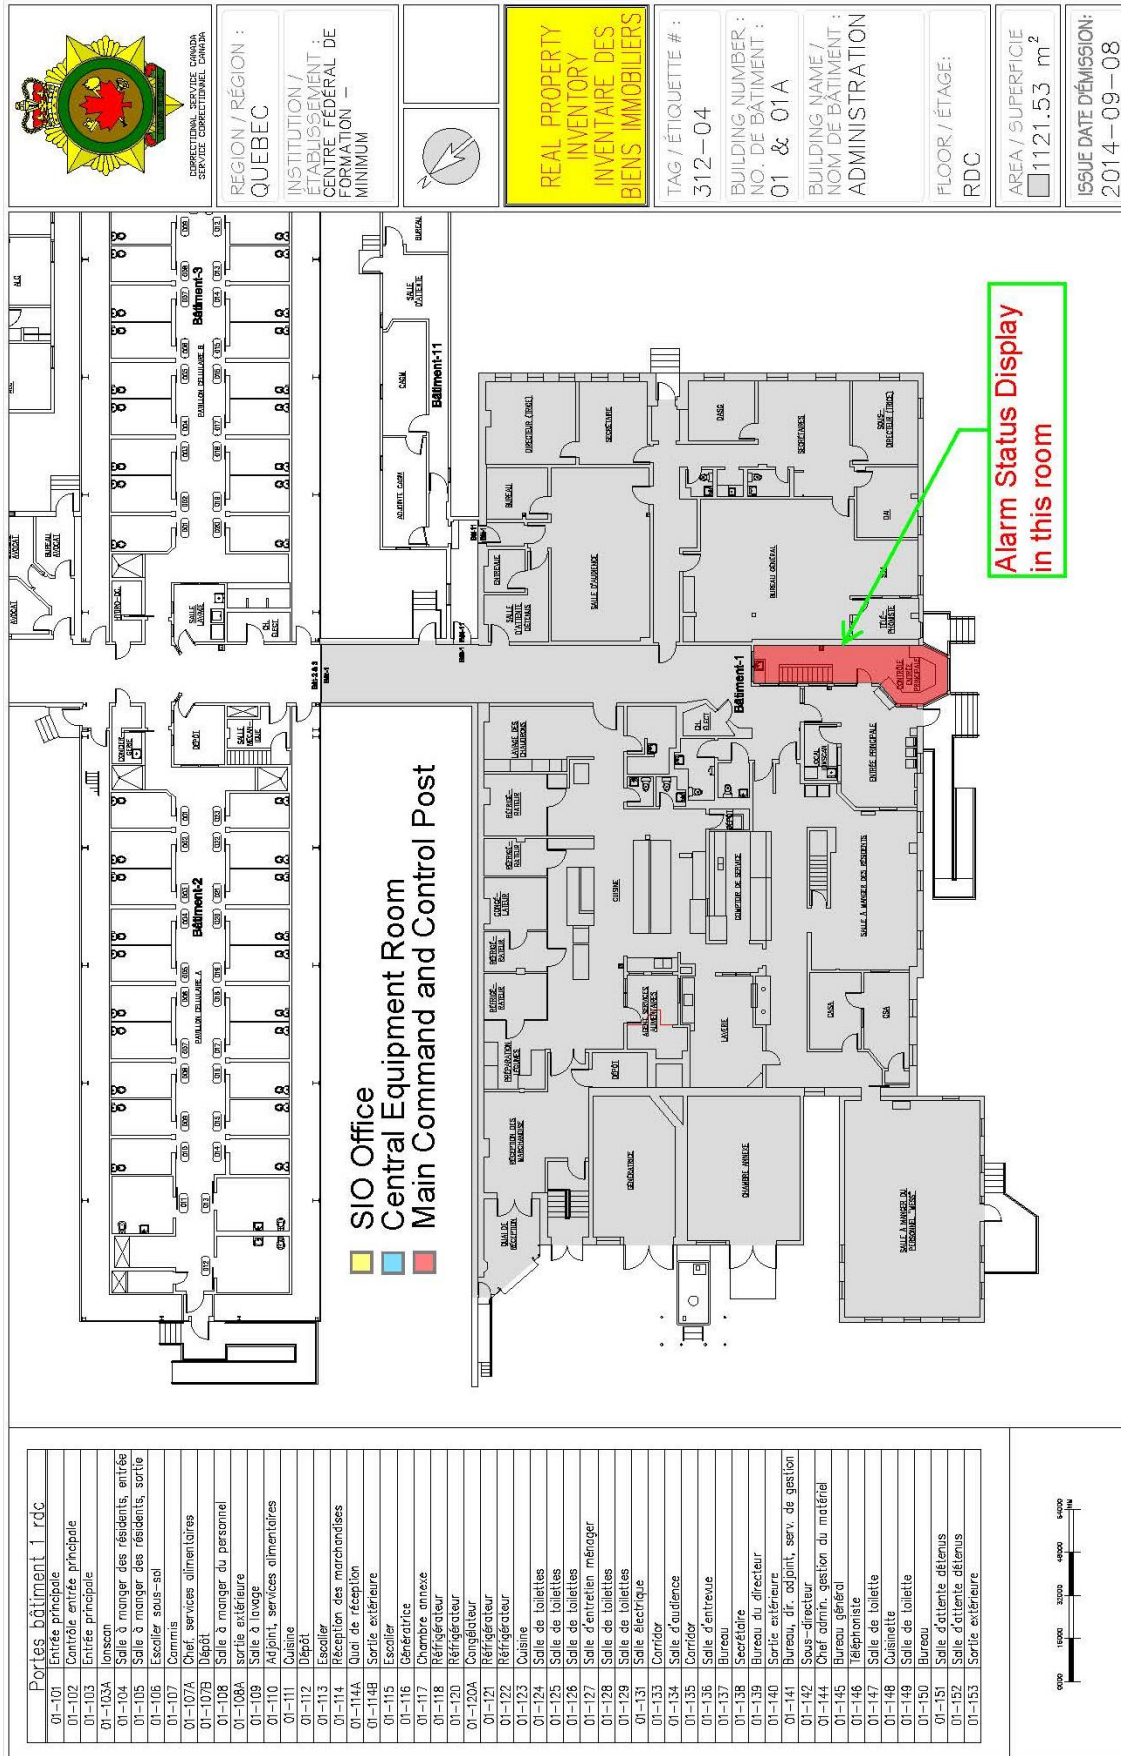

Joliette Institution


400 Marsolais Street
Joliette, Quebec
J6E 8V4

NOTES


One partition
One keypad
One door contact
One room
Alarm panel in partition

Statement of Work – SIO Alarm Systems – Quebec Region



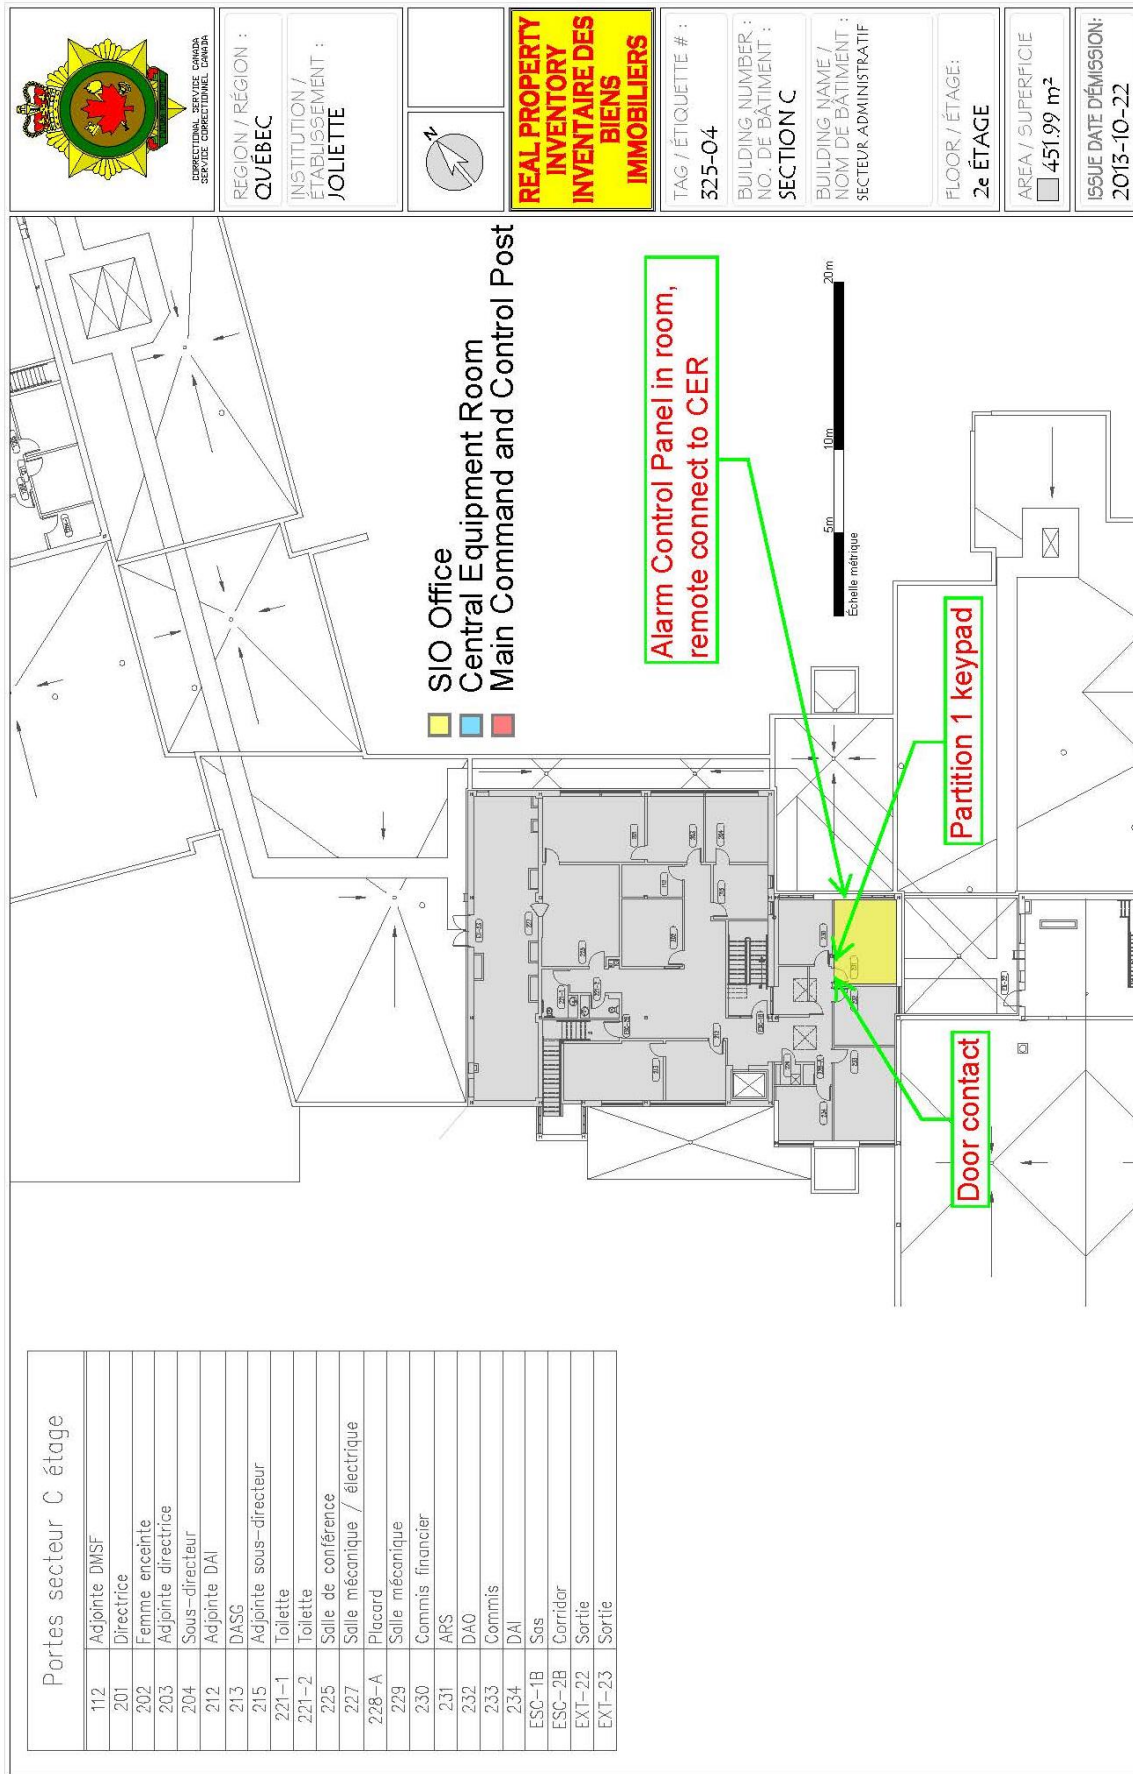

	REGION / RÉGION : QUÉBEC		REAL PROPERTY INVENTORY INVENTAIRE DES BIENS IMMOBILIERS	TAG / ÉTIQUETTE # : 325-04	BUILDING NUMBER : NO. DE BÂTIMENT : SECTION F	BUILDING NAME / NOM DE BÂTIMENT : UNITÉ MAX	FLOOR / ÉTAGE : REZ-DE-CHAUSS	AREA / SUPERFICIE 1756.11 m ²	ISSUE DATE D'ÉMISSION: 2014-10-30
	INSTITUTION / ÉTABLISSEMENT : JOLIETTE			TAG / ÉTIQUETTE # : 325-04	BUILDING NAME / NOM DE BÂTIMENT : UNITÉ MAX	FLOOR / ÉTAGE : REZ-DE-CHAUSS	AREA / SUPERFICIE 1756.11 m ²	ISSUE DATE D'ÉMISSION: 2014-10-30	

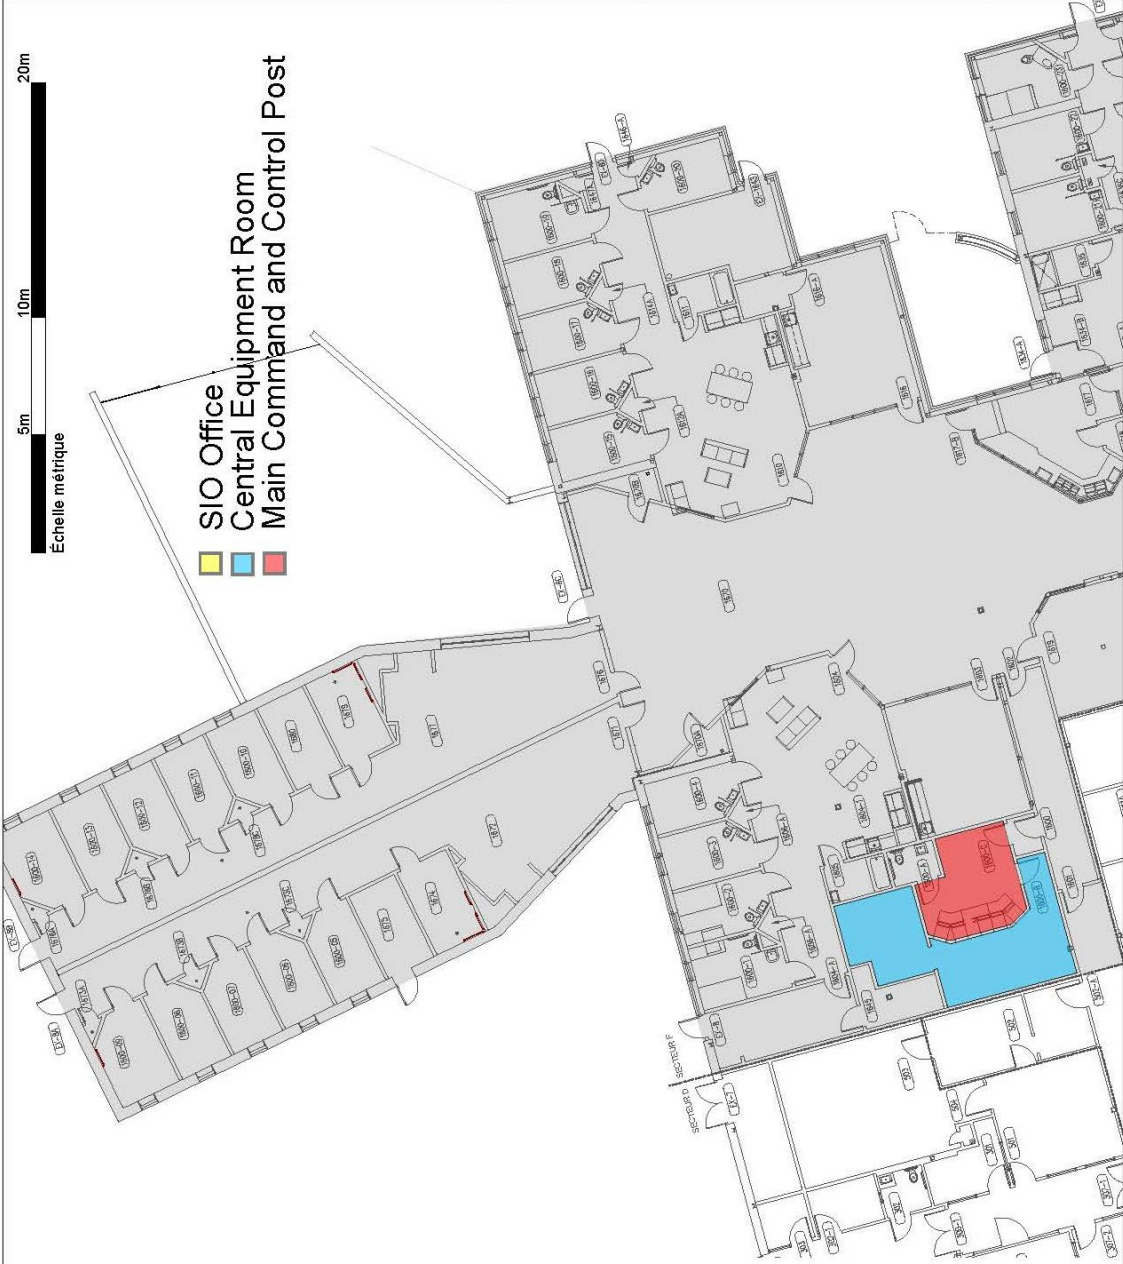


Portes secteur F	
1600	Vestibule MCPP
1600-A	Toilette
1600-B	Salle de services
1600-C	MCPP
1600-1	Cellules
1600-2	Porte corridor entrée du max.
1600-3	Hall central du max.
1600-4	Sortie
1600-5	Atelier de soudure USNF
1600-6	Atelier de soudure USNF
1600-7	Atelier de soudure USNF
1600-8	Salle de bain
1600-9	Puit mécanique
1600-10	Puit mécanique
1600-11	Puit mécanique
1600-12	Puit mécanique
1600-13	Puit mécanique
1600-14	Puit mécanique
1600-15	Puit mécanique
1600-16	Puit mécanique
1600-17	Puit mécanique
1600-18	Puit mécanique
1600-19	Puit mécanique
1600-20	Puit mécanique
1600-21	Puit mécanique
1600-22	Puit mécanique
1600-23	Puit mécanique
1600-24	Puit mécanique
1600-25	Puit mécanique
1600-26	Puit mécanique
1600-27	Puit mécanique
1600-28	Puit mécanique
1600-29	Puit mécanique
1600-30	Puit mécanique
1600-31	Puit mécanique
1600-32	Puit mécanique
1600-33	Puit mécanique
1600-34	Puit mécanique
1600-35	Puit mécanique
1600-36	Puit mécanique
1600-37	Puit mécanique
1600-38	Puit mécanique
1600-39	Puit mécanique
1600-40	Puit mécanique
1600-41	Puit mécanique
1600-42	Puit mécanique
1600-43	Puit mécanique
1600-44	Puit mécanique
1600-45	Puit mécanique
1600-46	Puit mécanique
1600-47	Puit mécanique
1600-48	Puit mécanique
1600-49	Puit mécanique
1600-50	Puit mécanique
1600-51	Puit mécanique
1600-52	Puit mécanique
1600-53	Puit mécanique
1600-54	Puit mécanique
1600-55	Puit mécanique
1600-56	Puit mécanique
1600-57	Puit mécanique
1600-58	Puit mécanique
1600-59	Puit mécanique
1600-60	Puit mécanique
1600-61	Puit mécanique
1600-62	Puit mécanique
1600-63	Puit mécanique
1600-64	Puit mécanique
1600-65	Puit mécanique
1600-66	Puit mécanique
1600-67	Puit mécanique
1600-68	Puit mécanique
1600-69	Puit mécanique


Laferrière CCC

202 St-Georges Street
St-Jérôme, QC
J7Z 4Z9

NOTES

One partition
One keypad
One door contact
One room
Alarm panel in Common Equipment Room
Alarm status display in Main Reception

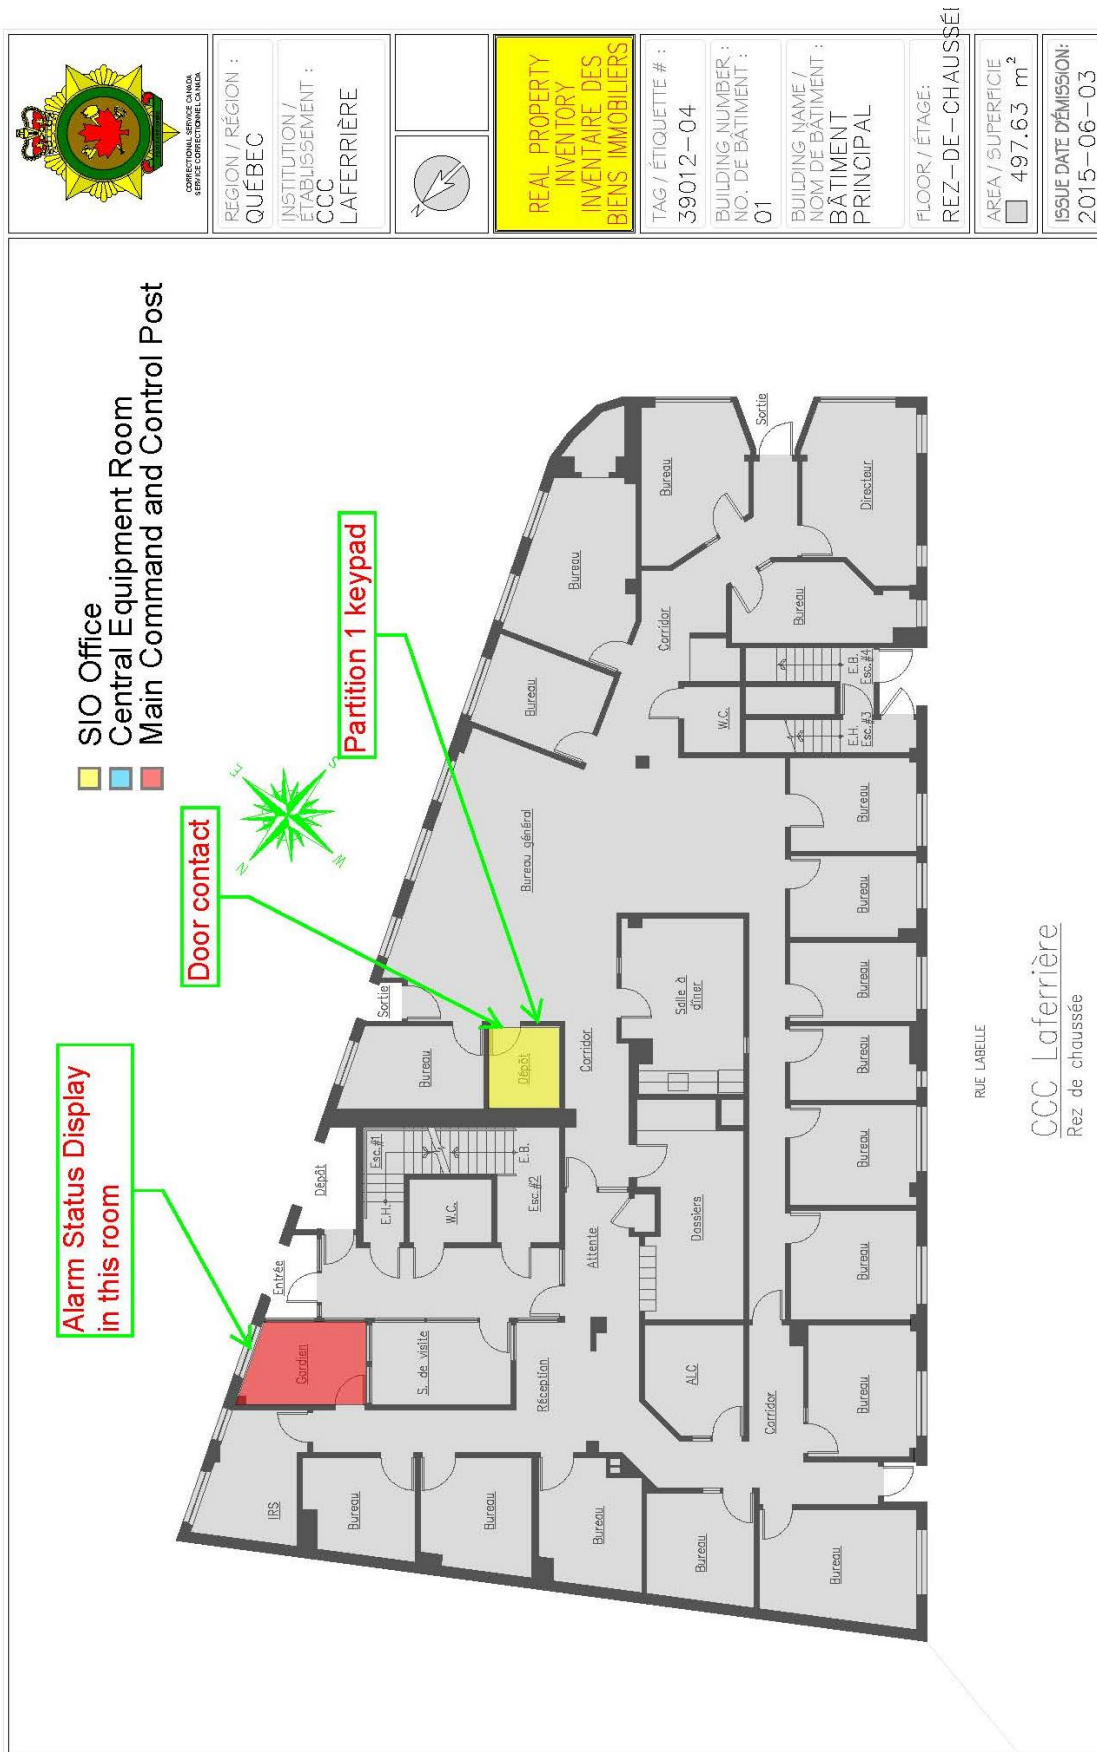

 <p style="font-size: 8px;">SERVICE DE PROTECTION INCENDIE VILLE DE QUÉBEC</p>	RÉGION / RÉGION : QUÉBEC	INSTITUTION / ÉTABLISSEMENT : CCC LAFERRIÈRE		REAL PROPERTY INVENTORY / INVENTAIRE DES BIENS IMMOBILIERS	TAG / ÉTIQUETTE # : 39012-04	BUILDING NUMBER / NO. DE BÂTIMENT : 01	BUILDING NAME / NOM DE BÂTIMENT : BÂTIMENT PRINCIPAL	FLOOR / ÉTAGE : SOUS-SOL	AREA / SUPERFICIE : 523.34 m ²	ISSUE DATE D'ÉMISSION : 2015-06-03
---	------------------------------------	--	---	--	---------------------------------	---	---	-----------------------------	--	---------------------------------------

SIO Office

Central Equipment Room

Main Command and Control Post





RUE LABELLE

CCC Laferrière

Sous-sol

La Macaza Institution

321 Chemin de l'Aéroport
La Macaza, Quebec
J0T 1R0


NOTES


One partition
One keypad
One door contact
Three rooms
Alarm panel in partition

Statement of Work – SIO Alarm Systems – Quebec Region



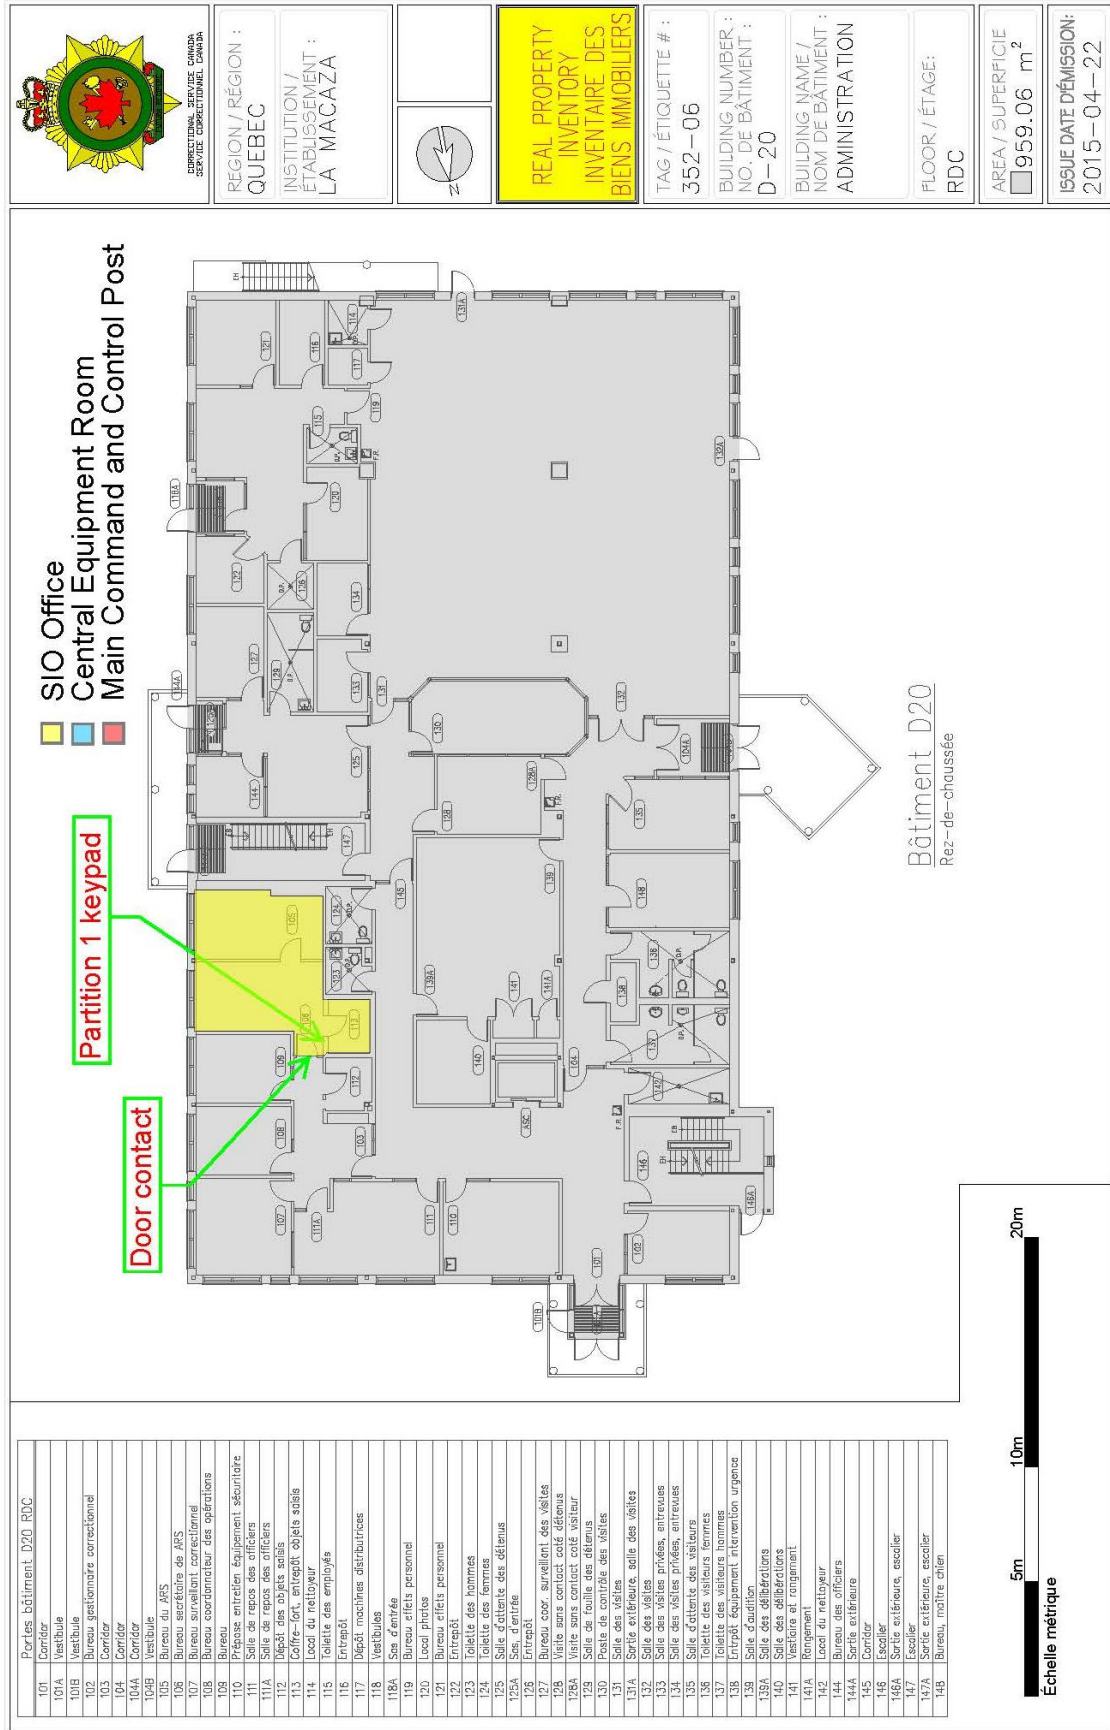


Statement of Work – SIO Alarm Systems – Quebec Region

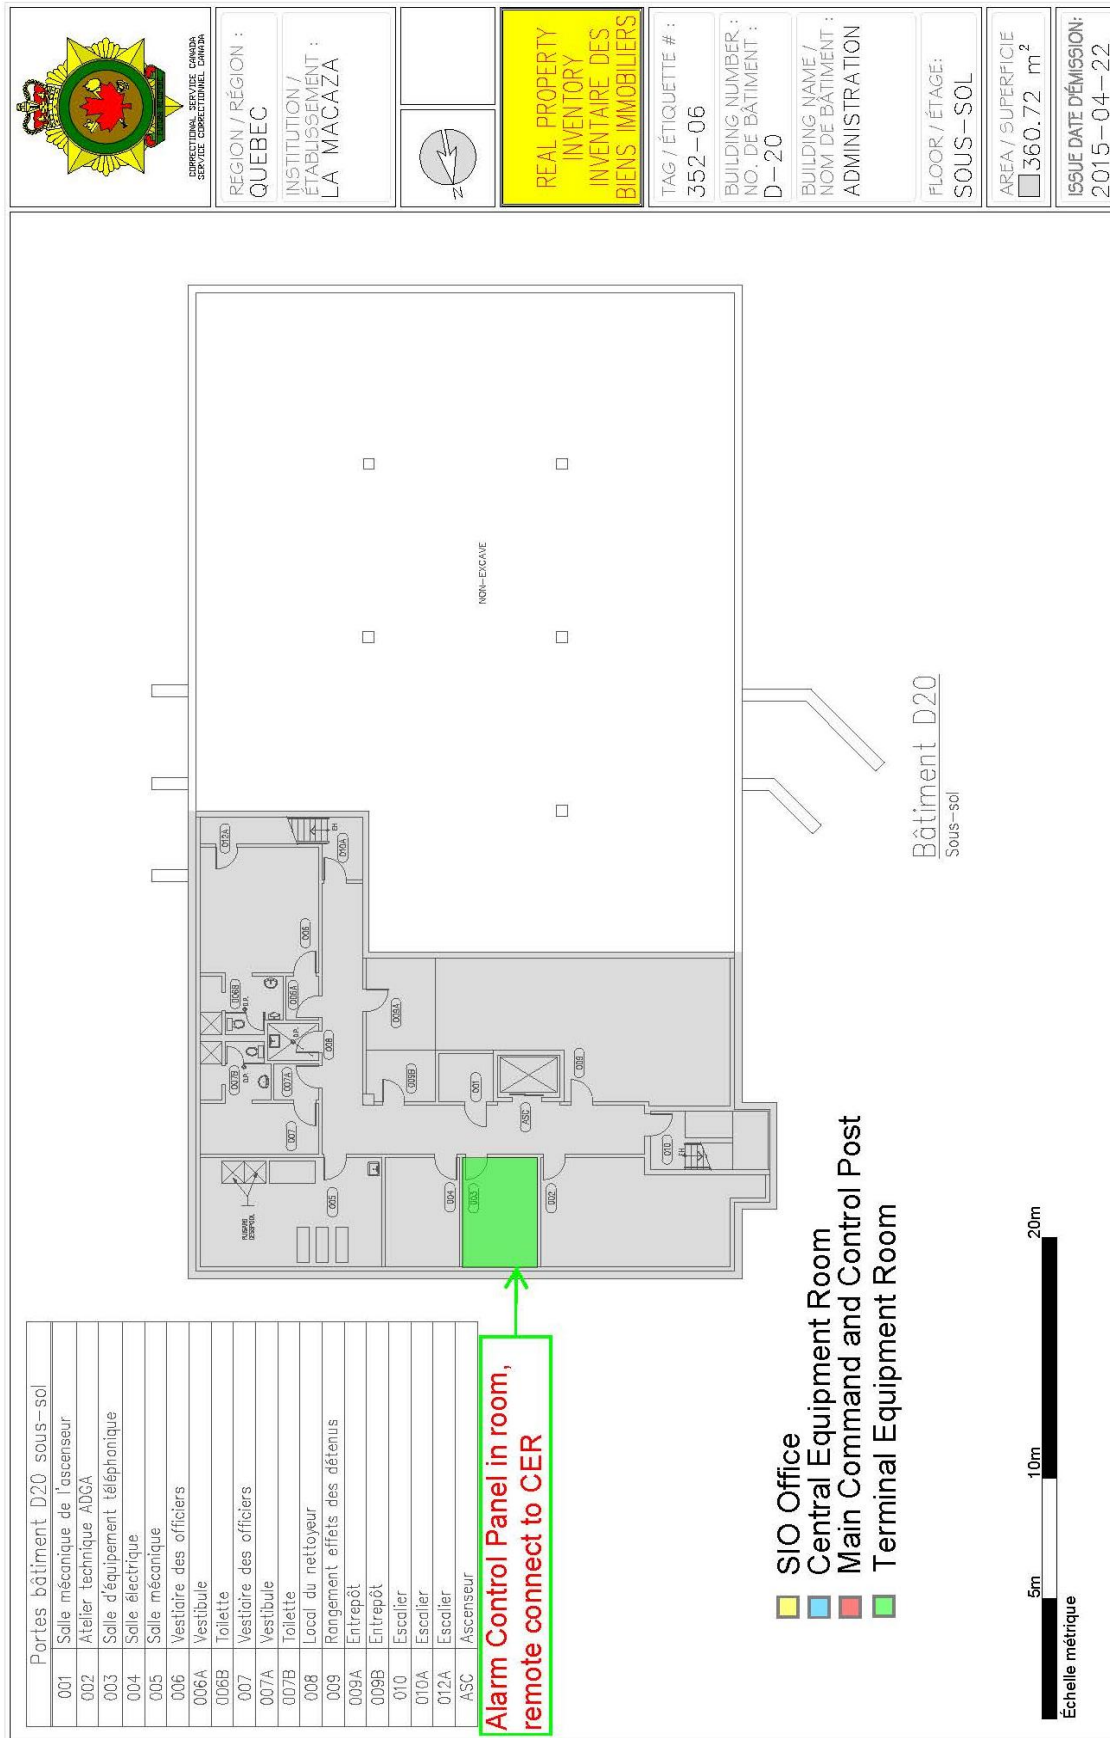



Statement of Work – SIO Alarm Systems – Quebec Region

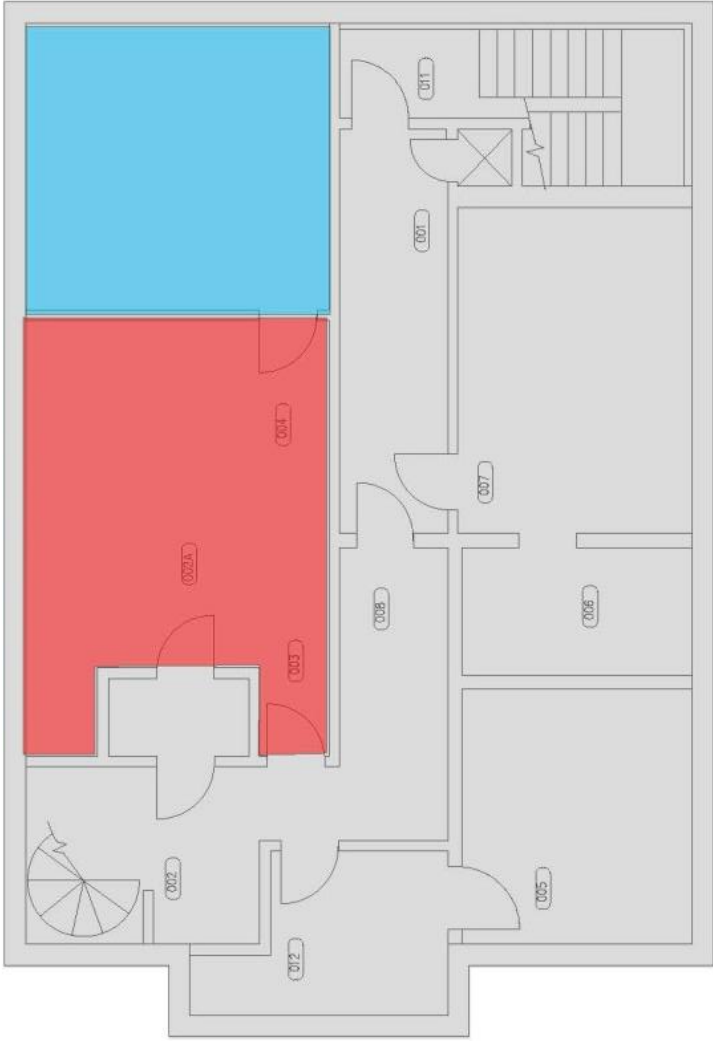 <p>OPÉRATIONAL SERVICES DIVISION SERVICES OPÉRATIONNELS, DIVISION</p>	<p>REGION / RÉGION : QUEBEC</p> <p>INSTITUTION / ÉTABLISSEMENT : LA MACAZA</p>		<p>REAL PROPERTY INVENTORY INVENTAIRE DES BIENS IMMOBILIERS</p>	<p>TAG / ÉTIQUETTE # : 352-04</p>	<p>BUILDING NUMBER / NO. DE BÂTIMENT : M-17</p>	<p>BUILDING NAME / NOM DE BÂTIMENT : POTERNE</p>	<p>FLOOR / ÉTAGE : SOUS-SOL</p>	<p>AREA / SUPERFICIE 140.24 m²</p>	<p>ISSUE DATE DÉMISSION: 2015-11-19</p>																								
<div style="display: flex; justify-content: space-between;"> <div data-bbox="207 682 300 1192" style="width: 20%;"> <p>SIO Office</p> <p>Central Equipment Room</p> <p>Main Command and Control Post</p> </div> <div data-bbox="344 430 1052 1465" style="width: 80%;">  </div> </div>																																	
<table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">Porte M-17 Sous-sol</th> </tr> </thead> <tbody> <tr><td>001</td><td>Vide technique</td></tr> <tr><td>002</td><td>Toilette</td></tr> <tr><td>002A</td><td>Toilette</td></tr> <tr><td>003</td><td>MCCP</td></tr> <tr><td>004</td><td>Équipement informatique MCCP</td></tr> <tr><td>005</td><td>Armurie</td></tr> <tr><td>006</td><td>Salle mécanique</td></tr> <tr><td>007</td><td>Salle mécanique</td></tr> <tr><td>008</td><td>Corridor</td></tr> <tr><td>011</td><td>Escalier</td></tr> <tr><td>012</td><td>Sas, armurerie</td></tr> </tbody> </table>										Porte M-17 Sous-sol		001	Vide technique	002	Toilette	002A	Toilette	003	MCCP	004	Équipement informatique MCCP	005	Armurie	006	Salle mécanique	007	Salle mécanique	008	Corridor	011	Escalier	012	Sas, armurerie
Porte M-17 Sous-sol																																	
001	Vide technique																																
002	Toilette																																
002A	Toilette																																
003	MCCP																																
004	Équipement informatique MCCP																																
005	Armurie																																
006	Salle mécanique																																
007	Salle mécanique																																
008	Corridor																																
011	Escalier																																
012	Sas, armurerie																																

Marcel-Caron CCC

825 Kirouac Street
Quebec, QC
G1N 2J7

NOTES

One partition
One keypad
One door contact
One room
Alarm panel in Central Equipment Room
Alarm status display in Main Reception

Statement of Work – SIO Alarm Systems – Quebec Region

 <p>DEPARTMENT OF PUBLIC SAFETY AND SECURITY SERVICES CORRECTIFNEL QUÉBEC</p>	REGION / RÉGION : QUÉBEC	INSTITUTION / ÉTABLISSEMENT : CCC MARCEL CARON		REAL PROPERTY INVENTORY INVENTAIRE DES BIENS IMMOBILIERS	TAG / ÉTIQUETTE # : 39003-04	BUILDING NUMBER / NO. DE BÂTIMENT : 01	BUILDING NAME / NOM DE BÂTIMENT : BÂTIMENT PRINCIPAL	FLOOR / ÉTAGE : 2E ÉTAGE	AREA / SUPERFICIE : 756.65 m²	ISSUE DATE / DÉMISSION : 2015-09-04
--	------------------------------------	--	---	---	--	--	--	------------------------------------	--	---

Étage	
300	Vestibule
301 à 303	Corridor
304 à 315	Bureau
316	Corridor
317 à 318	Rangement
319 à 329	Rangement
330	Consultation publique
331	Toilette
332	Consiergerie
333	Local électrique
334 à 336	Toilette
337	Salle d'employés
338	Local électrique
339	Local électrique
340	Local électrique
341	Local électrique
342	Local électrique
343	Local électrique
344	Local électrique
345	Local électrique
346	Local électrique
347	Local électrique
348	Local électrique
349	Local électrique
350	Local électrique
351	Local électrique
352	Local électrique
353	Local électrique
354	Local électrique
355	Local électrique
356	Local électrique
357	Local électrique
358	Local électrique
359	Local électrique
360	Local électrique
361	Local électrique
362	Local électrique
363	Local électrique
364	Local électrique
365	Local électrique
366	Local électrique
367	Local électrique
368	Local électrique
369	Local électrique
370	Local électrique
371	Local électrique
372	Local électrique
373	Local électrique
374	Local électrique
375	Local électrique
376	Local électrique
377	Local électrique
378	Local électrique
379	Local électrique
380	Local électrique
381	Local électrique
382	Local électrique
383	Local électrique
384	Local électrique
385	Local électrique
386	Local électrique
387	Local électrique
388	Local électrique
389	Local électrique
390	Local électrique
391	Local électrique
392	Local électrique
393	Local électrique
394	Local électrique
395	Local électrique
396	Local électrique
397	Local électrique
398	Local électrique
399	Local électrique
400	Local électrique



Rue Kings
CCC Marcel Caron
Étage

Alarm Control Panel in this room

Door contact

Partition 1 keypad

SIO Office

Central Equipment Room

Main Command and Control Post



OPERATIONAL SERVICE CANADA
SERVICE DIRECTIONNEL CANADA

REGION / RÉGION :
QUÉBEC

INSTITUTION /
ÉTABLISSEMENT :
CCC
MARCEL
CARON



REAL PROPERTY
INVENTORY
INVENTAIRE DES
BIENS IMMOBILIERS

TAG / ÉTIQUETTE # :
39003-04


BUILDING NUMBER :
NO. DE BÂTIMENT :
01

BUILDING NAME /
NOM DE BÂTIMENT :
BÂTIMENT
PRINCIPAL

FLOOR / ÉTAGE:
REZ-DE-CHAUSSEE

AREA / SUPERFICIE
765.29 m²

ISSUE DATE D'ÉMISSION:
2015-09-04

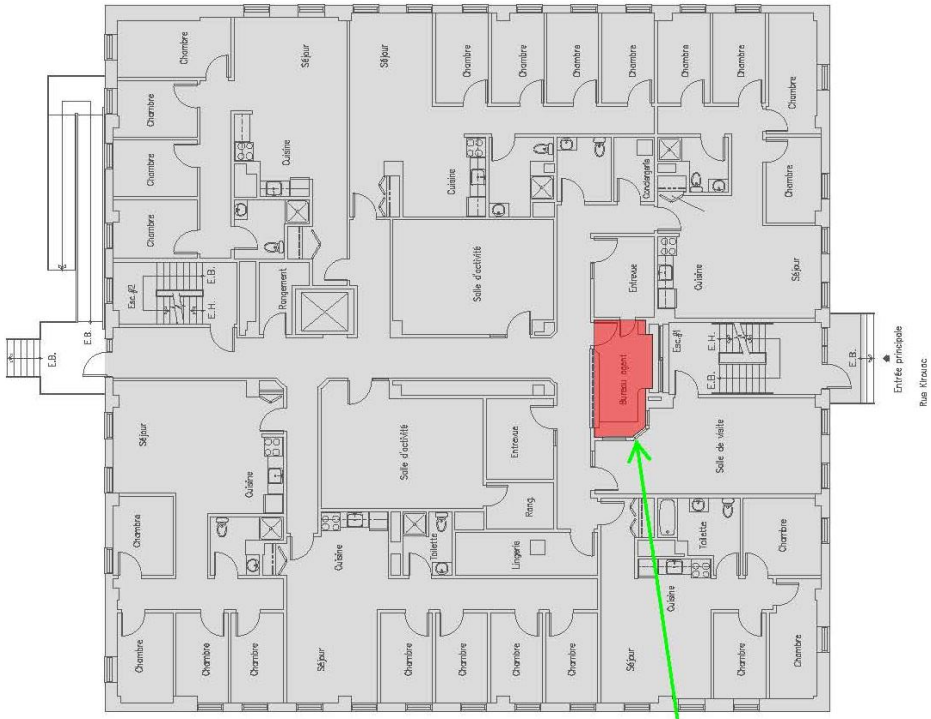

CCC Marcel Caron
Rez-de-chaussée

RDC	
100	Entrée
200	Bureau opérateur
210A	Entrée
201	Salle de visite
202	Cuisine
203	Sanitaires
210, 211, 213	Chambres
214	Toilette
215	Cuisine - séjour
218	Rangement
219	Toilette
219 à 227	Chambre
228	Toilette
229	Rangement
230	Cuisine - séjour
231	Sanitaires
232	Salle d'attente
235	Cuisine - séjour
236	Chambre
237	Toilette
238	Rangement
239 à 240	Chambre
242	Lingerie
243	Chambre
244	Salle d'attente
245	Rangement
246	Cuisine - séjour
249	Toilette
250 à 253	Chambre
254	Cuisine - séjour
257	Toilette
258 à 261	Chambre
262	Toilette
263	Sanitaires
264	Salle d'attente
265	Rangement
Esc-1	Escalier #1
Esc-2	Escalier #2

**Alarm Status Display
in this room**

- SIO Office
- Central Equipment Room
- Main Command and Control Post


Port Cartier Institution

1 Chemin de l'Aéroport
Port-Cartier, Quebec
G5B 2W2


NOTES

One partition
One keypad
Three door contacts (one double door + one single door)
Five rooms
Alarm panel in Central Equipment Room

Statement of Work – SIO Alarm Systems – Quebec Region

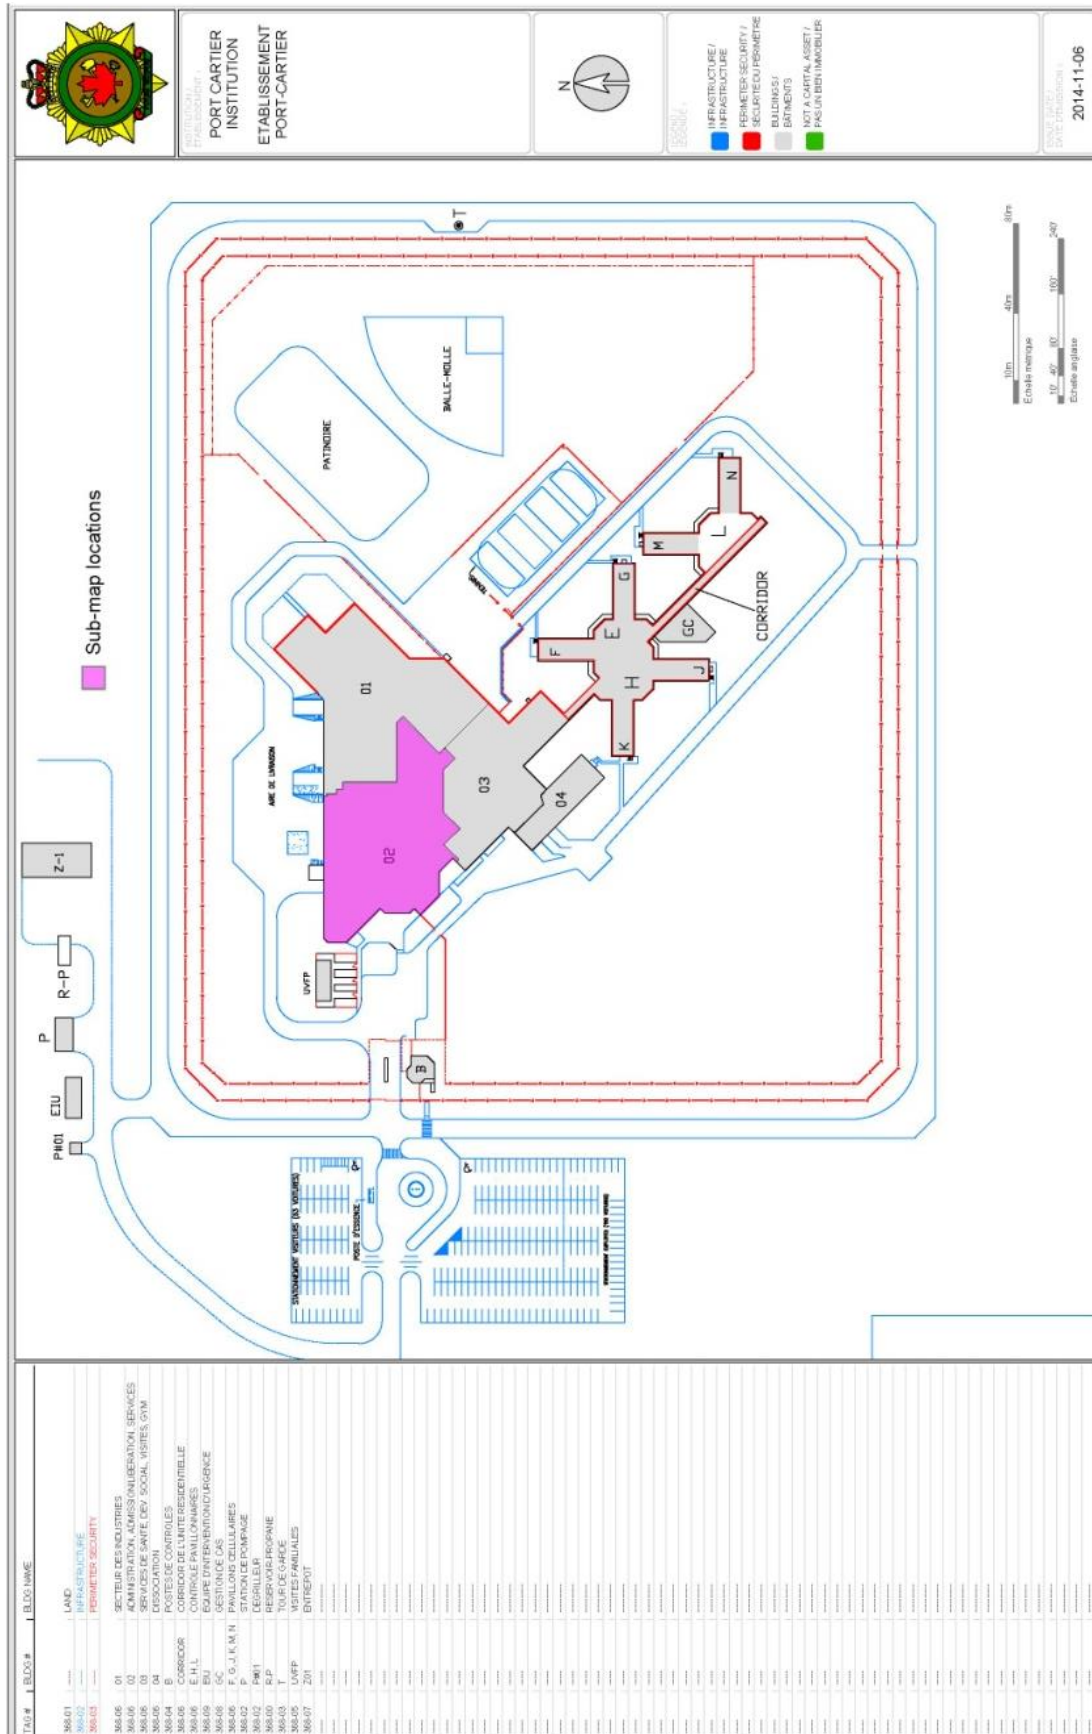

TAG #	BLOS #	BLOS NAME
385001		LIAC
385002		LIAC
385003		PERIMETER SECURITY
385004	01	SECTEUR DES INDUSTRIES
385005	02	COMMUNICATIION, ACCES (SANTÉ, SERVICES
385006	03	SECURITE PERIMETRE
385007	04	DISSOCIATION
385008	B	POSTES DE CONTRÔLES
385009	C	CORRIDOR DE LIMITE RESIDENTIELLE
385010	E, H, L	ÉQUIPE D'INTERVENTION/LORANGE
385011	GC	GESTION DES CAS
385012	F, G, J, K, M, N	PAVILLONS CELLAIRES
385013	P	STATION DE POMPAGE
385014	R, P	RESERVOIR
385015	T	TOUR DE GÂCHE
385016	U, V, W	VISITES FAMILIALES
385017	Z01	ENTREPOS

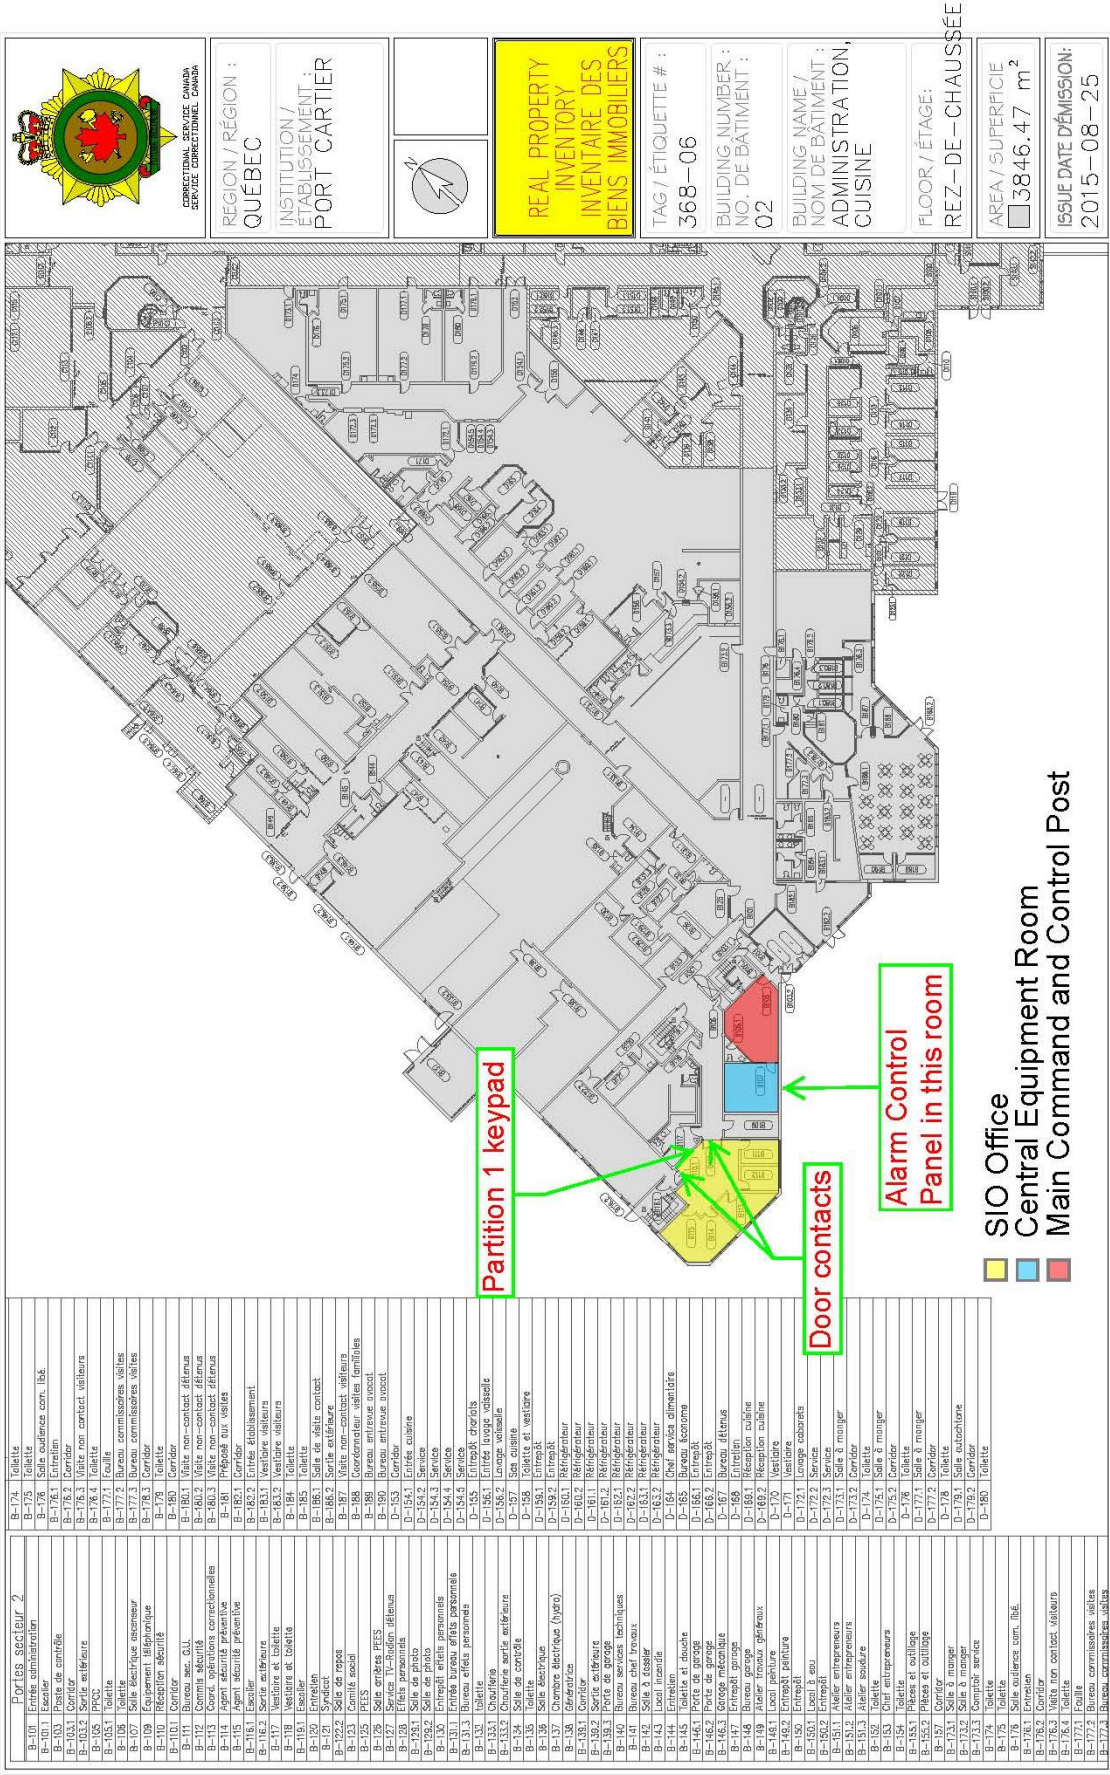

REGION / RÉGION :
QUÉBEC

INSTITUTION / ÉTABLISSEMENT :
PORT CARTIER

REAL PROPERTY INVENTORY / INVENTAIRE DES BIENS IMMOBILIERS

TAG / ÉTIQUETTE # :
368-06

BUILDING NUMBER / NO. DE BÂTIMENT :
02

BUILDING NAME / NOM DE BÂTIMENT :
ADMINISTRATION, CUISINE

FLOOR / ÉTAGE :
REZ-DE-CHAUSSEE

AREA / SUPERFICIE :
3846.47 m²

ISSUE DATE DÉMISSION :
2015-08-25

Portes Secteur 2	
B-100	Entrée administration
B-101.1	Escalier
B-103	Plaque de entrée
B-103.1	Corridor
B-105	Entrée
B-105.1	TOILETTE
B-106	Toilette
B-107	Plaque de entrée
B-108	Plaque de entrée
B-109	Plaque de entrée
B-110	Plaque de entrée
B-110.1	Corridor
B-111	Bureau sec. G.U.
B-112	Commissariat
B-113	Commissariat
B-114	Appel sécurité préventive
B-115	Appel sécurité préventive
B-116.1	Escalier
B-117	Escalier
B-118	Escalier
B-119.1	Escalier
B-120	Entrée
B-121	Entrée
B-122	Entrée
B-123	Commissariat
B-125	PEES
B-126	PEES
B-127	PEES
B-128	PEES
B-129	PEES
B-130	PEES
B-131	PEES
B-132	PEES
B-133	PEES
B-134	PEES
B-135	PEES
B-136	PEES
B-137	PEES
B-138	PEES
B-139	PEES
B-140	PEES
B-141	PEES
B-142	PEES
B-143	PEES
B-144	PEES
B-145	PEES
B-146	PEES
B-147	PEES
B-148	PEES
B-149	PEES
B-150	PEES
B-151	PEES
B-152	PEES
B-153	PEES
B-154	PEES
B-155	PEES
B-156	PEES
B-157	PEES
B-158	PEES
B-159	PEES
B-160	PEES
B-161	PEES
B-162	PEES
B-163	PEES
B-164	PEES
B-165	PEES
B-166	PEES
B-167	PEES
B-168	PEES
B-169	PEES
B-170	PEES
B-171	PEES
B-172	PEES
B-173	PEES
B-174	PEES
B-175	PEES
B-176	PEES
B-177	PEES
B-178	PEES
B-179	PEES
B-180	PEES
B-181	PEES
B-182	PEES
B-183	PEES
B-184	PEES
B-185	PEES
B-186	PEES
B-187	PEES
B-188	PEES
B-189	PEES
B-190	PEES
B-191	PEES
B-192	PEES
B-193	PEES
B-194	PEES
B-195	PEES
B-196	PEES
B-197	PEES
B-198	PEES
B-199	PEES
B-200	PEES
B-201	PEES
B-202	PEES
B-203	PEES
B-204	PEES
B-205	PEES
B-206	PEES
B-207	PEES
B-208	PEES
B-209	PEES
B-210	PEES
B-211	PEES
B-212	PEES
B-213	PEES
B-214	PEES
B-215	PEES
B-216	PEES
B-217	PEES
B-218	PEES
B-219	PEES
B-220	PEES
B-221	PEES
B-222	PEES
B-223	PEES
B-224	PEES
B-225	PEES
B-226	PEES
B-227	PEES
B-228	PEES
B-229	PEES
B-230	PEES
B-231	PEES
B-232	PEES
B-233	PEES
B-234	PEES
B-235	PEES
B-236	PEES
B-237	PEES
B-238	PEES
B-239	PEES
B-240	PEES
B-241	PEES
B-242	PEES
B-243	PEES
B-244	PEES
B-245	PEES
B-246	PEES
B-247	PEES
B-248	PEES
B-249	PEES
B-250	PEES
B-251	PEES
B-252	PEES
B-253	PEES
B-254	PEES
B-255	PEES
B-256	PEES
B-257	PEES
B-258	PEES
B-259	PEES
B-260	PEES
B-261	PEES
B-262	PEES
B-263	PEES
B-264	PEES
B-265	PEES
B-266	PEES
B-267	PEES
B-268	PEES
B-269	PEES
B-270	PEES
B-271	PEES
B-272	PEES
B-273	PEES
B-274	PEES
B-275	PEES
B-276	PEES
B-277	PEES
B-278	PEES
B-279	PEES
B-280	PEES
B-281	PEES
B-282	PEES
B-283	PEES
B-284	PEES
B-285	PEES
B-286	PEES
B-287	PEES
B-288	PEES
B-289	PEES
B-290	PEES
B-291	PEES
B-292	PEES
B-293	PEES
B-294	PEES
B-295	PEES
B-296	PEES
B-297	PEES
B-298	PEES
B-299	PEES
B-300	PEES

SIO Office
Central Equipment Room
Main Command and Control Post


Regional Reception Centre

246 Montée Gagnon
Sainte-Anne-de-Plaines, Quebec
J0N 1H0

NOTES

Two partitions
Two keypads
Three door contacts
Two rooms
Alarm panel in Central Equipment Room

Statement of Work – SIO Alarm Systems – Quebec Region

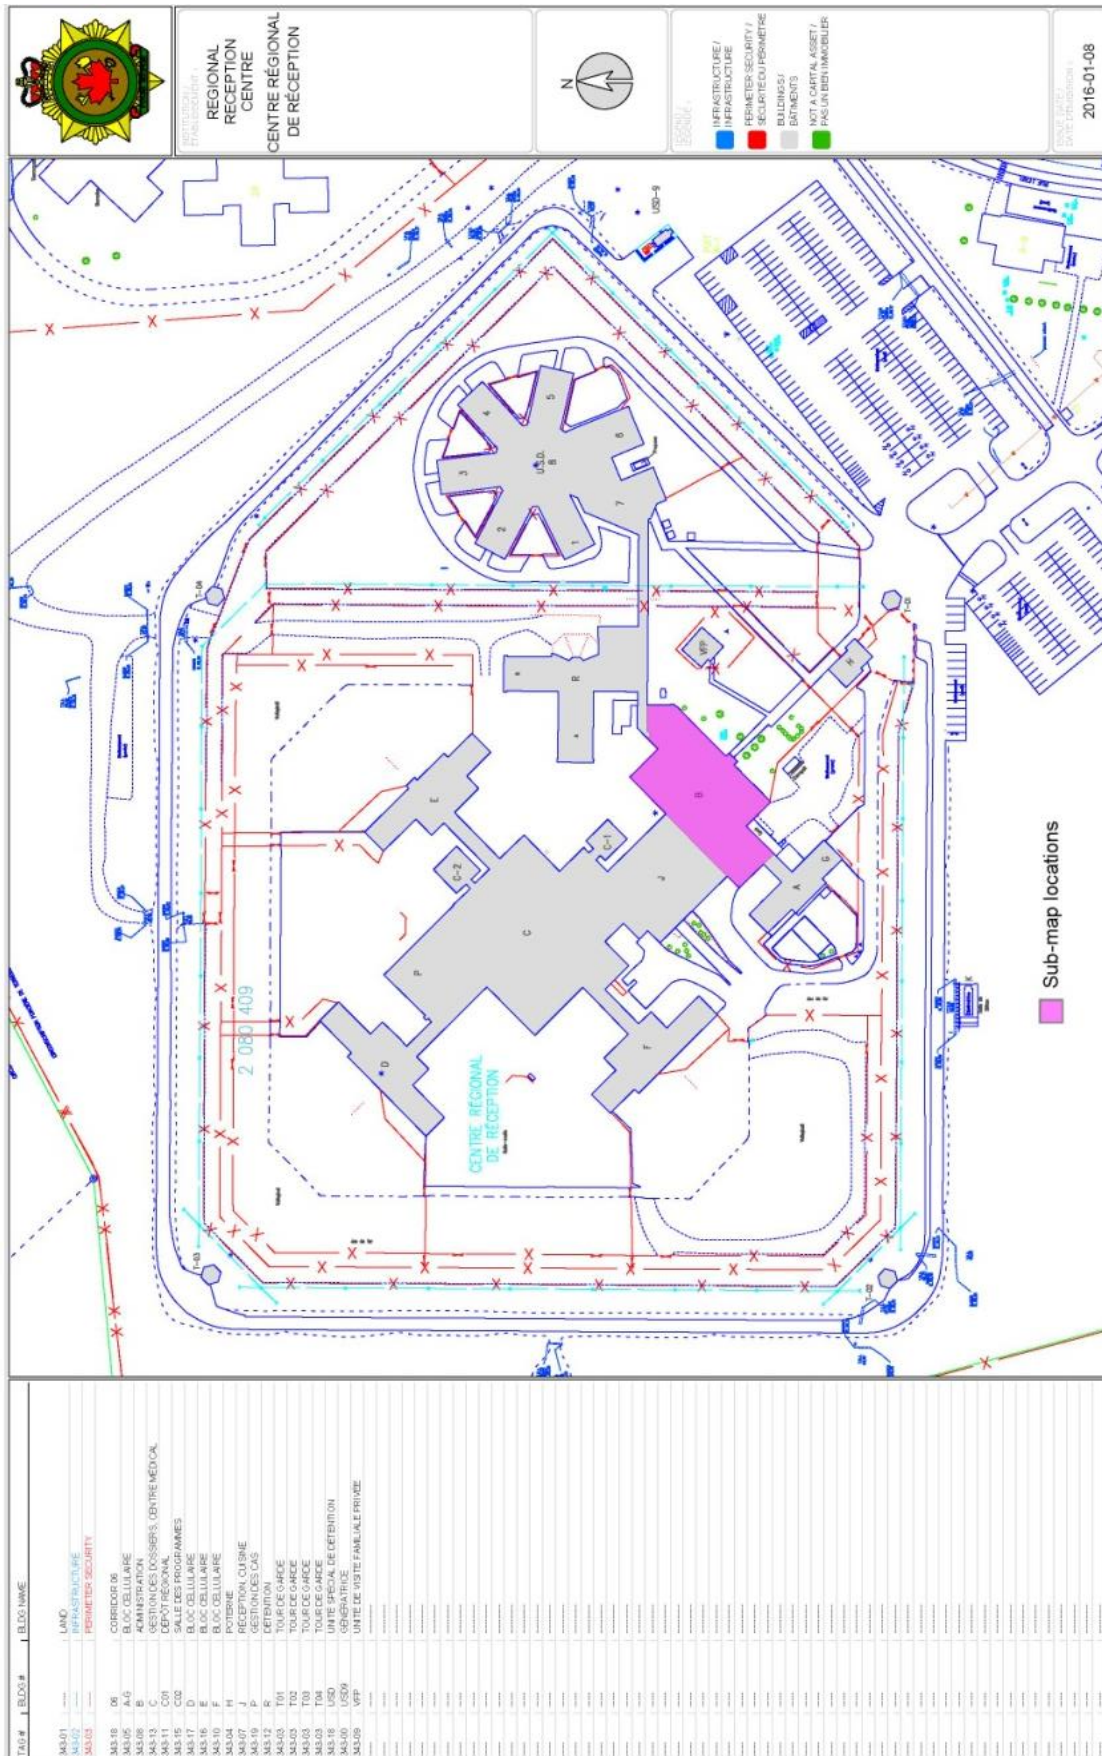

Statement of Work – SIO Alarm Systems – Quebec Region



ASSOCIATION DES SERVICES DE PROTECTION INCENDIE DU CANADA
CANADIAN FIRE SERVICE ASSOCIATION

REGION / RÉGION :
QUÉBEC

INSTITUTION / ÉTABLISSEMENT :
CENTRE RÉGIONAL DE RÉCEPTION



REAL PROPERTY INVENTORY
INVENTAIRE DES BIENS IMMOBILIERS

TAG / ÉTIQUETTE # :
343-08

BUILDING NUMBER :
NO. DE BÂTIMENT :
B


BUILDING NAME /
NOM DE BÂTIMENT :
ADMINISTRATION

FLOOR / ÉTAGE :
REZ-DE-CHAUSSÉE

AREA / SUPERFICIE
1693.26 m²

ISSUE DATE DÉMISSION:
2014-12-11

B100	US	US	US
B101	US	US	US
B102	US	US	US
B103	US	US	US
B104	US	US	US
B105	US	US	US
B106	US	US	US
B107	US	US	US
B108	US	US	US
B109	US	US	US
B110	US	US	US
B111	US	US	US
B112	US	US	US
B113	US	US	US
B114	US	US	US
B115	US	US	US
B116	US	US	US
B117	US	US	US
B118	US	US	US
B119	US	US	US
B120	US	US	US
B121	US	US	US
B122	US	US	US
B123	US	US	US
B124	US	US	US
B125	US	US	US
B126	US	US	US
B127	US	US	US
B128	US	US	US
B129	US	US	US
B130	US	US	US
B131	US	US	US
B132	US	US	US
B133	US	US	US
B134	US	US	US
B135	US	US	US
B136	US	US	US
B137	US	US	US
B138	US	US	US
B139	US	US	US
B140	US	US	US
B141	US	US	US
B142	US	US	US
B143	US	US	US
B144	US	US	US
B145	US	US	US
B146	US	US	US
B147	US	US	US
B148	US	US	US
B149	US	US	US
B150	US	US	US
B151	US	US	US
B152	US	US	US
B153	US	US	US
B154	US	US	US
B155	US	US	US
B156	US	US	US
B157	US	US	US
B158	US	US	US
B159	US	US	US
B160	US	US	US
B161	US	US	US
B162	US	US	US
B163	US	US	US
B164	US	US	US
B165	US	US	US
B166	US	US	US
B167	US	US	US
B168	US	US	US
B169	US	US	US
B170	US	US	US
B171	US	US	US
B172	US	US	US
B173	US	US	US
B174	US	US	US
B175	US	US	US
B176	US	US	US
B177	US	US	US
B178	US	US	US
B179	US	US	US
B180	US	US	US
B181	US	US	US
B182	US	US	US
B183	US	US	US
B184	US	US	US
B185	US	US	US
B186	US	US	US
B187	US	US	US
B188	US	US	US
B189	US	US	US
B190	US	US	US
B191	US	US	US
B192	US	US	US
B193	US	US	US
B194	US	US	US
B195	US	US	US
B196	US	US	US
B197	US	US	US
B198	US	US	US
B199	US	US	US
B200	US	US	US

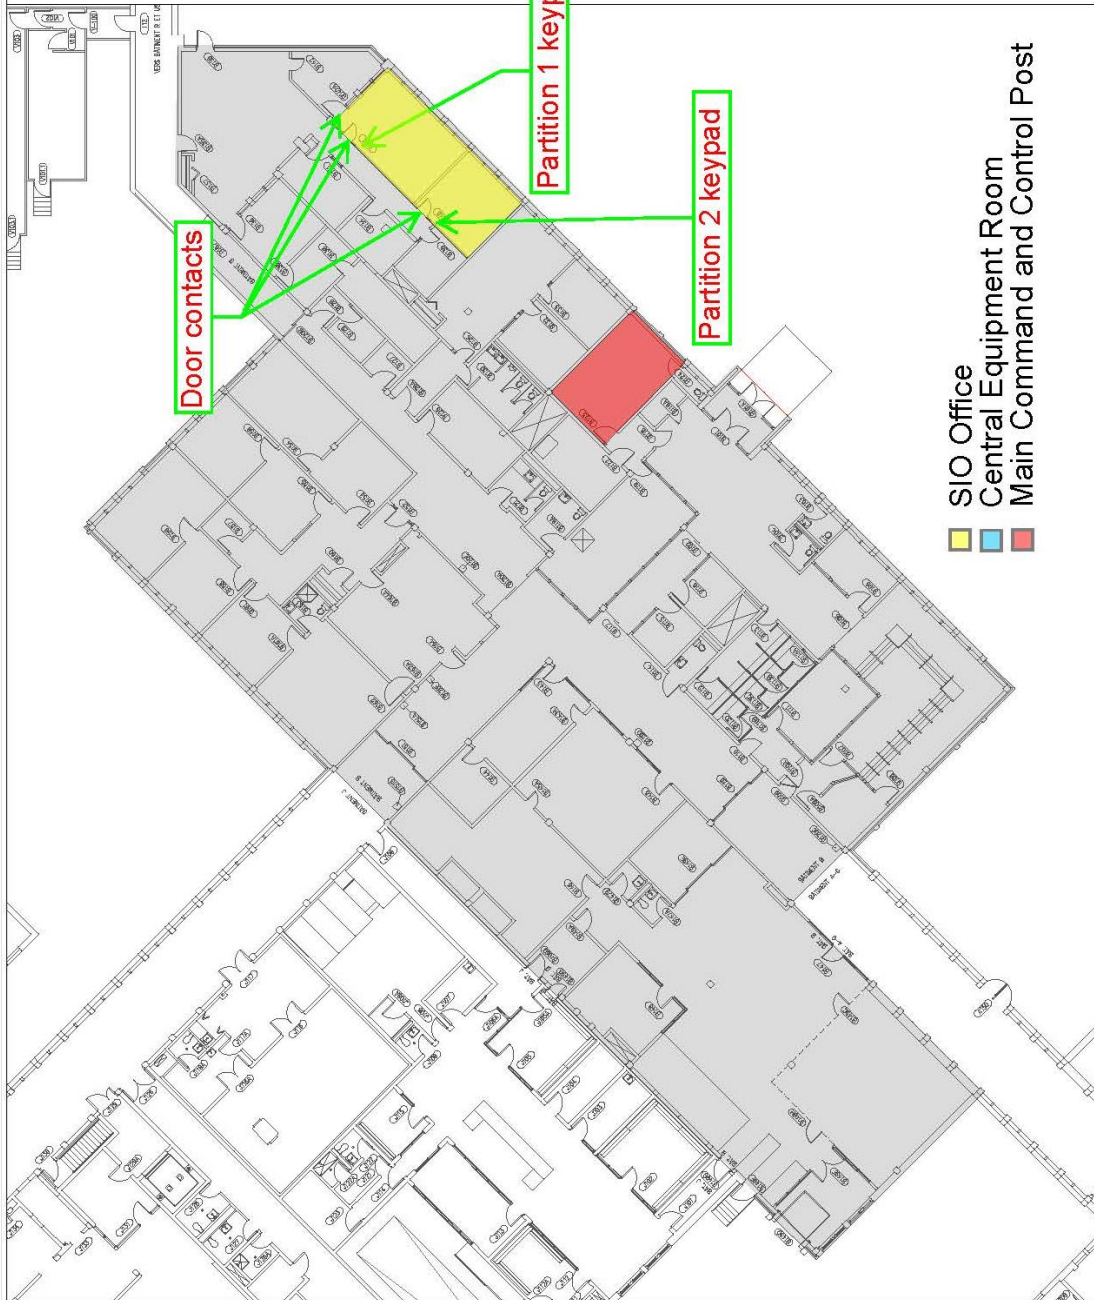

Statement of Work – SIO Alarm Systems – Quebec Region

