





LIGHTING DEMOLITION CID AREA
SCALE/ÉCHELLE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

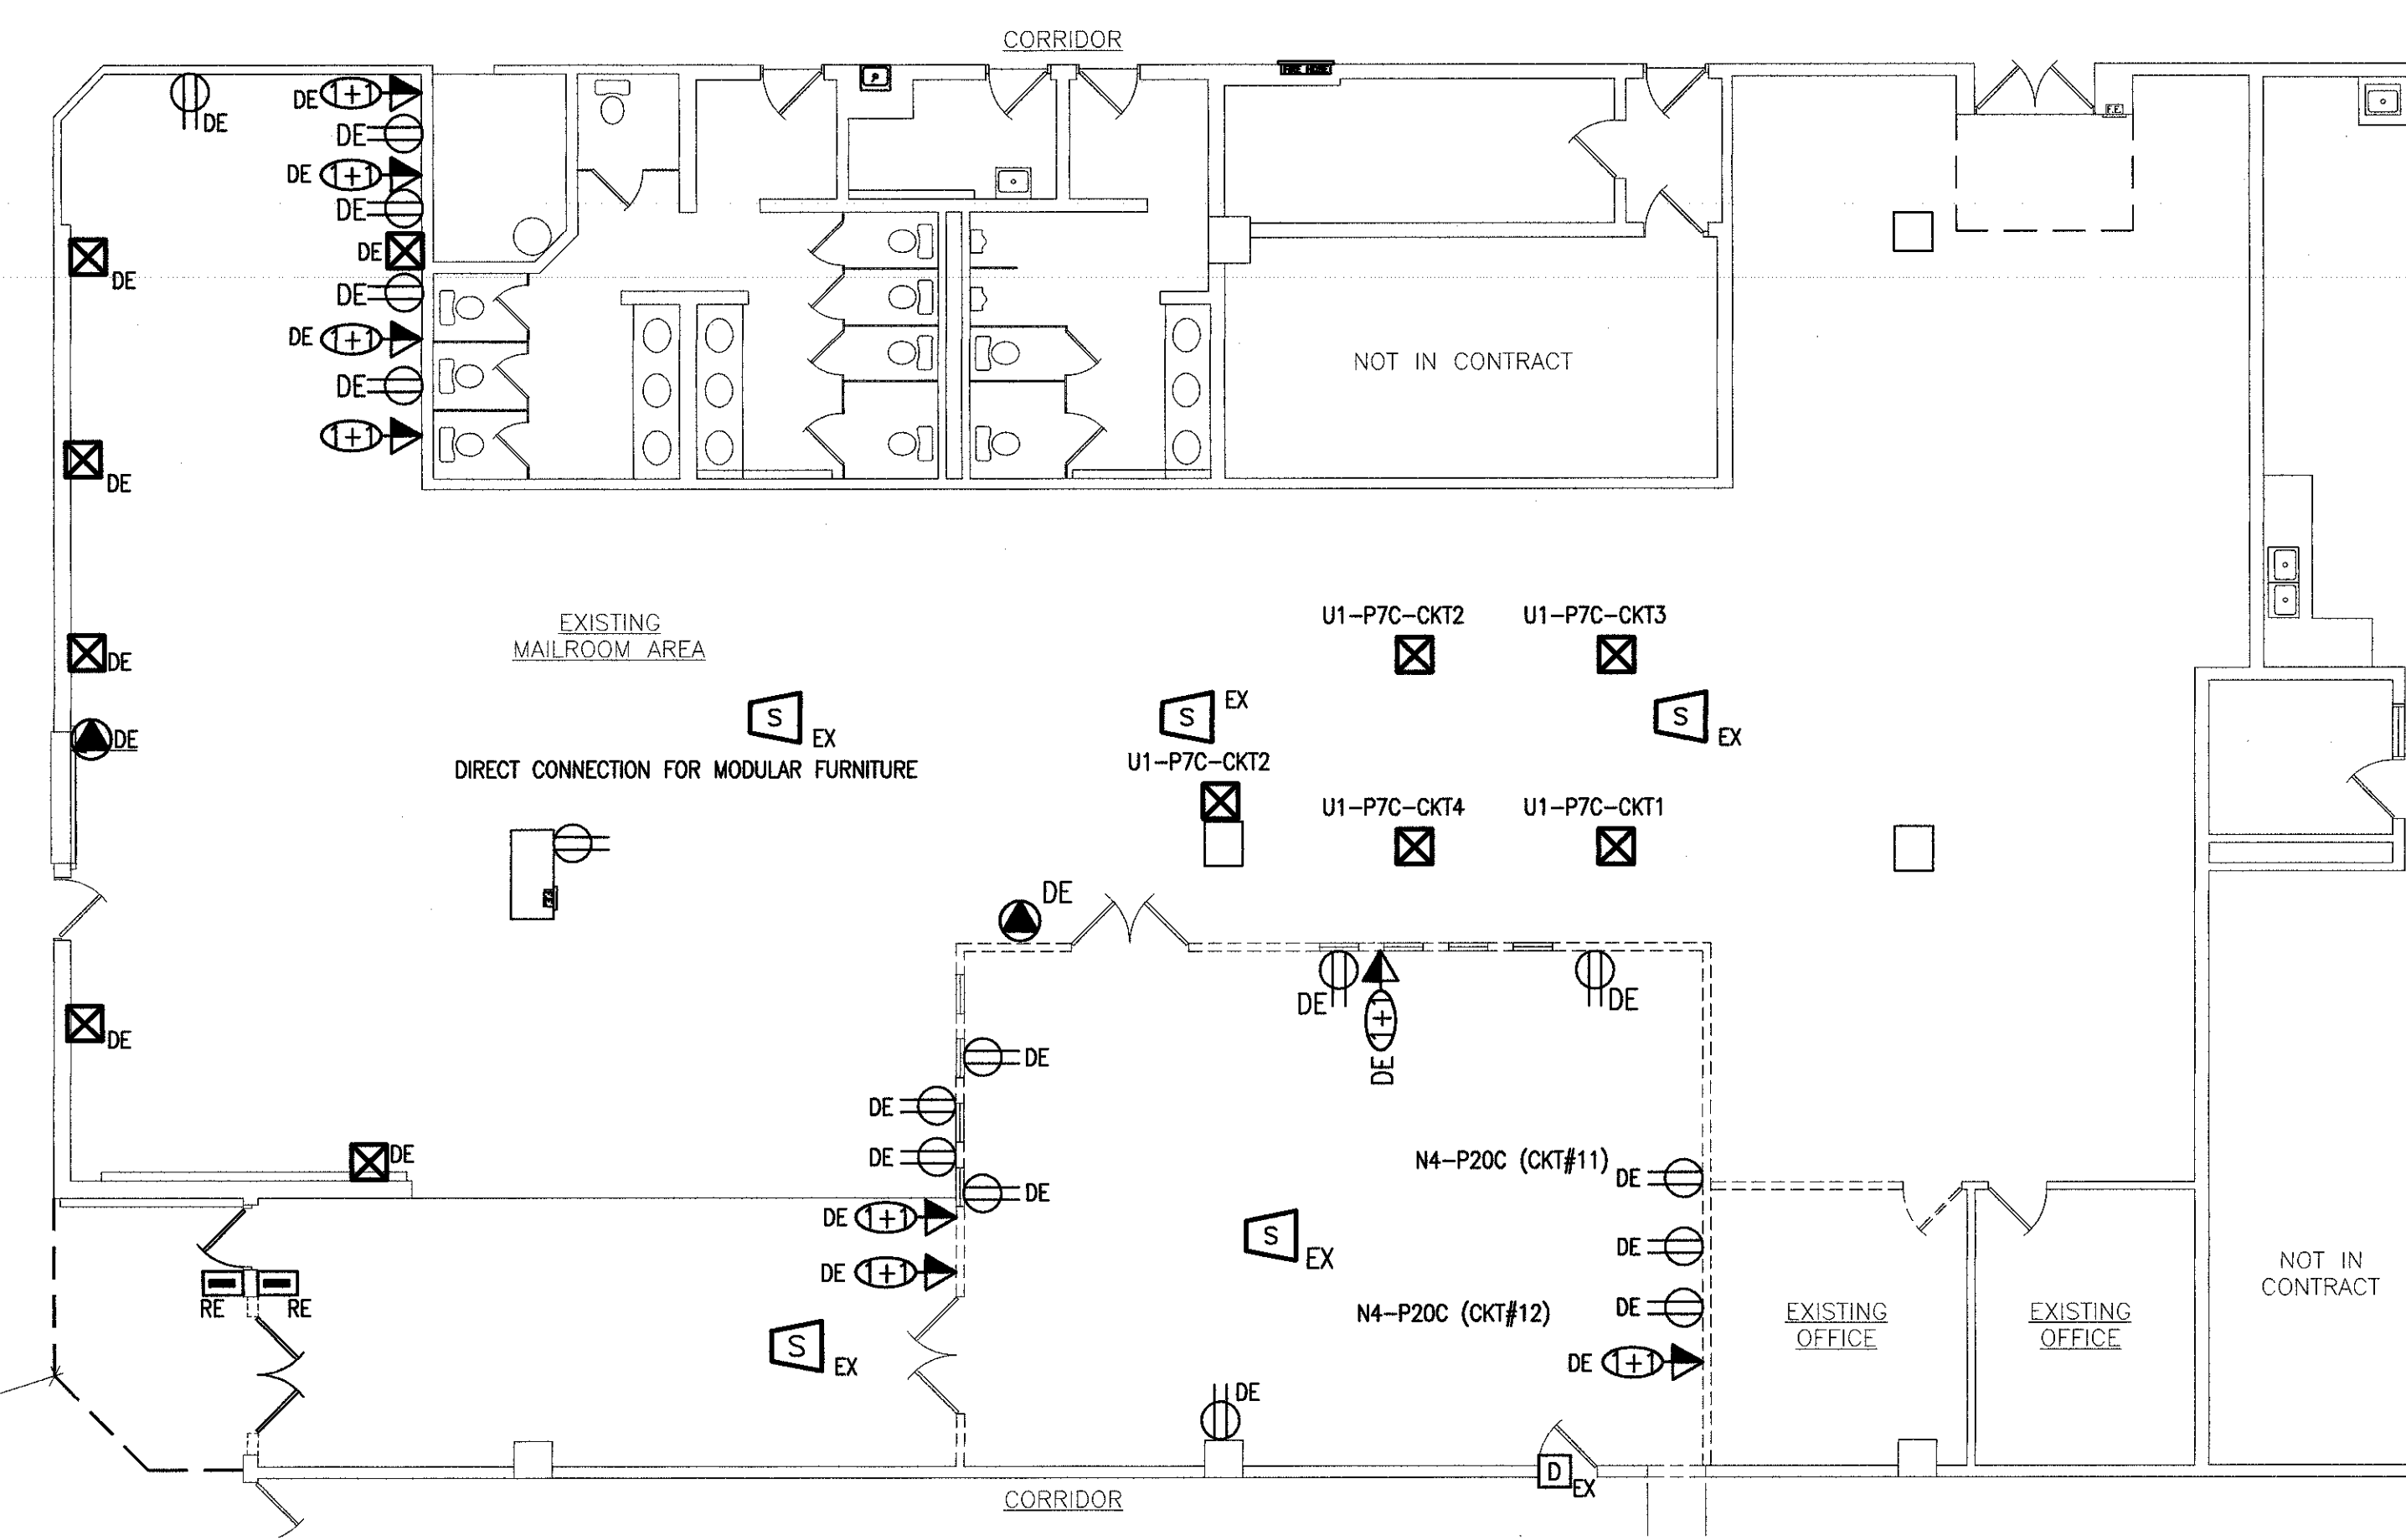

POWER & SYSTEMS DEMOLITION CID AREA
SCALE/ÉCHELLE : 1:100
0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

SWITCHING LEGEND	
SYMBOL	DESCRIPTION
\$	LOW VOLTAGE MOMENTARY SWITCH. NEW SWITCHES TO MATCH EXISTING.
POWER LEGEND	
SYMBOL	DESCRIPTION
⊕	DUPLEX RECEPTACLE 15A 125V, COMMERCIAL SPECIFICATION GRADE, 18" AFF. WHITE IN COLOUR WITH STAINLESS STEEL COVERPLATE.
⊕	DUPLEX RECEPTACLE 15A 125V, COMMERCIAL SPECIFICATION GRADE, 42" AFF. WHITE IN COLOUR WITH STAINLESS STEEL COVERPLATE.
⊕	DUPLEX RECEPTACLE 20A, 125V, COMMERCIAL SPECIFICATIONS GRADE, 42" AFF. WHITE IN COLOUR WITH STAINLESS STEEL COVERPLATE.
⊕	DUPLEX RECEPTACLE 20A, 125V, COMMERCIAL SPECIFICATIONS GRADE, WHITE IN COLOUR WITH STAINLESS STEEL COVERPLATE.
⊕	DIRECT CONNECTION
⊕	PANEL AS NOTED, SURFACE MOUNTED
⊕	PANEL AS NOTED, FLUSH MOUNTED
⊕	DUAL CHANNEL POWER AND COMMUNICATIONS POLE WITH OUTLETS AS NOTED.
⊕	INDICATES MODULAR FURNITURE CONNECTION. INCLUDES CONDUIT AND WIRING DOWN THE WALL FOR POWER AND EMPTY CONDUIT DOWN THE WALL TO A 100mm X 100mm JUNCTION BOX FOR COMMUNICATIONS.
COMMUNICATIONS LEGEND	
SYMBOL	DESCRIPTION
⊕	COMMUNICATIONS OUTLET. PROVIDE 27mm CONDUIT AND BACK BOX ONLY. WIRING BY OTHERS.
SECURITY LEGEND	
SYMBOL	DESCRIPTION
⊕	CARD READER
⊕	SECURITY SYSTEM DOOR CONTACT LOCATED AT THE TOP OF DOOR FRAME
⊕	MOTION DETECTOR
⊕	KEYPAD
LIFE SAFETY LEGEND	
SYMBOL	DESCRIPTION
⊕	LED RUNNING MAN EXIT LIGHT, CEILING MOUNTED, SELF POWERED, 120V AC, LED LIGHT PANEL AND STEEL HOUSING, WHITE FINISH.
⊕	LED RUNNING MAN EXIT LIGHT, WALL MOUNTED, SELF POWERED, 120V AC, LED LIGHT PANEL AND STEEL HOUSING, WHITE FINISH.
WHITE NOISE SYSTEM	
SYMBOL	DESCRIPTION
⊕	WHITE NOISE SPEAKER, EXISTING
MISCELLANEOUS LEGEND	
SYMBOL	DESCRIPTION
GFI	GROUND FAULT CIRCUIT INTERRUPTER
EX	EXISTING TO REMAIN
UF	UNFUSED
AFF	ABOVE FINISHED FLOOR
C/W	COMPLETE WITH
NL	NIGHT LIGHT
DE	DEMOLISHED
RE	RELOCATED

GENERAL DEMOLITION NOTES
1. DISCONNECT, REMOVE AND DISPOSE OF ALL ABANDONED WIRING AND CONDUIT.

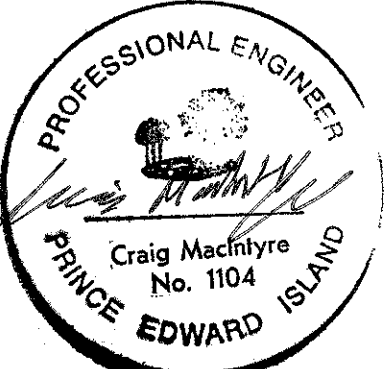

1.	ISSUED FOR TENDER	17.10.03
revisions		date

project
**CID OFFICE RENOVATION
- JOSEPH A. GHIZ
BUILDING**
SUMMERSIDE/PE

drawing
DEMOLITION PLANS

designed	C. MACINTYRE	conçu
date	2017-08-30	
drawn	R.CHEVERIE	dessiné
date	2017-08-30	
approved	C.MACINTYRE	approuvé
date	2017-10-03	
Tender		Soumission
PWGSC Project Manager	Administrateur de projets TPSGC	
project number		no. du projet
	R.090981.001	
drawing no.		no. du dessin
	E1 of 2	