
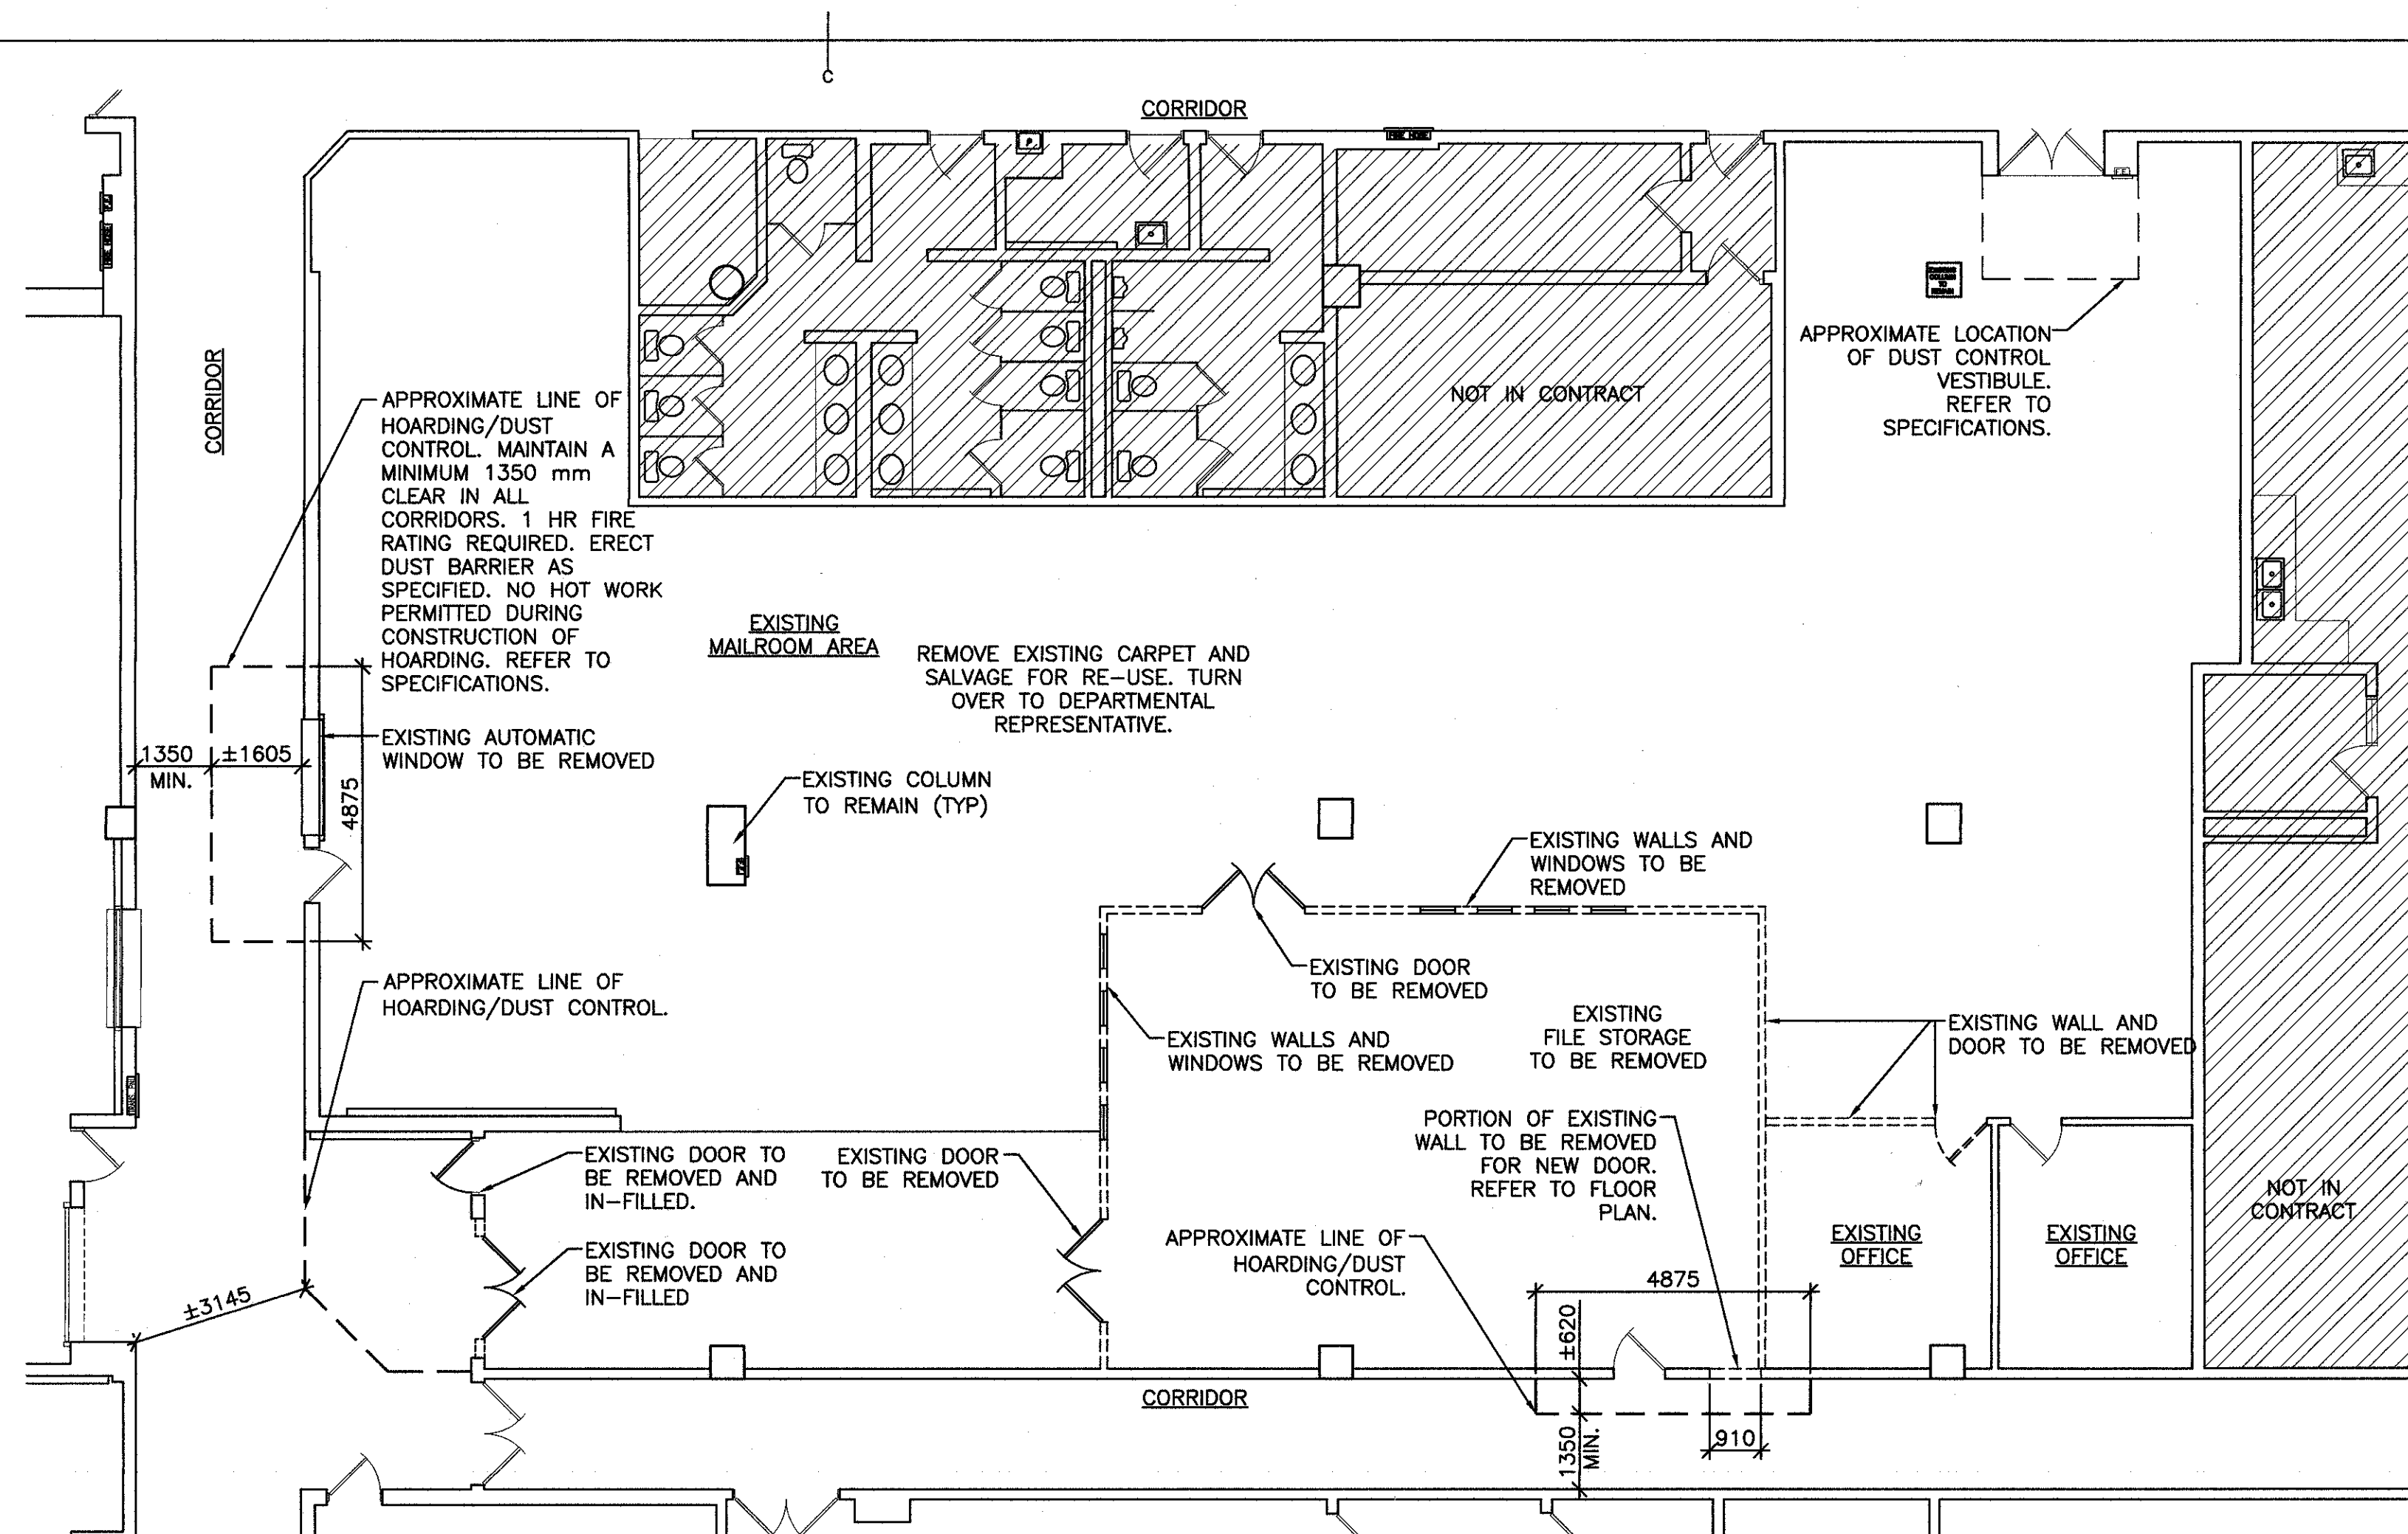


DEMOLITION NOTES

1. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR DEMOLITION WORK REQUIRED TO IMPLEMENT ALL NEW WORK AS SHOWN ON THE DRAWINGS. THIS PLAN ONLY INDICATES THE APPROXIMATE DEMOLITION REQUIRED FOR COMPLETION OF THE REMODEL. EXISTING CONDITIONS NOT SHOWN OR NOTED SHALL REMAIN UNCHANGED UNLESS APPROVED BY THE DEPARTMENTAL REPRESENTATIVE. EXISTING MATERIALS ADJACENT TO NEW CONSTRUCTION SHALL BE PROTECTED, PATCHED, REPAIRED, AND FINISHED TO PROVIDE A SMOOTH LEVEL AND UNNOTICEABLE TRANSITION BETWEEN NEW AND EXISTING FINISHES.
2. CONSULT WITH DEPARTMENT REPRESENTATIVE PRIOR TO THE REMOVAL OF ANY LOAD-BEARING WALLS/COLUMNS.
3. CONTRACTOR TO VERIFY ANY DISCREPANCIES WITH DEPARTMENT REPRESENTATIVE BEFORE PROCEEDING WITH WORK.
4. REMOVE DEMOLISHED MATERIALS, TOOLS, AND EQUIPMENT FROM SITE UPON COMPLETION OF WORK. GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE REMOVAL AND DISPOSAL OF ALL DEMOLISHED MATERIALS. REFER TO SPECIFICATIONS.
5. DISCONNECT AND/OR REMOVE UNUSED/ABANDONED ELECTRICAL CIRCUITS FROM ELECTRICAL SOURCE PER CODE.
6. PROVIDE HOARDING AND DUST CONTROL MEASURES FOR THE DURATION OF THE CONSTRUCTION. REFER TO SPECIFICATIONS.
7. GENERAL CONTRACTOR TO REVIEW WITH DEPARTMENTAL REPRESENTATIVE. ANY MATERIALS/ITEMS TO BE SALVAGED PRIOR TO DEMOLITION OF WORK.
8. HIGH DENSITY SHELVING TO BE DE-MOUNTED AND PROTECTED FOR RE-INSTALLATION IN NEW LOCATION. COORDINATE REMOVAL WITH DEPARTMENT REPRESENTATIVE.

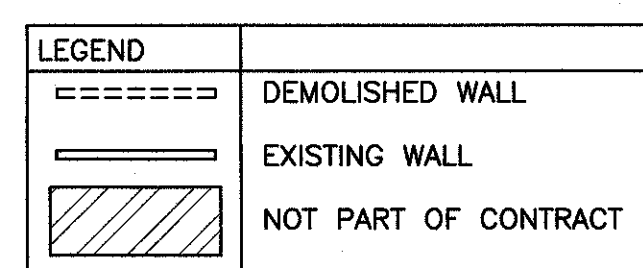


MAIN FLOOR DEMO. PLAN

SCALE/ÉCHELLE : 1:100

0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m


2  
A1

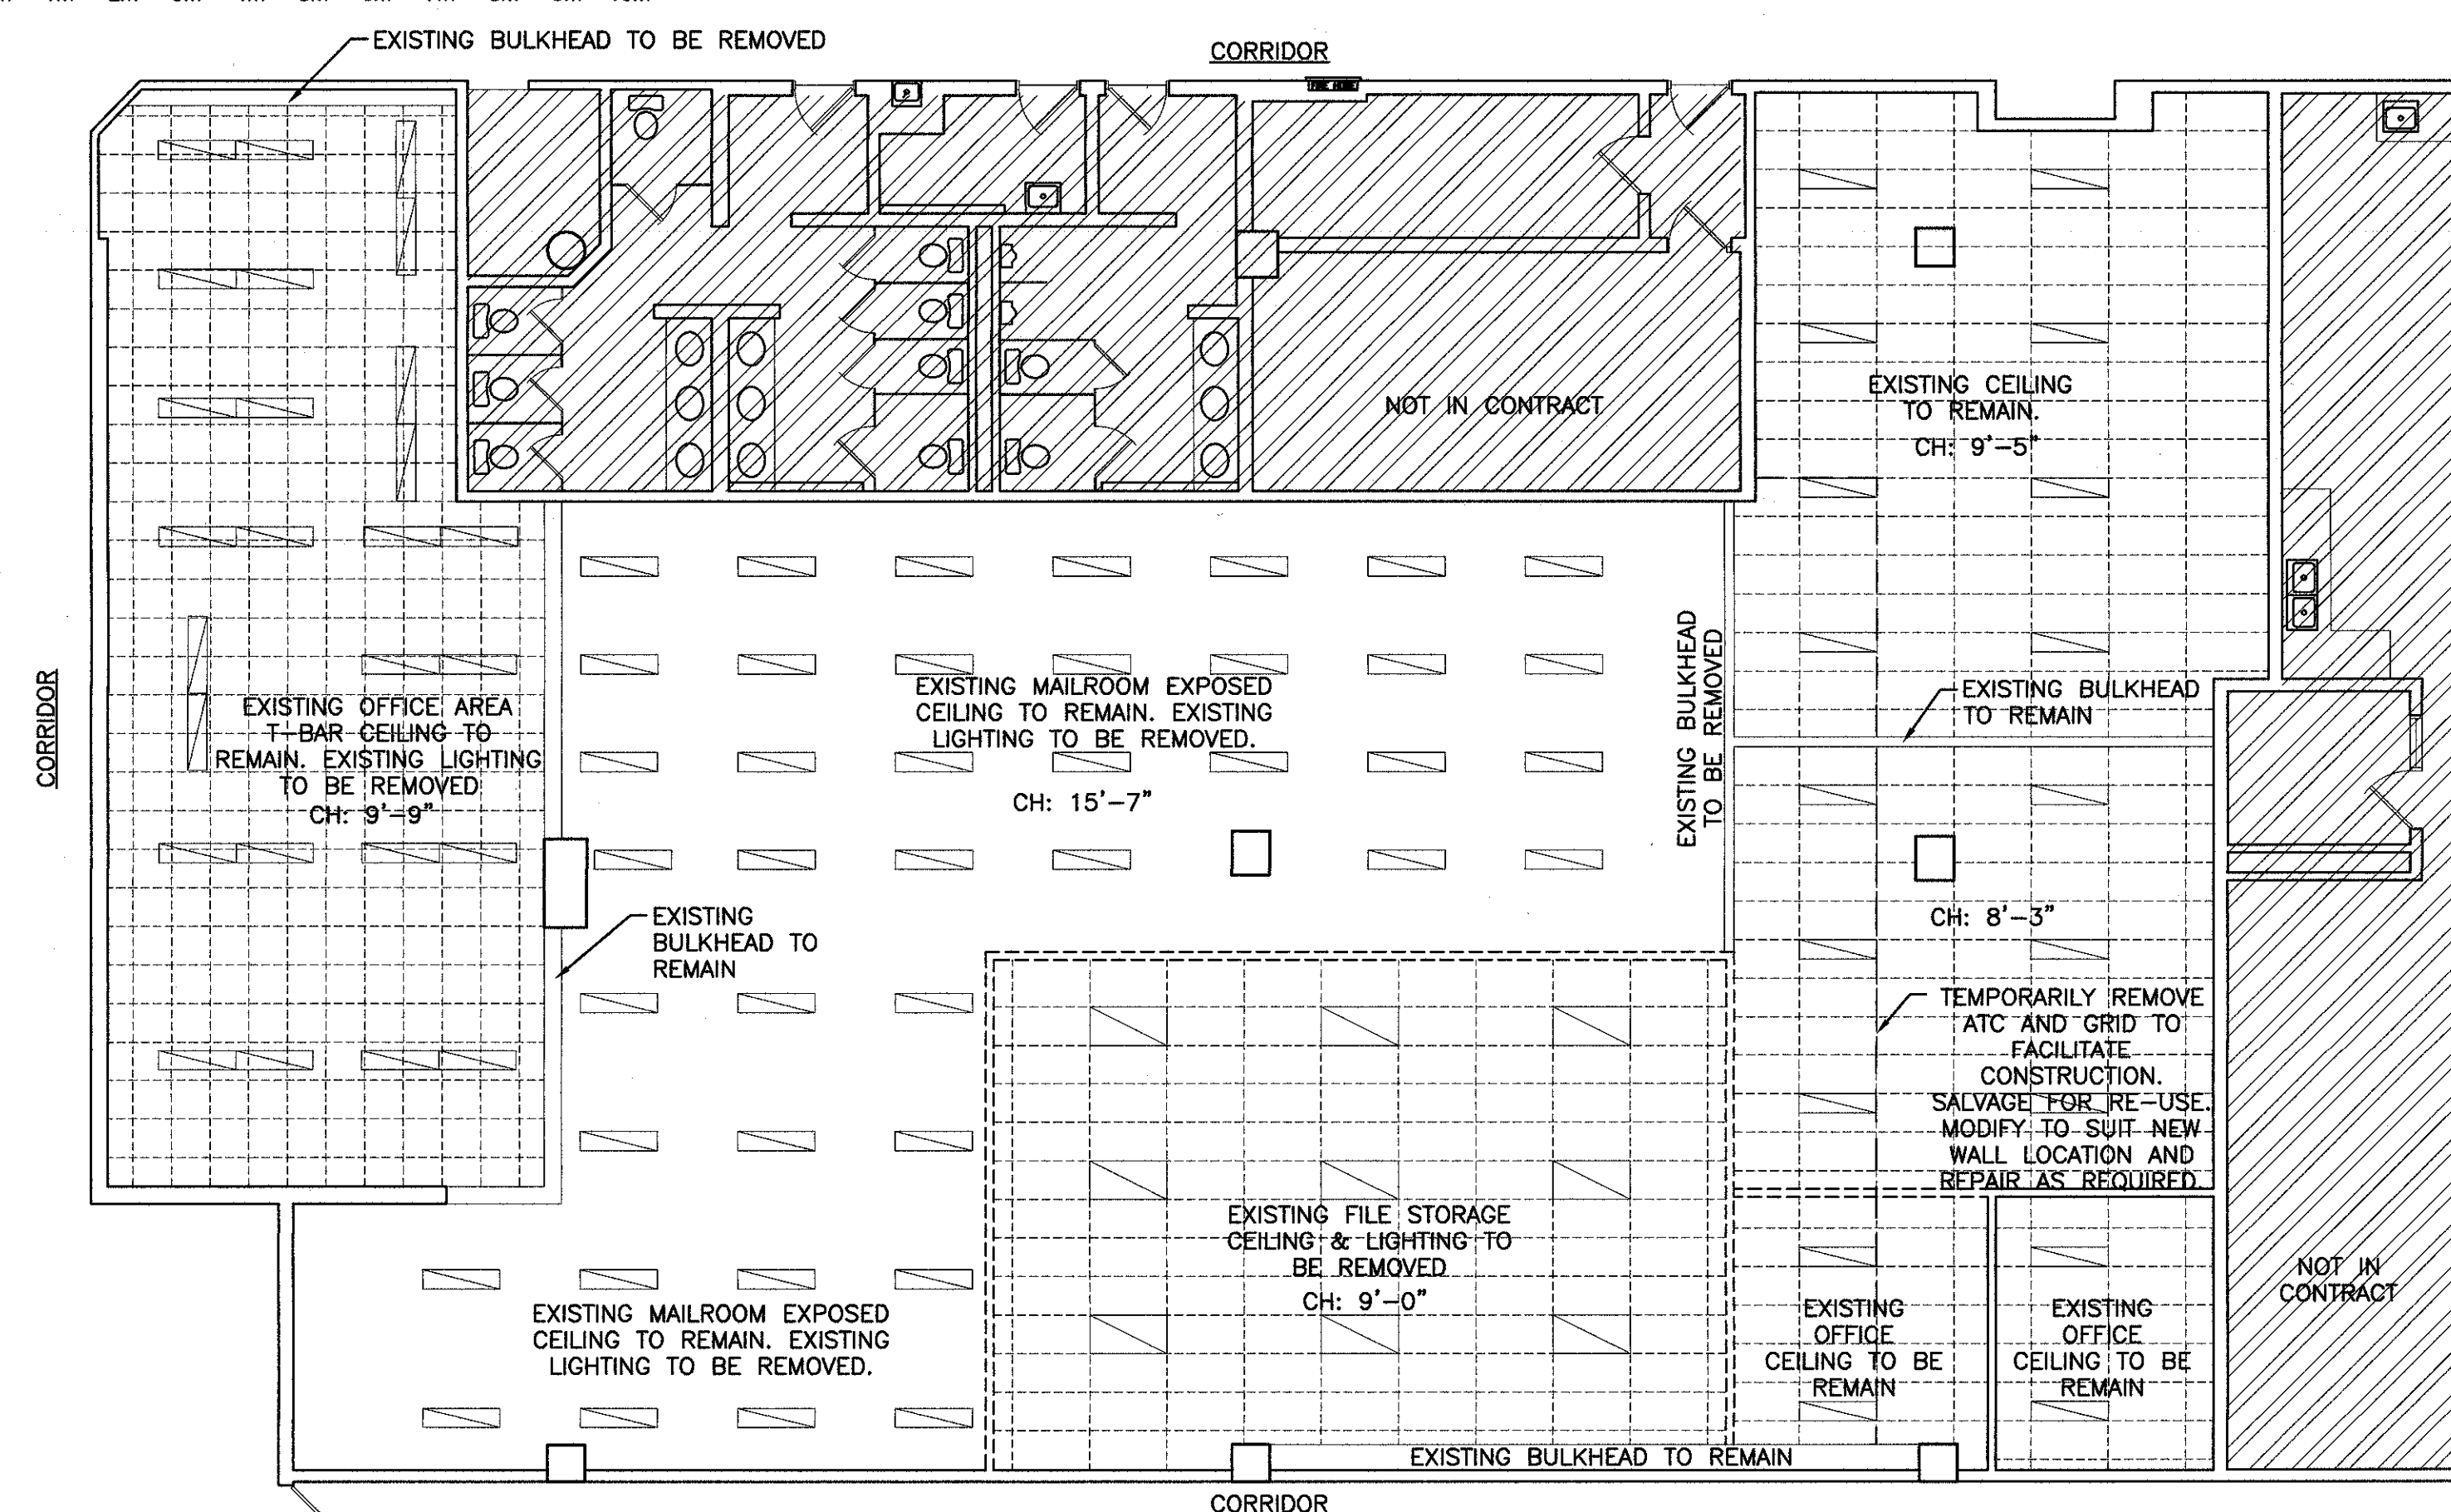

REFLECTED CEILING DEMO. 3  
A1

SCALE/ÉCHELLE : 1:100

0m 1m 2m 3m 4m 5m 6m 7m 8m 9m 10m

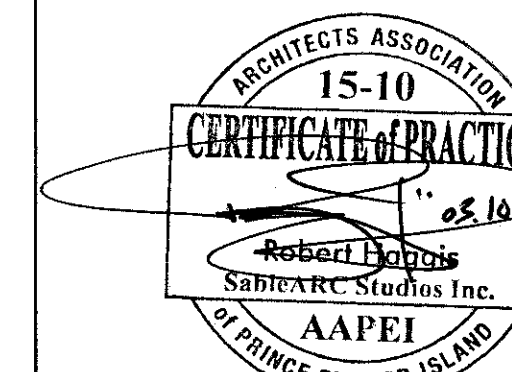



1.	ISSUED FOR TENDER	17.10.0
revisions		date

CID OFFICE RENOVATION  
- JOSEPH A. GHIZ  
BUILDING

SUMMERSIDE/PE

drawing dessin

## DEMOLITION PLANS

designed	ROBERT HAGGIS; AIA, RAIC	conçu
date	2017-08-02	
drawn	FVI	dessiné
date	2017-10-03	
approved		approuvé
date		
Tender		Soumission
PWSSC Project Manager	Administrateur de projets TPSSC	
project number	R.090981.001	no. du projet
drawing no.		no. du dessin