


NOTES:

1. CONFIRM ALL MEASUREMENTS ON SITE PRIOR TO CONSTRUCTION.
2. REMOVE AND STORE SHORE PROTECTION STONE FOR RE-USE. IF NEW STONE IS REQUIRED, STONE SIZE TO MATCH EXISTING.
3. DRIVE RELOCATED EXISTING PILE FULL DEPTH APPROXIMATE 10m. FILL PILE SOLID WITH CONCRETE.
4. ROUGHEN SURFACE OF EXISTING CONCRETE AT INTERFACE LOCATIONS TO A FULL AMPLITUDE OF 5mm OVER ENTIRE SURFACE.
5. PREPARE HOLES AND INSTALL ADHESIVE EPOXY TO MANUFACTURER'S RECOMMENDATIONS.
6. ADDITIONAL WEIGHT FOR BUOYANCY BILLET CALCULATION APPROX. 720 kg PER STRONG ARM.

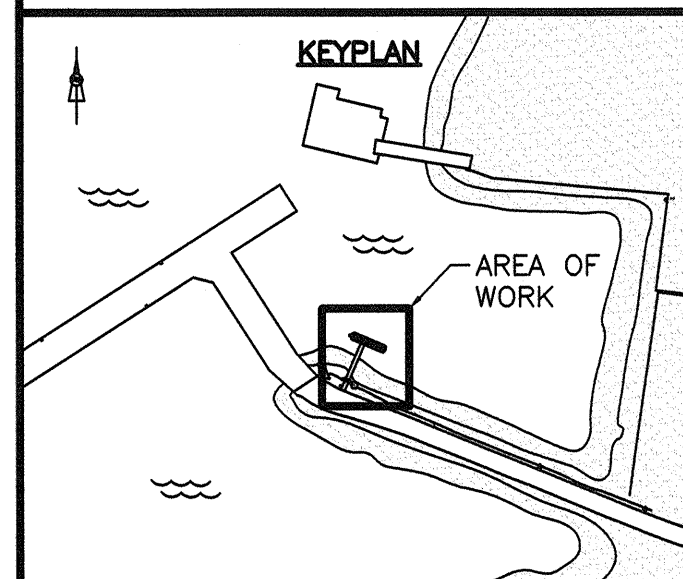

1	ISSUED FOR TENDER	JAN/29 2018
0	ISSUED FOR TENDER	JAN/05 2018
revisions		date
project	DFO-CCG FLOATING WHARF CONSTRUCTION LOBSTER ROCK, YARMOUTH CO. NOVA SCOTIA	

CONCRETE ABUTMENT DETAIL AND SECTION

designed	G.F.	conçu
drawn	A.C.	dessiné
approved	B.T.	approuvé
Tender	BEN ALLARD	Source/Sign
PWGS	Project Manager	Administrateur de projets
project number	10706	no. du projet
drawing no.	R.082146.001	no. du dessin

