



RETURN BIDS TO:

RETOURNER LES SOUMISSIONS À:

Réception des soumissions - TPSGC / Bid Receiving -
PWGSC

1550, Avenue d'Estimauville

1550, D'Estimauville Avenue

Québec

Québec

G1J 0C7

**SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION**

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address

Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution

TPSGC-PWGSC

601-1550, Avenue d'Estimauville

Québec

Québec

G1J 0C7

Title - Sujet Nouveau havre à Harrington Harbour	
Solicitation No. - N° de l'invitation F3731-170101/A	Amendment No. - N° modif. 009
Client Reference No. - N° de référence du client F3731-170101	Date 2017-11-27
GETS Reference No. - N° de référence de SEAG PW-\$QCM-032-17241	
File No. - N° de dossier QCM-7-40184 (032)	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2017-11-29	Time Zone Fuseau horaire Heure Normale du l'Est HNE
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Girard, Isabelle	Buyer Id - Id de l'acheteur qcm032
Telephone No. - N° de téléphone (418) 649-2847 ()	FAX No. - N° de FAX (418) 648-2209
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction:	

Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

AMENDMENT 009

Title: Development of a Fishing Harbour, Harrington Harbour


Included in the present amendment:

1. Questions and Answers 84 to 87

QUESTIONS AND ANSWERS:

- Question 84 :**
- a. Are there wintering anchor rings to be provided for the existing pontoons and if so, how much by pontoon?
 - b. Are there wintering rings for the new pontoons and if so, how much is there for each pontoon?
 - c. In the event of an affirmative answer to question a - and / or b - could you provide us with the details of the wintering ring?

- Answer 84 :**
- a. Yes there are two wintering anchor rings per existing floating dock.
 - b. No, there is no anchor ring for the new docks.
 - c. Here is the detail of the wintering anchor ring.

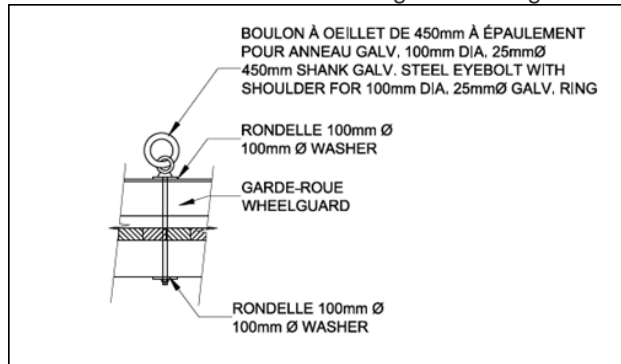

- Question 85 :** On the tender documents, there is no information on the depth of the water at the location of the reefs (Plan number 23). Would it be possible to obtain the information?

Answer 85 : The depth of water is about 7m to 8m.

- Question 86 :** We need clarification regarding the aluminum overlap plates for floating docks, items T14, T15 and T16 from the list the parts shown at the top right on drawings 09 and 10: We would like to know the exact quantity of T14, T15 and T16 to be included in items 6.1.2 (existing docks) and 6.2.2 (new docks).

Answer 86 : Overlap plates between existing docks (T14 model only) will be provided by DFO. DFO will provide 16 X T14 overlap plates.

- Question 87 :** It is specified that the building will be demolished by others and that the slab and part of the concrete foundations will be demolished by us:
- a. when will the building be demolished so that we can demolish the slab and the top of the wall and fill the interior of the foundations?

b. Is there any existing backfill to be removed under the slab? Is it full of water? In other words, what is under the slab? Gap, water or backfill saturated with water or dry?

Answer 87 : a. The building will be demolished one week before the beginning of the works by the Contractor. In order to coordinate the demolition of the building, Contractor must inform the Department Representative at least two weeks before the start of the works.

b. There is a gap under the slab, so no backfill to remove. Refer to Sheet 11, Upper Left Section.

***** All the other clauses and conditions remain unchanged *****