

December 7, 2017

ROUND LAKE DAM
CONTRACT NO. 1 – HANDRAIL FABRICATION
CONTRACT #4547-928-7R1-0-C1

Questions and Answers

Q1 - Drawing 209170 -5/8 only shows there are 9 units of typical hand rail as on drawing 6/8, but drawing 7/8 shows guard rail gate swing, is the gate required? How many locations?

A1 – Two gates are required. Number and location of gates are referred to in Drawing 209169 (see note SWING GATE EACH END REFER TO SHEET 172 FOR DETAILS). See attached photo for general arrangement of gate.

Q2 - Dwg # 8/8 is calling up paint systems refer to Spec 05501 misc metalwork, but I can't find Spec 05501 in the bid documents.


A2 – DWG 209173 Sheet 8/8 the following phrase should be eliminated “05501 MISCELLANEOUS METALWORK” and replaced with “05 50 01 MISCELLANEOUS METALWORK”

DWG 209173 Sheet 8/8 the following phrase should be eliminated “09901 PAINTING METALWORK” and replaced with “09 90 01 PAINTING METALWORK”

Q3 - Do we need to quote 2 optional painting system: one is for galvanized only, the other is for galvanized with SSPC SP6 and Epoxy finished painting system?

A3 – Contractors are advised to quote on PAINT SYSTEM OPTION 1 – HOT DIP GALVANIZED only.

Q4 - Is the tender for this project just for the typical handrail sections only as shown in the drawing section below and all other steel is under another contract?

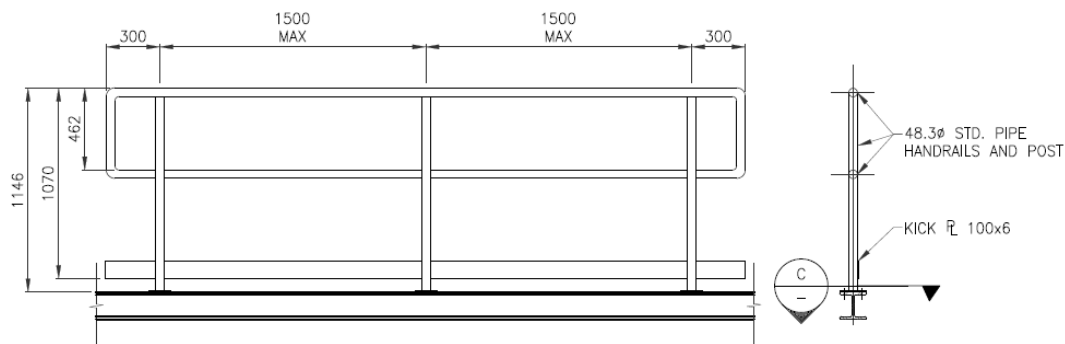

TYPICAL HANDRAIL DETAIL

1 : 20

A4 - NO, the tender is for all fabricated steel shown on the drawings with the exception of those items labelled BY OTHERS or PHASE 2



2015/11/03 17:12