



RETURN BIDS TO:

RETOURNER LES SOUMISSIONS À:

Bid Receiving - PWGSC / Réception des soumissions - TPSGC

**11 Laurier/11,rue Laurier
Place du Portage, Phase III
Core 0B2 / Noyau 0B2
Gatineau, Québec K1A 0S5
Bid Fax: (819) 997-9776**

**SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION**

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

This project includes a security requirement.
Ce projet comprend un condition en matire de sécurité.

**Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur**

Issuing Office - Bureau de distribution
Parliamentary Precinct Division/Acquisitions de la Cité
parlementaire
222 Queen Street / 222, rue Queen
Ottawa
Ontario
K1A 0S5

Title - Sujet LoP - Repl. Exterior Roof Catwalk	
Solicitation No. - N° de l'invitation EP749-183094/A	Amendment No. - N° modif. 002
Client Reference No. - N° de référence du client 20183094	Date 2018-04-19
GETS Reference No. - N° de référence de SEAG PW-\$PPS-020-26765	
File No. - N° de dossier 020pps.EP749-183094	CCC No./N° CCC - FMS No./N° VME
Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2018-04-24	
Time Zone Fuseau horaire Eastern Daylight Saving Time EDT	
F.O.B. - F.A.B. Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/>	
Address Enquiries to: - Adresser toutes questions à: Michaud, Jasmin	Buyer Id - Id de l'acheteur 020pps
Telephone No. - N° de téléphone (613) 990-3715 ()	FAX No. - N° de FAX () -
Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: PWGSC / TPSGC OPERATIONS-PARL. LIBRARY OPERATIONS-BIBLIO. DE PARL. 111 WELLINGTON ST OTTAWA-ON K1A 0A9 CANADA	


Instructions: See Herein

Instructions: Voir aux présentes

Delivery Required - Livraison exigée	Delivery Offered - Livraison proposée
Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur	
Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur	
Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie)	
Signature	Date

Cette Modification à l'invitation à soumissionner 002 est émise pour les raisons suivantes :

Émettre les documents .pdf manquant de la Modification à l'invitation à soumissionner 001.

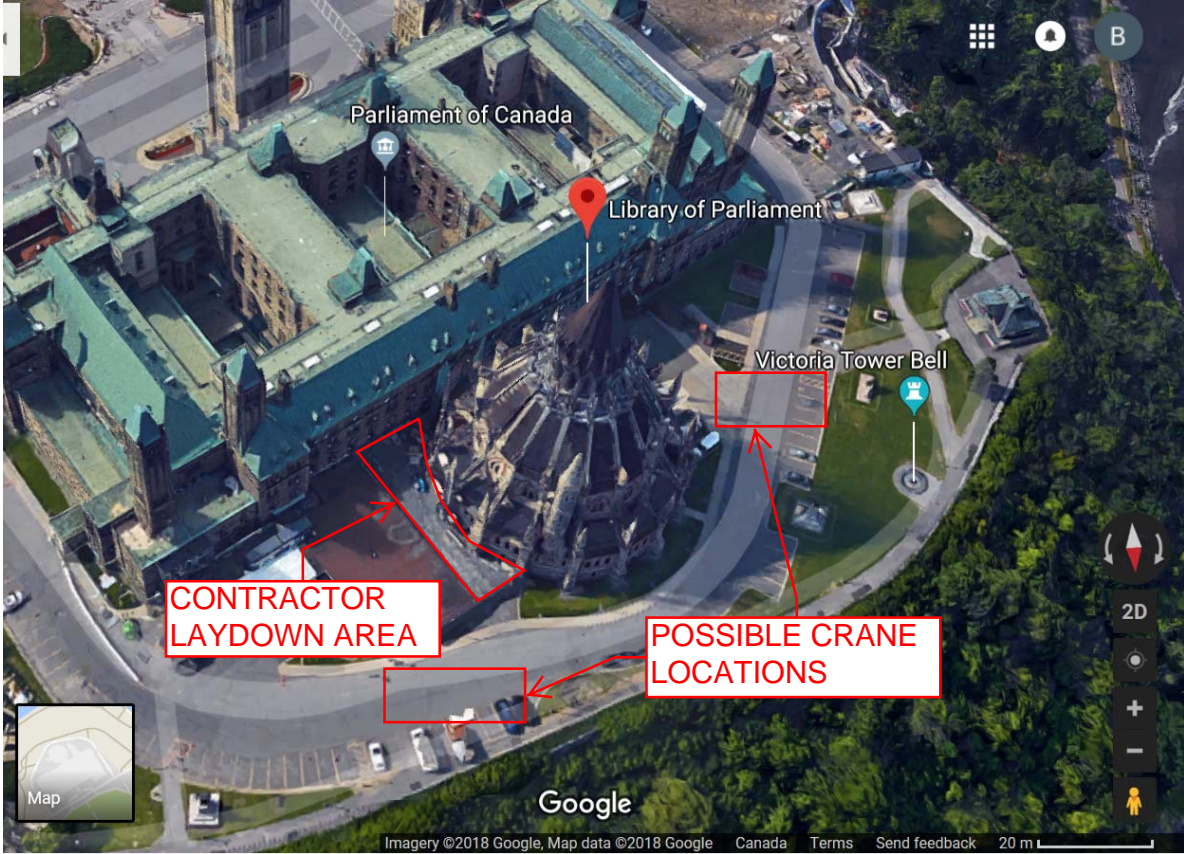

NO.	REVISIONS	DATE	BY
1			
2			
3			




THIS DOCUMENT IS THE PROPERTY OF THALER METAL INDUSTRIES LTD. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREIN. IT IS NOT TO BE REPRODUCED, COPIED, EITHER WHOLLY OR IN PART, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF THALER METAL INDUSTRIES LTD.



LIBRARY OF PARLIAMENT
FALL ARREST SYSTEM
AT LANTERN WINDOW LEVEL

K-701 "EASY GLIDER" HORIZONTAL LIFE LINE SYSTEM (END AND INTERMEDIATE ANCHORAGE)

Date	04 MAY 24, 2005
Drawn by	D.K.
Checked by	D.K.
Project No.	122-05-01
Sheet No.	8-1/1

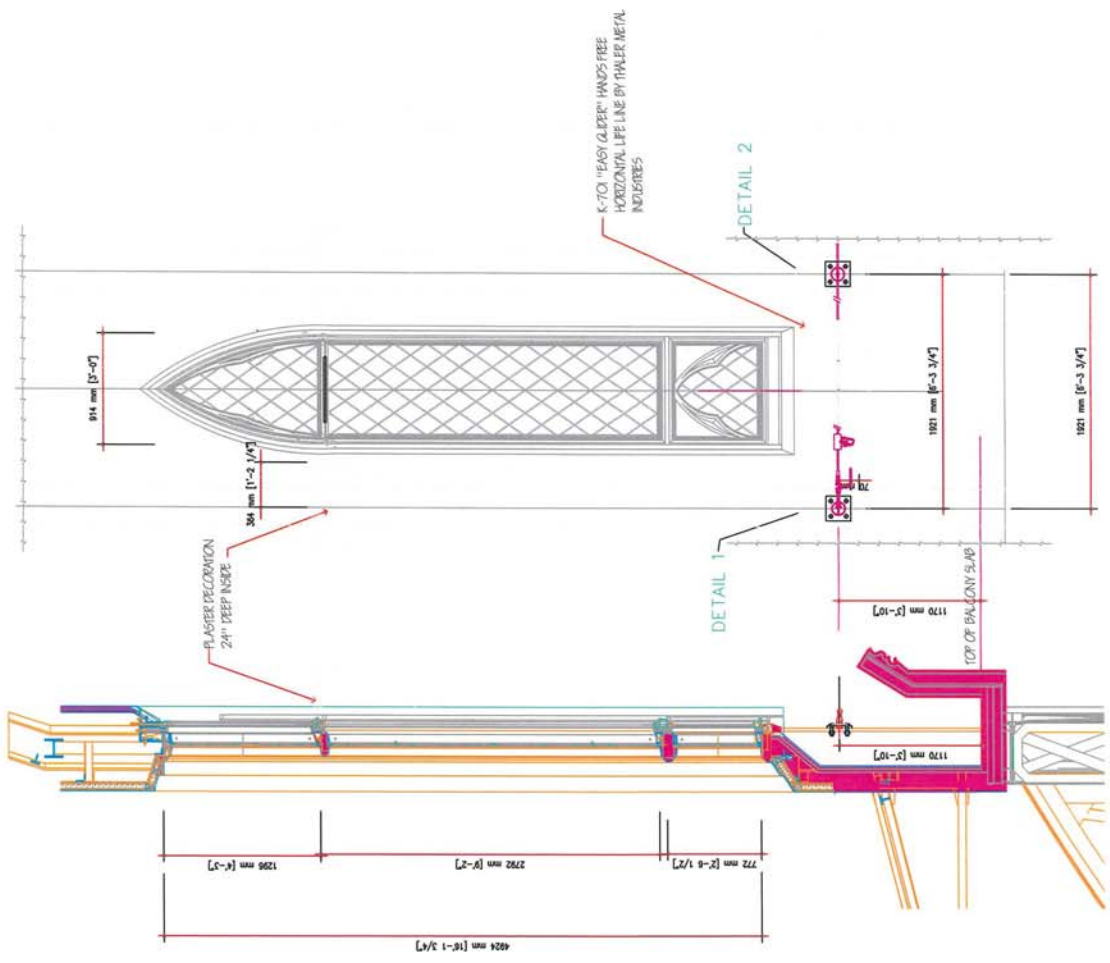

SECTION - THROUGH LANTERN

ELEVATION DETAIL

- NOTE:**
- 1.) RECOMMENDED FOR THIS SYSTEM IS USE OF LANYARD WITH PERMANENTLY ATTACHED SHOCK ABSORBER, LANYARD AND STANDARD 23561 OR SOME OTHER RECOGNIZED STANDARDS
 - 2.) DESIGNED IN ACCORDANCE WITH STATE BUILDING CODES (MOST RECENT REVISION), FEDERAL OSHA STANDARD 1910.28 (MOST RECENT REVISION), FEDERAL OSHA STANDARD 1910.106, OSHA STANDARD 1910.66, SUBPART I (PERSONAL FALL ARREST SYSTEMS, ASME/ANSI STANDARD A3.1-1990 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.146 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.147 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.148 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.149 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.150 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.151 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.152 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.153 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.154 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.155 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.156 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.157 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.158 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.159 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.160 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.161 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.162 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.163 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.164 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.165 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.166 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.167 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.168 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.169 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.170 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.171 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.172 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.173 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.174 (SAFETY DEVICES FOR FALL PROTECTION), OSHA STANDARD 1910.175 (SAFETY DEVICES FOR FALL PROTECTION).
 - 3.) STEEL WELDING TO BE DONE TO CSA W9-1989 BY WELDERS QUALIFIED TO CSA W47-1-1988. ALUMINUM WELDING TO BE DONE TO CSA W47-2-1988 BY WELDERS QUALIFIED TO CSA W47-2-1987.
 - 4.) ANCHORS ARE CAPABLE OF SUPPORTING AT LEAST 5,000 LBS (22.2 KN) PER EMPLOYEE ATTACHED AND SHALL BE DESIGNED TO SUPPORT THE WEIGHT OF THE FALL ARREST SYSTEM WHICH MAINTAINS A SAFETY FACTOR OF AT LEAST 2, UNDER THE SUPERVISION OF A QUALIFIED PERSON.
 - 5.) PERSONAL FALL ARREST SYSTEMS SHALL BE DESIGNED TO CONFORM TO OSHA STANDARD 1910.66 APPENDIX C. THE ANCHORAGE SHOULD NOT HAVE A DEFLECTION GREATER THAN 0.04 INCHES (1.0mm) WHEN A FORCE 2,250 LBS (1011 N) IS APPLIED TO THE ANCHORAGE POINT PER OSHA STANDARD 1910.66 APPENDIX "C" PER.
 - 6.) STRUCTURAL STEEL TO CONFORM TO MINIMUM GRADE 500W (TYPE "A") FOR HOLLOW STRUCTURAL SECTIONS AND GRADE 50 (TYPE "A") FOR ALL OTHER STRUCTURAL SECTIONS. ALL NON STAINLESS STEEL BOLTS AND THREADED ROD TO BE MINIMUM 300W STEEL. BOLTS MAY BE ASTM A325, TO BE TYPE 304 TO ASTM A304 WITH A MINIMUM YIELD OF 205 MPa, AND AN ULTIMATE TENSILE STRENGTH OF 580 MPa. ALL STAINLESS STEEL BOLTS AND THREADED ROD TO BE TYPE 304 WITH A MINIMUM YIELD OF 205 MPa, AND AN ULTIMATE TENSILE STRENGTH OF 580 MPa. ALL ALUMINUM COMPONENTS TO BE GRADE HA.4 6061-T6 (6061-T6) OR GRADE 511C-16 (6351-16).
 - 7.) ALL RETAINING BOLTS MUST HAVE A MINIMUM OF TWO THREADS AND BE PROTECTED FROM CORROSION. ALL BOLTS AND THESE THREADS BE DEFORMED TO PREVENT TAMPERING.
 - 8.) THE MAXIMUM WORKING LOAD OF ANCHORS IS 8 KN (1,800 LBS) (EQUAL TO MAXIMUM ARREST FORCE ALLOWABLE).
 - 9.) WORKERS MUST TIE OFF TO AN ANCHOR PRIOR TO APPROACHING AND REMAIN CONTINUOUSLY TIED OFF WHEN WORKING, WITHIN 6'-0" OF ROOF EDGE WHERE PARAPET IS LESS THAN SAFETY RAILING HEIGHT. WORKERS MUST PROTECT LINES FROM CHIPPING AT ALL TIMES.
 - 10.) WHEN USING FORMER SUPPORT METHODS, THEY MUST BE TIED BACK TO AN ANCHOR IN A SECURE MANNER.
 - 11.) THIS SYSTEM MUST BE INSPECTED BY A QUALIFIED PERSON BEFORE EACH SCHEDULED SERVICE AND NOT LESS THAN ONCE A YEAR AND ACCORDING TO MANUFACTURER'S RECOMMENDATIONS.
 - 12.) THIS SYSTEM SHALL NOT BE USED FOR ANY OTHER PURPOSES WITHOUT THE WRITTEN APPROVAL OF THE ENGINEER. THE ENGINEER SHALL BE NOTIFIED OF ANY DEVIATIONS OF THE POSITION OR DETAILS OF THE CAST-IN ITEMS FROM THAT SHOWN ON THIS DRAWING.
 - 13.) ALL REPAIRING OF BUILDING STRUCTURE ON WHICH ANCHOR SHALL BE INSTALLED SHALL BE DONE IN ACCORDANCE WITH THE RECOMMENDATIONS OF THE STRUCTURAL ENGINEER FOR THE OVERALL PROJECT.
 - 14.) APPROVAL HAS BEEN RECEIVED FROM THE ENGINEER TO USE ALTERNATE PROVISIONS.
 - 15.) THE PROPERTY (OWNER) HAS THE RESPONSIBILITY TO ENSURE (THROUGH ONE OF ITS AGENTS (PLANO, CONSULTANTS ETC.) THAT THE STRUCTURE ON WHICH THIS ASSEMBLY IS BEING ATTACHED HAS SUFFICIENT STRENGTH TO WITHSTAND ABOVE MENTIONED FORCES (THAT ARE BEING TRANSFERRED TO IT).

1. PHASE
FINAL PROPOSAL FOR HORIZONTAL LIFE LINE BY THALER METAL INDUSTRIES HANDS FREE K-700 HORIZONTAL LIFE LINE