



4

3

2

1

REVISION HISTORY				
REV	DESCRIPTION	DATE	DRAWN	APPROVED

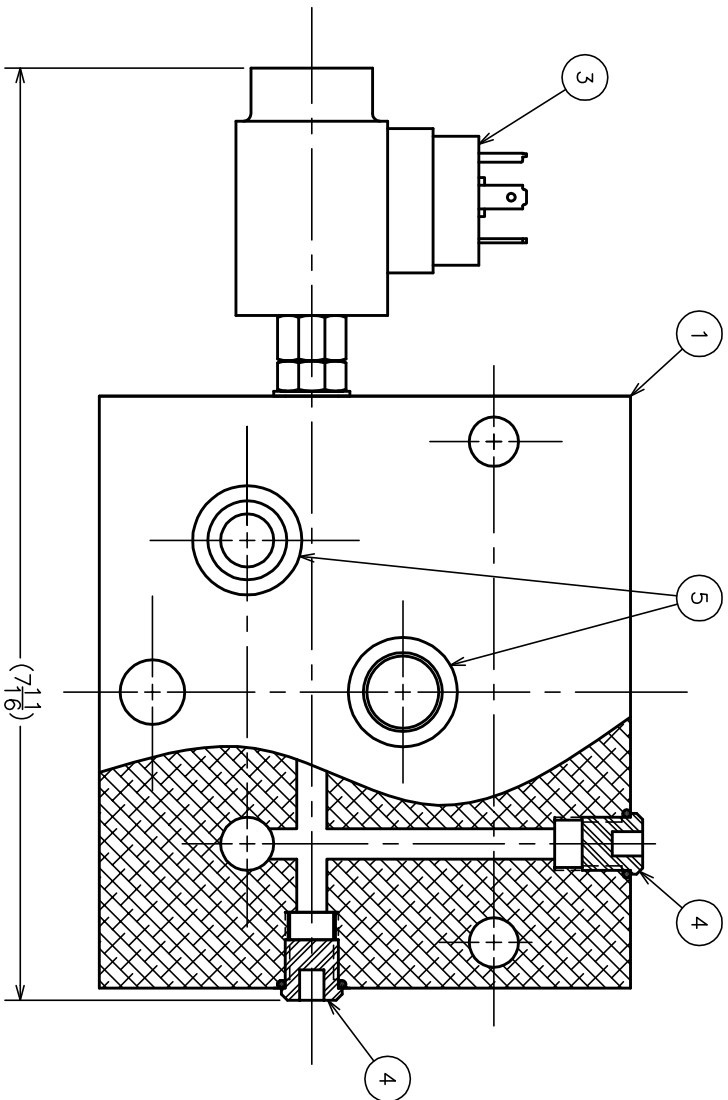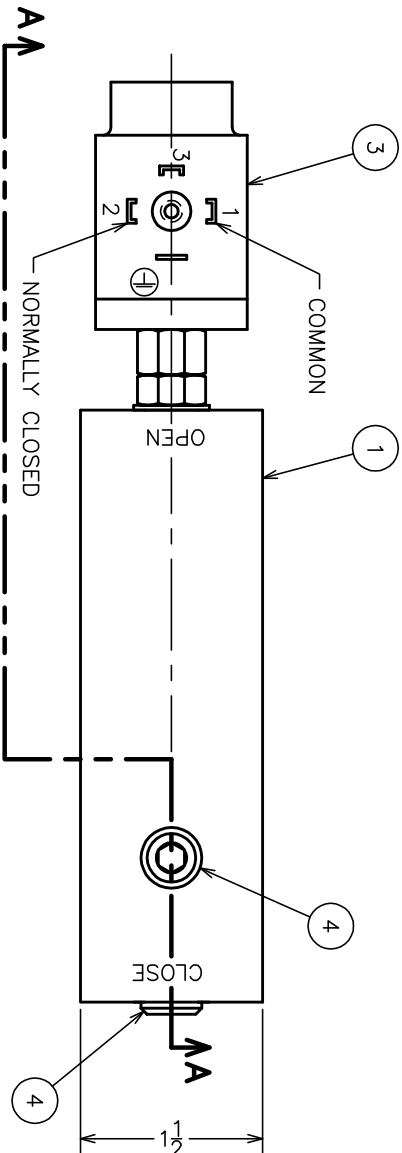

NOTES:

1. PC. 3 IS SET AT 750 PSI.
2. PC. 6 IS TURCK V-FAST CONNECTOR #VAS 3-AW, DIN 43650, TYPE A, WITH 3 CONTACTS PLUS A GROUND. EQUIVALENT SUBSTITUTE MAY BE USED. CABLE TO CONNECTOR SHALL BE SUPPLIED BY SHIPYARD. CABLE DIAMETER SHALL BE 6-8MM WITH TWO 18 AWG CONDUCTORS. PC. 6 IS NOT SHOWN.
3. MAX WORKING PRESSURE IS 1000 PSI AND HYDROSTATIC TEST PRESSURE IS 1500 PSI.

6	1	CABLE CONNECTOR	VARIOUS	SEE NOTE 2
5	3	O-RING	NITRILE	AS568A-115
4	2	SAE-4 SOCKET HEAD PLUG	STEEL	MCMMASTER# 4835K23
3	1	CLOSE/SHUT-OFF PRESS. SWITCH	VARIOUS	NASON# WX-18B-750U/HH126
2				
1	1	BODY	ALUMINUM	D-WK-852-50
PC#	QTY	DESCRIPTION	MATERIAL	DRAWING NO. REMARKS

BILL OF MATERIAL

THIS DRAWING CONTAINS COMPANY PROPRIETARY AND CONFIDENTIAL INFORMATION AND IS NOT TO BE COPIED, DISCLOSED TO OTHERS OR USED IN ANY MANNER WITHOUT PRIOR PERMISSION OF WALZ & KRENZER, INC.				BY		DATE
				DRAWN	S.S.	7/31/07
PRESSURE SWITCH ASSEMBLY				CHECKED	C.K.	8/1/07
				APPROVED	B.R.	8/1/07
SIZE		FSCAL NO.	DWG. NO.	REV.		
C		87045	C-WK-852-63	-		
SCALE: 1/1		SHEET NO. 1 OF 1				

WK WALZ & KRENZER, INC.
91 WILLENBROCK RD., UNIT B-4 OXFORD, CT. 06478
WEB SITE: www.wkdoors.com

SECTION A-A

4

3

2

1