


- GENERAL NOTES**
- A. CONTRACTOR TO FIELD VERIFY DIMENSIONS AND LOCATION OF ALL EXISTING MECHANICAL, PLUMBING, ELECTRICAL AND MISCELLANEOUS FIXTURES TO BE DEMOLISHED OR RELOCATED BEFORE RENOVATION WORK BEGINS.
 - B. CONTRACTOR TO MAKE GOOD ALL WALLS, FLOOR AND CEILING AFTER DEMOLITION IS COMPLETE. ALL SURFACES AND SERVICES SHALL BE MADE SUITABLE FOR SUBSEQUENT WORK AS DETAILED BY THIS DRAWING PACKAGE AND FOR CODE COMPLIANCE.
 - C. DIMENSIONS ARE TO FACE OF FINISHED MATERIALS, UNLESS OTHERWISE NOTED.
 - D. EXISTING FUMEHOOD ENCLOSURE TO BE REMOVED AND REINSTALLED AS PART OF THE RENOVATION WORK. PROTECT DURING CONSTRUCTION AND REINSTALLED AT NEW LOCATION. COORDINATE SERVICES AND EXHAUST DUCT CONNECTION WITH MEP PACKAGE.
 - E. CONTRACTOR TO PROVIDE ADEQUATE NOISE AND DUST CONTROL BETWEEN CORRIDOR AND CONSTRUCTION SPACE.
 - F. CONTRACTOR TO DEMOLISH EXISTING ACOUSTIC TILE CEILING LAYER WITH SUSPENSION SYSTEM. COORDINATE WITH ELECTRICAL AND MECHANICAL FOR REMOVAL OF ALL FIXTURES. SECONDARY GYPSUM CEILING TO REMAIN - PROTECT AS REQUIRED.
 - G. CONTRACTOR TO DEMOLISH DEMISING WALL BETWEEN LABORATORIES 2048 AND 2050 UP TO EXISTING FIRE RATED STRUCTURE. AFTER DEMOLITION WORK IS COMPLETE, DEPARTMENTAL REPRESENTATIVE TO VERIFY CONDITIONS OF FIRE SEPARATION. IF DEEMED NECESSARY, CONTRACTOR WILL BE REQUIRED TO PROVIDE A MINIMUM 2 HOUR ULC-DESIGN, FIRE RATED ASSEMBLY TO PROTECT ANY EXPOSED STRUCTURAL ELEMENTS. IN ADDITION, CONTRACTOR TO REPAIR THE SURROUNDING AREAS AS REQUIRED TO ENSURE A CODE COMPLIANT FIRE SEPARATION.

- KEY NOTES**
- 1 CORRIDOR DOORS. CONTRACTOR TO REMOVE PRIOR TO DEMOLITION. PROTECT DURING NEW CONSTRUCTION AND REINSTALL.
 - 2 WOOD PANEL SERVICE CHASE. SEE DETAIL 2/A-001. REFER TO MECHANICAL FOR SERVICES TO REMAIN AND/OR DEMOLISHED.
 - 3 RADIATOR ENCLOSURE. SEE DETAILS 3/A-001 AND 4/A-001.
 - 4 WALL / PARTITION & DOOR TO BE DEMOLISHED. REFER TO GENERAL NOTES.
 - 5 CASEWORK SYSTEM TO BE DEMOLISHED.
 - 6 PLUMBING FIXTURES TO BE DEMOLISHED. COORDINATE WITH PLUMBING DRAWINGS.
 - 7 OVERHEAD EMERGENCY SHOWER TO BE REMOVED AND REINSTALLED AT NEW LOCATION. REFER TO PLUMBING PACKAGE.
 - 8 EXISTING FUMEHOOD ENCLOSURE TO BE REMOVED AND REINSTALLED AS PART OF THE RENOVATION WORK. PROTECT DURING CONSTRUCTION AND REINSTALLED AT NEW LOCATION. COORDINATE SERVICES AND EXHAUST DUCT CONNECTION WITH MEP PACKAGE.
 - 9 CONTRACTOR TO DEMOLISH EXISTING SHEET VINYL TILE FLOOR FINISH. PATCH AND REPAIR FLOOR SURFACE PRIOR TO NEW CONSTRUCTION.
 - 10 EXISTING FLOOR MOUNTED EQUIPMENT TO BE REMOVED / RELOCATED TO OTHER LAB AREAS. CONTRACTOR TO COORDINATE LOGISTICS WITH OWNER AND ENSURE EQUIPMENT IS PROTECTED AT ALL TIMES.
 - 11 ACOUSTIC CEILING TILE SYSTEM TO BE DEMOLISHED.
 - 12 ALUMINUM ELECTRICAL SERVICE CHASE TO BE DEMOLISHED.
 - 13 SHAFT ACCESS DOOR TO REMAIN.

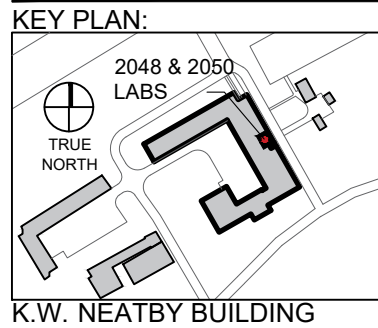


DATE	DESCRIPTION
05/18/2018	1. ISSUE FOR CONSTRUCTION

SHEET TITLE:


ARCHITECTURAL DEMOLITION PLAN

SCALE:	N/A
DATE:	04-02-2018
DRAWN:	XM
CHECKED:	SE
PROJECT:	74019668
SHEET NO:	


- LEGEND**
- EXISTING TO REMAIN
 - WALL TO BE DEMOLISHED
 - CASEWORK SYSTEM / EQUIPMENT TO BE REMOVED OR RELOCATED

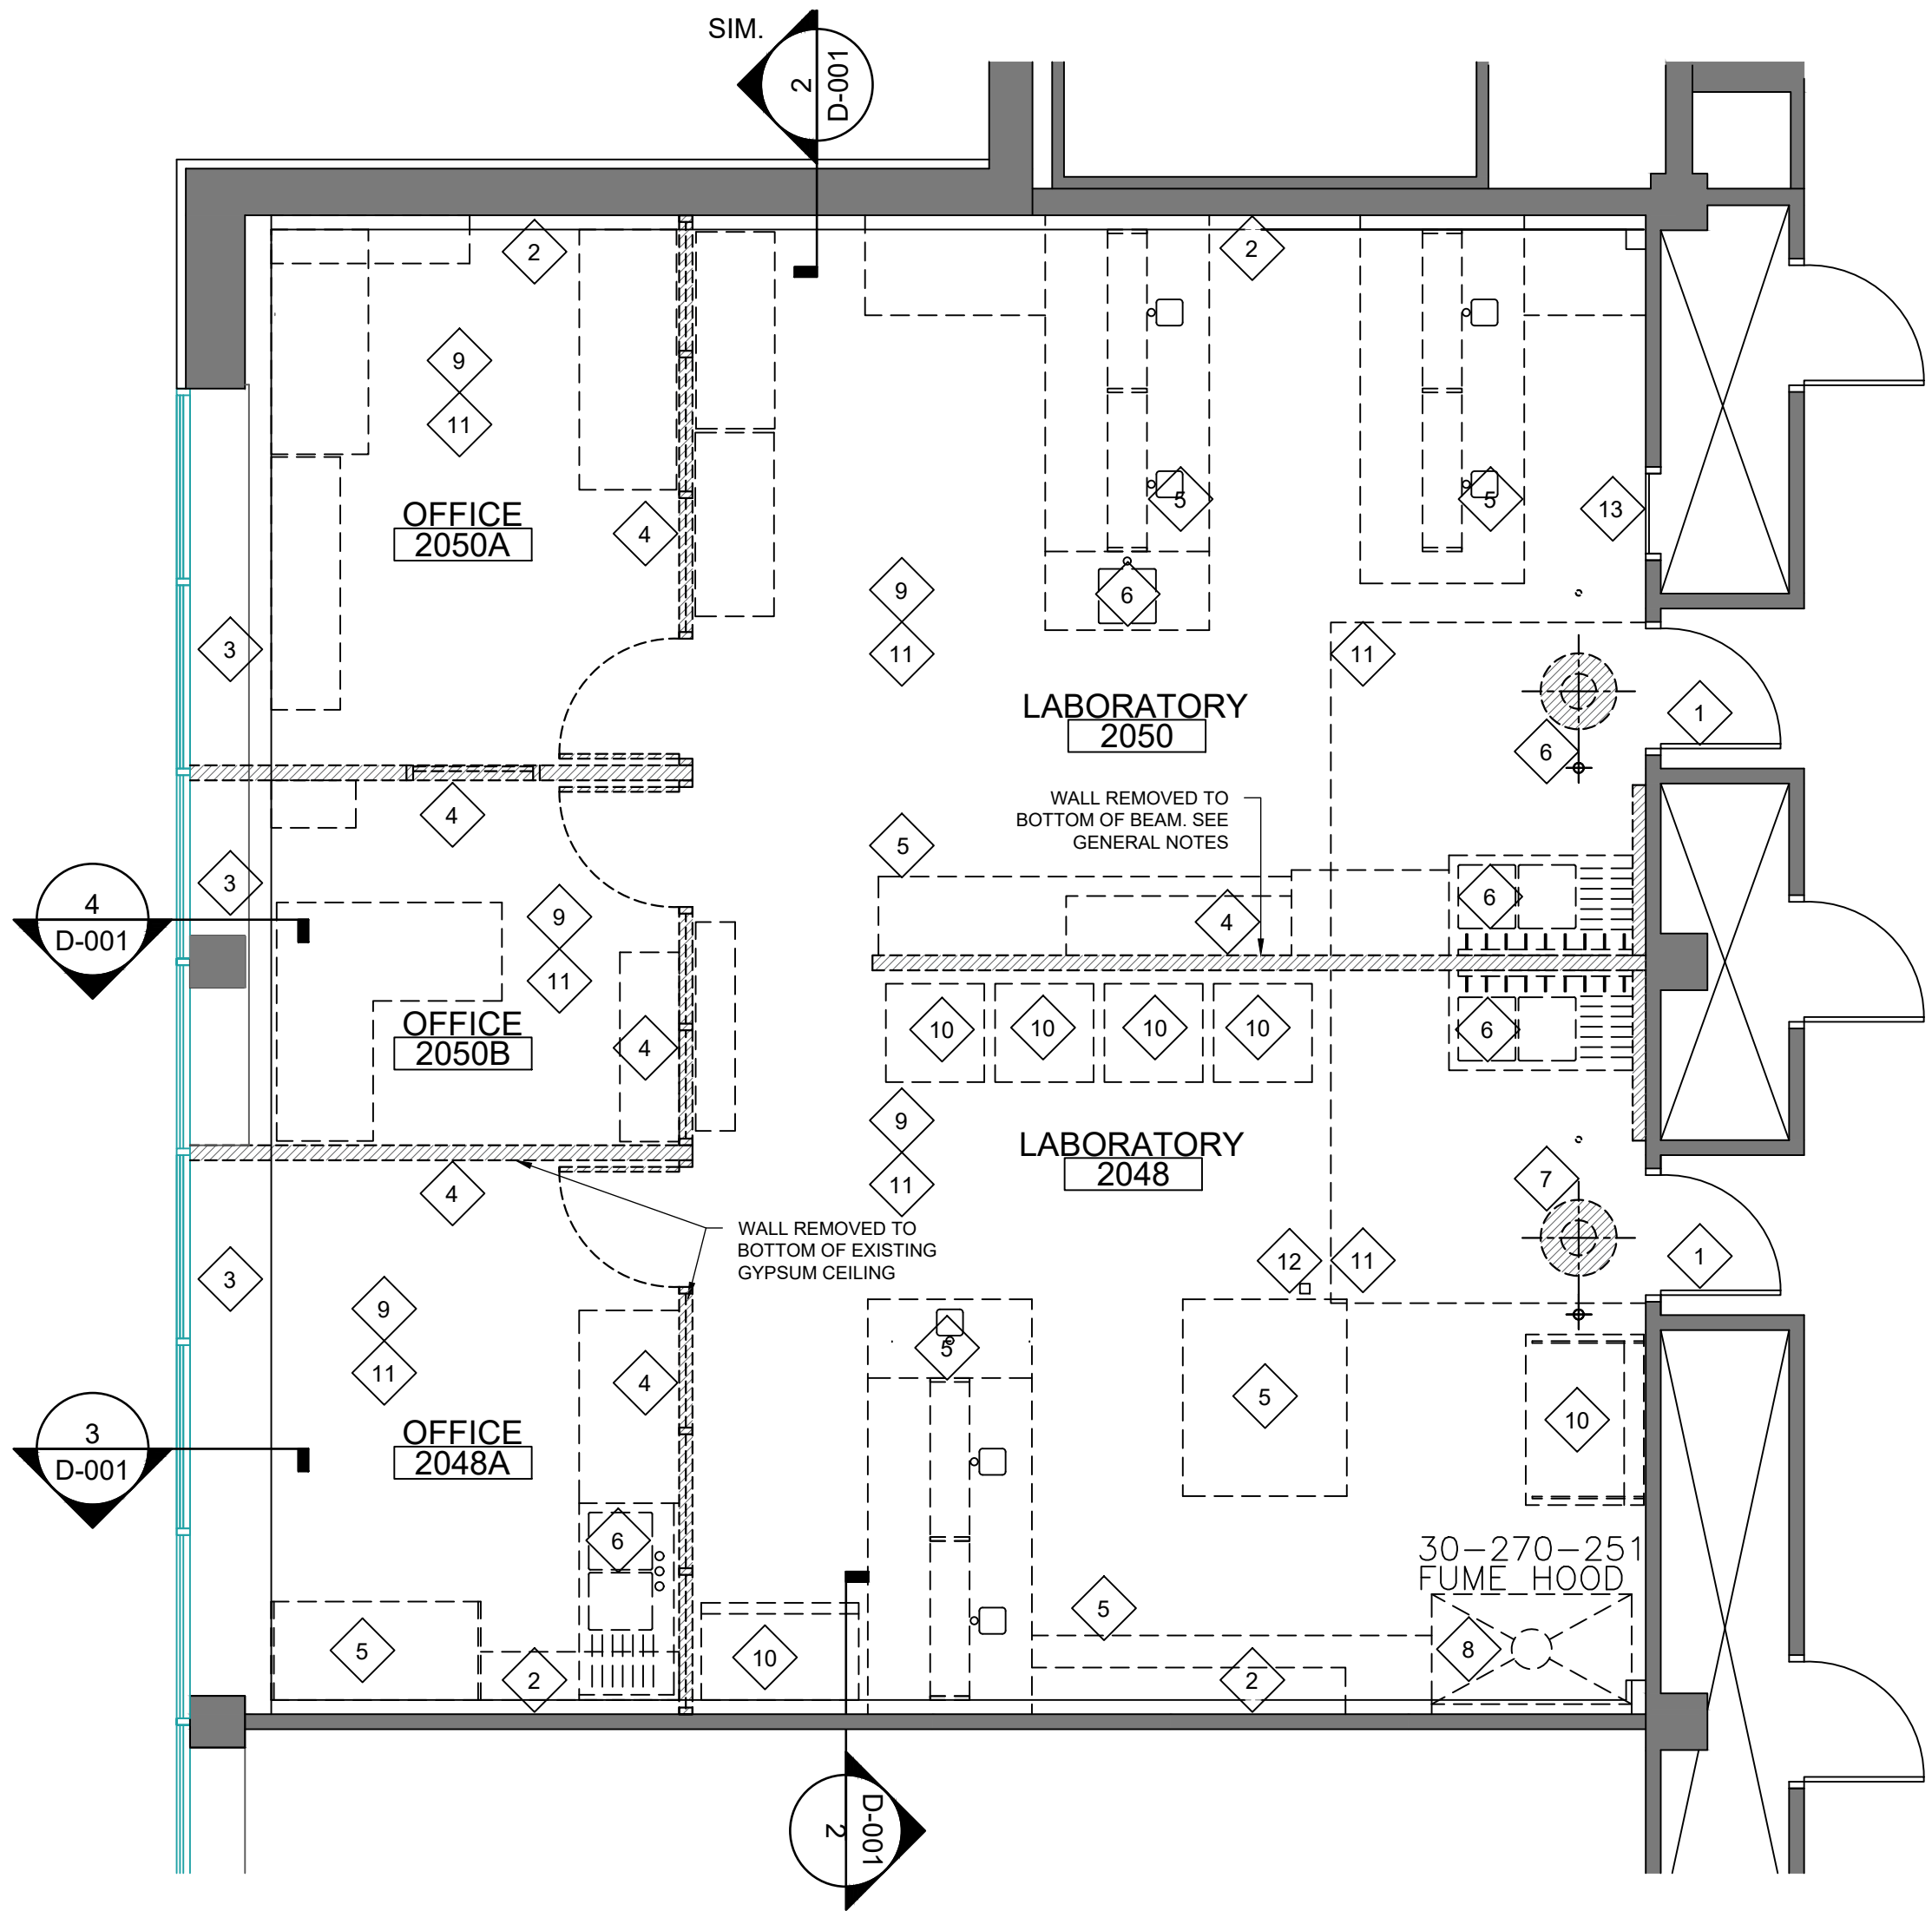


1 ARCHITECTURAL DEMOLITION PLAN
D-001 SCALE 1:50

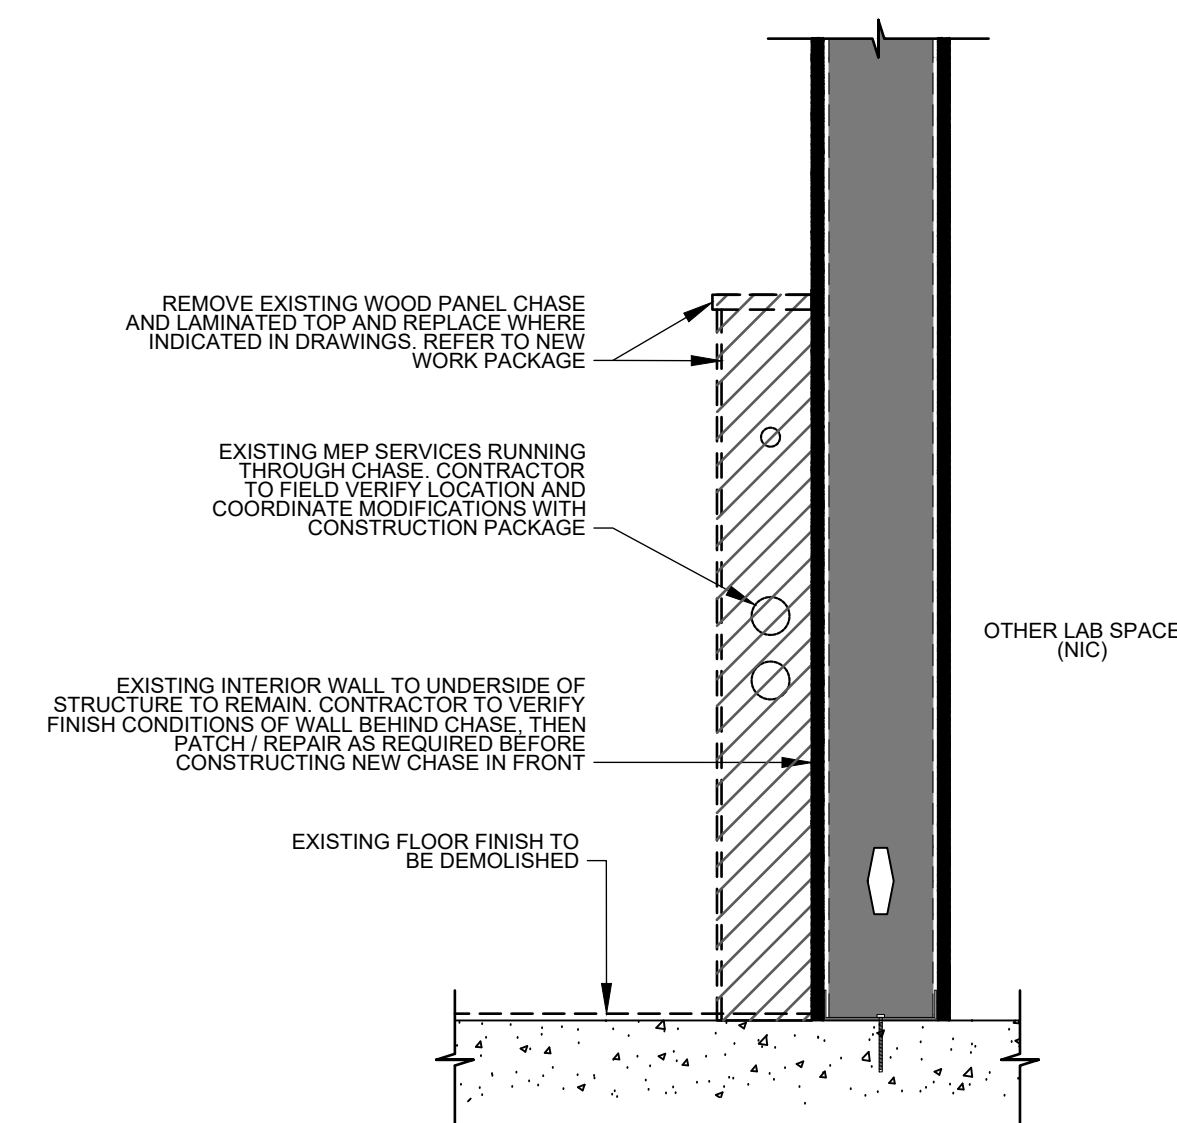


2 INTERIOR WALL CHASE DEMO
D-001 SCALE 1:10

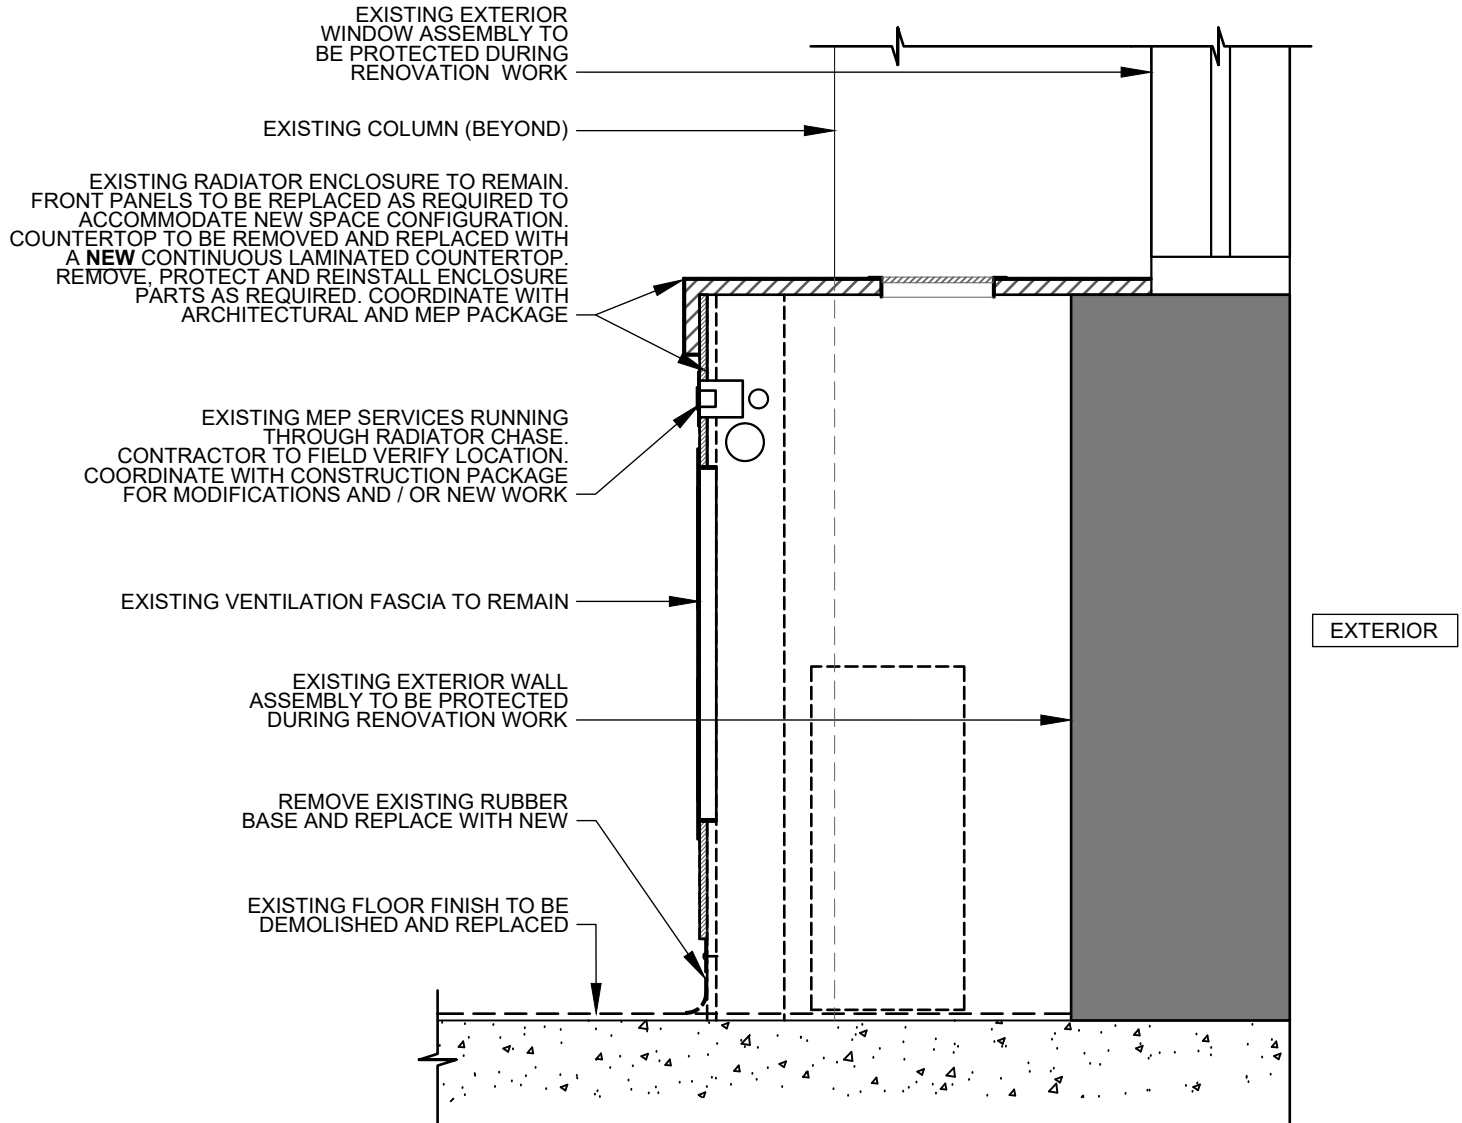

3 EXTERIOR WALL CHASE DEMO
D-001 SCALE 1:10

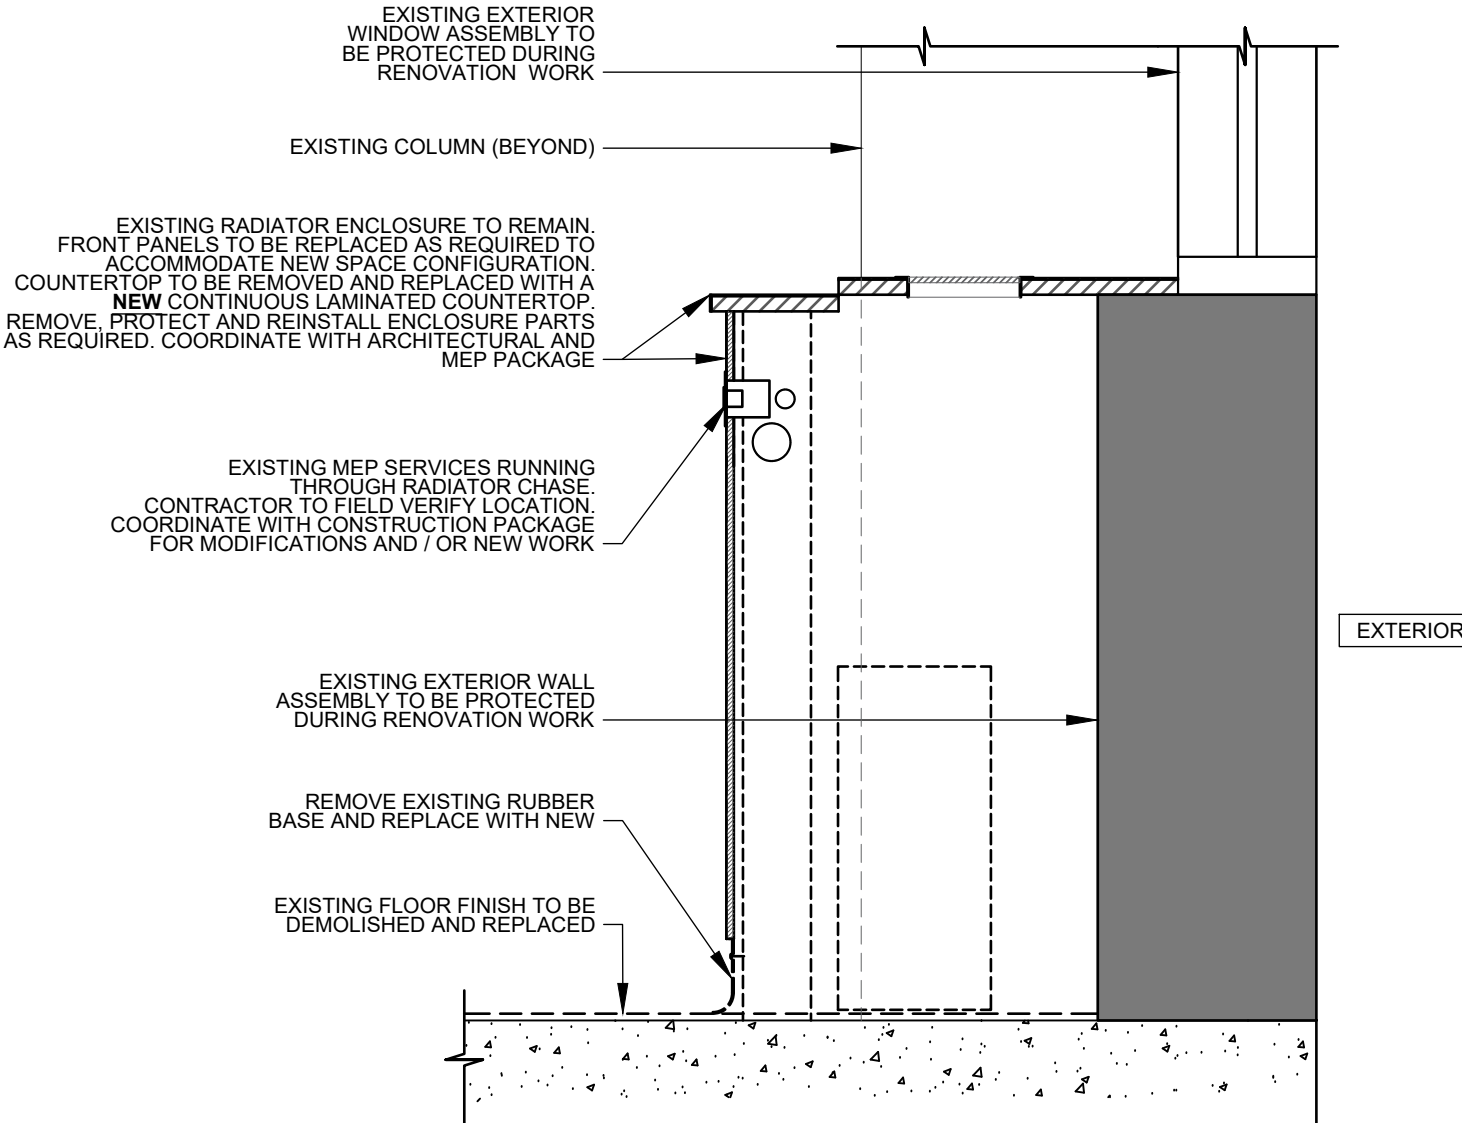

4 EXTERIOR WALL CHASE DEMO
D-001 SCALE 1:10

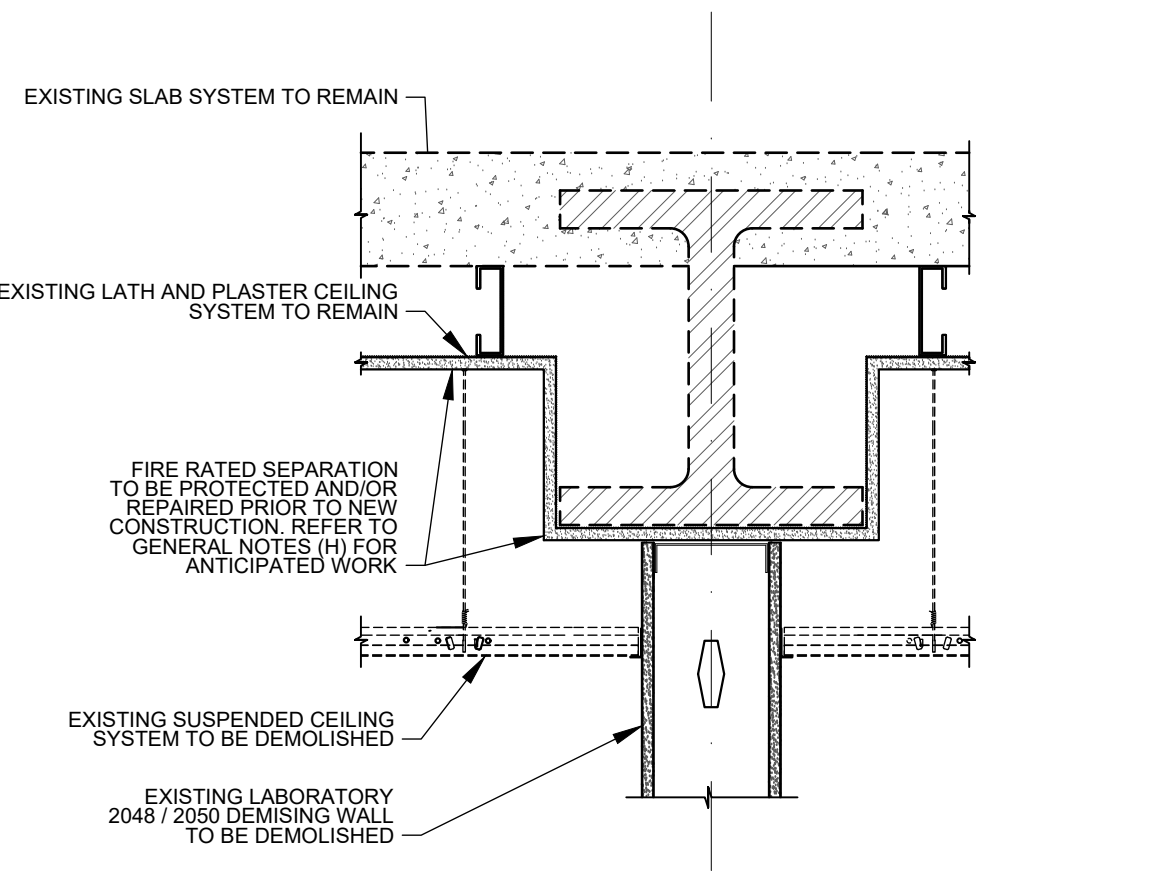

5 DEMISING WALL DEMO
D-001 SCALE 1:10