

SIR FREDERICK BANTING BLDG. FIT-UP PROJECT PHASE 2 & 3

251 Sir Frederick Banting Driveway, Ottawa, Ontario

ISSUED FOR TENDER: 2018/06/29

DRAWING LIST:

ARCHITECTURAL:

- A000 COVER PAGE, KEY PLANS AND LOCATION PLAN
- A001 CODE COMPLIANCE, SCHEDULES & ASSEMBLIES
- A220 C WING - SECOND FLOOR OFFICE SPACE PLANS
- A230 C WING - THIRD FLOOR OFFICE SPACE PLANS
- A240 C WING - FOURTH FLOOR OFFICE SPACE PLANS
- A250 C-WING - CORRIDORS AT 2ND AND THIRD FLOORS
- A260 C WING - THIRD FLOOR PLAN KITCHENETTE
- A635 KITCHENETTE ELEVATIONS AND DETAILS

MECHANICAL:

- M0 MECHANICAL TITLE PAGE
- M1 C WING SECOND AND THIRD FLOOR OFFICE SPACE
- M2 C WING THIRD FLOOR KITCHENETTE
- M3 FURTH FLOOR OFFICE


ELECTRICAL:

- E0 ELECTRICAL TITLE PAGE
- E1 C WING SECOND AND THIRD FLOOR OFFICE SPACE
- E2 C WING THIRD FLOOR KITCHENETTE
- E3 ELECTRICAL SPECIFICATIONS




LOCATION PLAN


NTS

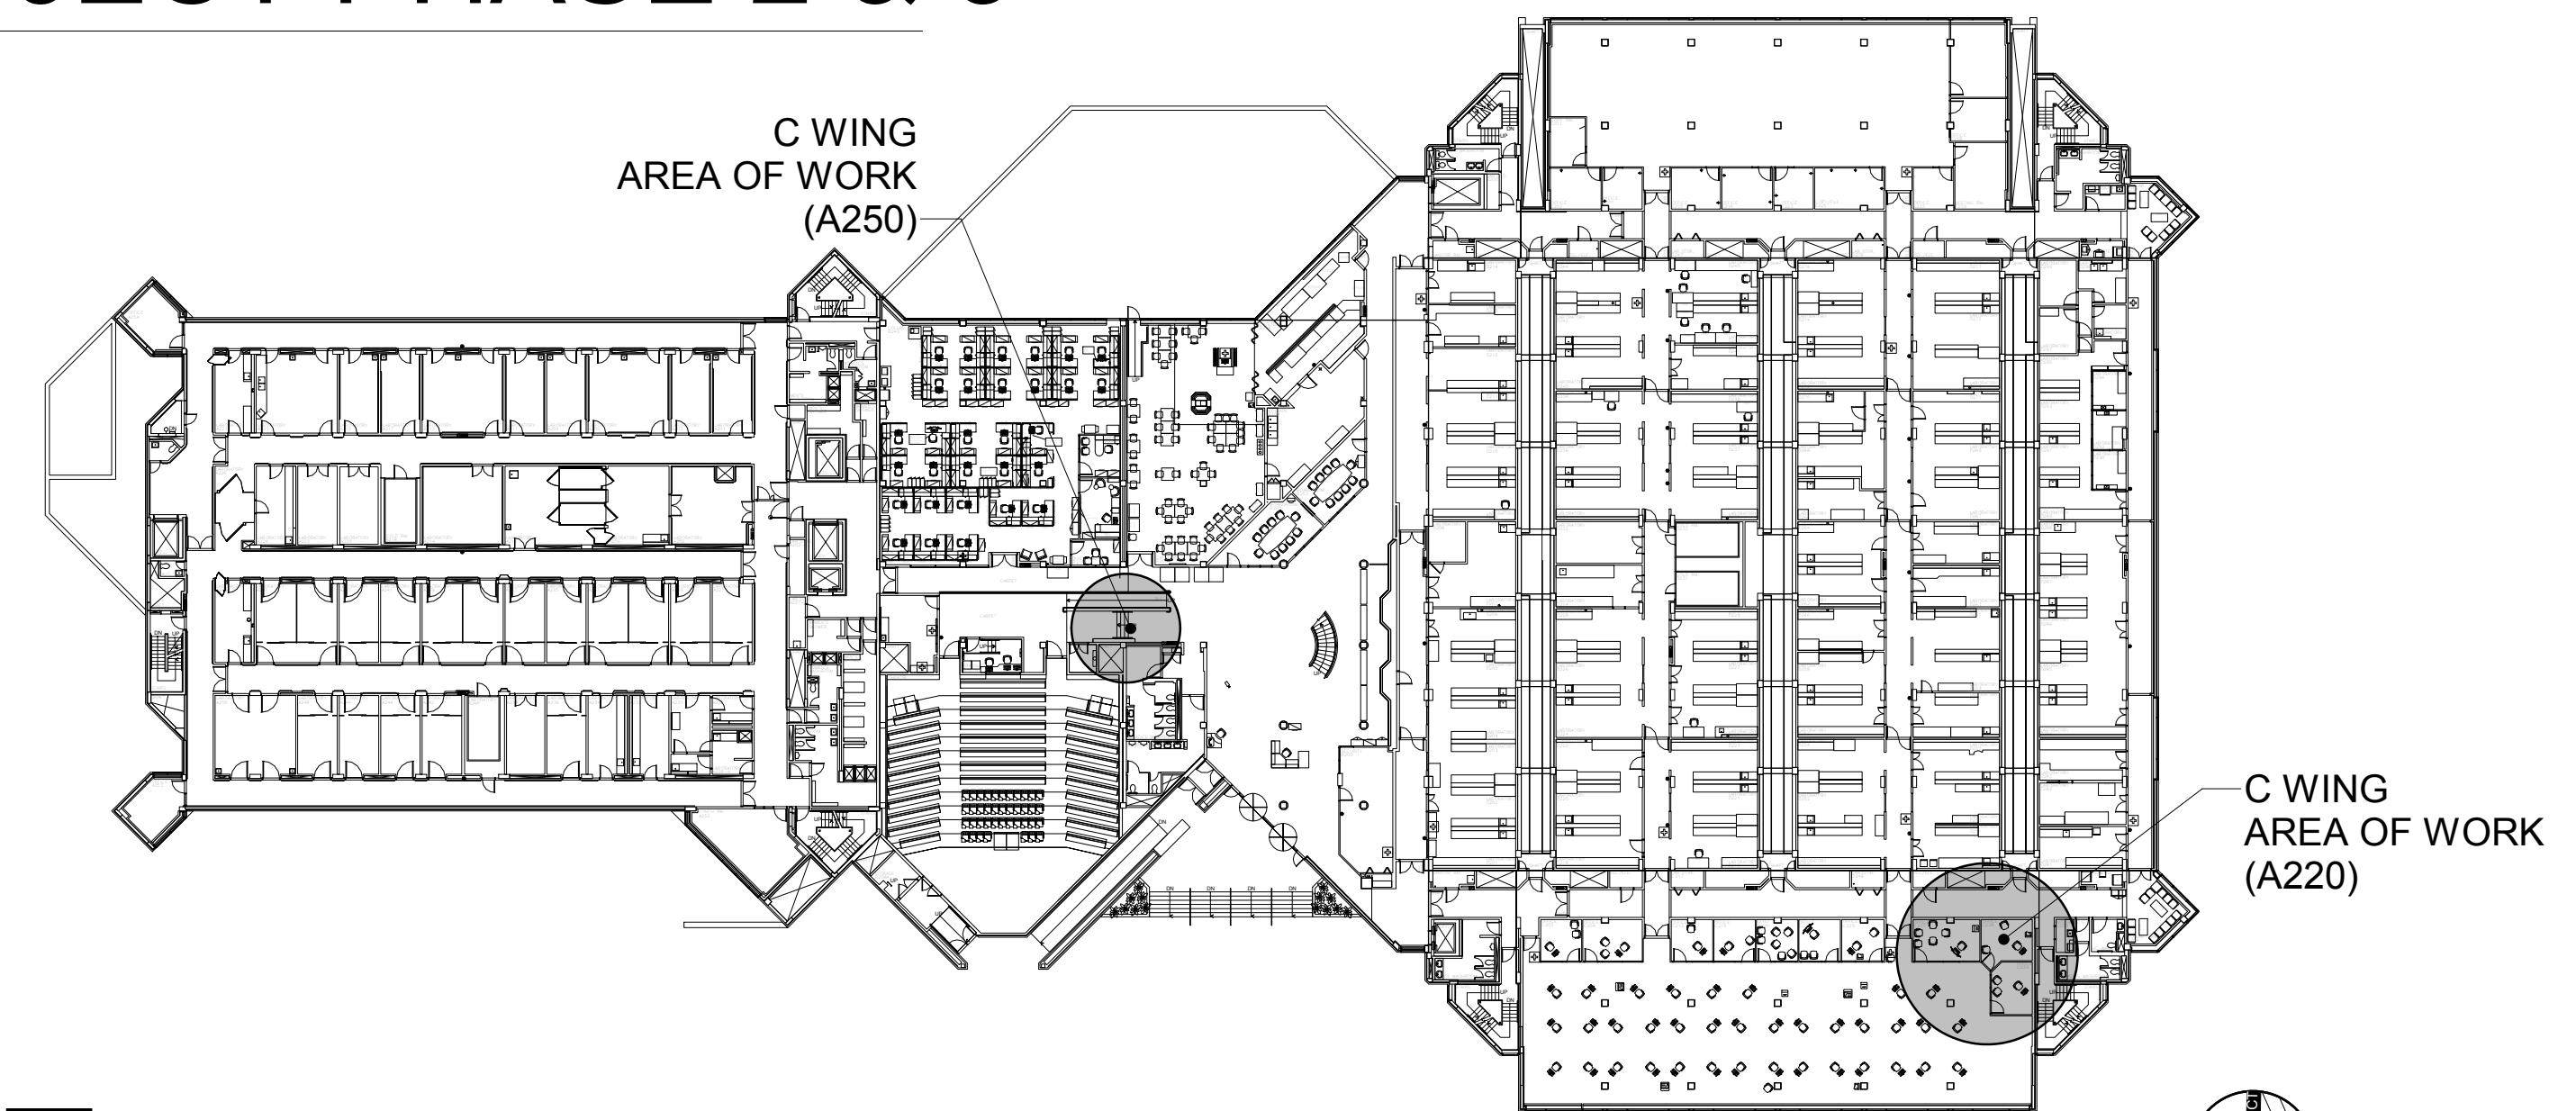

1 SECOND FLOOR KEY PLAN
A000 1:500

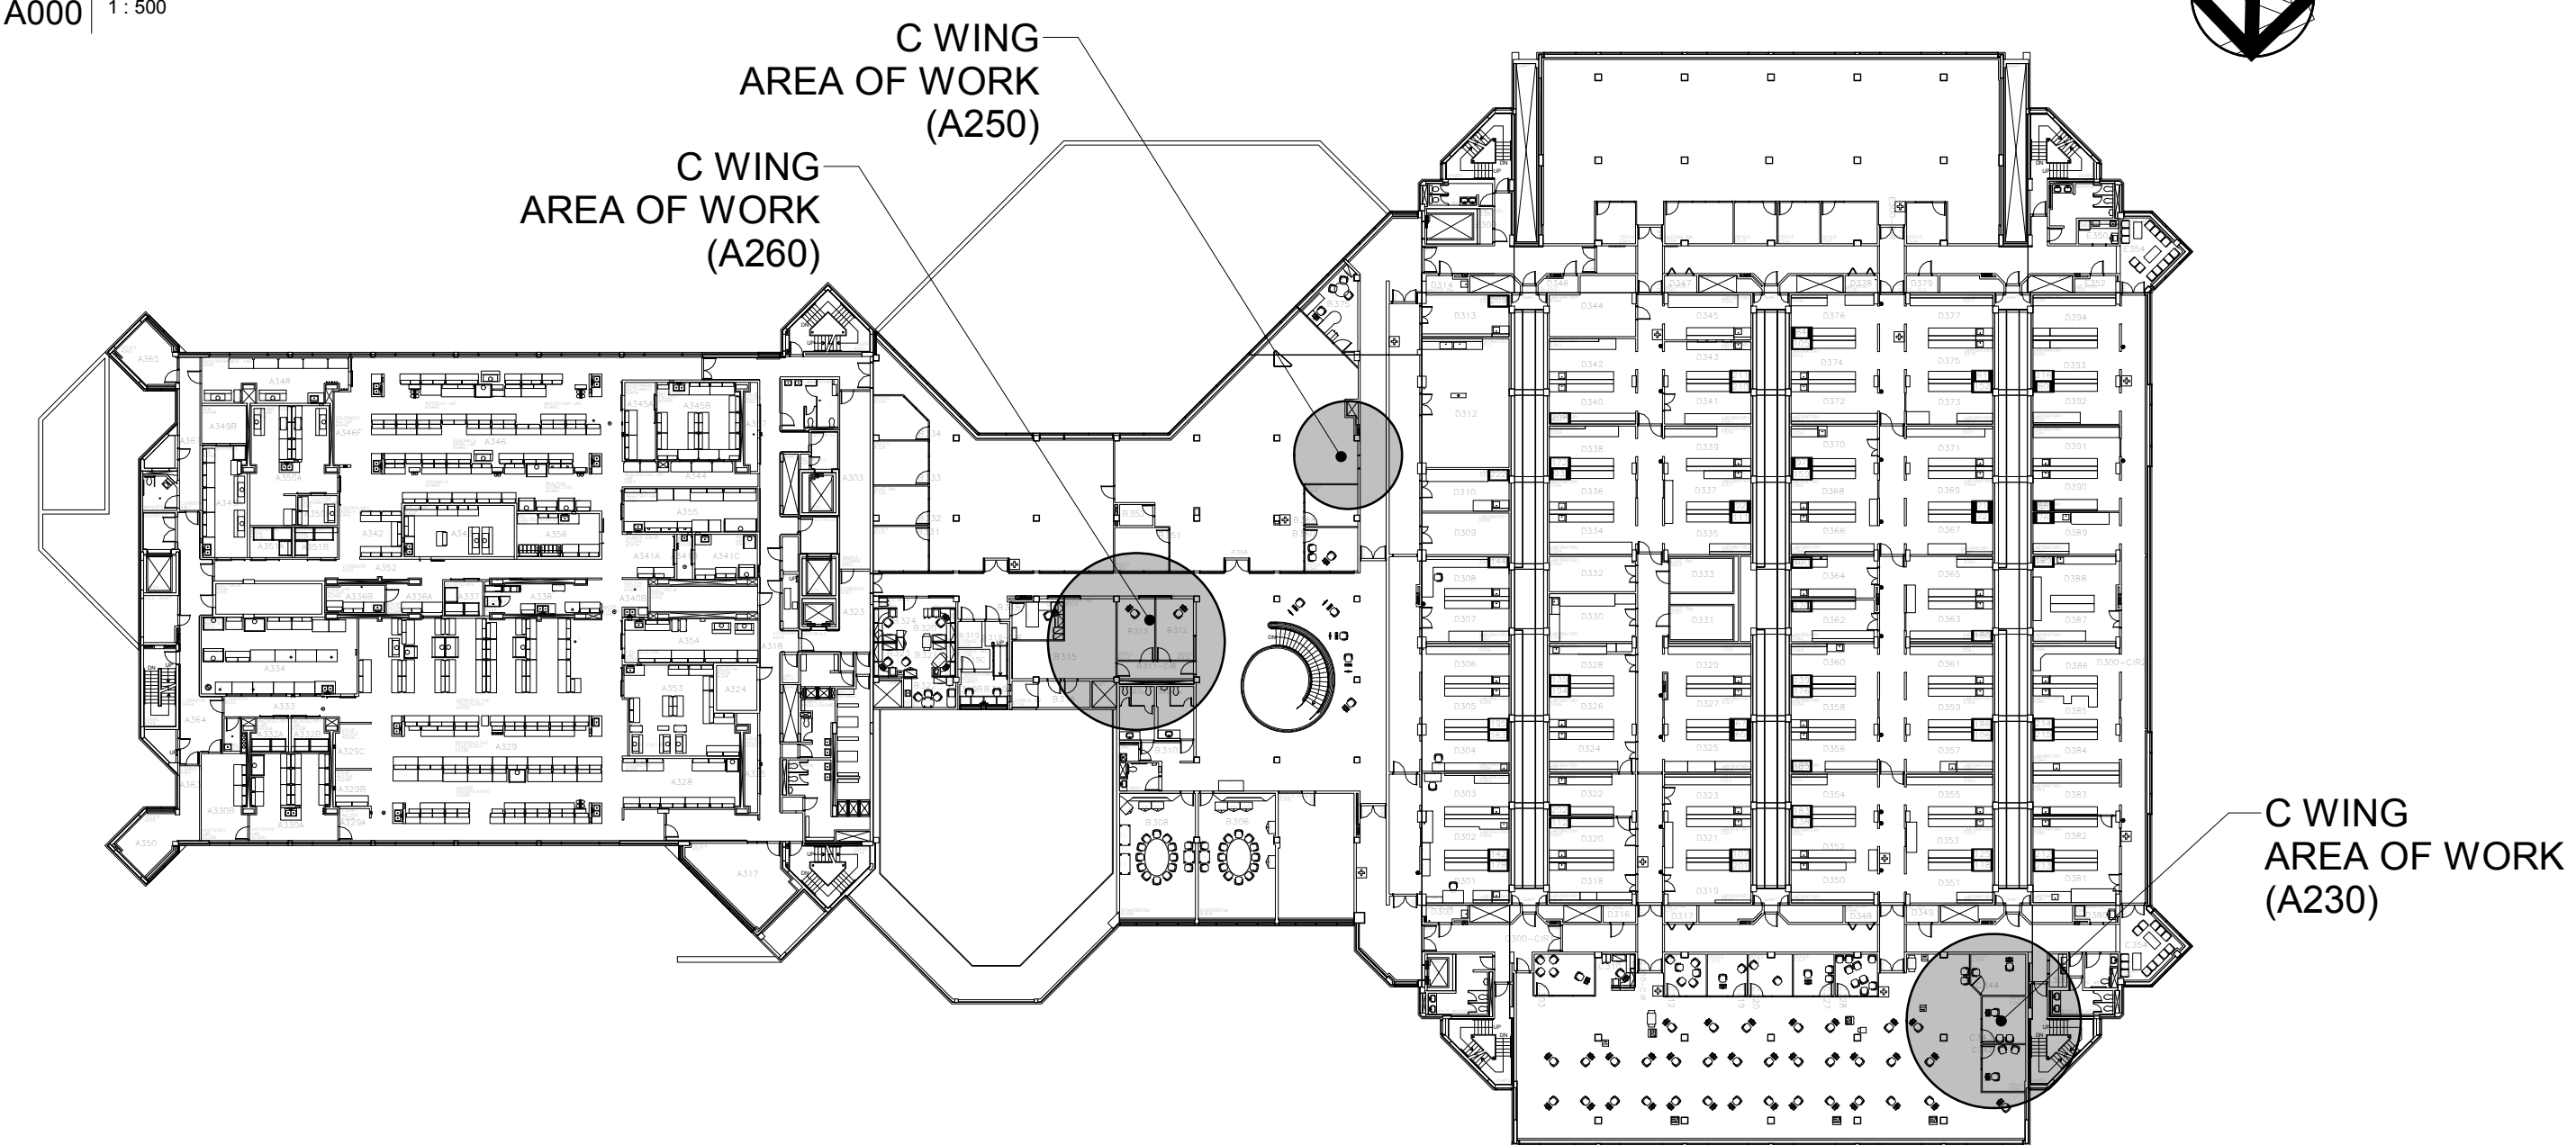

2 THIRD FLOOR KEY PLAN
A000 1:500

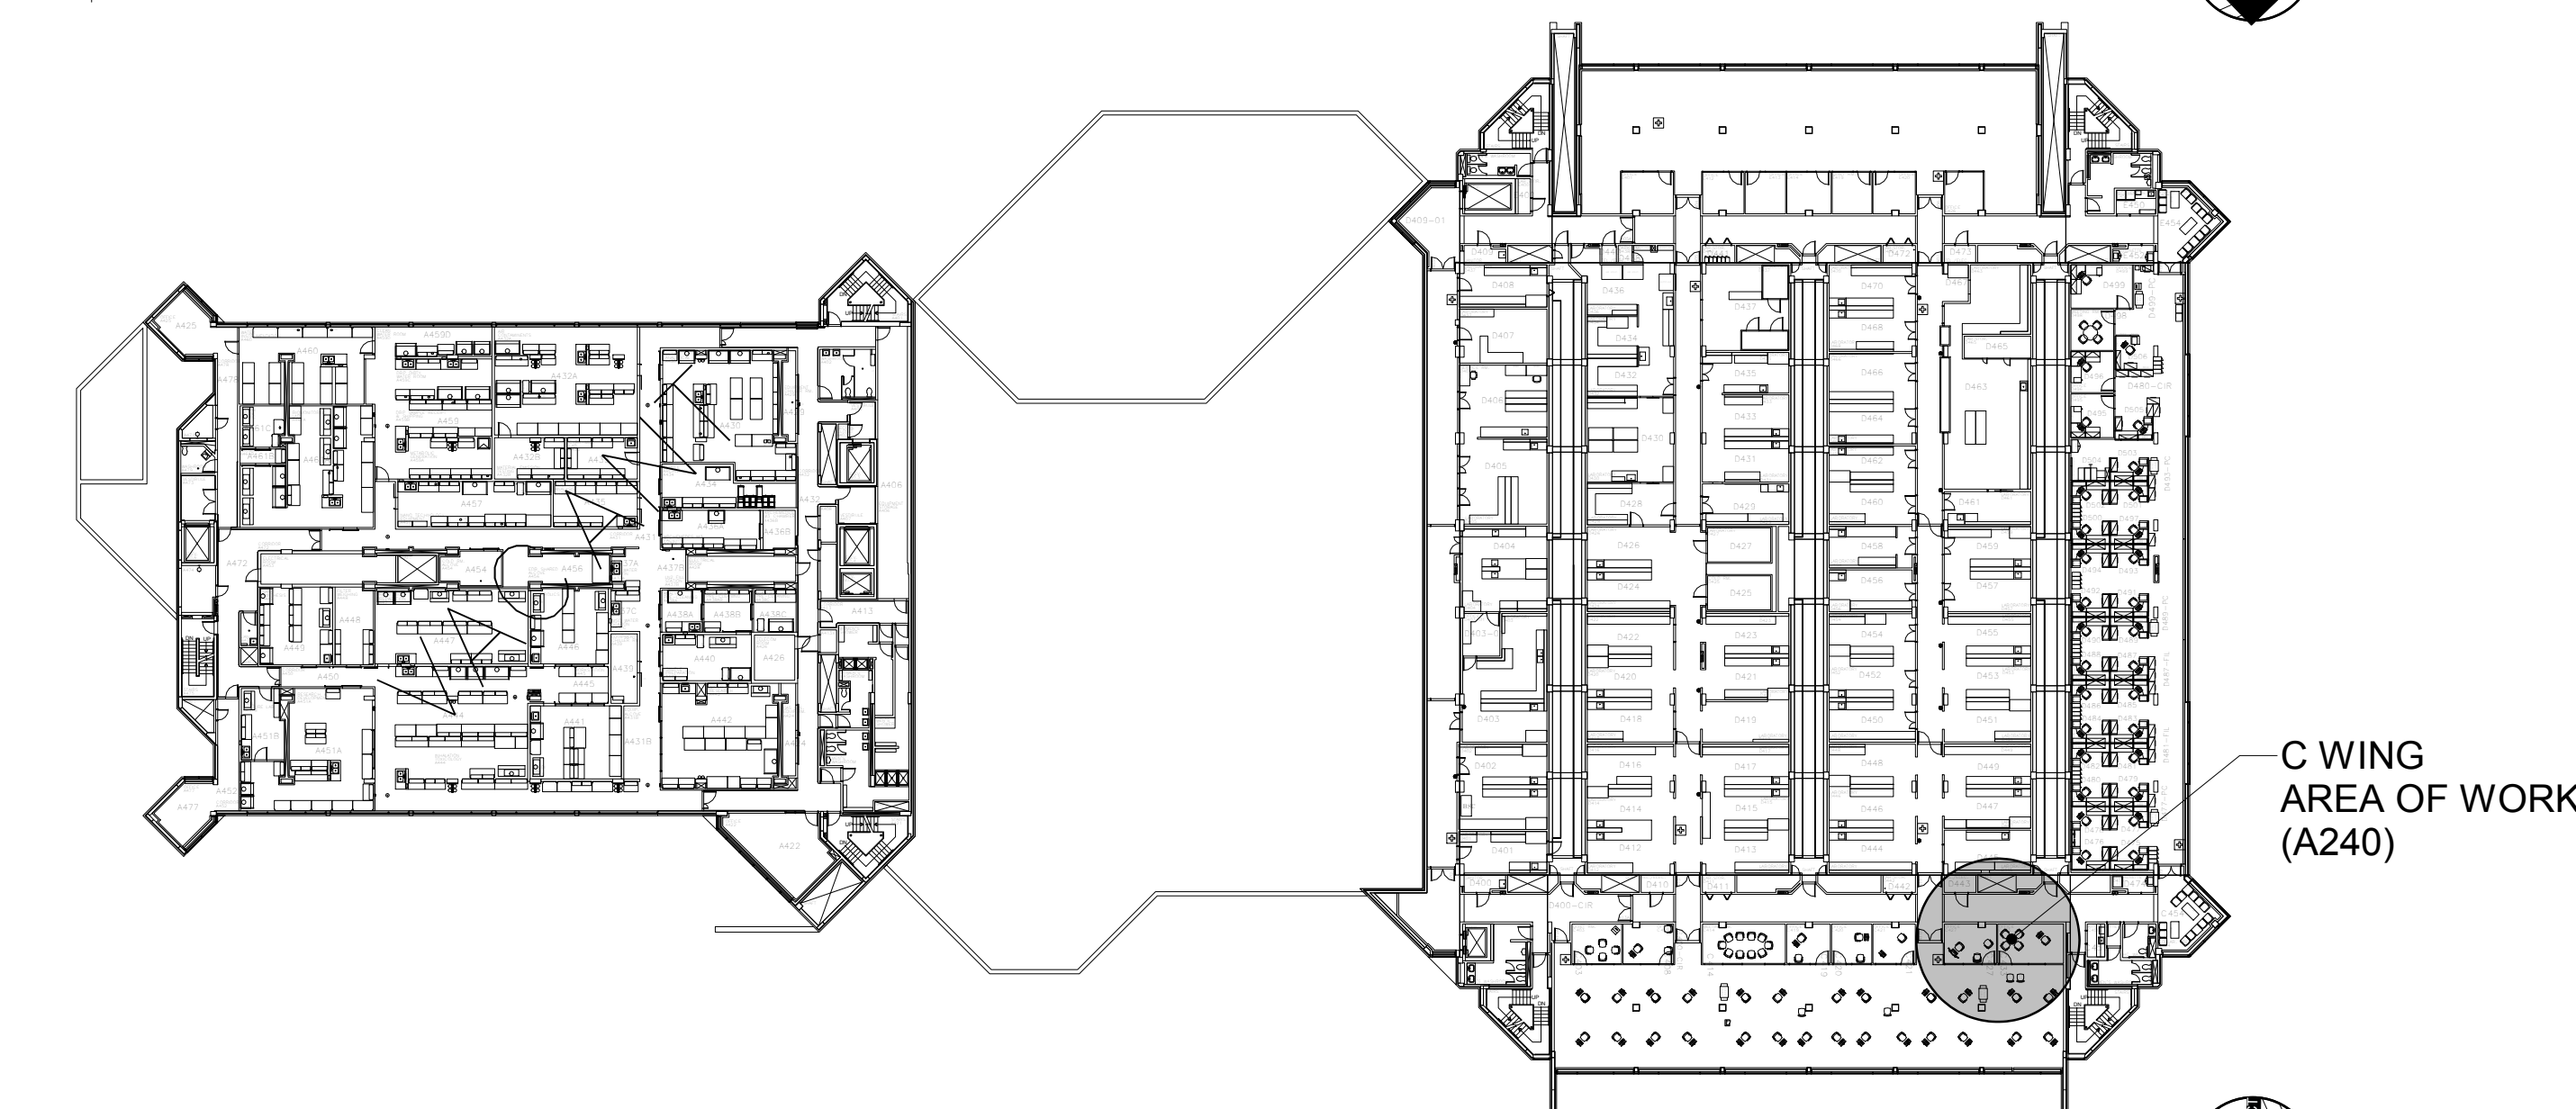

3 FOURTH FLOOR KEY PLAN
A000 1:500

STAMP

1 2018/06/29 ISSUED FOR TENDER

REV DATE ISSUE

NOTE

1. OWNERSHIP OF THE COPYRIGHT OF THE DESIGN AND THE WORKS EXECUTED FROM THE DESIGN REMAINS WITH CSV ARCHITECTS, AND MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN CONSENT OF CSV ARCHITECTS.

2. THE DRAWINGS, PRESENTATIONS AND SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF CSV ARCHITECTS. THEY ARE NOT TO BE USED BY THE CLIENT ON OTHER PROJECTS OR ON EXTENSIONS TO THIS PROJECT WITHOUT THE WRITTEN CONSENT OF CSV ARCHITECTS.

3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER PROJECT DRAWINGS AND SPECIFICATIONS.

4. DO NOT SCALE DRAWINGS. CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY DIMENSIONS ON SITE.

5. ALL WORK SHALL BE IN ACCORDANCE WITH THE ONTARIO BUILDING CODE AND ALL SUPPLEMENTS AND APPLICABLE MUNICIPAL REGULATIONS.

CLIENT

HEALTH CANADA

PROJECT

SIR FREDERICK BANTING BLDG. FIT-UP PROJECT PHASE 2 & 3

251 Sir Frederick Banting Driveway, Ottawa, Ontario

TITLE

COVER PAGE, KEY PLANS AND LOCATION PLAN

PROJECT NO: 2018-0220

DRAWN: JW

APPROVED: RF

SCALE: As indicated


FIRST ISSUE: 2018/04/17

DRAWING NO. _____ REV _____

A000

1

DOOR SCHEDULE																																
IDENTITY INFO				DOOR PANEL						DOOR FRAME				HARDWARE INFO						Comments												
Door No.	Location	Drawing	Type	Dimensions			Material	Finish	FRR	Type	Material	Finish	FRR	Glazing	LOCKSET		ACCESS		Power Door Operator		Astragal	Coordinator	Push/Pull	Kickplate	Drop Bolt	Floor Stop	Overhead Stop	Wall Stop	Threshold Sweep			
				Width	Height	Thickness									Panic	Passage	Storeroom	Classroom												Electric Strike	Card Reader	R.E.X.
D301	IT LAN ROOM	A260	A	914	2134	44	HM	PT		FM1	PSF	PT																				8ga W/ 16ga FRAME C/W DOOR CLOSER. HARDWARE SPECIFICATION TO BE REVIEWED BY HC SECURITY PRIOR TO INSTALL.
D302	QUIET ROOM	A260	A	914	2134	44	HM	PT		FM1	PSF	PT																				8ga W/ 16ga FRAME C/W DOOR CLOSER. HARDWARE SPECIFICATION TO BE REVIEWED BY HC SECURITY PRIOR TO INSTALL.
D303	QUIET ROOM	A260	A	914	2134	44	HM	PT		FM1	PSF	PT																				8ga W/ 16ga FRAME C/W DOOR CLOSER. HARDWARE SPECIFICATION TO BE REVIEWED BY HC SECURITY PRIOR TO INSTALL.
D304	CORRIDOR	A250	B	914	2134	44	HM	PT	45min.	FM1	PSF	PT	45min.	GL-2																		8ga W/ 16ga FRAME C/W DOOR CLOSER. HARDWARE SPECIFICATION TO BE REVIEWED BY HC SECURITY PRIOR TO INSTALL.

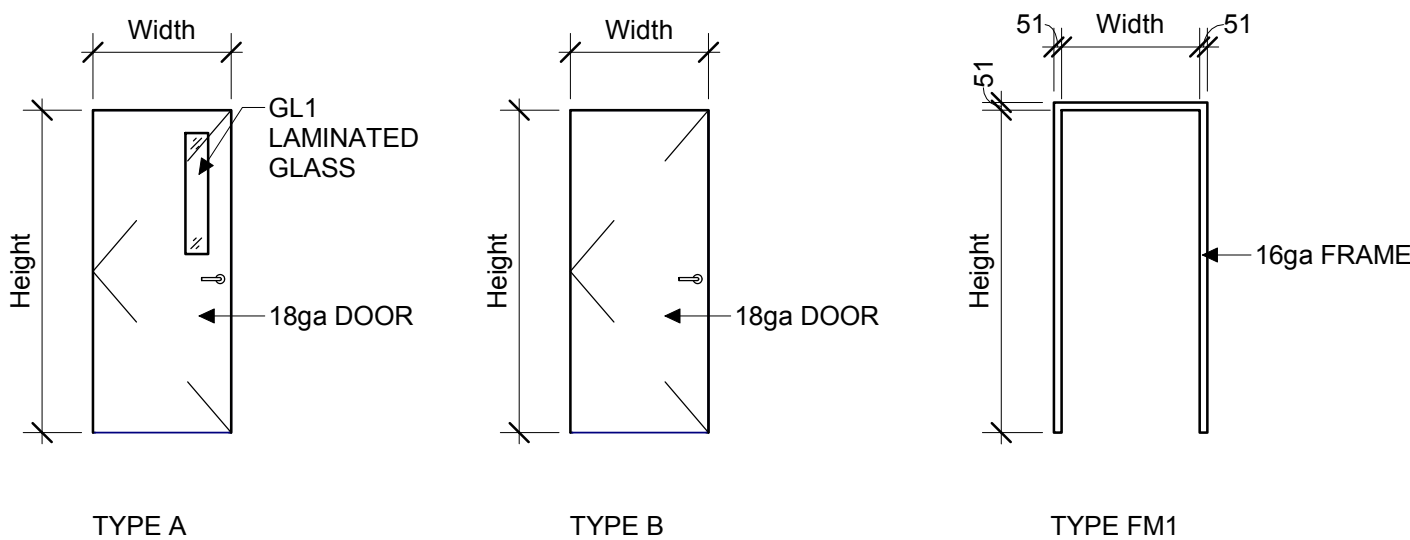

DOOR PANEL LEGEND

DOOR FRAME LEGEND

GENERAL NOTES:

- A. GLAZING PANEL WITHIN DOOR
- B. FIRE RATED


MATERIAL LEGEND:

- GL GLASS
- HCW HOLLOW CORE WOOD
- HM HOLLOW METAL
- PSF PRESSED STEEL FRAME - PAINTED
- PT PAINTED
- SCW SOLID CORE WOOD

GLAZING TYPE:


- GL-1 LAMINATED SAFETY GLASS
- GL-2 FIRE RATED GLASS

Finishes	Specification	Lead location	Notes
Flooring			
CPT-01 Carpet tile	Carpet tile Shaw Carpet or equivalent Style name: Catalyst Tile Collection name: Mix style number: 59579 Install method: To match existing	Office Area	Carpet tile is to match existing
WB-02	Rubber baseboard 08-icicle 4" high	Throughout	
WB-03	Rubber baseboard 48-Grey 4" high	Throughout	
LVT-01	Luxury vinyl tile LVT plank tile size: Plank size: 184.2x1219.2mm Color: Camaro 2242-Boathouse Oak 0.3 MM wear layer	Kitchen Flooring	
Wall Finish			
PT-01	Paint: Color: Meeting House Code: 50YY 74/069-A1864 Finish Eggshell	Gypsum Paint	
PT-02	Paint: Color: Newborn Code: 535Y 78/269-A0710 Finish Eggshell	Gypsum paint	
PT-03	Paint: Color: Calico Product code: 70YR 36/468 A0506	Gypsum paint	
PT-04	Paint: Color: Serengeti Plain code: 90YY 48/255-A0970	Gypsum paint	
PT-05	Paint: Color: Frost Grey code: 30gg 52/011 a1942 Eggshell	Gypsum paint	
PT06	Paint: color: Atlantic Blue Code: 970BG 53/164	Gypsum paint	
PT-07	Paint: Color: Brun Chabel code: 2023 Finsh Finish Pearl	Door and Frames	
CT-1	Ceramic Glazed wall tile: Color: Arctic White Bright Size: 4"x6"	Kitchen	
Millwork Finish			
PL1	Plastic laminate: Wood grain Smoky Brown Pear Matt Finish	Interior shelves to be white melamine	
PL2	Plastic laminate: Grey Oyster Gray Matt Finish	Counter top & upper cabinet doors. Open microwave shelf and task light trim.	
Additional Finishes			
ACT-01 Acoustical Tile and T-Bar	To Match Existing	Throughout	
HW-01	Hardware: Richelieu or equivalent #BP348796170	Kitchen	
HW-02	Hardware: Richelieu or equivalent Hinges 375T158180	Kitchen	
HW-03	Hardware: Richelieu or equivalent Shelf Pins : CP2291180	Kitchen	
HW-04	Hardware: Richelieu or equivalent Bumpers #MP30311	Kitchen	

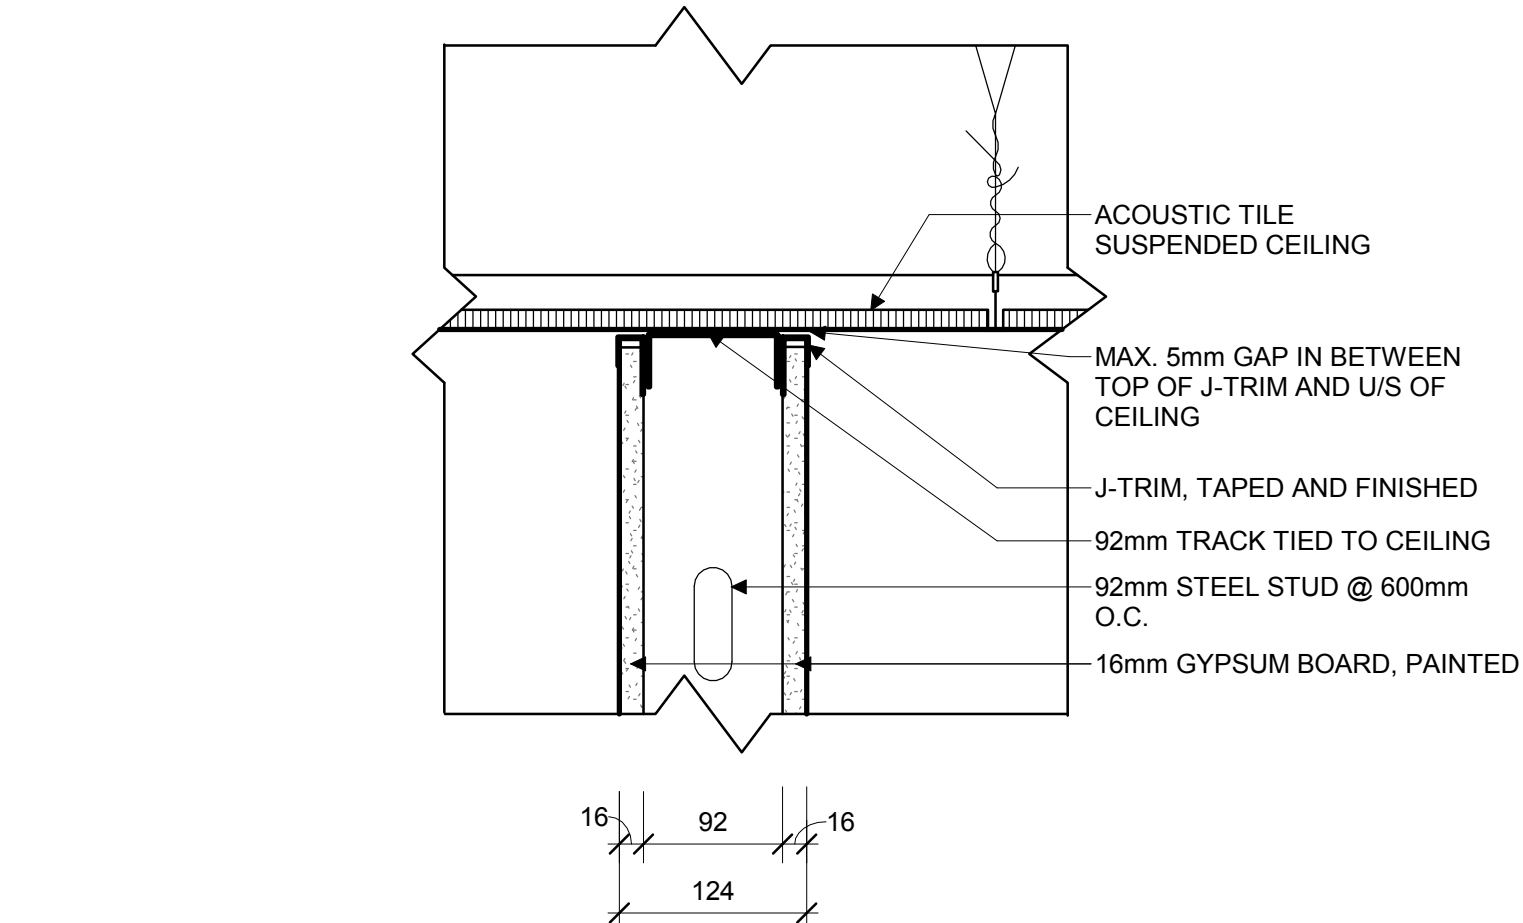

SECTION DETAIL: P4C.1 PARTITION HEAD AT ACOUSTIC SUSPENDED CEILING TILE

A001 1:5

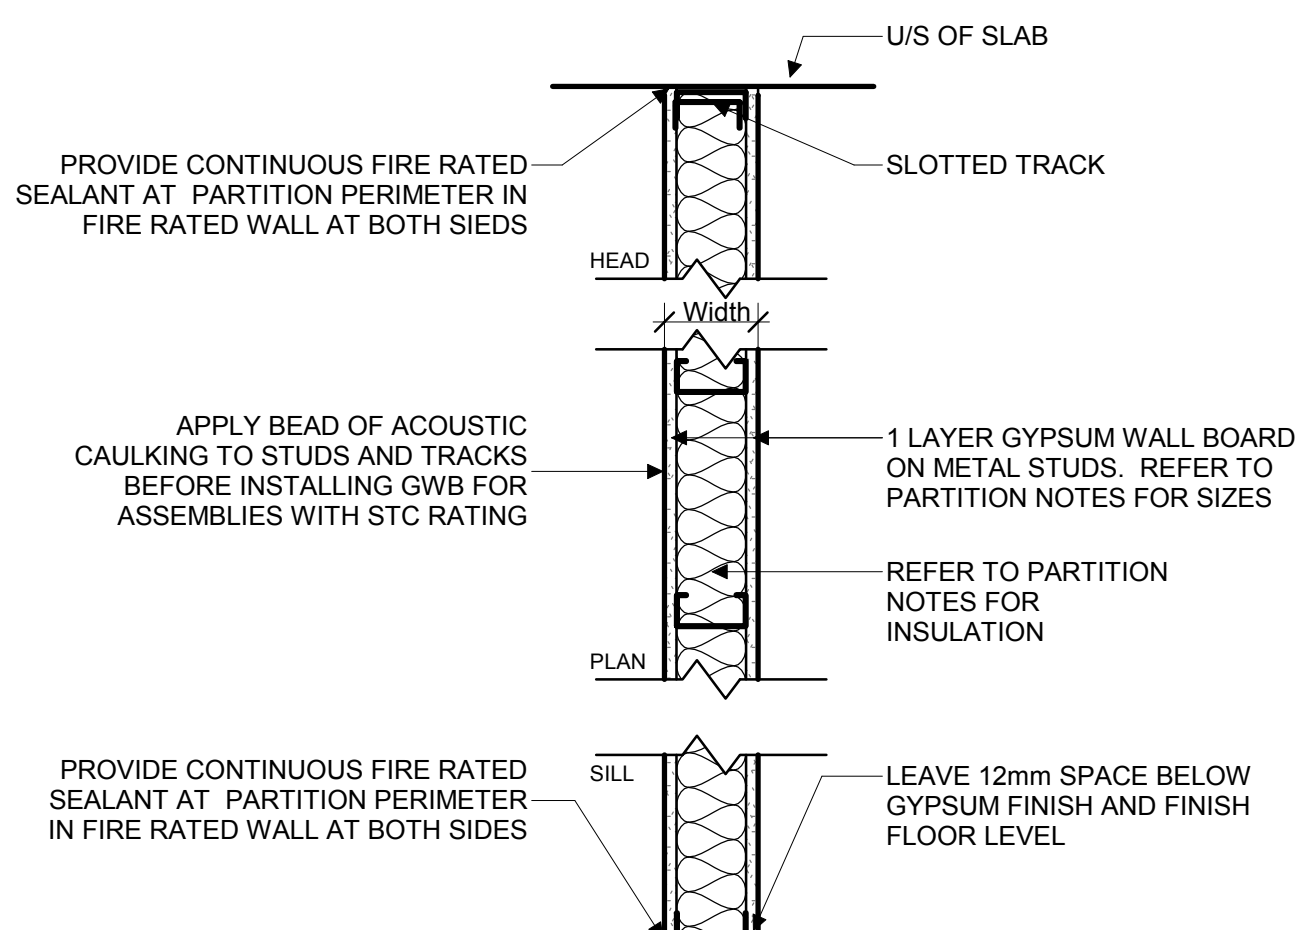

PARTITION NOTES							
type	width	structure	finish	insulation	STC	FRR	comments
P4C.1	124mm	92mm stud @600 o.c.	16mm GWB	--	--	--	TO U/S SLAB
X4C.1	184mm	152mm stud @600 o.c.	16mm TYPE X GWB	BATT	51 OBC SB-3 T.1 S7a	1h ULC W480	TO U/S SLAB
--	--	--	--	--	--	--	--

PARTITION ASSEMBLIES

Item	Ontario Building Code 2012 Part 11 - Renovation of Existing Building	OBC Reference
11.1	Existing Building Classification: Describe Existing Use: OFFICE BUILDING, GROUP D Construction Index: _____ Hazard Index: _____ <input checked="" type="checkbox"/> not applicable (no change in major occupancy)	11.2.1 T11.2.1A T11.2.1B to N
11.2	Alteration to Existing Building is: Basic Renovation: <input type="checkbox"/> Extensive Renovation: <input checked="" type="checkbox"/>	11.3.3.1 11.3.3.2
11.3	Reduction in Performance Level: Structural: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes By increase in occupant load: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes By change in major occupancy: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes Plumbing: <input type="checkbox"/> No <input checked="" type="checkbox"/> Yes Sewage System: <input type="checkbox"/> No <input checked="" type="checkbox"/> Yes	11.4.2 11.4.2.1 11.4.2.2 11.4.2.3 11.4.2.4 11.4.2.5
11.4	Reduction in Performance Level: Structural: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explain) By increase in occupant load: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explain) By change in major occupancy: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explain) Plumbing: <input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (explain) Sewage System: <input type="checkbox"/> No <input checked="" type="checkbox"/> Yes (explain)	11.4.3 11.4.3.2 11.4.3.3 11.4.3.4 11.4.3.5 11.4.3.6
11.5	Compliance Alternatives Proposed: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (give numbers) _____	11.5.1
11.6	Alternative Measures Proposed: <input checked="" type="checkbox"/> No <input type="checkbox"/> Yes (explain) _____	11.5.2

COD COMPLIANCE

FINISHES SCHEDULE

DEMOLITION PLAN KEYNOTES:

- 1 REMOVE EXISTING DEMOUNTABLE PARTITION BACK TO ADJACENT WALL. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 2 REMOVE EXISTING DOOR, FRAME AND TRANSOM. REMOVE EXISTING HARDWARE FROM DOOR AND THRESHOLD AND RETURN TO OWNER. DISPOSE DOOR, FRAME AND TRANSOM.
- 3 REMOVE EXISTING SUSPENDED ACOUSTICAL TILE CEILING
- 4 REMOVE EXISTING CARPET AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING
- 5 REMOVE ALL PLENUM BAFFLES AND LAY-IN SOUND INSULATION
- 6 REMOVE EXISTING GLAZING SYSTEM
- 7 AED DEFIBRILLATOR TO REMAIN
- 8 REMOVE PORTION OF EXISTING DRYWALL PARTITION AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 9 ELECTRICAL PANEL TO REMAIN
- 10 EXISTING BULKHEAD TO REMAIN
- 11 REMOVE EXISTING VCT FLOORING AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING.
- 12 REMOVE EXISTING PARTITION TO U/S OF EXISTING SLAB. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 13 REMOVE EXISTING FLOOR FINISH AND WALL BASES. PREPARE SUBSTRATE TO RECEIVE NEW FLOOR FINISH.
- 14 REMOVE EXISTING ACCESS DOOR TO ISOLATION VALVES (AT BOTTOM OF WALL)
- 15 REMOVE PORTION OF EXISTING CONCRETE BLOCK WALL AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 16 REMOVE EXISTING SUSPENDED GYPSUM BOARD CEILING AS REQUIRED FOR NEW PLUMBING WORK
- 17 REMOVE EXISTING CEILING ACCESS DOOR. CLEAN, REPAIR AND STORE FOR RE-INSTALLATION.

DEMOLITION LEGEND:

- EXISTING TO REMAIN
- EXISTING TO BE REMOVED
- REMOVE EXISTING GLAZING
- REMOVE EXISTING DOOR
- EXISTING DOOR TO REMAIN
- AREA OF CARPET TO BE REMOVED
- AREA OF VINYL COMPOSITION TILE FLOORING TO BE REMOVED
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING LIGHT FIXTURE TO REMAIN
- REMOVE EXISTING EXIT SIGN
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING DIFFUSER TO REMAIN
- REMOVE EXISTING LINEAR DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING THERMOSTAT AND ALL ASSOCIATED WIRING PER MECHANICAL. PATCH TO MATCH EXISTING WALL WHERE REQUIRED.
- EXISTING THERMOSTAT TO REMAIN. RECONNECT WIRING AND PROVIDE NEW CONDUITS AS REQUIRED PER MECHANICAL.

NEW WORK LEGEND:

- NEW CONSTRUCTION
- NEW DOOR
- AREA OF NEW CARPET
- AREA OF NEW TILE FLOORING
- ARE ON NEW FLOORING TO MATCH EXISTING
- NEW GYPSUM BOARD SUSPENDED CEILING
- NEW EMERGENCY EXIT SIGN
- RE-USE EXISTING LIGHT FIXTURE
- NEW PENDANT LIGHT FIXTURE
- RE-USE EXISTING DIFFUSER
- RE-USE EXISTING DIFFUSER
- NEW RETURN GRILE
- NEW THERMOSTAT PER MECHANICAL C/W NEW ALL ASSOCIATED WIRING AND CONDUITS

GENERAL NOTES:


- A. PROVIDE TEMPORARY DUST TIED HOARDING AROUND AREAS OF WORK FOR PERIOD OF CONSTRUCTION. CO-ORDINATE HOARDING LAYOUT WITH OWNER ON SITE.
- B. ALL DIMENSIONS ARE SHOWN TO FACE OF WALL UNLESS OTHERWISE NOTED
- C. ALL SHOWN EXISTING ASSEMBLIES ARE ASSUMED. VERIFY ASSEMBLIES ON SITE AND CO-ORDINATE WITH ARCHITECT DISCREPANCIES.
- D. ADJUST EXISTING FRAMING AND RE-INSTATE EXISTING PARTITION ASSEMBLIES AT LOCATION OF NEW PLUMBING AND ELECTRICAL SERVICES.
- E. PROVIDE PENETRATIONS THROUGH FLOOR AND PARTITION ASSEMBLIES AS REQUIRED FOR ELECTRICAL AND MECHANICAL SERVICES. PROVIDE CONDUITS AND FIRE STOPS AROUND SERVICE PENETRATIONS THROUGH PARTITIONS, FLOOR AND CEILING ASSEMBLIES. LOCATE SERVICES PER MECHANICAL AND ELECTRICAL.
- F. PATCH AND FINISH EXISTING PARTITIONS AS REQUIRED AFTER REMOVAL OF ELECTRICAL AND MECHANICAL COMPONENTS.
- G. PROTECT FROM DAMAGE ALL EXISTING WALL, FLOOR, CEILING ASSEMBLY, ELECTRICAL AND MECHANICAL FIXTURES DURING CONSTRUCTION
- H. REMOVE AND STORE ALL EXISTING FURNITURE FROM WORK AREA FOR PERIOD OF CONSTRUCTION

NEW WORK KEYNOTES:


- 51 PATCH AND REPAIR WALL. PAINT TO MATCH EXISTING
- 52 NEW CARPET TO MATCH EXISTING. USE FULL TILES. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 53 PATCH REPAIR T-BAR CEILING TO MATCH EXISTING. PROVIDE 20% CASH ALLOWANCES FOR NEW T-BAR AND CEILING TILES.
- 54 NEW DOOR AND FRAME. PAINT DOOR AND FRAME TO MATCH EXISTING
- 55 NEW INFILL WALL AT EXISTING PARTITION OPENINGS. MIN. 64mm STEEL STUDS @ 600mm O.C. C/W 2 LAYERS OF 13mm TYPE X GYPSUM BOARD AT EXPOSED SIDES (FRR 1H, SB-2 T.2.3.4.A). CO-ORDINATE STEEL STUD FRAMING WIDTH ON SITE AS REQUIRED TO MATCH EXISTING ADJACENT PARTITION THICKNESS
- 56 NEW PARTITION. ASSEMBLY TO MATCH EXISTING ADJACENT PARTITION
- 57 NEW PARTITION TO U/S OF SUSPENDED CEILING.
- 58 PROVIDE ADEQUATE BLOCKING WITHIN NEW INFILL WALL CAVITY FOR MILLWORK BRACKET SUPPORT. FOR LOCATION REFER 1/A635.
- 59 NEW PARTITION TO U/S OF SLAB
- 60 PATCH AND REPAIR EXISTING CEILING
- 61 NEW ACOUSTICAL TILE CEILING AND T-BAR SYSTEM. MATCH EXISTING ADJACENT CEILING.
- 62 NEW GYPSUM BOARD SUSPENDED CEILING, PAINTED.
- 63 FINISH WALL, TAPE AND FILL JOINTS
- 64 MATCH EXISTING PAINT COLOUR
- 65 FLOOR FINISH TO MATCH EXISTING. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 66 NEW FIRE RATED DOOR AND DOOR FRAME FRR 45min. PAINT DOOR AND FRAME TO MATCH EXISTING
- 67 NEW +/- 400mm(W) x 500mm(H) ACCESS DOOR TO ISOLATION VALVES. PAINTED. FIT BELOW NEW COUNTERTOP. VERIFY ACCESS DOOR DIMENSIONS TO FIT ON SITE. PATCH AND REPAIR EXISTING WALL AS REQUIRED. MATCH EXISTING WALL ASSEMBLY TO FIT NEW ACCESS DOOR.
- 68 REINSTATE DEMOLISHED PORTION CONCRETE BLOCK WALL WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED
- 69 RE-INSTALL SALVAGED CEILING ACCESS DOOR, PAINTED. ADJUST CEILING FRAMING AS REQUIRED.
- 70 NEW SANITARY DRAIN BY MECHANICAL FROM KITCHENETTE ABOVE. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF MAIN SANITARY DRAIN ON SITE.
- 71 NEW KITCHENETTE WATER SUPPLY LINES BY MECHANICAL. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF CONNECTION POINTS ON SITE.
- 72 NEW FLOOR FINISH TRANSITION PROFILE THR-1 PER SCHEDULE 1(A011)
- 73 EXISTING STUCCO FINISH AT UPPER PORTION OF WALL TO REMAIN. NEW PAINT AT TOP OF STUCCO TO MATCH EXISTING.
- 74 INFILL WALL OPENING ABOVE DOOR. MATCH ASSEMBLY TO EXISTING ADJACENT PARTITION. PROVIDE NEW HEADER AND DOUBLE STUD JAMB FRAMING.
- 75 NEW SUSPENDED ACOUSTIC TILE CEILING C/W NEW T-BARS AND SUSPENSION SYSTEM ACT-01
- 76 REINSTATE DEMOLISHED PORTION OF DRYWALL PARTITION WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED

WALL FINISH LEGEND:


- PT1 MANUFACTURER: DULUX COLOUR NAME: MEETING HOUSE PRODUCT: 50YY 74/069- A1864 EGG SHELL FINISH
- PT2 MANUFACTURER: DULUX COLOUR NAME: NEWBORN PRODUCT: 35YY 78/269 -A0710 EGG SHELL FINISH
- PT3 MANUFACTURER: DULUX COLOUR NAME: CALICO PRODUCT: 70YR 36/468 A0506 EGG SHELL FINISH
- PT4 MANUFACTURER: DULUX COLOUR NAME: SERENGETI PLAIN PRODUCT: 90YY 48/255- A0970 EGG SHELL FINISH
- PT5 MANUFACTURER: DULUX COLOUR NAME: FROST GREY PRODUCT: 30GG 52/011 A1942 EGG SHELL FINISH
- PT6 MANUFACTURER: DULUX COLOUR NAME: ANLANTIS BLUE PRODUCT: 970BG 54/164 EGG SHELL FINISH

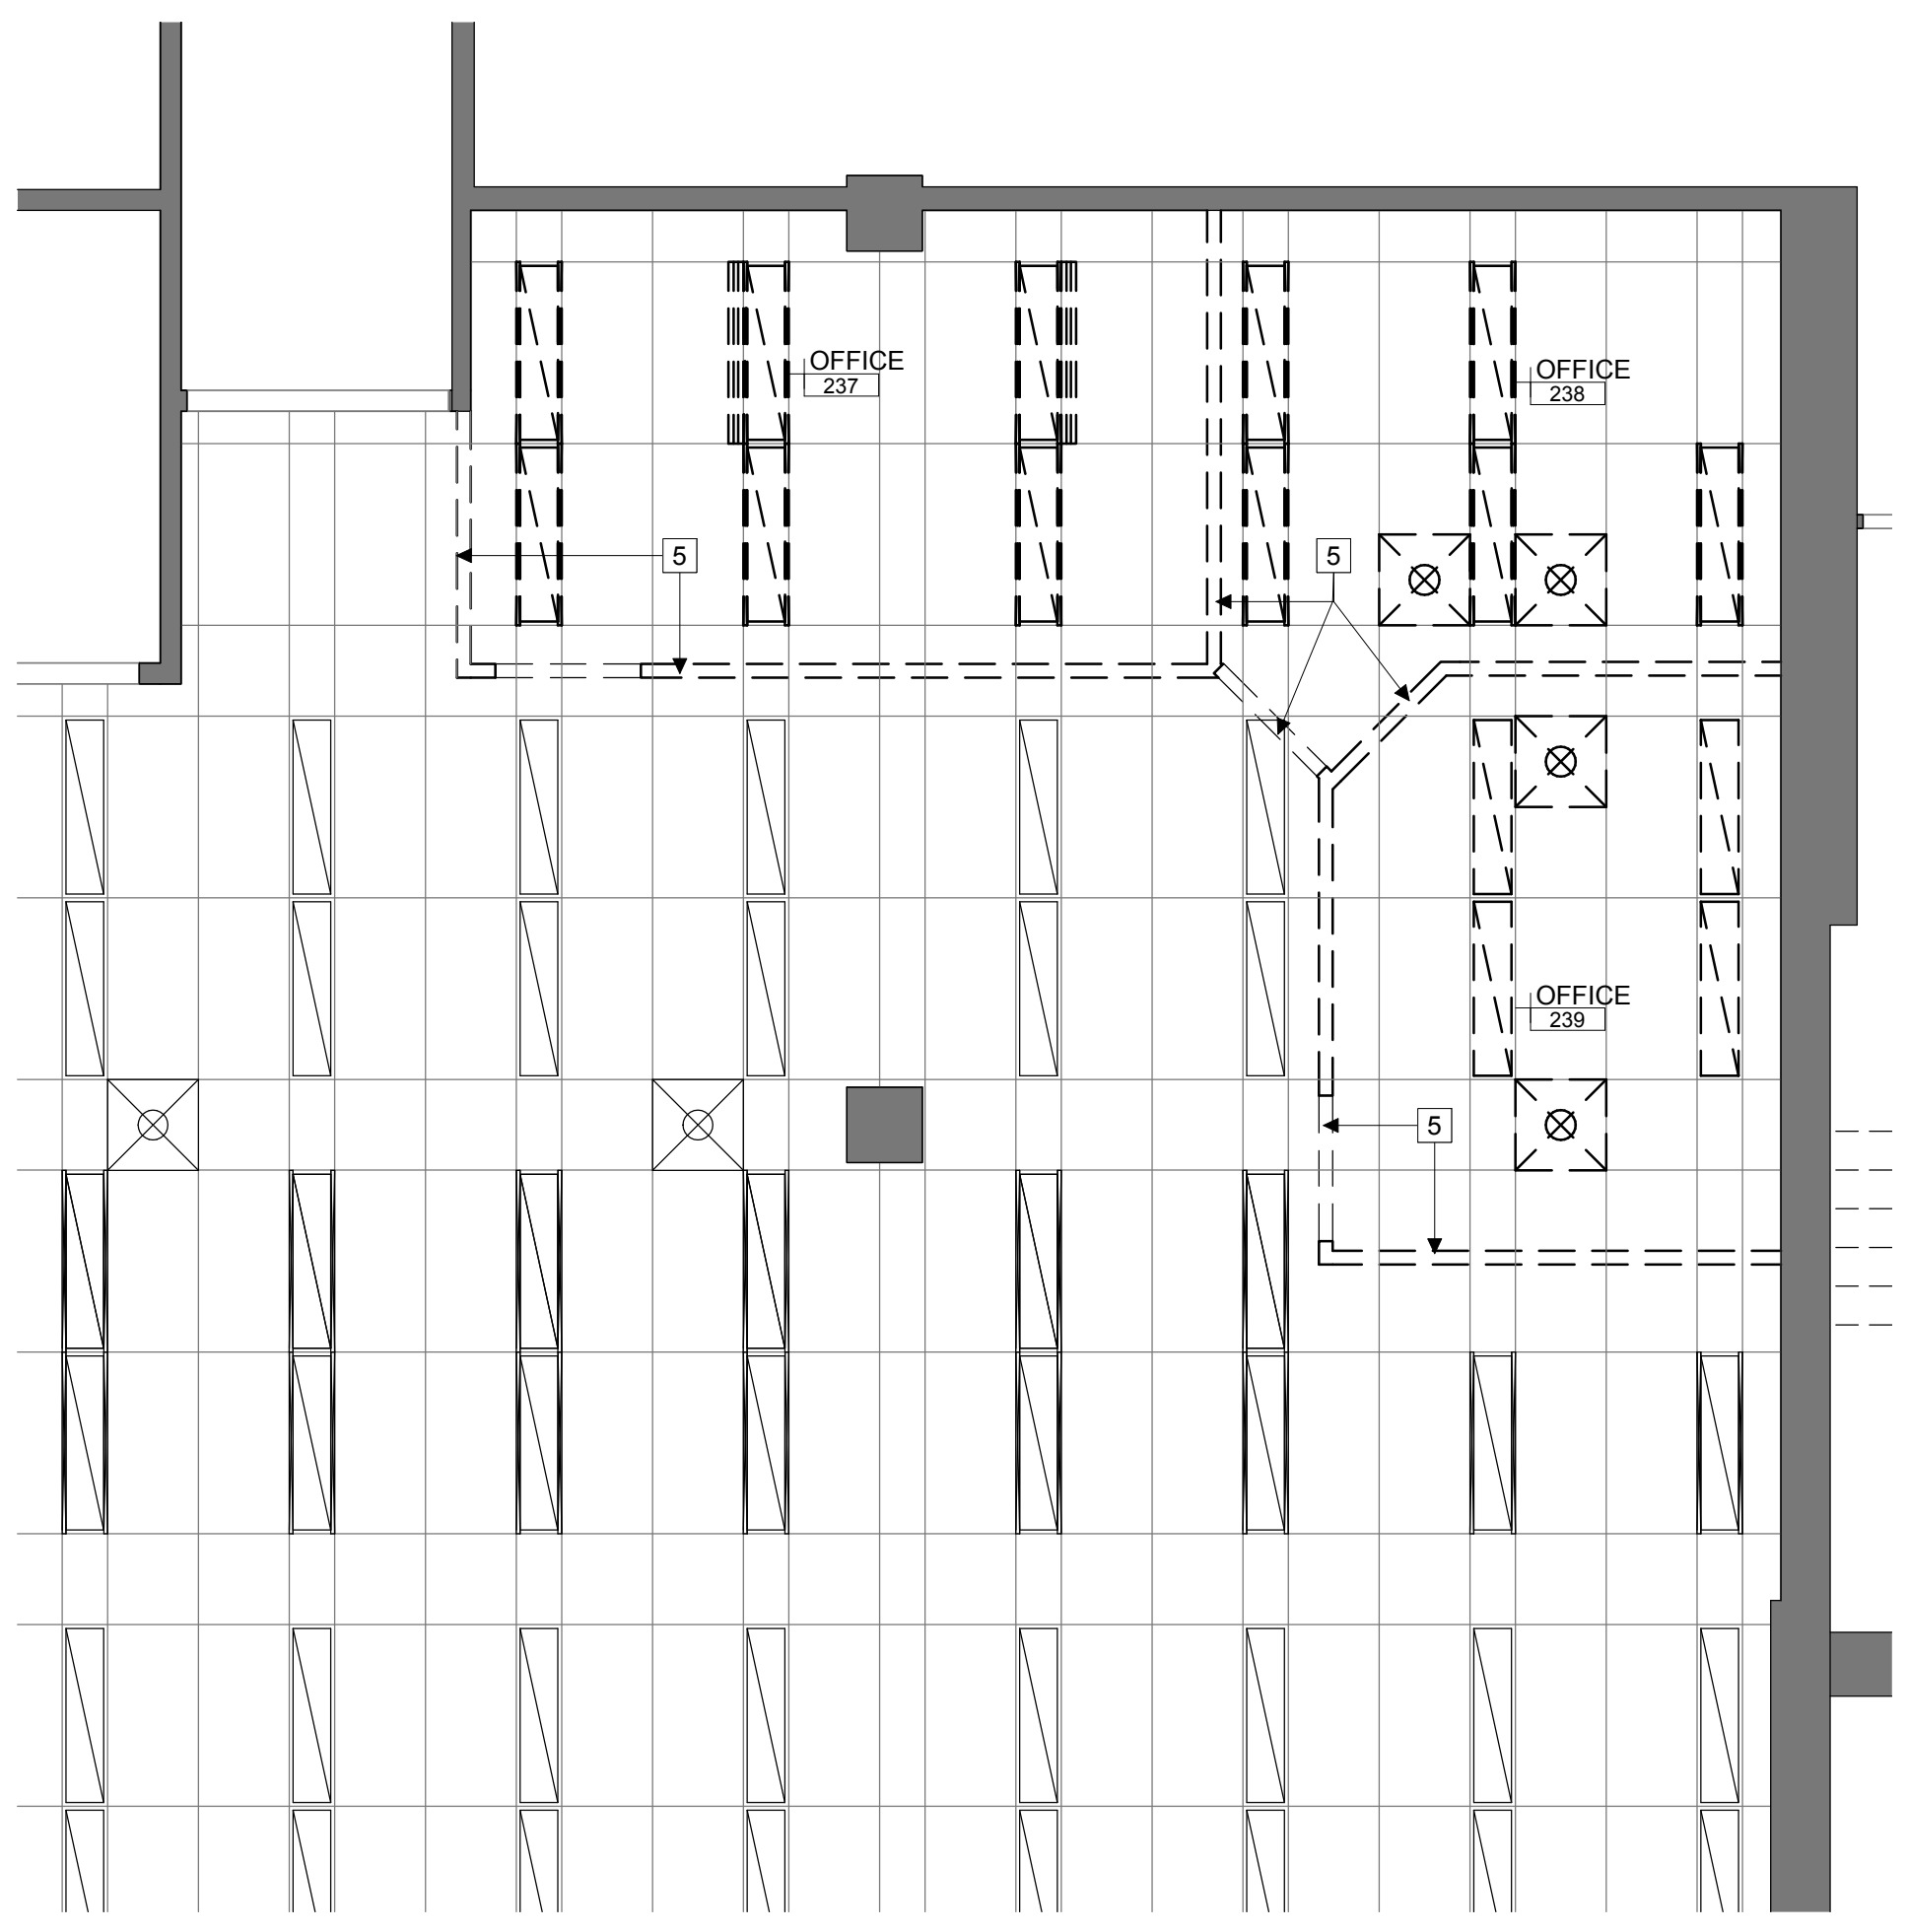


1 C WING 2ND FLOOR OFFICE REFLECTED CEILING PLAN - DEMOLITION
A220 | 1:50

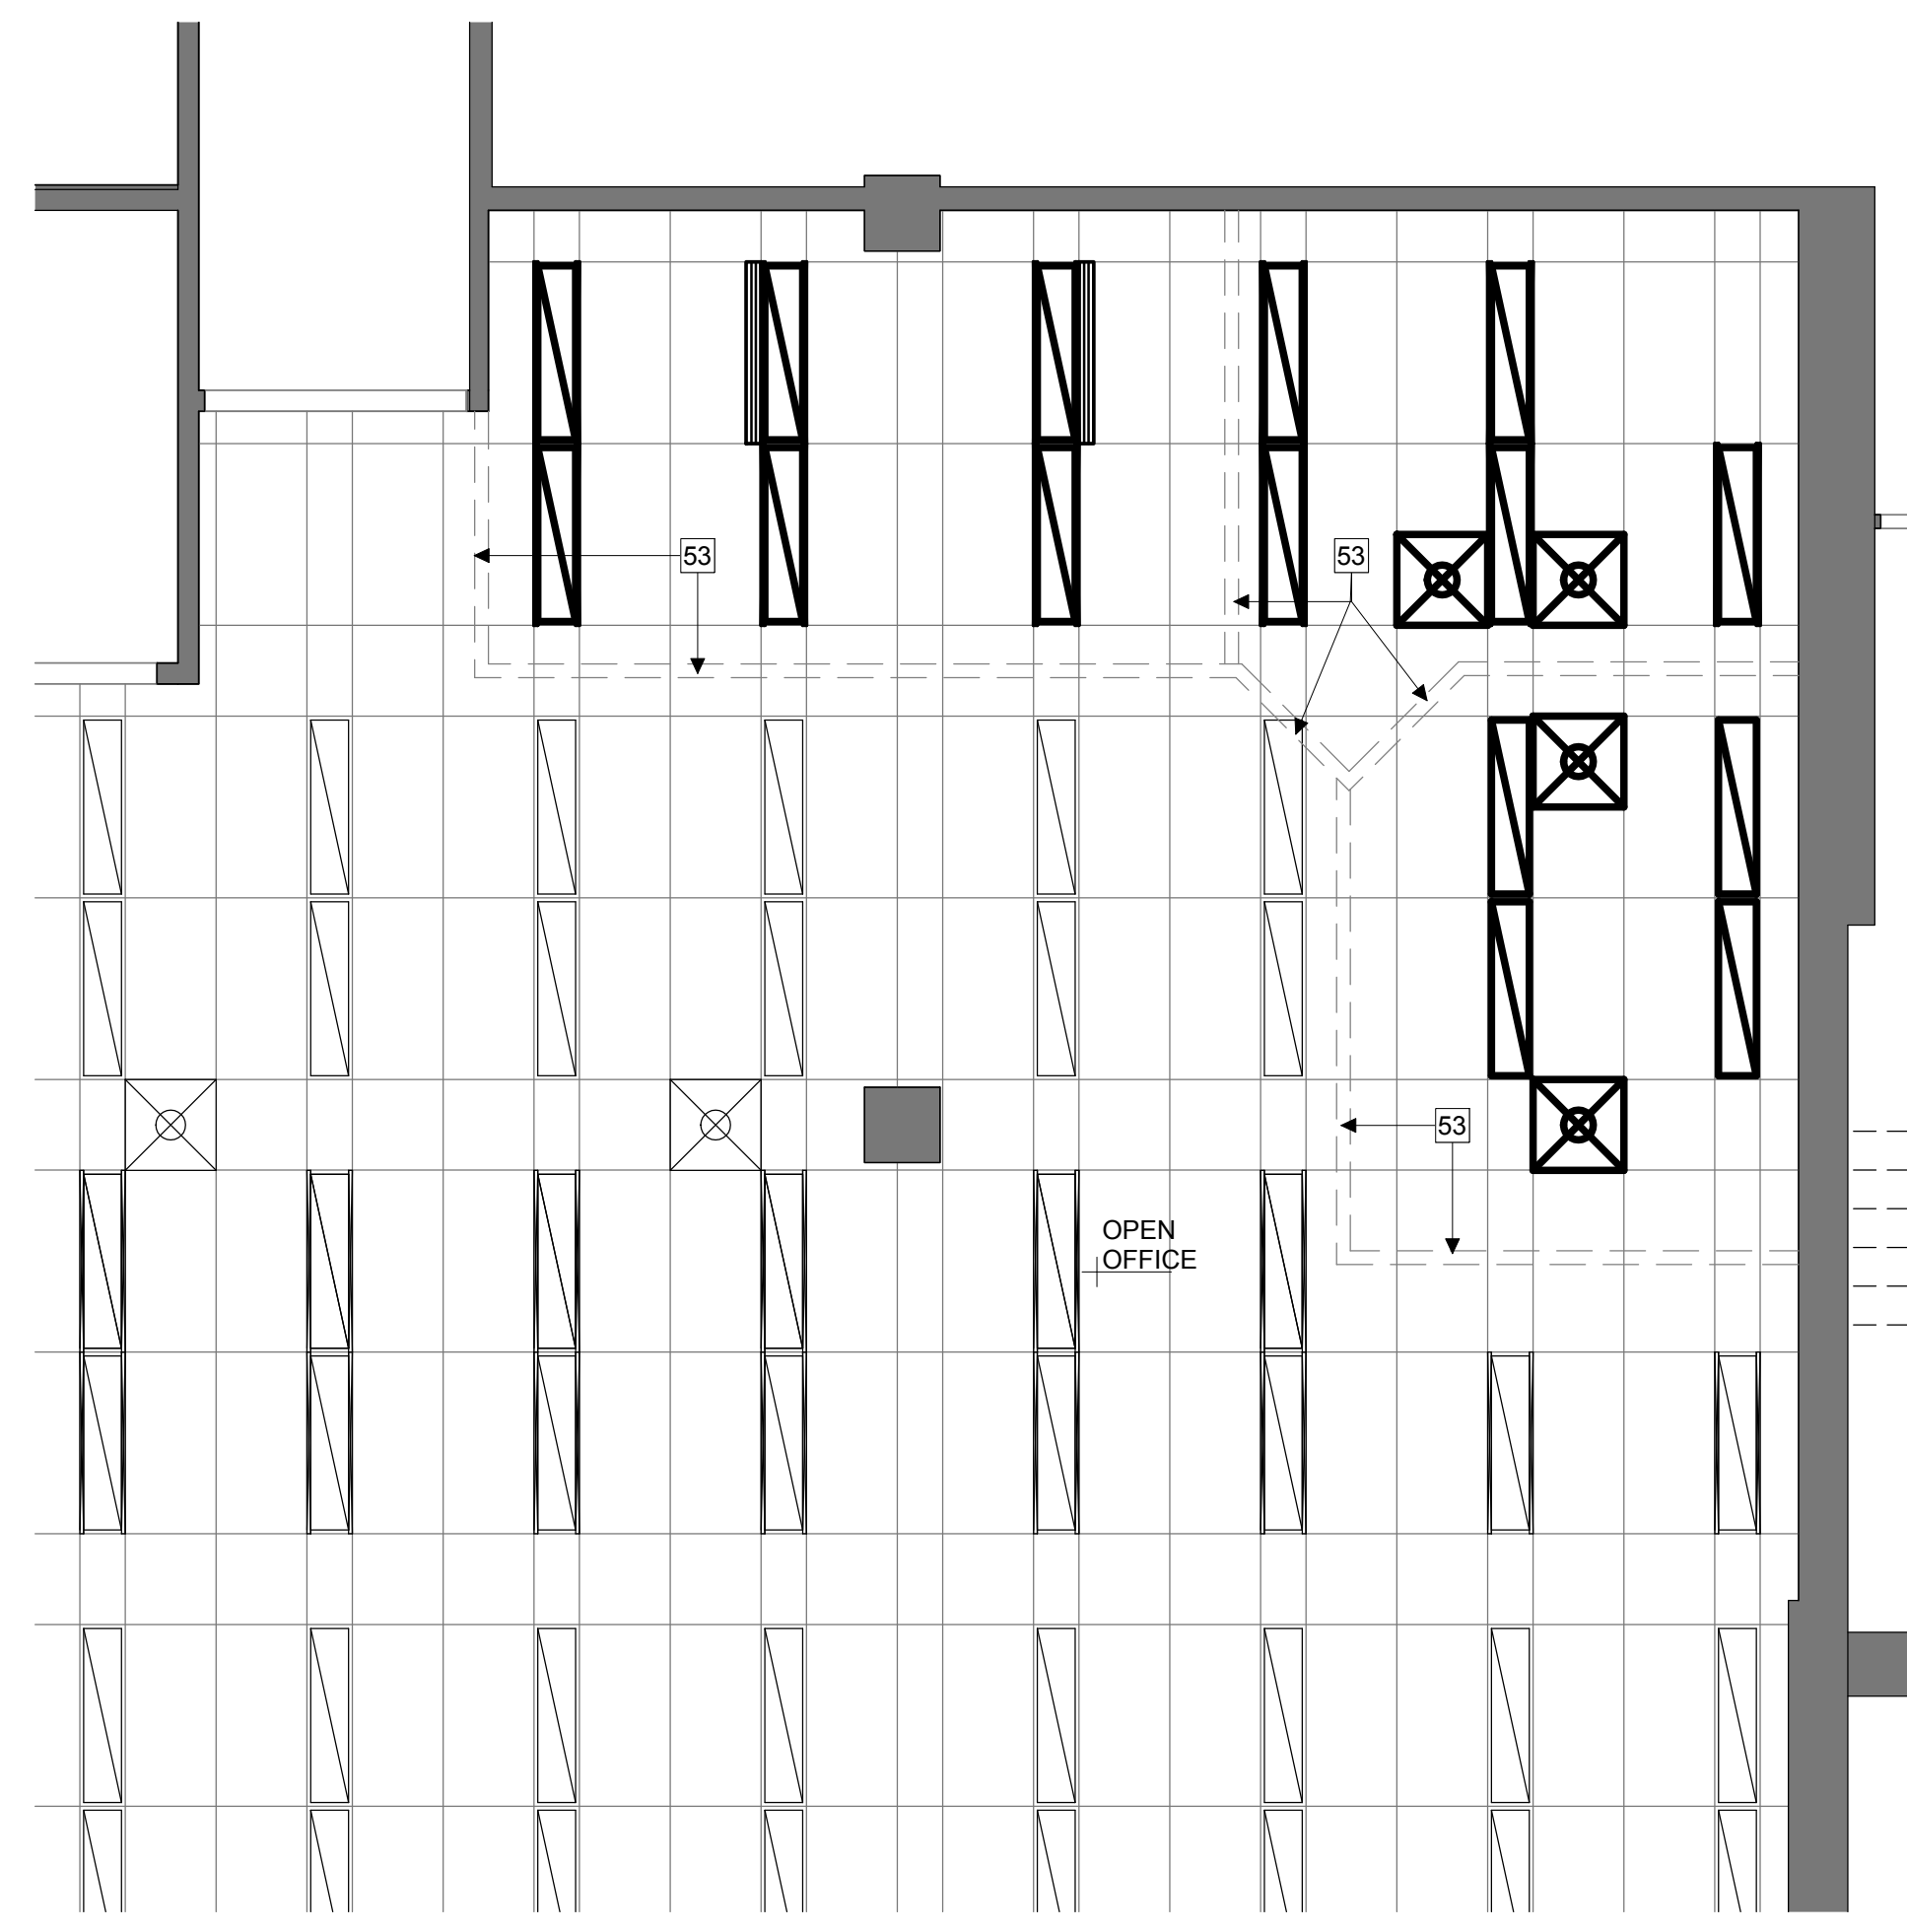

2 C WING 2ND FLOOR OFFICE REFLECTED CEILING PLAN - NEW
A220 | 1:50

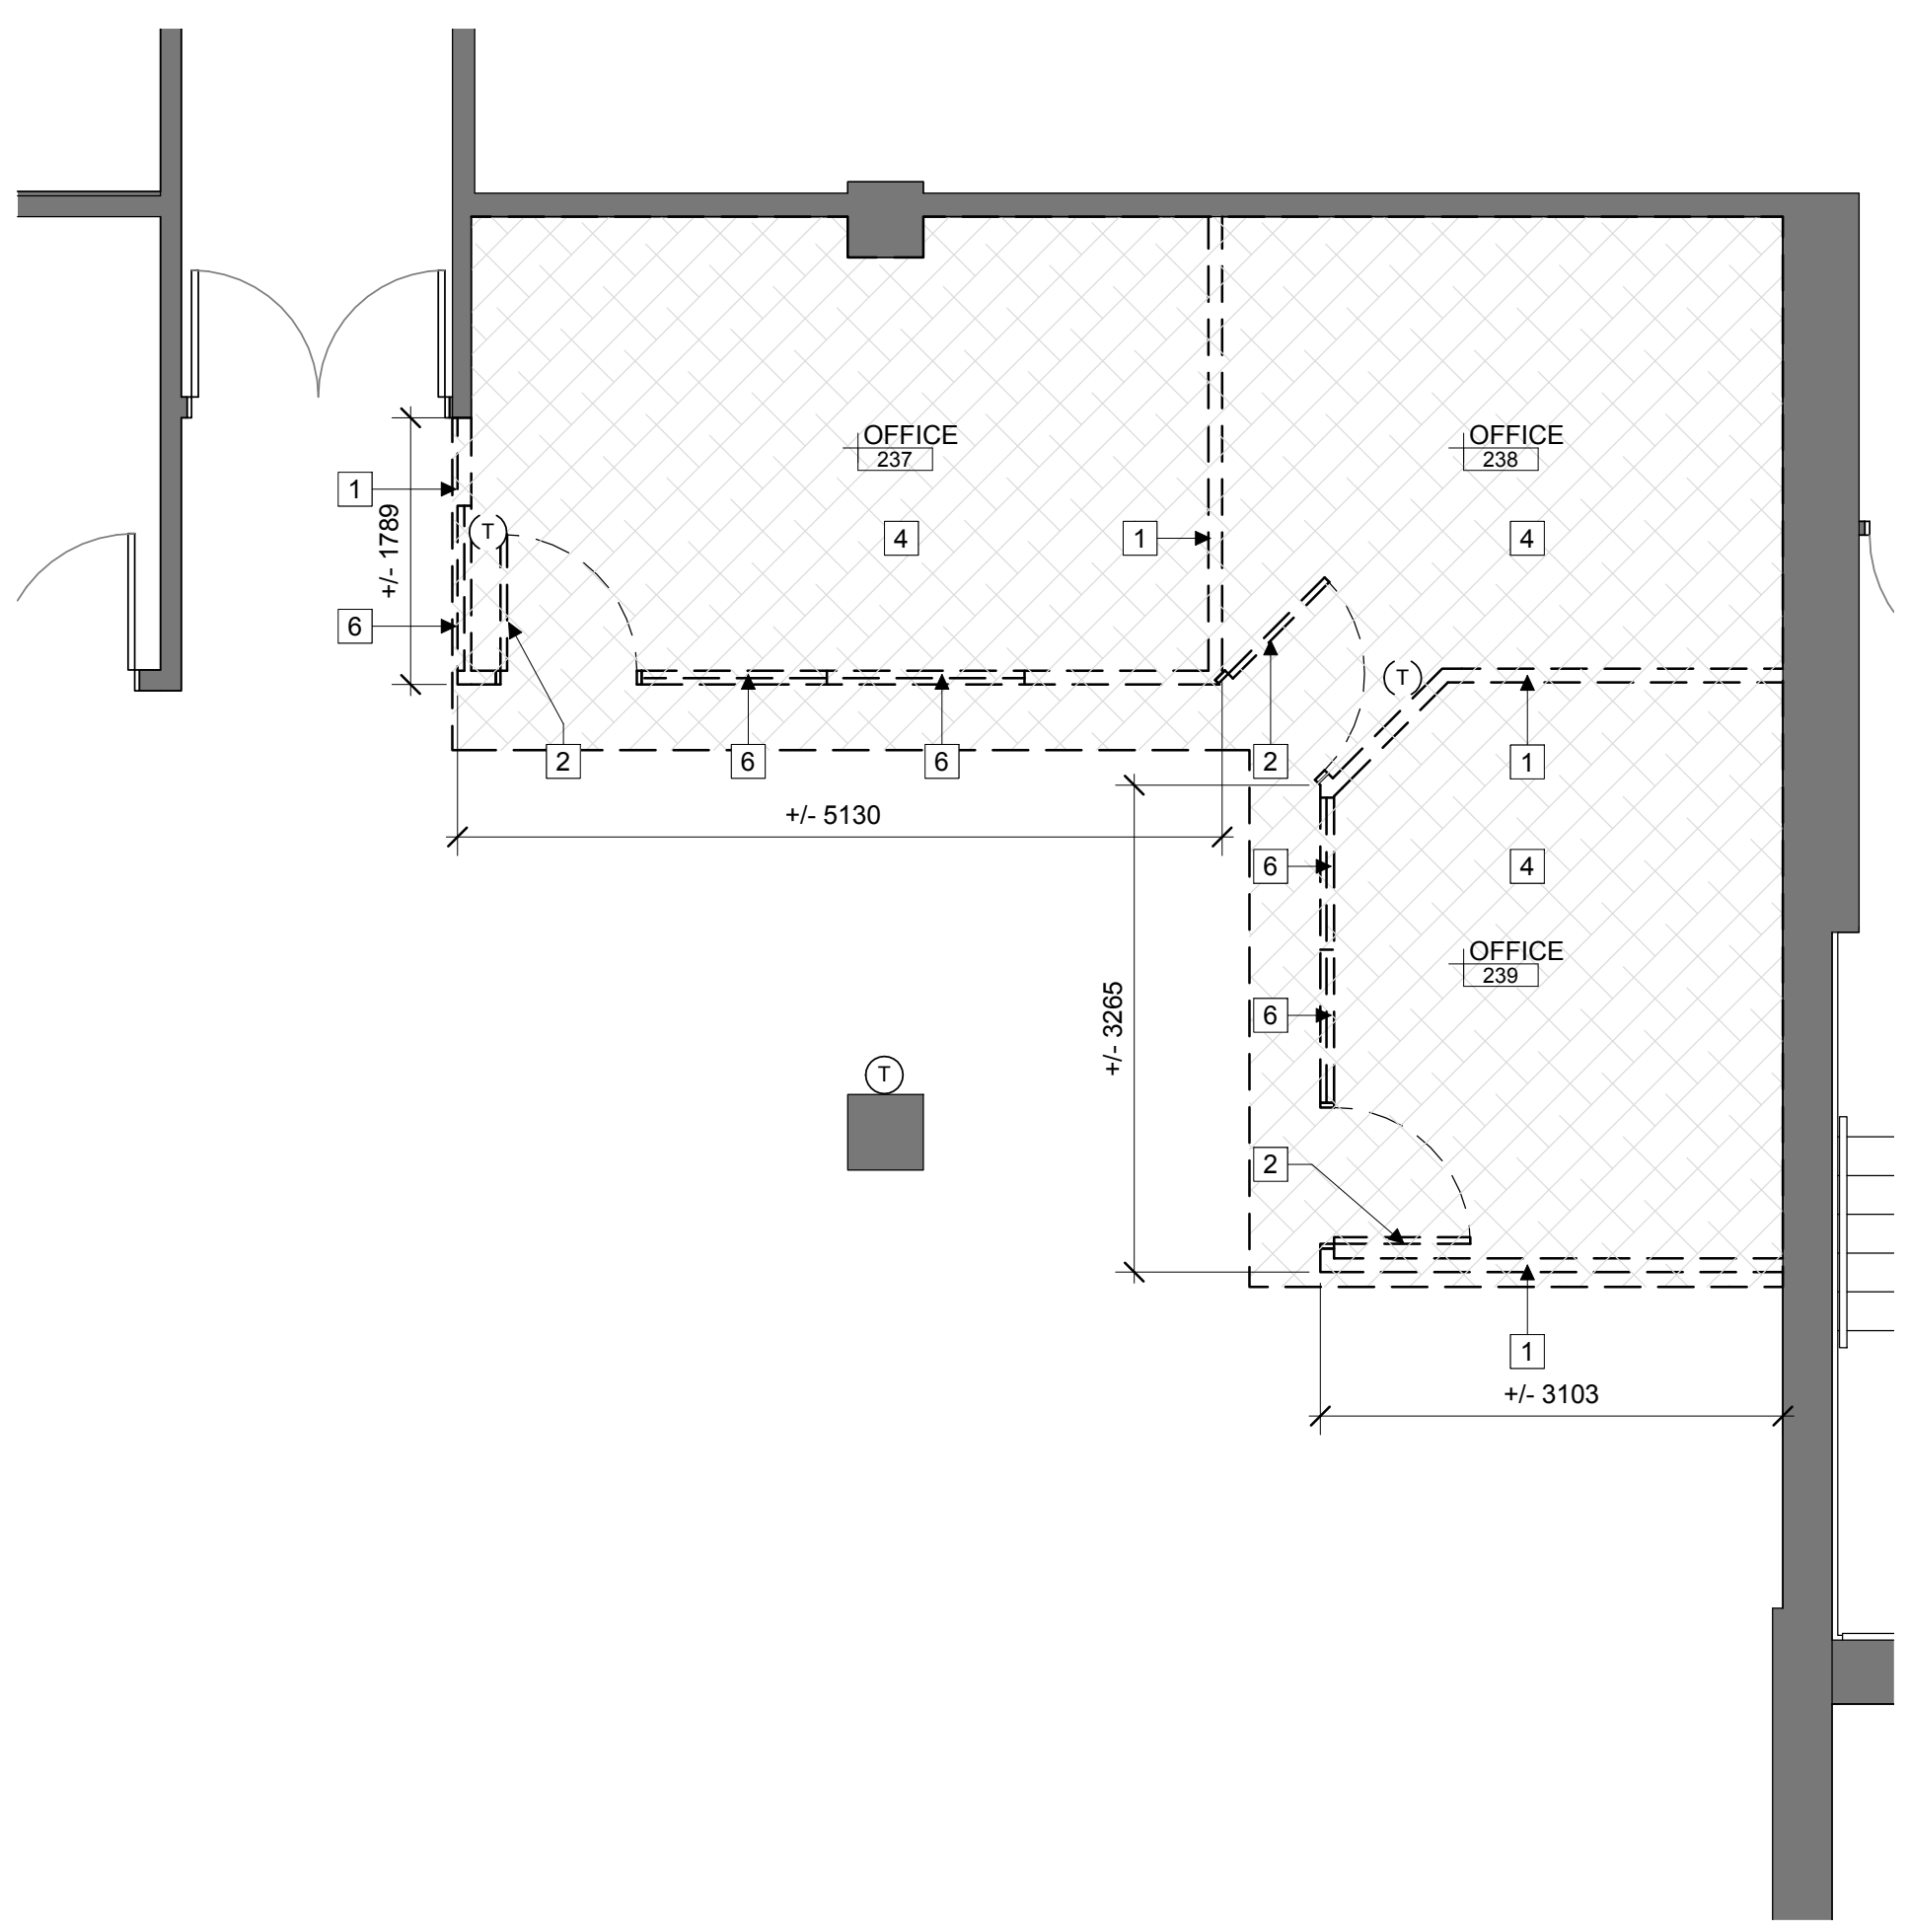

3 C WING 2ND FLOOR OFFICE PLAN - DEMOLITION
A220 | 1:50

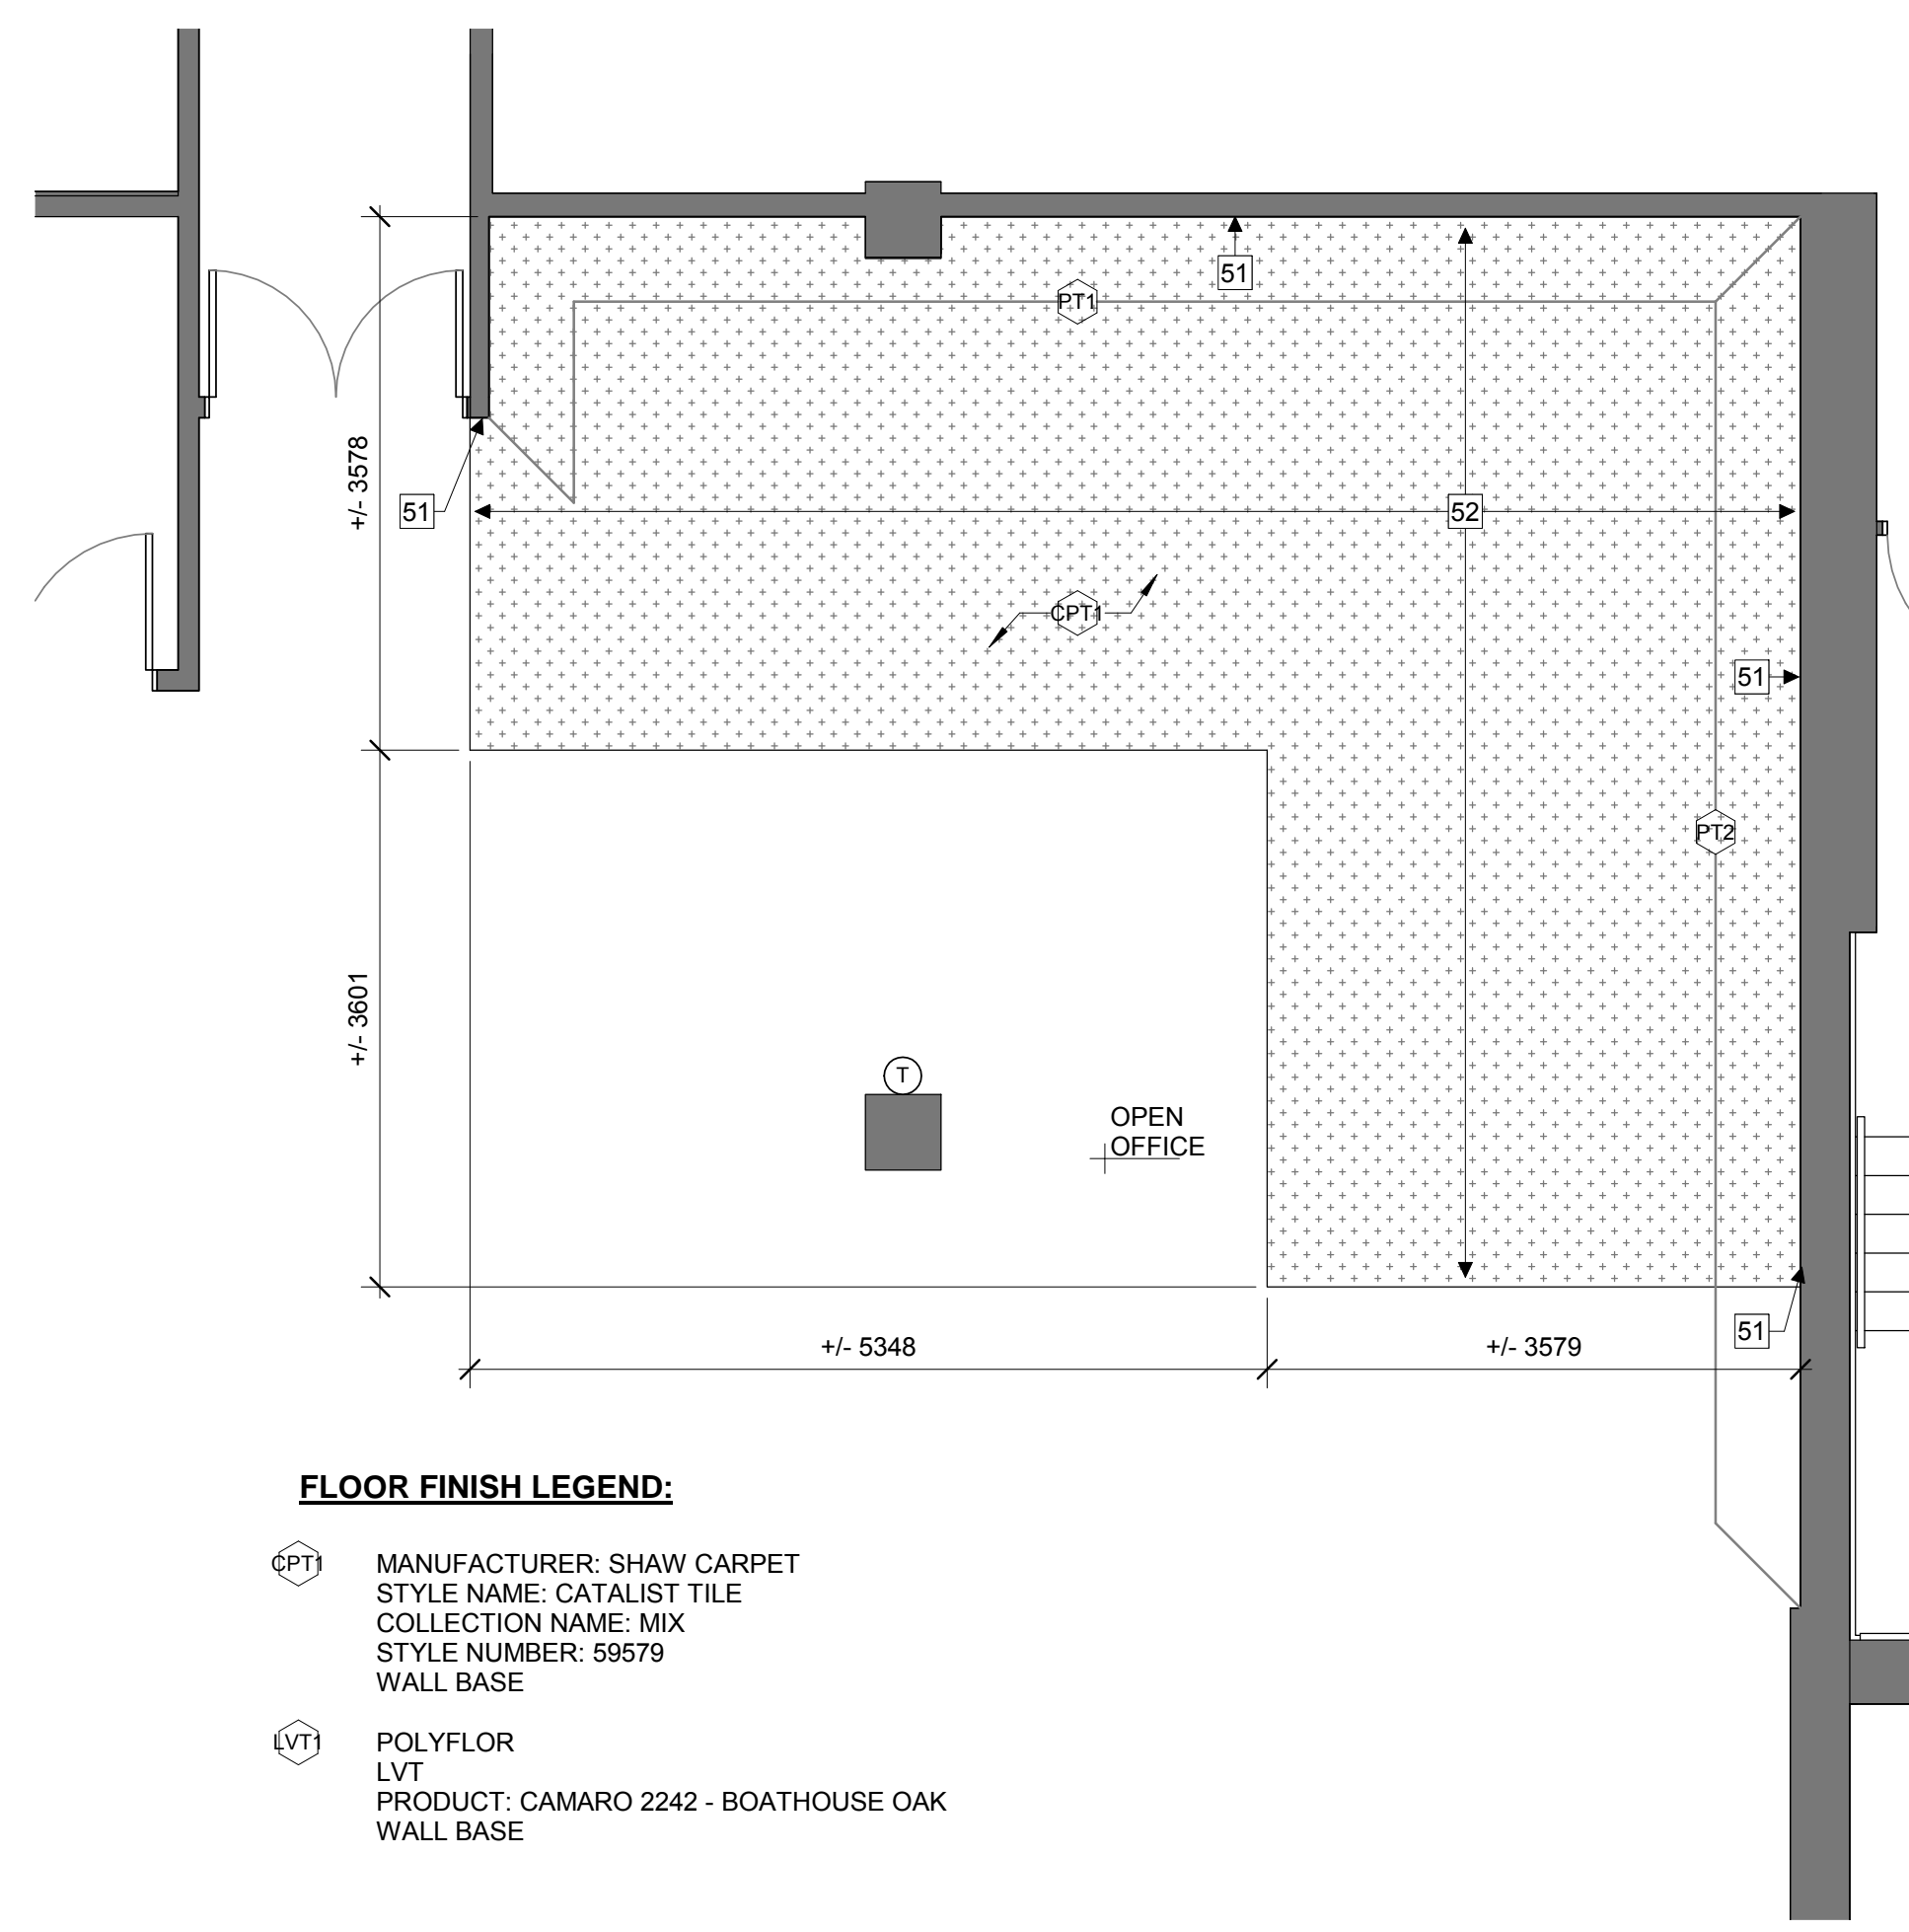

4 C WING 2ND FLOOR OFFICE PLAN - NEW
A220 | 1:50

FLOOR FINISH LEGEND:

- CP1 MANUFACTURER: SHAW CARPET STYLE NAME: CATALIST TILE COLLECTION NAME: MIX STYLE NUMBER: 59579 WALL BASE
- LV1 POLYFLOR LVT PRODUCT: CAMARO 2242 - BOATHOUSE OAK WALL BASE

DEMOLITION PLAN KEYNOTES:

- 1 REMOVE EXISTING DEMOUNTABLE PARTITION BACK TO ADJACENT WALL. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 2 REMOVE EXISTING DOOR, FRAME AND TRANSOM. REMOVE EXISTING HARDWARE FROM DOOR AND THRESHOLD AND RETURN TO OWNER. DISPOSE DOOR, FRAME AND TRANSOM.
- 3 REMOVE EXISTING SUSPENDED ACOUSTICAL TILE CEILING
- 4 REMOVE EXISTING CARPET AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING
- 5 REMOVE ALL PLENUM BAFFLES AND LAY-IN SOUND INSULATION
- 6 REMOVE EXISTING GLAZING SYSTEM
- 7 AED DEBRILLATOR TO REMAIN
- 8 REMOVE PORTION OF EXISTING DRYWALL PARTITION AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 9 ELECTRICAL PANEL TO REMAIN
- 10 EXISTING BULKHEAD TO REMAIN
- 11 REMOVE EXISTING VCT FLOORING AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING.
- 12 REMOVE EXISTING PARTITION TO U/S OF EXISTING SLAB. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 13 REMOVE EXISTING FLOOR FINISH AND WALL BASES. PREPARE SUBSTRATE TO RECEIVE NEW FLOOR FINISH.
- 14 REMOVE EXISTING ACCESS DOOR TO ISOLATION VALVES (AT BOTTOM OF WALL)
- 15 REMOVE PORTION OF EXISTING CONCRETE BLOCK WALL AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 16 REMOVE EXISTING SUSPENDED GYPSUM BOARD CEILING AS REQUIRED FOR NEW PLUMBING WORK
- 17 REMOVE EXISTING CEILING ACCESS DOOR. CLEAN, REPAIR AND STORE FOR RE-INSTALLATION.

DEMOLITION LEGEND:

- EXISTING TO REMAIN
- EXISTING TO BE REMOVED
- REMOVE EXISTING GLAZING
- REMOVE EXISTING DOOR
- EXISTING DOOR TO REMAIN
- AREA OF CARPET TO BE REMOVED
- AREA OF VINYL COMPOSITION TILE FLOORING TO BE REMOVED
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING LIGHT FIXTURE TO REMAIN
- REMOVE EXISTING EXIT SIGN
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING DIFFUSER TO REMAIN
- REMOVE EXISTING LINEAR DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING THERMOSTAT AND ALL ASSOCIATED WIRING PER MECHANICAL. PATCH TO MATCH EXISTING WALL WHERE REQUIRED.
- EXISTING THERMOSTAT TO REMAIN. RECONNECT WIRING AND PROVIDE NEW CONDUITS AS REQUIRED PER MECHANICAL.

NEW WORK LEGEND:

- NEW CONSTRUCTION
- NEW DOOR
- AREA OF NEW CARPET
- AREA OF NEW TILE FLOORING
- ARE ON NEW FLOORING TO MATCH EXISTING
- NEW GYPSUM BOARD SUSPENDED CEILING
- NEW EMERGENCY EXIT SIGN
- RE-USE EXISTING LIGHT FIXTURE
- NEW PENDANT LIGHT FIXTURE
- RE-USE EXISTING DIFFUSER
- RE-USE EXISTING DIFFUSER
- NEW RETURN GRILE
- NEW THERMOSTAT PER MECHANICAL C/W NEW ALL ASSOCIATED WIRING AND CONDUITS

GENERAL NOTES:


- A. PROVIDE TEMPORARY DUST TIED HOARDING AROUND AREAS OF WORK FOR PERIOD OF CONSTRUCTION. CO-ORDINATE HOARDING LAYOUT WITH OWNER ON SITE.
- B. ALL DIMENSIONS ARE SHOWN TO FACE OF WALL UNLESS OTHERWISE NOTED
- C. ALL SHOWN EXISTING ASSEMBLIES ARE ASSUMED. VERIFY ASSEMBLIES ON SITE AND CO-ORDINATE WITH ARCHITECT DISCREPANCIES
- D. ADJUST EXISTING FRAMING AND RE-INSTALL EXISTING PARTITION ASSEMBLIES AT LOCATION OF NEW PLUMBING AND ELECTRICAL SERVICES.
- E. PROVIDE PENETRATIONS THROUGH FLOOR AND PARTITION ASSEMBLIES AS REQUIRED FOR ELECTRICAL AND MECHANICAL SERVICES. PROVIDE CONDUITS AND FIRE STOPS AROUND SERVICE PENETRATIONS THROUGH PARTITIONS, FLOOR AND CEILING ASSEMBLIES. LOCATE SERVICES PER MECHANICAL AND ELECTRICAL.
- F. PATCH AND FINISH EXISTING PARTITIONS AS REQUIRED AFTER REMOVAL OF ELECTRICAL AND MECHANICAL COMPONENTS.
- G. PROTECT FROM DAMAGE ALL EXISTING TO REMAIN WALL, FLOOR, CEILING ASSEMBLY, ELECTRICAL AND MECHANICAL FIXTURES DURING CONSTRUCTION
- H. REMOVE AND STORE ALL EXISTING FURNITURE FROM WORK AREA FOR PERIOD OF CONSTRUCTION

NEW WORK KEYNOTES:


- 51 PATCH AND REPAIR WALL. PAINT TO MATCH EXISTING
- 52 NEW CARPET TO MATCH EXISTING. USE FULL TILES. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 53 PATCH REPAIR T-BAR CEILING TO MATCH EXISTING. PROVIDE 20% CASH ALLOWANCES FOR NEW T-BAR AND CEILING TILES.
- 54 NEW DOOR AND FRAME. PAINT DOOR AND FRAME TO MATCH EXISTING
- 55 NEW INFILL WALL AT EXISTING PARTITION OPENINGS: MIN. 64mm STEEL STUDS @ 600mm O.C. C/W 2 LAYERS OF 13mm TYPE X GYPSUM BOARD AT EXPOSED SIDES (FRR 1H, SB-2 T.2.3.4.A). CO-ORDINATE STEEL STUD FRAMING WIDTH ON SITE AS REQUIRED TO MATCH EXISTING ADJACENT PARTITION THICKNESS.
- 56 NEW PARTITION. ASSEMBLY TO MATCH EXISTING ADJACENT PARTITION
- 57 NEW PARTITION TO U/S OF SUSPENDED CEILING.
- 58 PROVIDE ADEQUATE BLOCKING WITHIN NEW INFILL WALL CAVITY FOR MILLWORK BRACKET SUPPORT. FOR LOCATION REFER 1/A635.
- 59 NEW PARTITION TO U/S OF SLAB
- 60 PATCH AND REPAIR EXISTING CEILING
- 61 NEW ACOUSTICAL TILE CEILING AND T-BAR SYSTEM. MATCH EXISTING ADJACENT CEILING.
- 62 NEW GYPSUM BOARD SUSPENDED CEILING, PAINTED.
- 63 FINISH WALL, TAPE AND FILL JOINTS
- 64 MATCH EXISTING PAINT COLOUR
- 65 FLOOR FINISH TO MATCH EXISTING. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 66 NEW FIRE RATED DOOR AND DOOR FRAME FRR 45min. PAINT DOOR AND FRAME TO MATCH EXISTING
- 67 NEW +/- 400mm(W) x 500mm(H) ACCESS DOOR TO ISOLATION VALVES, PAINTED. FIT BELOW NEW COUNTERTOP. VERIFY ACCESS DOOR DIMENSIONS TO FIT ON SITE. PATCH AND REPAIR EXISTING WALL AS REQUIRED. MATCH EXISTING WALL ASSEMBLY TO FIT NEW ACCESS DOOR.
- 68 REINSTATE DEMOLISHED PORTION CONCRETE BLOCK WALL WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED
- 69 RE-INSTALL SALVAGED CEILING ACCESS DOOR, PAINTED. ADJUST CEILING FRAMING AS REQUIRED.
- 70 NEW SANITARY DRAIN BY MECHANICAL FROM KITCHENETTE ABOVE. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF MAIN SANITARY DRAIN ON SITE.
- 71 NEW KITCHENETTE WATER SUPPLY LINES BY MECHANICAL. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF CONNECTION POINTS ON SITE.
- 72 NEW FLOOR FINISH TRANSITION PROFILE THR-1 PER SCHEDULE (A001)
- 73 EXISTING STUCCO FINISH AT UPPER PORTION OF WALL TO REMAIN. NEW PAINT AT TOP OF STUCCO TO MATCH EXISTING.
- 74 INFILL WALL OPENING ABOVE DOOR. MATCH ASSEMBLY TO EXISTING ADJACENT PARTITION. PROVIDE NEW HEADER AND DOUBLE STUD JAMB FRAMING.
- 75 NEW SUSPENDED ACOUSTIC TILE CEILING C/W NEW T-BARS AND SUSPENSION SYSTEM ACT-01
- 76 REINSTATE DEMOLISHED PORTION OF DRYWALL PARTITION WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED

WALL FINISH LEGEND:


- PT1 MANUFACTURER: DULUX COLOUR NAME: MEETING HOUSE PRODUCT: 50YY 74/069 - A1864 EGGHELL FINISH
- PT2 MANUFACTURER: DULUX COLOUR NAME: NEWBORN PRODUCT: 35YY 78/269 - A0710 EGGHELL FINISH
- PT3 MANUFACTURER: DULUX COLOUR NAME: CALICO PRODUCT: 70YR 36/468 A0506 EGGHELL FINISH
- PT4 MANUFACTURER: DULUX COLOUR NAME: SERENGETI PLAIN PRODUCT: 90YY 48/255 - A0970 EGGHELL FINISH
- PT5 MANUFACTURER: DULUX COLOUR NAME: FROST GREY PRODUCT: 30GG 52/011 A1942 EGGHELL FINISH
- PT6 MANUFACTURER: DULUX COLOUR NAME: ANLANTIS BLUE PRODUCT: 970BG 54/164 EGGHELL FINISH

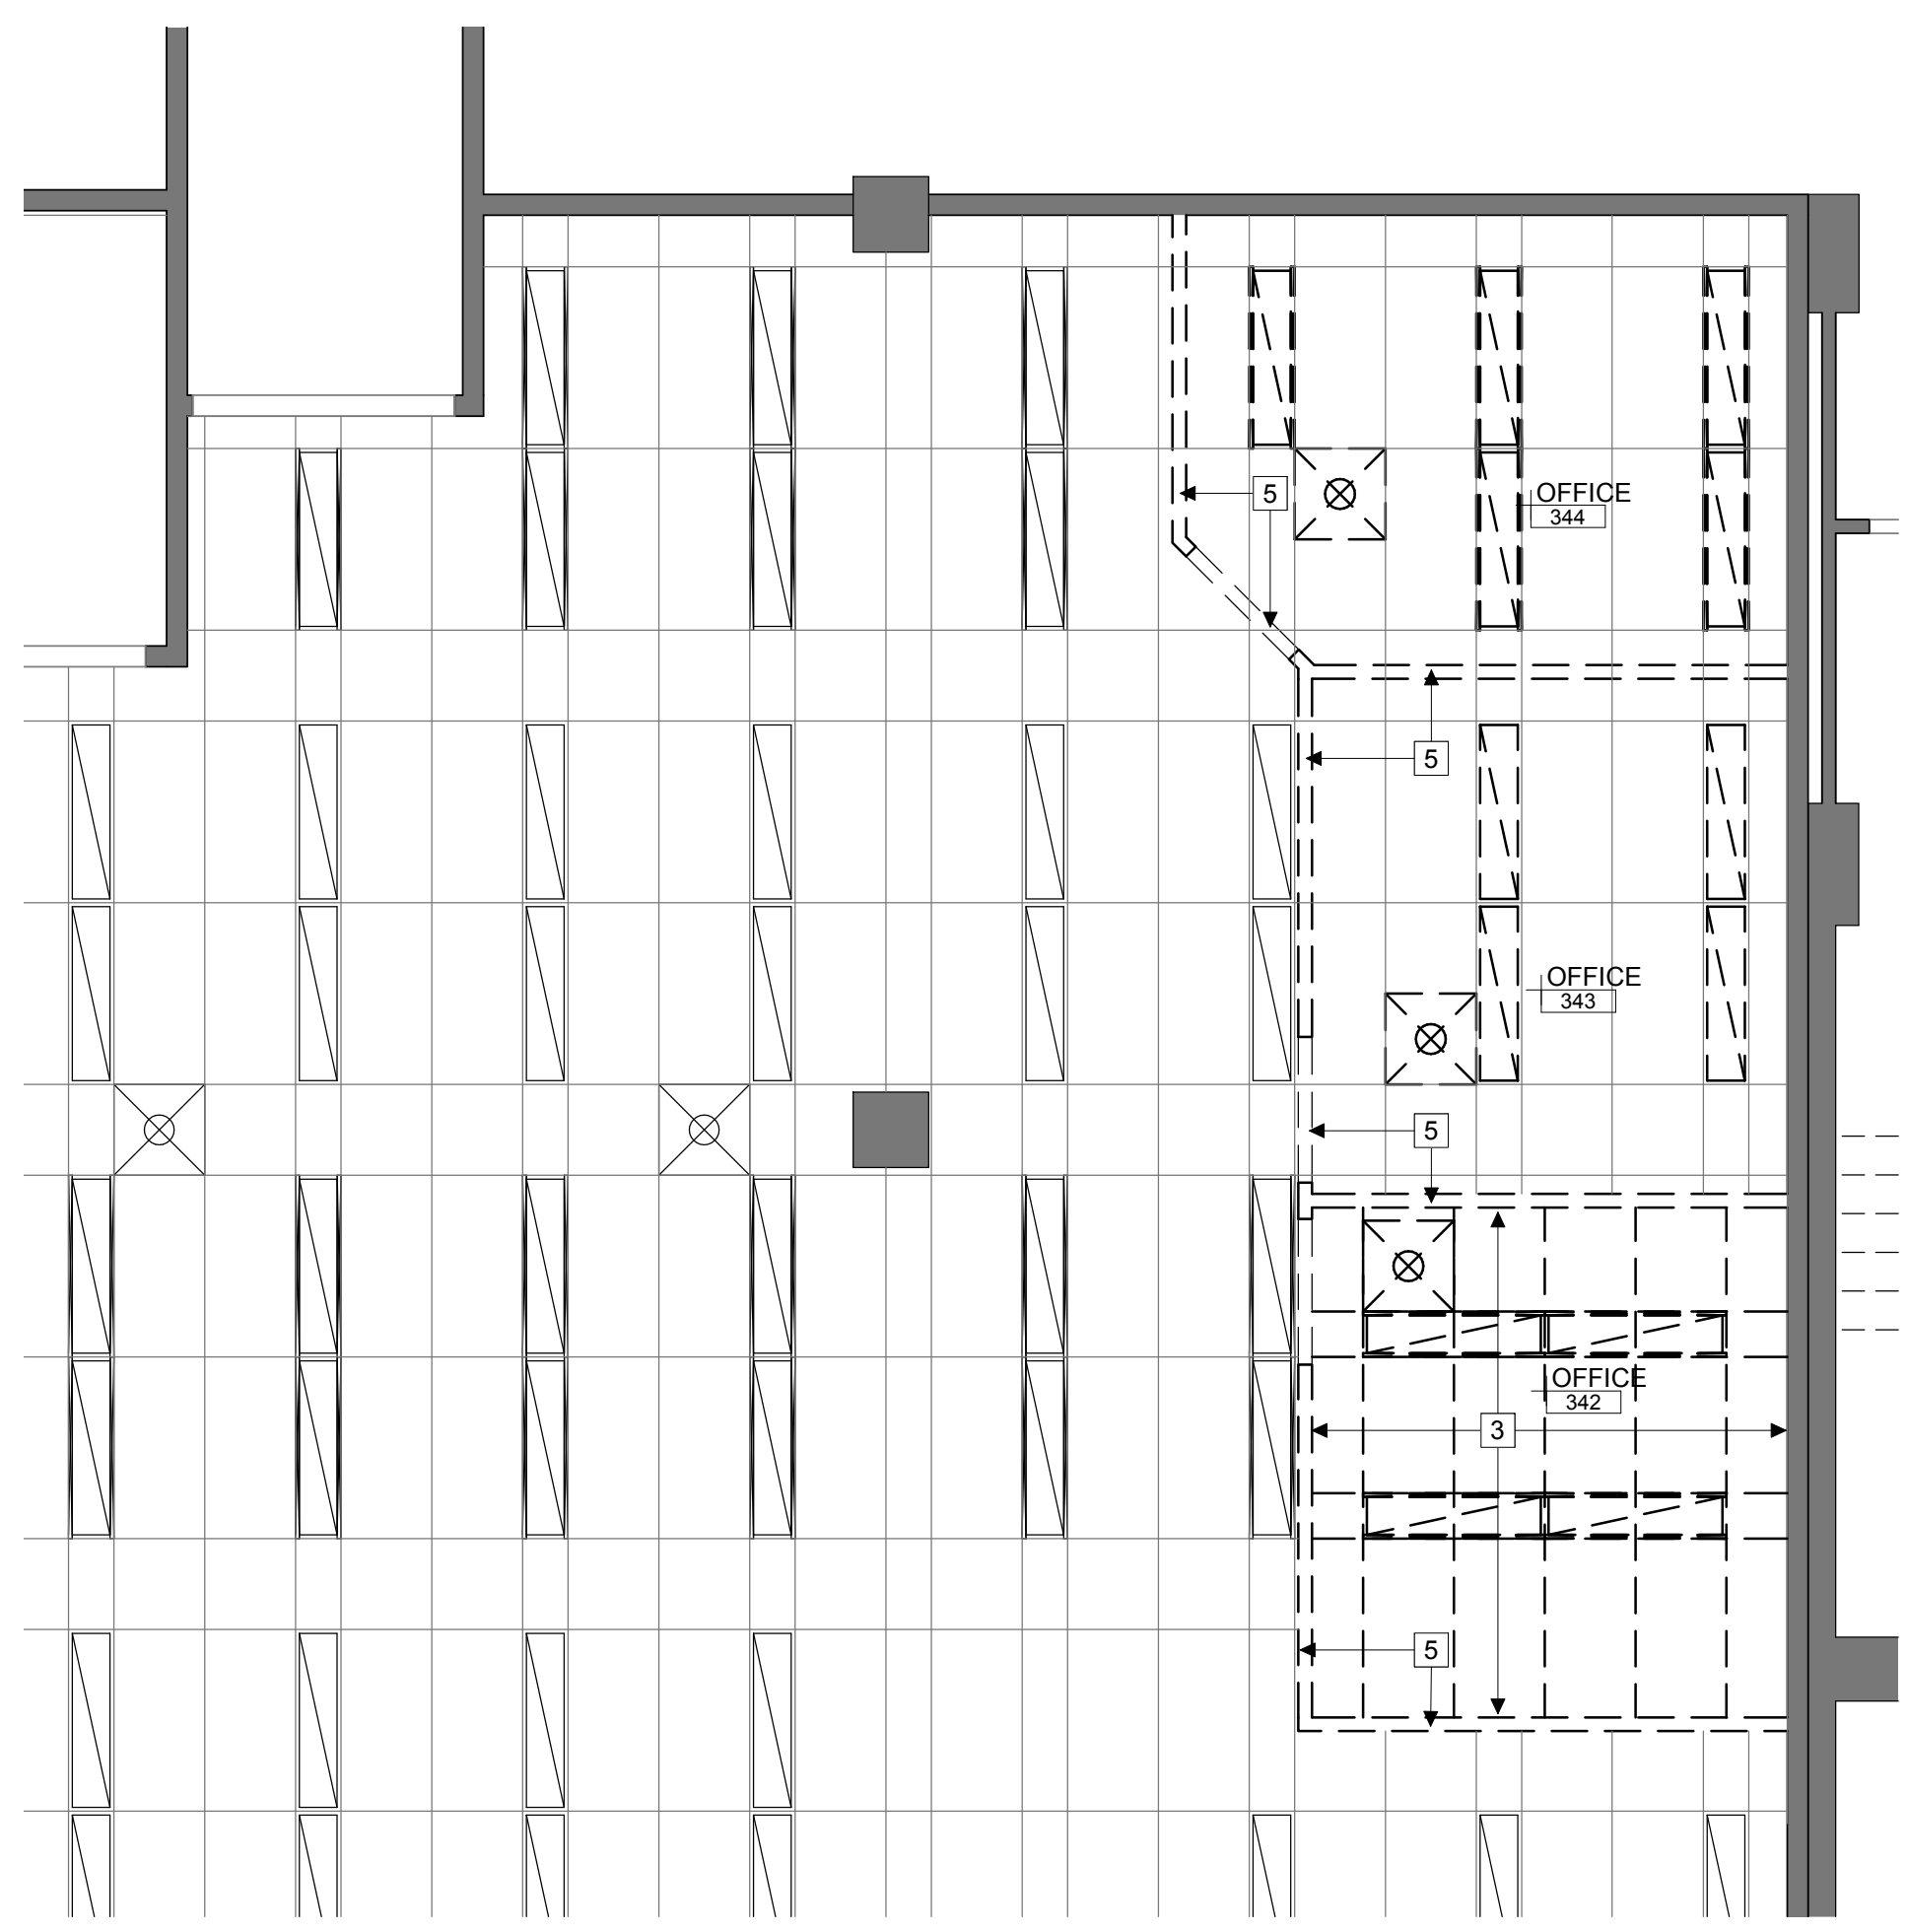


1 C WING 3RD FLOOR OFFICE REFLECTED CEILING PLAN - DEMOLITION
A230 1:50

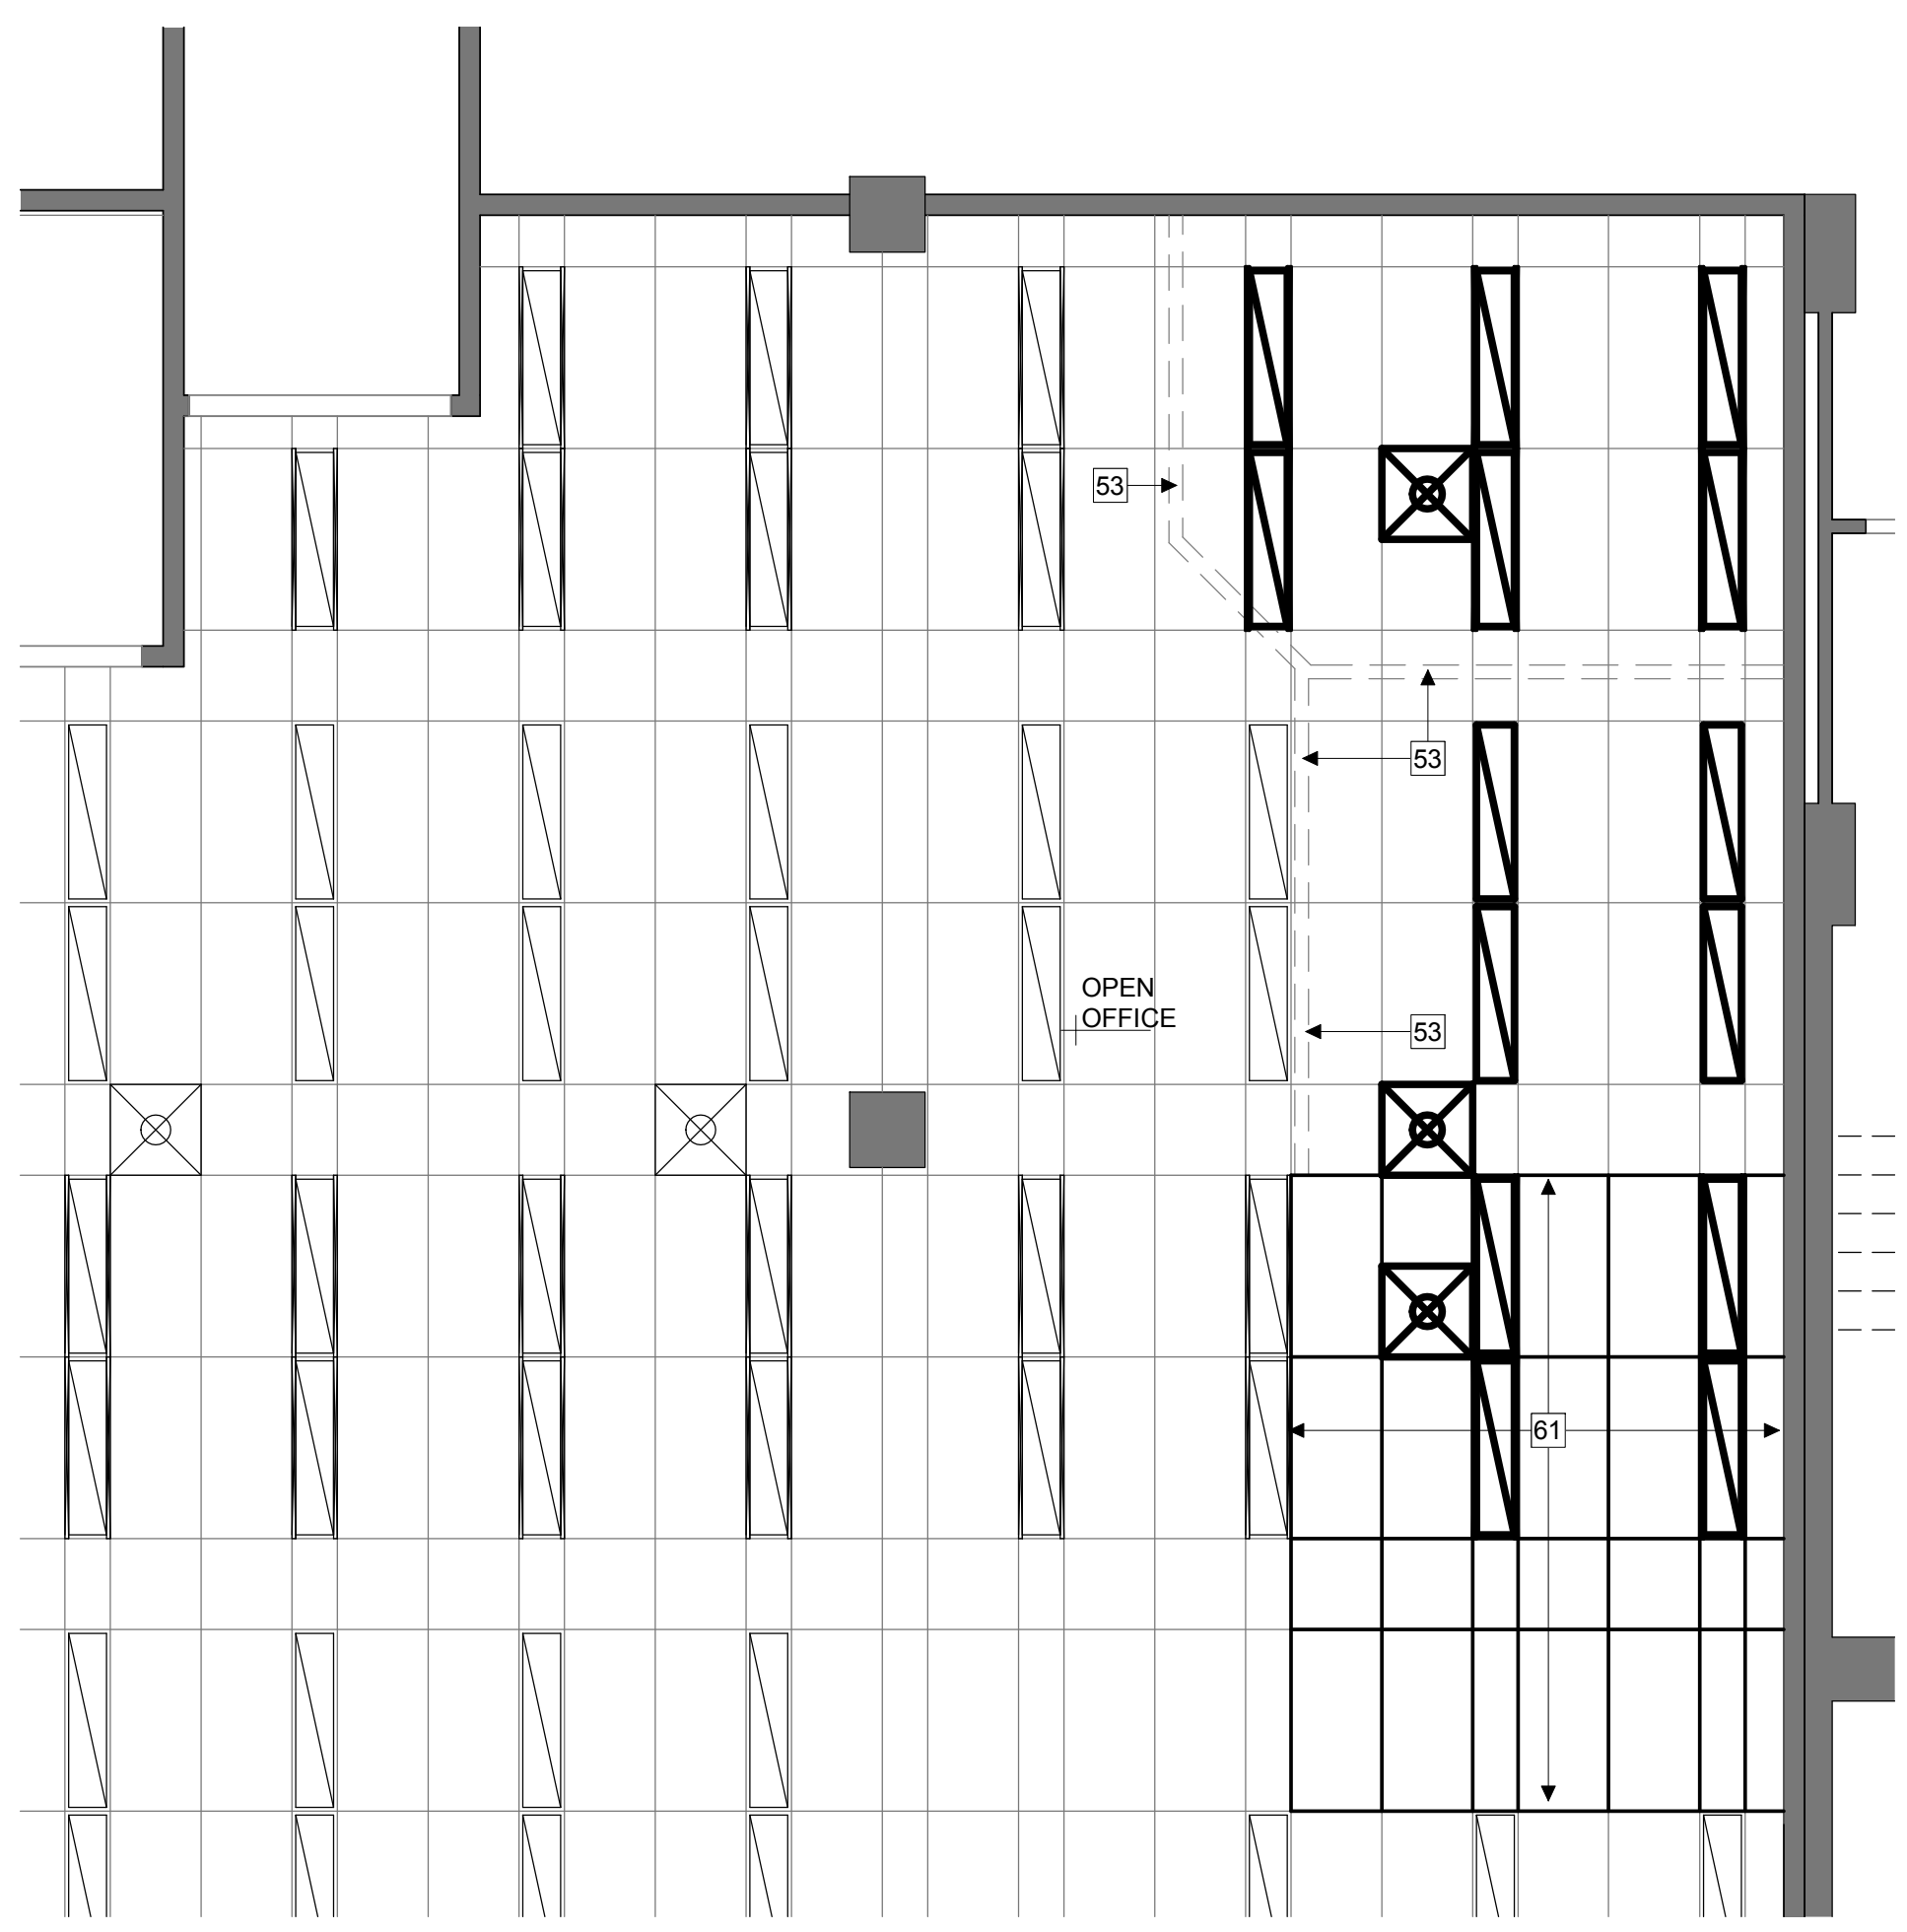

2 C WING 3RD FLOOR OFFICE REFLECTED CEILING PLAN - NEW
A230 1:50

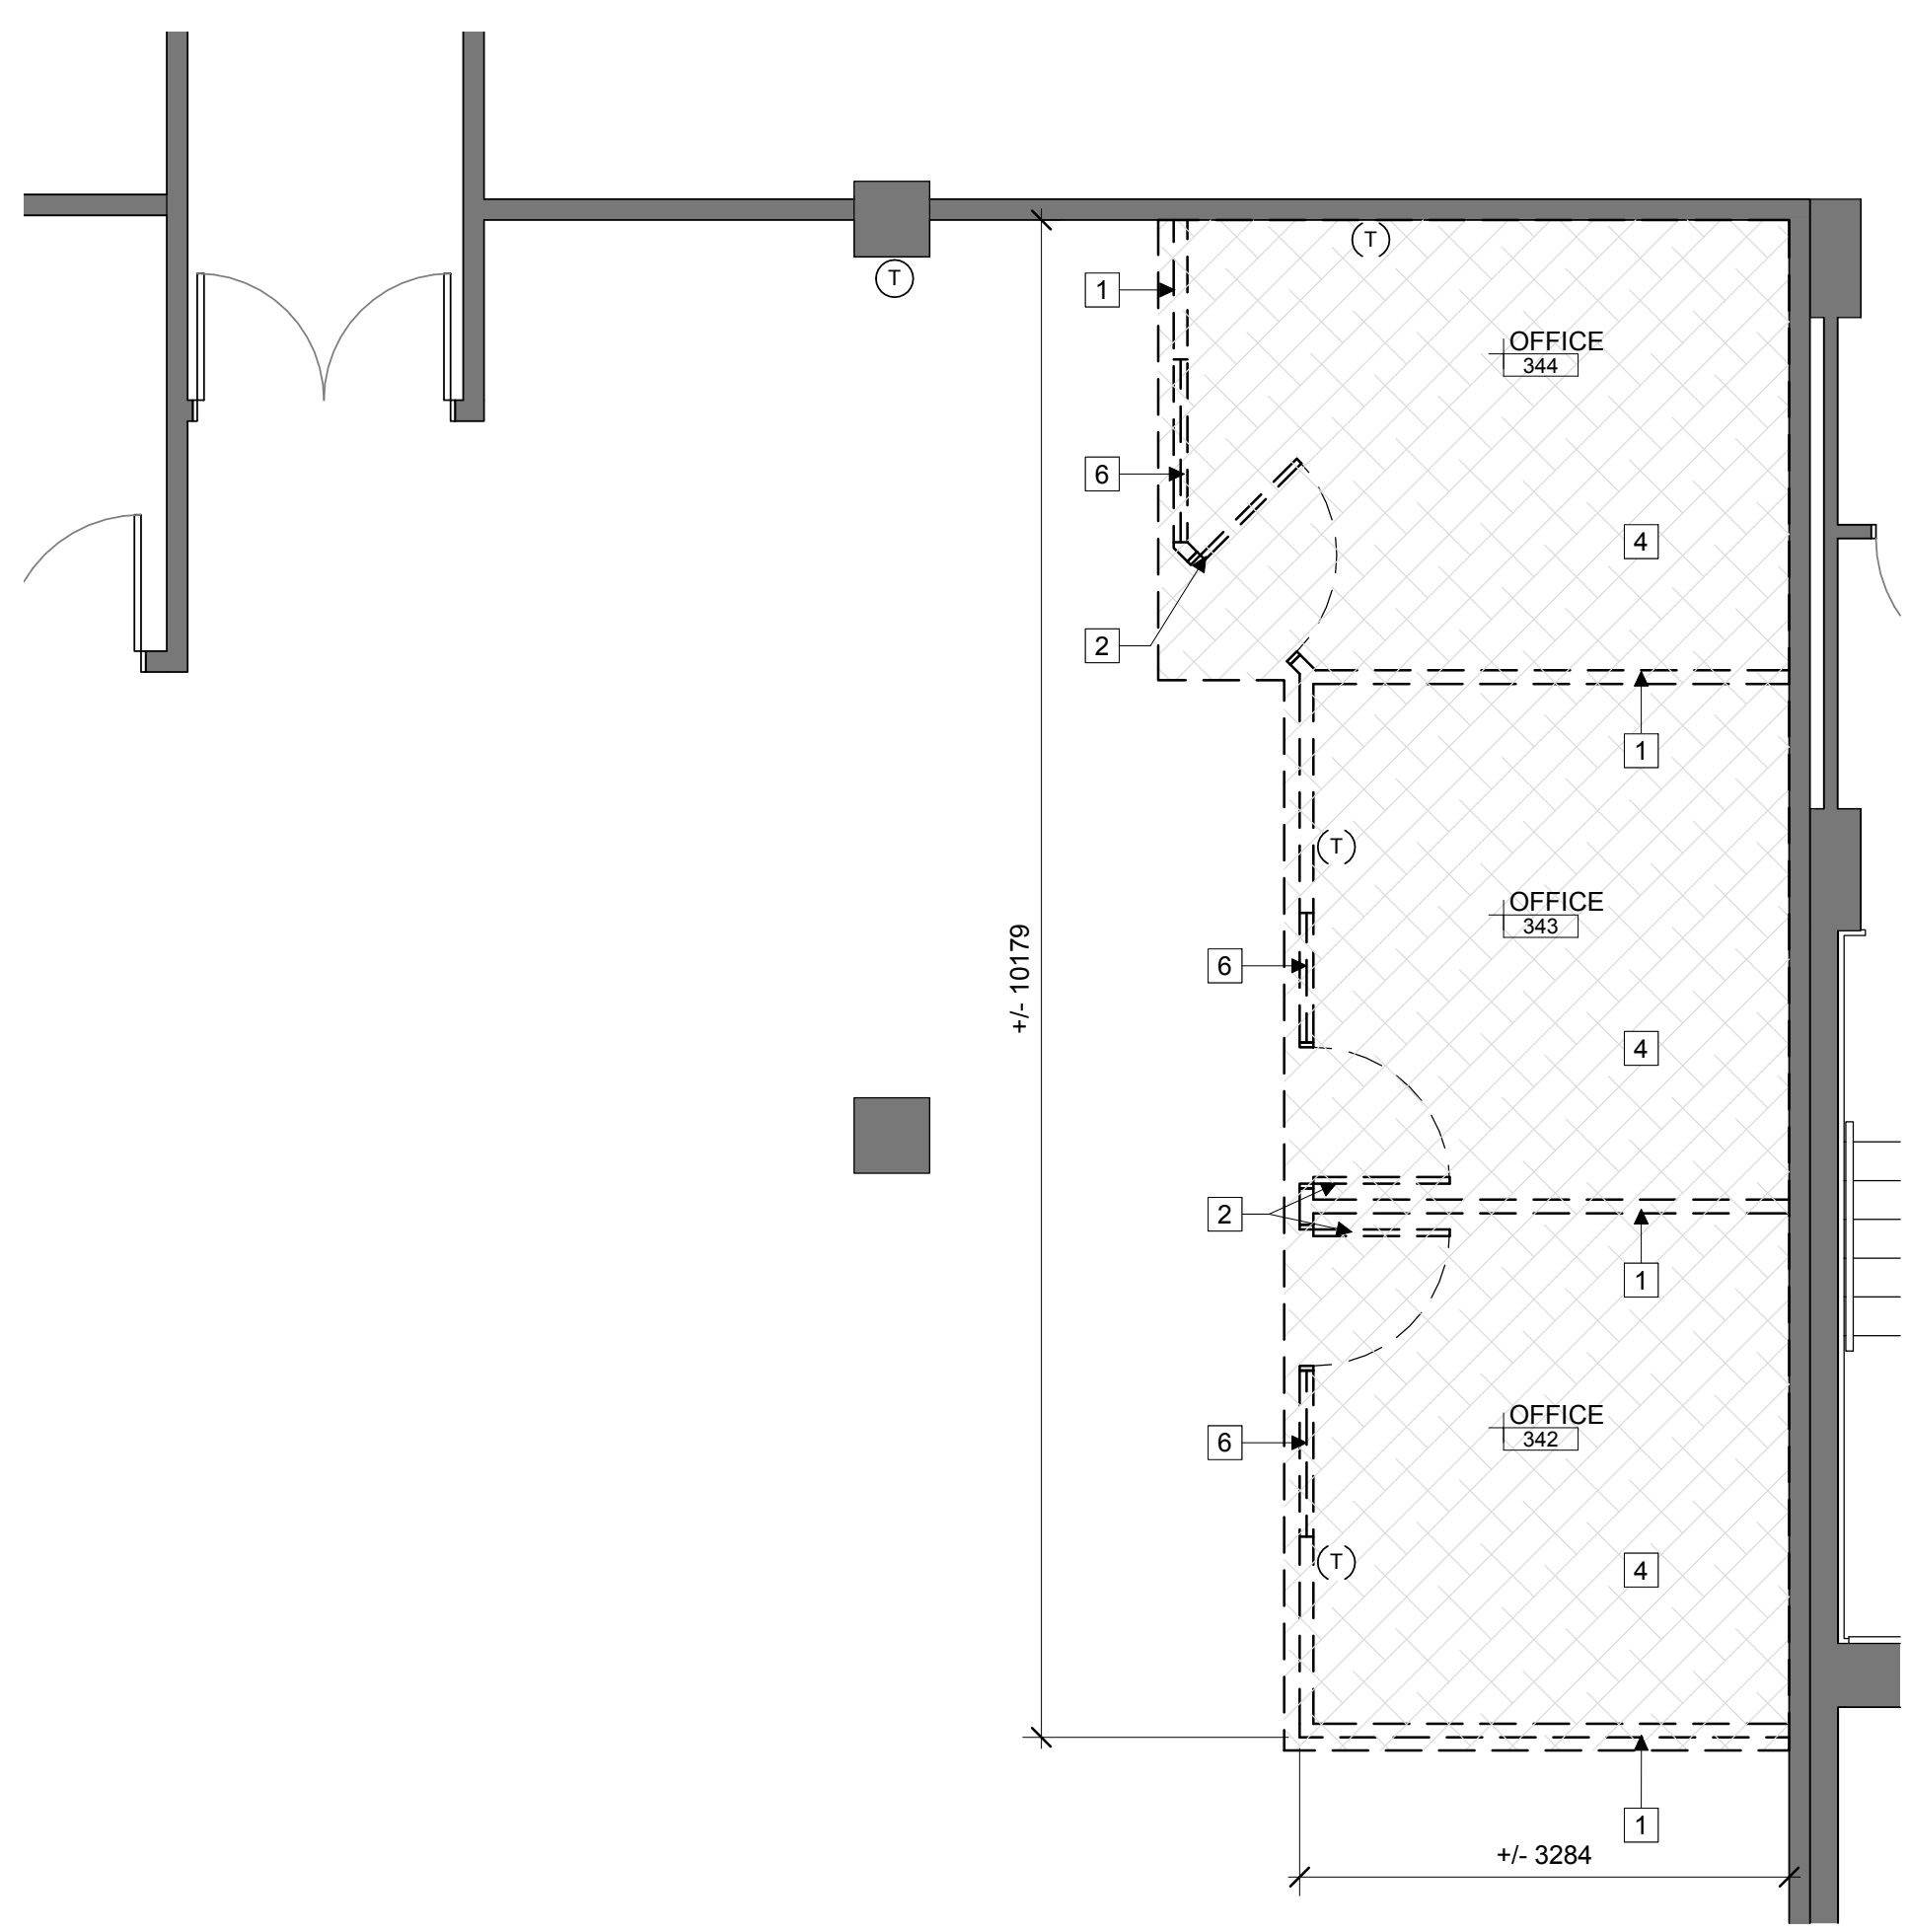

3 C WING 3RD FLOOR OFFICE PLAN - DEMOLITION
A230 1:50

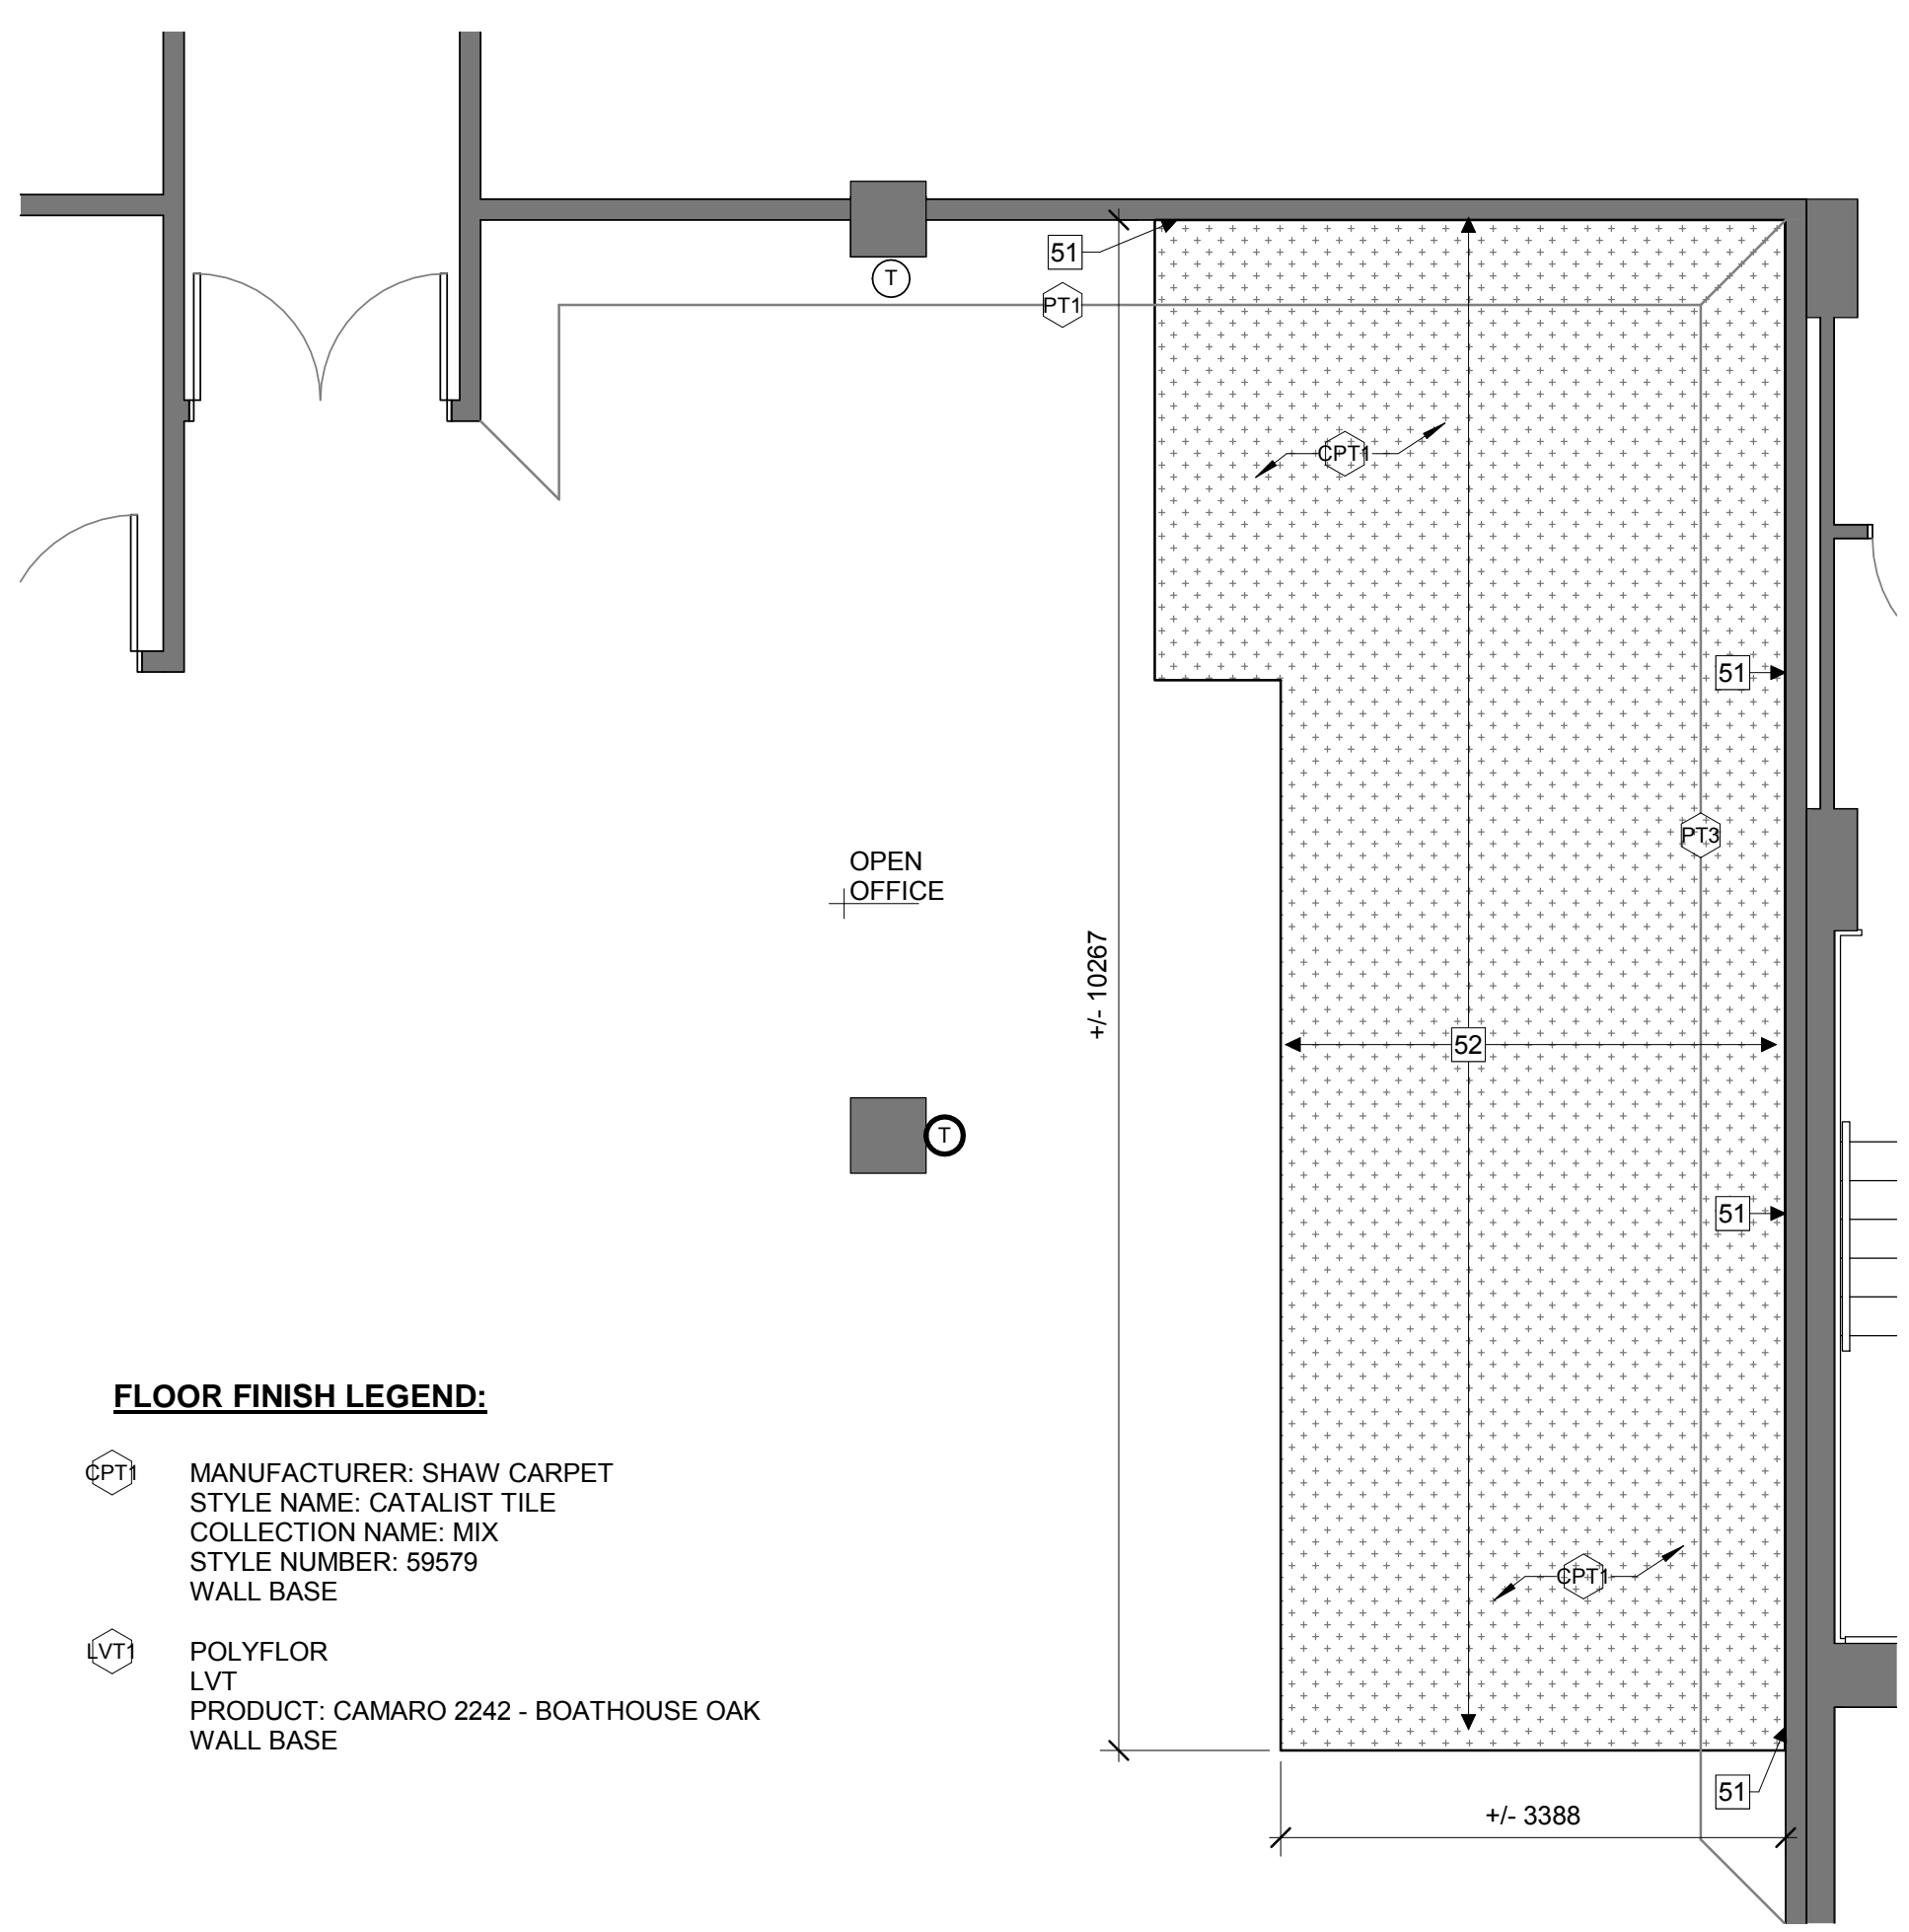

4 C WING 3RD FLOOR OFFICE PLAN - NEW
A230 1:50

FLOOR FINISH LEGEND:

- CP1 MANUFACTURER: SHAW CARPET STYLE NAME: CATALIST TILE COLLECTION NAME: MIX STYLE NUMBER: 59579 WALL BASE
- LV1 POLYFLOR LVT PRODUCT: CAMARO 2242 - BOATHOUSE OAK WALL BASE

DEMOLITION PLAN KEYNOTES:

- 1 REMOVE EXISTING DEMOUNTABLE PARTITION BACK TO ADJACENT WALL. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 2 REMOVE EXISTING DOOR, FRAME AND TRANSOM. REMOVE EXISTING HARDWARE FROM DOOR AND THRESHOLD AND RETURN TO OWNER. DISPOSE DOOR, FRAME AND TRANSOM.
- 3 REMOVE EXISTING SUSPENDED ACOUSTICAL TILE CEILING
- 4 REMOVE EXISTING CARPET AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING
- 5 REMOVE ALL PLENUM BAFFLES AND LAY-IN SOUND INSULATION
- 6 REMOVE EXISTING GLAZING SYSTEM
- 7 AED DEFIBRILLATOR TO REMAIN
- 8 REMOVE PORTION OF EXISTING DRYWALL PARTITION AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 9 ELECTRICAL PANEL TO REMAIN
- 10 EXISTING BULKHEAD TO REMAIN
- 11 REMOVE EXISTING VCT FLOORING AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING.
- 12 REMOVE EXISTING PARTITION TO U/S OF EXISTING SLAB. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 13 REMOVE EXISTING FLOOR FINISH AND WALL BASES. PREPARE SUBSTRATE TO RECEIVE NEW FLOOR FINISH.
- 14 REMOVE EXISTING ACCESS DOOR TO ISOLATION VALVES (AT BOTTOM OF WALL)
- 15 REMOVE PORTION OF EXISTING CONCRETE BLOCK WALL AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 16 REMOVE EXISTING SUSPENDED GYPSUM BOARD CEILING AS REQUIRED FOR NEW PLUMBING WORK
- 17 REMOVE EXISTING CEILING ACCESS DOOR. CLEAN, REPAIR AND STORE FOR RE-INSTALLATION.

DEMOLITION LEGEND:

- EXISTING TO REMAIN
- EXISTING TO BE REMOVED
- REMOVE EXISTING GLAZING
- REMOVE EXISTING DOOR
- EXISTING DOOR TO REMAIN
- AREA OF CARPET TO BE REMOVED
- AREA OF VINYL COMPOSITION TILE FLOORING TO BE REMOVED
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING LIGHT FIXTURE TO REMAIN
- REMOVE EXISTING EXIT SIGN
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING DIFFUSER TO REMAIN
- REMOVE EXISTING LINEAR DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING THERMOSTAT AND ALL ASSOCIATED WIRING PER MECHANICAL. PATCH TO MATCH EXISTING WALL WHERE REQUIRED.
- EXISTING THERMOSTAT TO REMAIN. RECONNECT WIRING AND PROVIDE NEW CONDUITS AS REQUIRED PER MECHANICAL.

NEW WORK LEGEND:

- NEW CONSTRUCTION
- NEW DOOR
- AREA OF NEW CARPET
- AREA OF NEW TILE FLOORING
- ARE ON NEW FLOORING TO MATCH EXISTING
- NEW GYPSUM BOARD SUSPENDED CEILING
- NEW EMERGENCY EXIT SIGN
- RE-USE EXISTING LIGHT FIXTURE
- NEW PENDANT LIGHT FIXTURE
- RE-USE EXISTING DIFFUSER
- RE-USE EXISTING DIFFUSER
- NEW RETURN GRILE
- NEW THERMOSTAT PER MECHANICAL CW
- NEW ALL ASSOCIATED WIRING AND CONDUITS

GENERAL NOTES:


- A. PROVIDE TEMPORARY DUST TIED HOARDING AROUND AREAS OF WORK FOR PERIOD OF CONSTRUCTION. CO-ORDINATE HOARDING LAYOUT WITH OWNER ON SITE.
- B. ALL DIMENSIONS ARE SHOWN TO FACE OF WALL UNLESS OTHERWISE NOTED
- C. ALL SHOWN EXISTING ASSEMBLIES ARE ASSUMED. VERIFY ASSEMBLIES ON SITE AND CO-ORDINATE WITH ARCHITECT DISCREPANCIES
- D. ADJUST EXISTING FRAMING AND RE-INSTATE EXISTING PARTITION ASSEMBLIES AT LOCATION OF NEW PLUMBING AND ELECTRICAL SERVICES.
- E. PROVIDE PENETRATIONS THROUGH FLOOR AND PARTITION ASSEMBLIES AS REQUIRED FOR ELECTRICAL AND MECHANICAL SERVICES. PROVIDE CONDUITS AND FIRE STOPS AROUND SERVICE PENETRATIONS THROUGH PARTITIONS, FLOOR AND CEILING ASSEMBLIES. LOCATE SERVICES PER MECHANICAL AND ELECTRICAL.
- F. PATCH AND FINISH EXISTING PARTITIONS AS REQUIRED AFTER REMOVAL OF ELECTRICAL AND MECHANICAL COMPONENTS.
- G. PROTECT FROM DAMAGE ALL EXISTING TO REMAIN WALL, FLOOR, CEILING ASSEMBLY, ELECTRICAL AND MECHANICAL FIXTURES DURING CONSTRUCTION
- H. REMOVE AND STORE ALL EXISTING FURNITURE FROM WORK AREA FOR PERIOD OF CONSTRUCTION

NEW WORK KEYNOTES:

- 51 PATCH AND REPAIR WALL. PAINT TO MATCH EXISTING
- 52 NEW CARPET TO MATCH EXISTING. USE FULL TILES. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 53 PATCH REPAIR T-BAR CEILING TO MATCH EXISTING. PROVIDE 20% CASH ALLOWANCES FOR NEW T-BAR AND CEILING TILES.
- 54 NEW DOOR AND FRAME. PAINT DOOR AND FRAME TO MATCH EXISTING
- 55 NEW INFILL WALL AT EXISTING PARTITION OPENINGS: MIN. 64mm STEEL STUDS @ 600mm O.C. C/W 2 LAYERS OF 13mm TYPE X GYPSUM BOARD AT EXPOSED SIDES (FRR 1H, SB-2 T.2.3.4.A). CO-ORDINATE STEEL STUD FRAMING WIDTH ON SITE AS REQUIRED TO MATCH EXISTING ADJACENT PARTITION THICKNESS
- 56 NEW PARTITION. ASSEMBLY TO MATCH EXISTING ADJACENT PARTITION
- 57 NEW PARTITION TO U/S OF SUSPENDED CEILING.
- 58 PROVIDE ADEQUATE BLOCKING WITHIN NEW INFILL WALL CAVITY FOR MILLWORK BRACKET SUPPORT. FOR LOCATION REFER 1/A635.
- 59 NEW PARTITION TO U/S OF SLAB
- 60 PATCH AND REPAIR EXISTING CEILING
- 61 NEW ACOUSTICAL TILE CEILING AND T-BAR SYSTEM. MATCH EXISTING ADJACENT CEILING.
- 62 NEW GYPSUM BOARD SUSPENDED CEILING, PAINTED.
- 63 FINISH WALL, TAPE AND FILL JOINTS
- 64 MATCH EXISTING PAINT COLOUR
- 65 FLOOR FINISH TO MATCH EXISTING. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 66 NEW FIRE RATED DOOR AND DOOR FRAME FRR 45min. PAINT DOOR AND FRAME TO MATCH EXISTING
- 67 NEW +/- 400mm(W) x 500mm(H) ACCESS DOOR TO ISOLATION VALVES. PAINTED. FIT BELOW NEW COUNTERTOP. VERIFY ACCESS DOOR DIMENSIONS TO FIT ON SITE. PATCH AND REPAIR EXISTING WALL AS REQUIRED. MATCH EXISTING WALL ASSEMBLY TO FIT NEW ACCESS DOOR.
- 68 REINSTATE DEMOLISHED PORTION CONCRETE BLOCK WALL WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED
- 69 RE-INSTALL SALVAGED CEILING ACCESS DOOR, PAINTED. ADJUST CEILING FRAMING AS REQUIRED.
- 70 NEW SANITARY DRAIN BY MECHANICAL FROM KITCHENETTE ABOVE. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF MAIN SANITARY DRAIN ON SITE.
- 71 NEW KITCHENETTE WATER SUPPLY LINES BY MECHANICAL. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF CONNECTION POINTS ON SITE.
- 72 NEW FLOOR FINISH TRANSITION PROFILE THR-1 PER SCHEDULE (A01)
- 73 EXISTING STUCCO FINISH AT UPPER PORTION OF WALL TO REMAIN. NEW PAINT AT TOP OF STUCCO TO MATCH EXISTING.
- 74 INFILL WALL OPENING ABOVE DOOR. MATCH ASSEMBLY TO EXISTING ADJACENT PARTITION. PROVIDE NEW HEADER AND DOUBLE STUD JAMB FRAMING.
- 75 NEW SUSPENDED ACOUSTIC TILE CEILING C/W NEW T-BARS AND SUSPENSION SYSTEM ACT-01
- 76 REINSTATE DEMOLISHED PORTION OF DRYWALL PARTITION WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED


WALL FINISH LEGEND:

- PT1 MANUFACTURER: DULUX
COLOUR NAME: MEETING HOUSE
PRODUCT: 90Y 78/069- A1864
EGGSHELL FINISH
- PT2 MANUFACTURER: DULUX
COLOUR NAME: NEWBORN
PRODUCT: 90Y 78/269 -A0710
EGGSHELL FINISH
- PT3 MANUFACTURER: DULUX
COLOUR NAME: CALICO
PRODUCT: 70YR 26/468 A0506
EGGSHELL FINISH
- PT4 MANUFACTURER: DULUX
COLOUR NAME: SERENGETI PLAIN
PRODUCT: 90Y 78/255- A0970
EGGSHELL FINISH
- PT5 MANUFACTURER: DULUX
COLOUR NAME: FROST GREY
PRODUCT: 30GG 52/011 A1942
EGGSHELL FINISH
- PT6 MANUFACTURER: DULUX
COLOUR NAME: ANLANTIS BLUE
PRODUCT: 970G 54/164
EGGSHELL FINISH

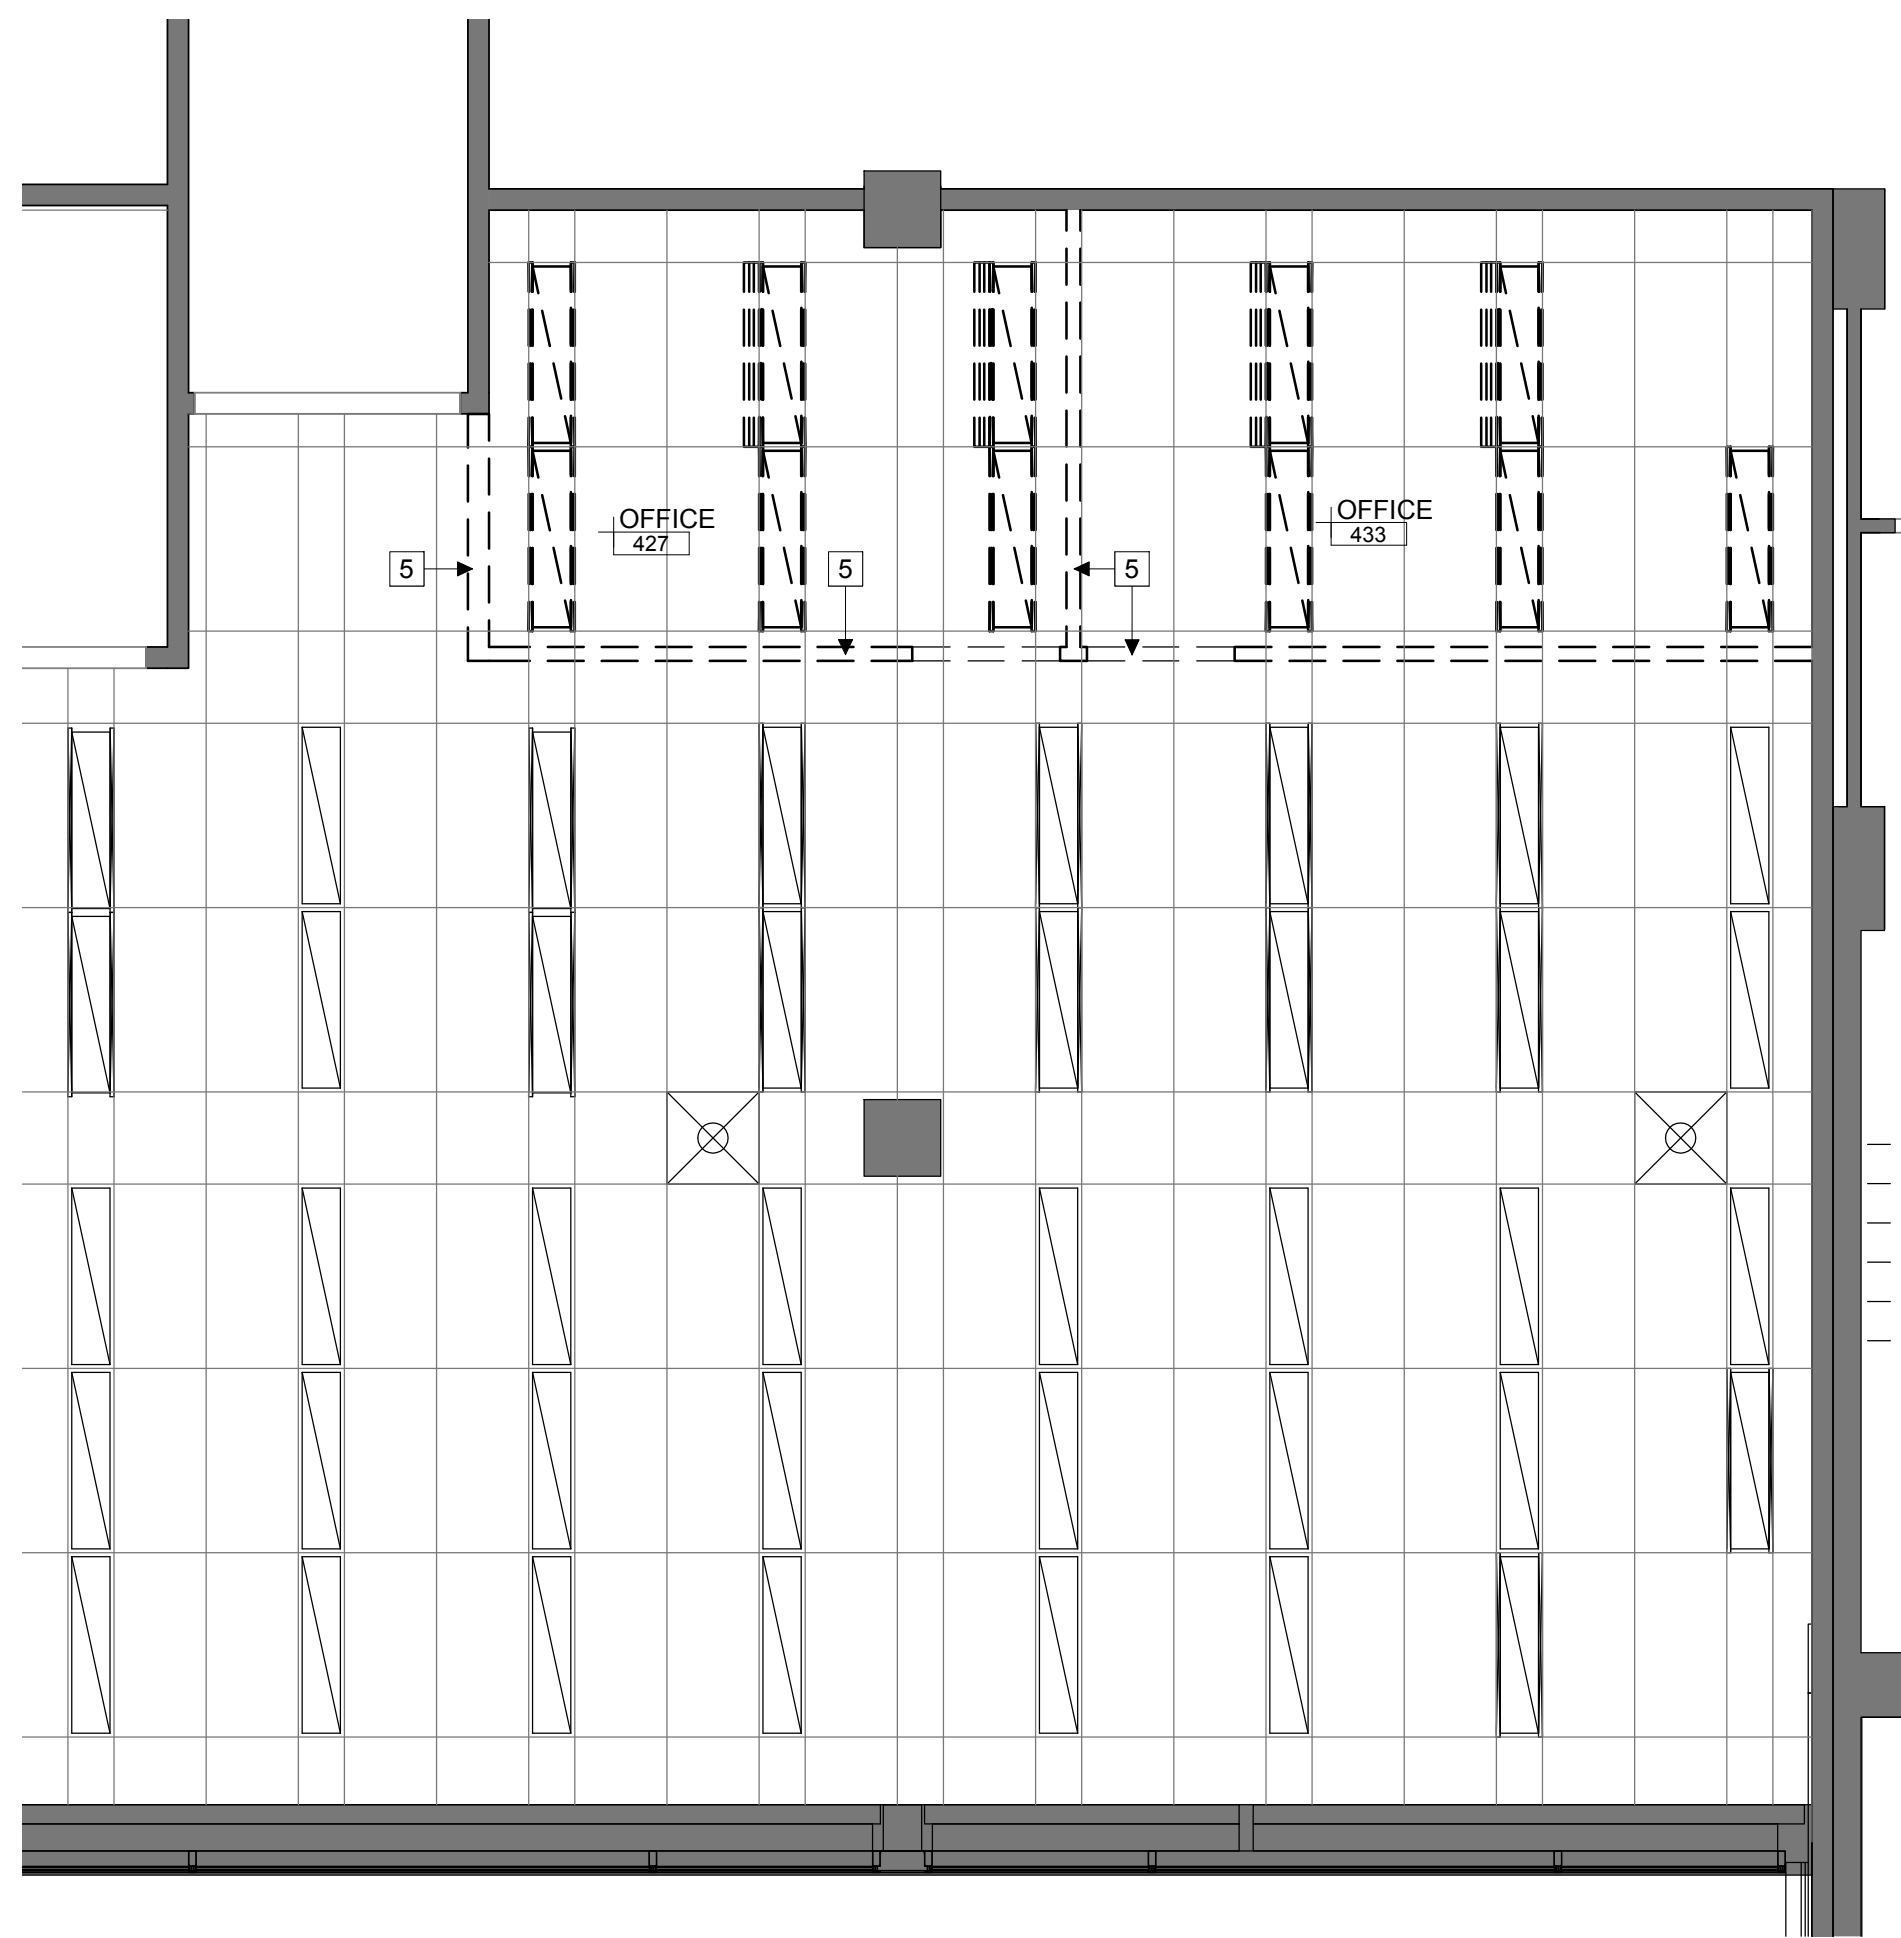


1 WING C 4TH FLOOR OFFICE REFLECTED CEILING PLAN - DEMOLITION

A240 1:50

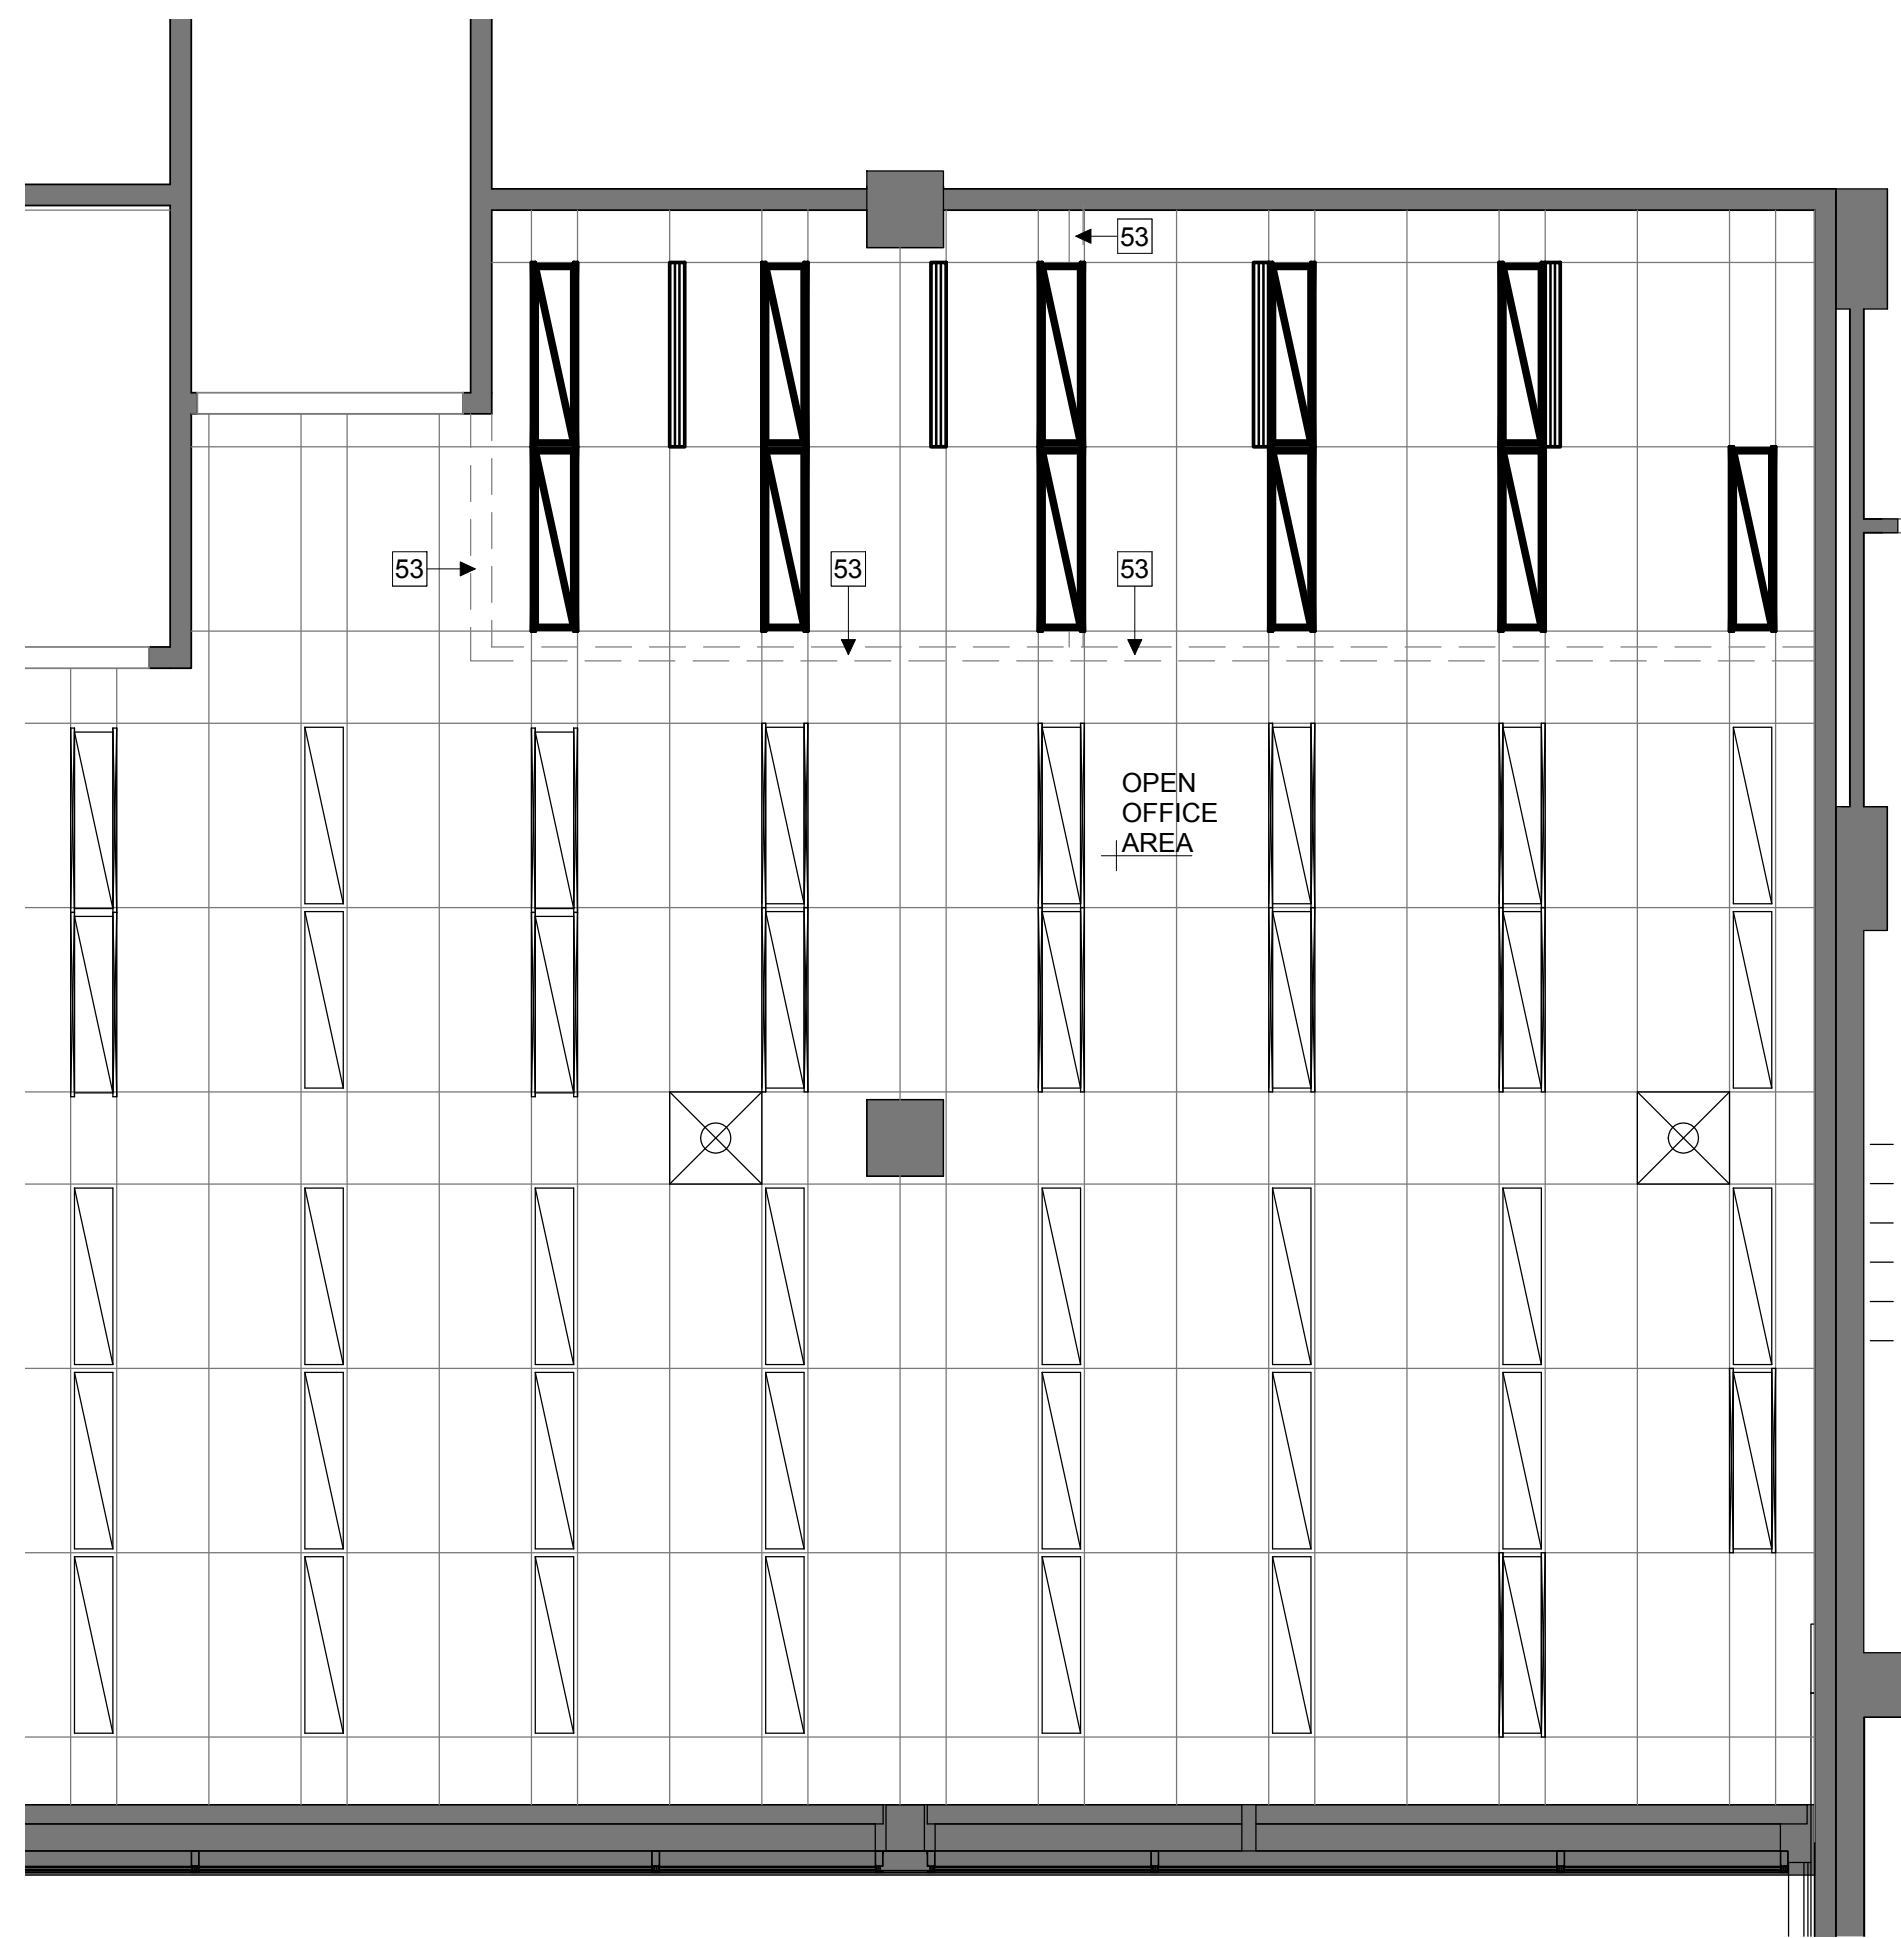


2 C WING 4TH FLOOR OFFICE REFLECTED CEILING PLAN - NEW

A240 1:50

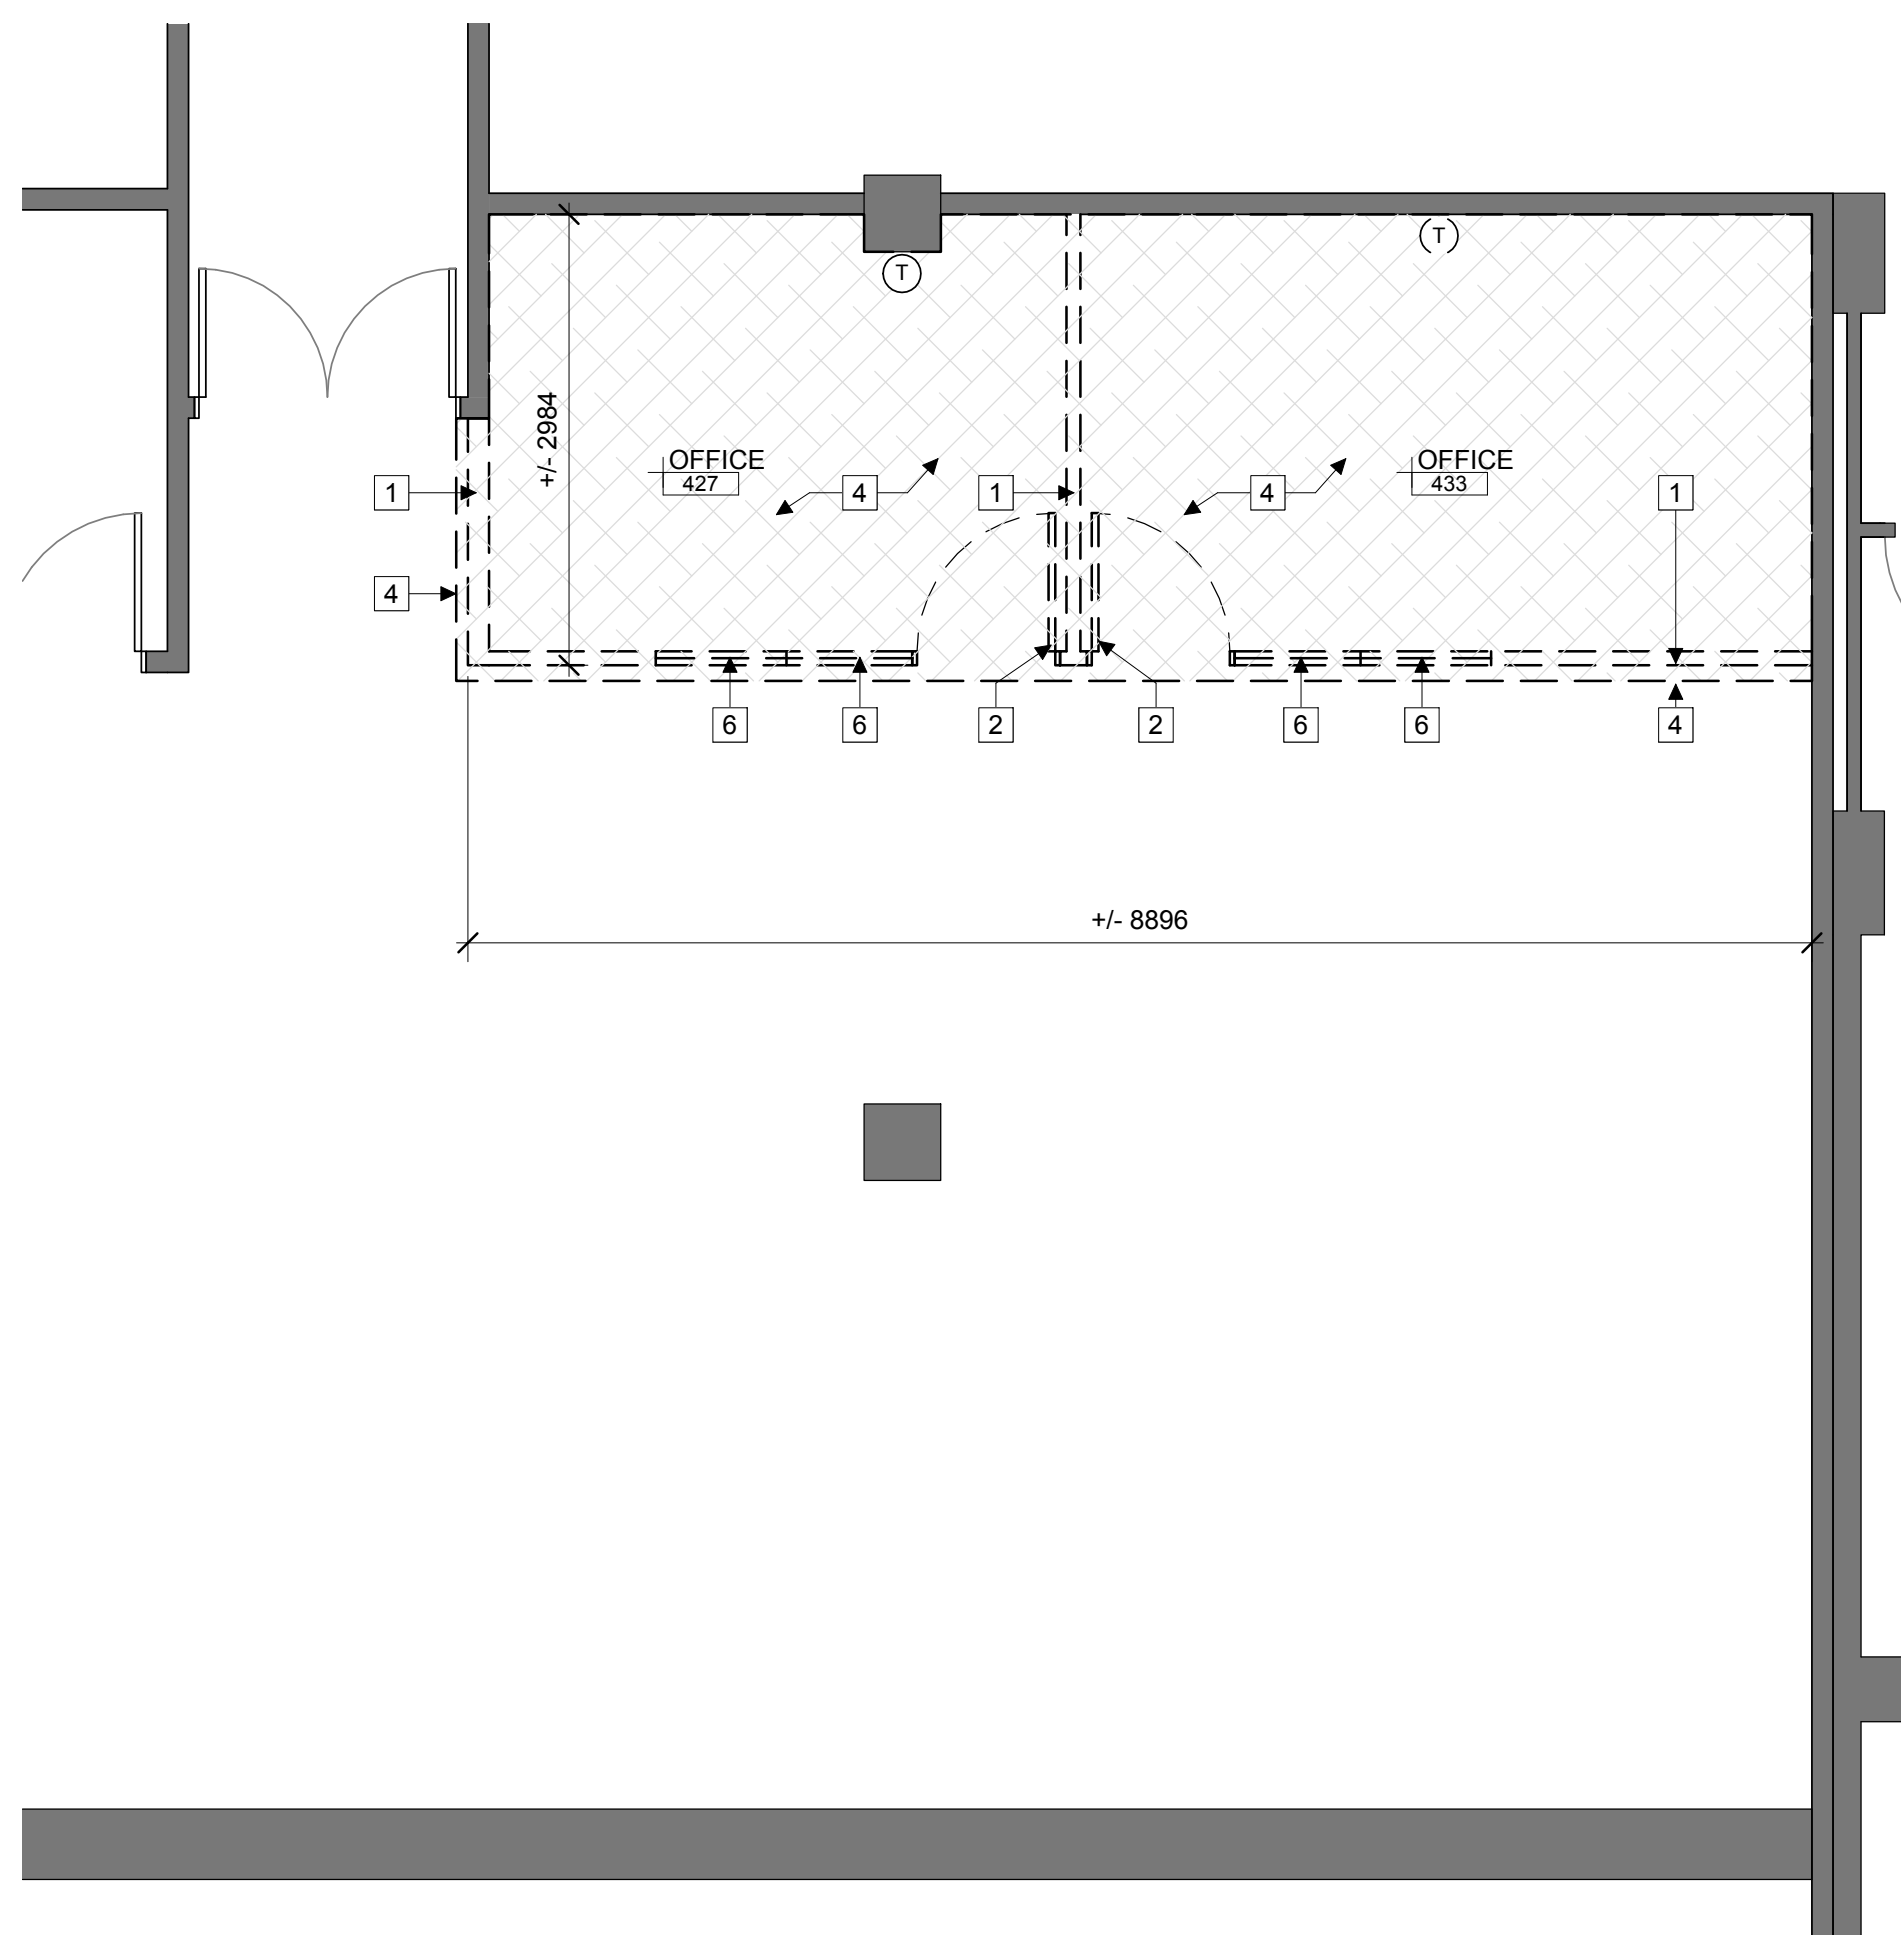

3 C WING 4TH FLOOR OFFICE PLAN - DEMOLITION

A240 1:50

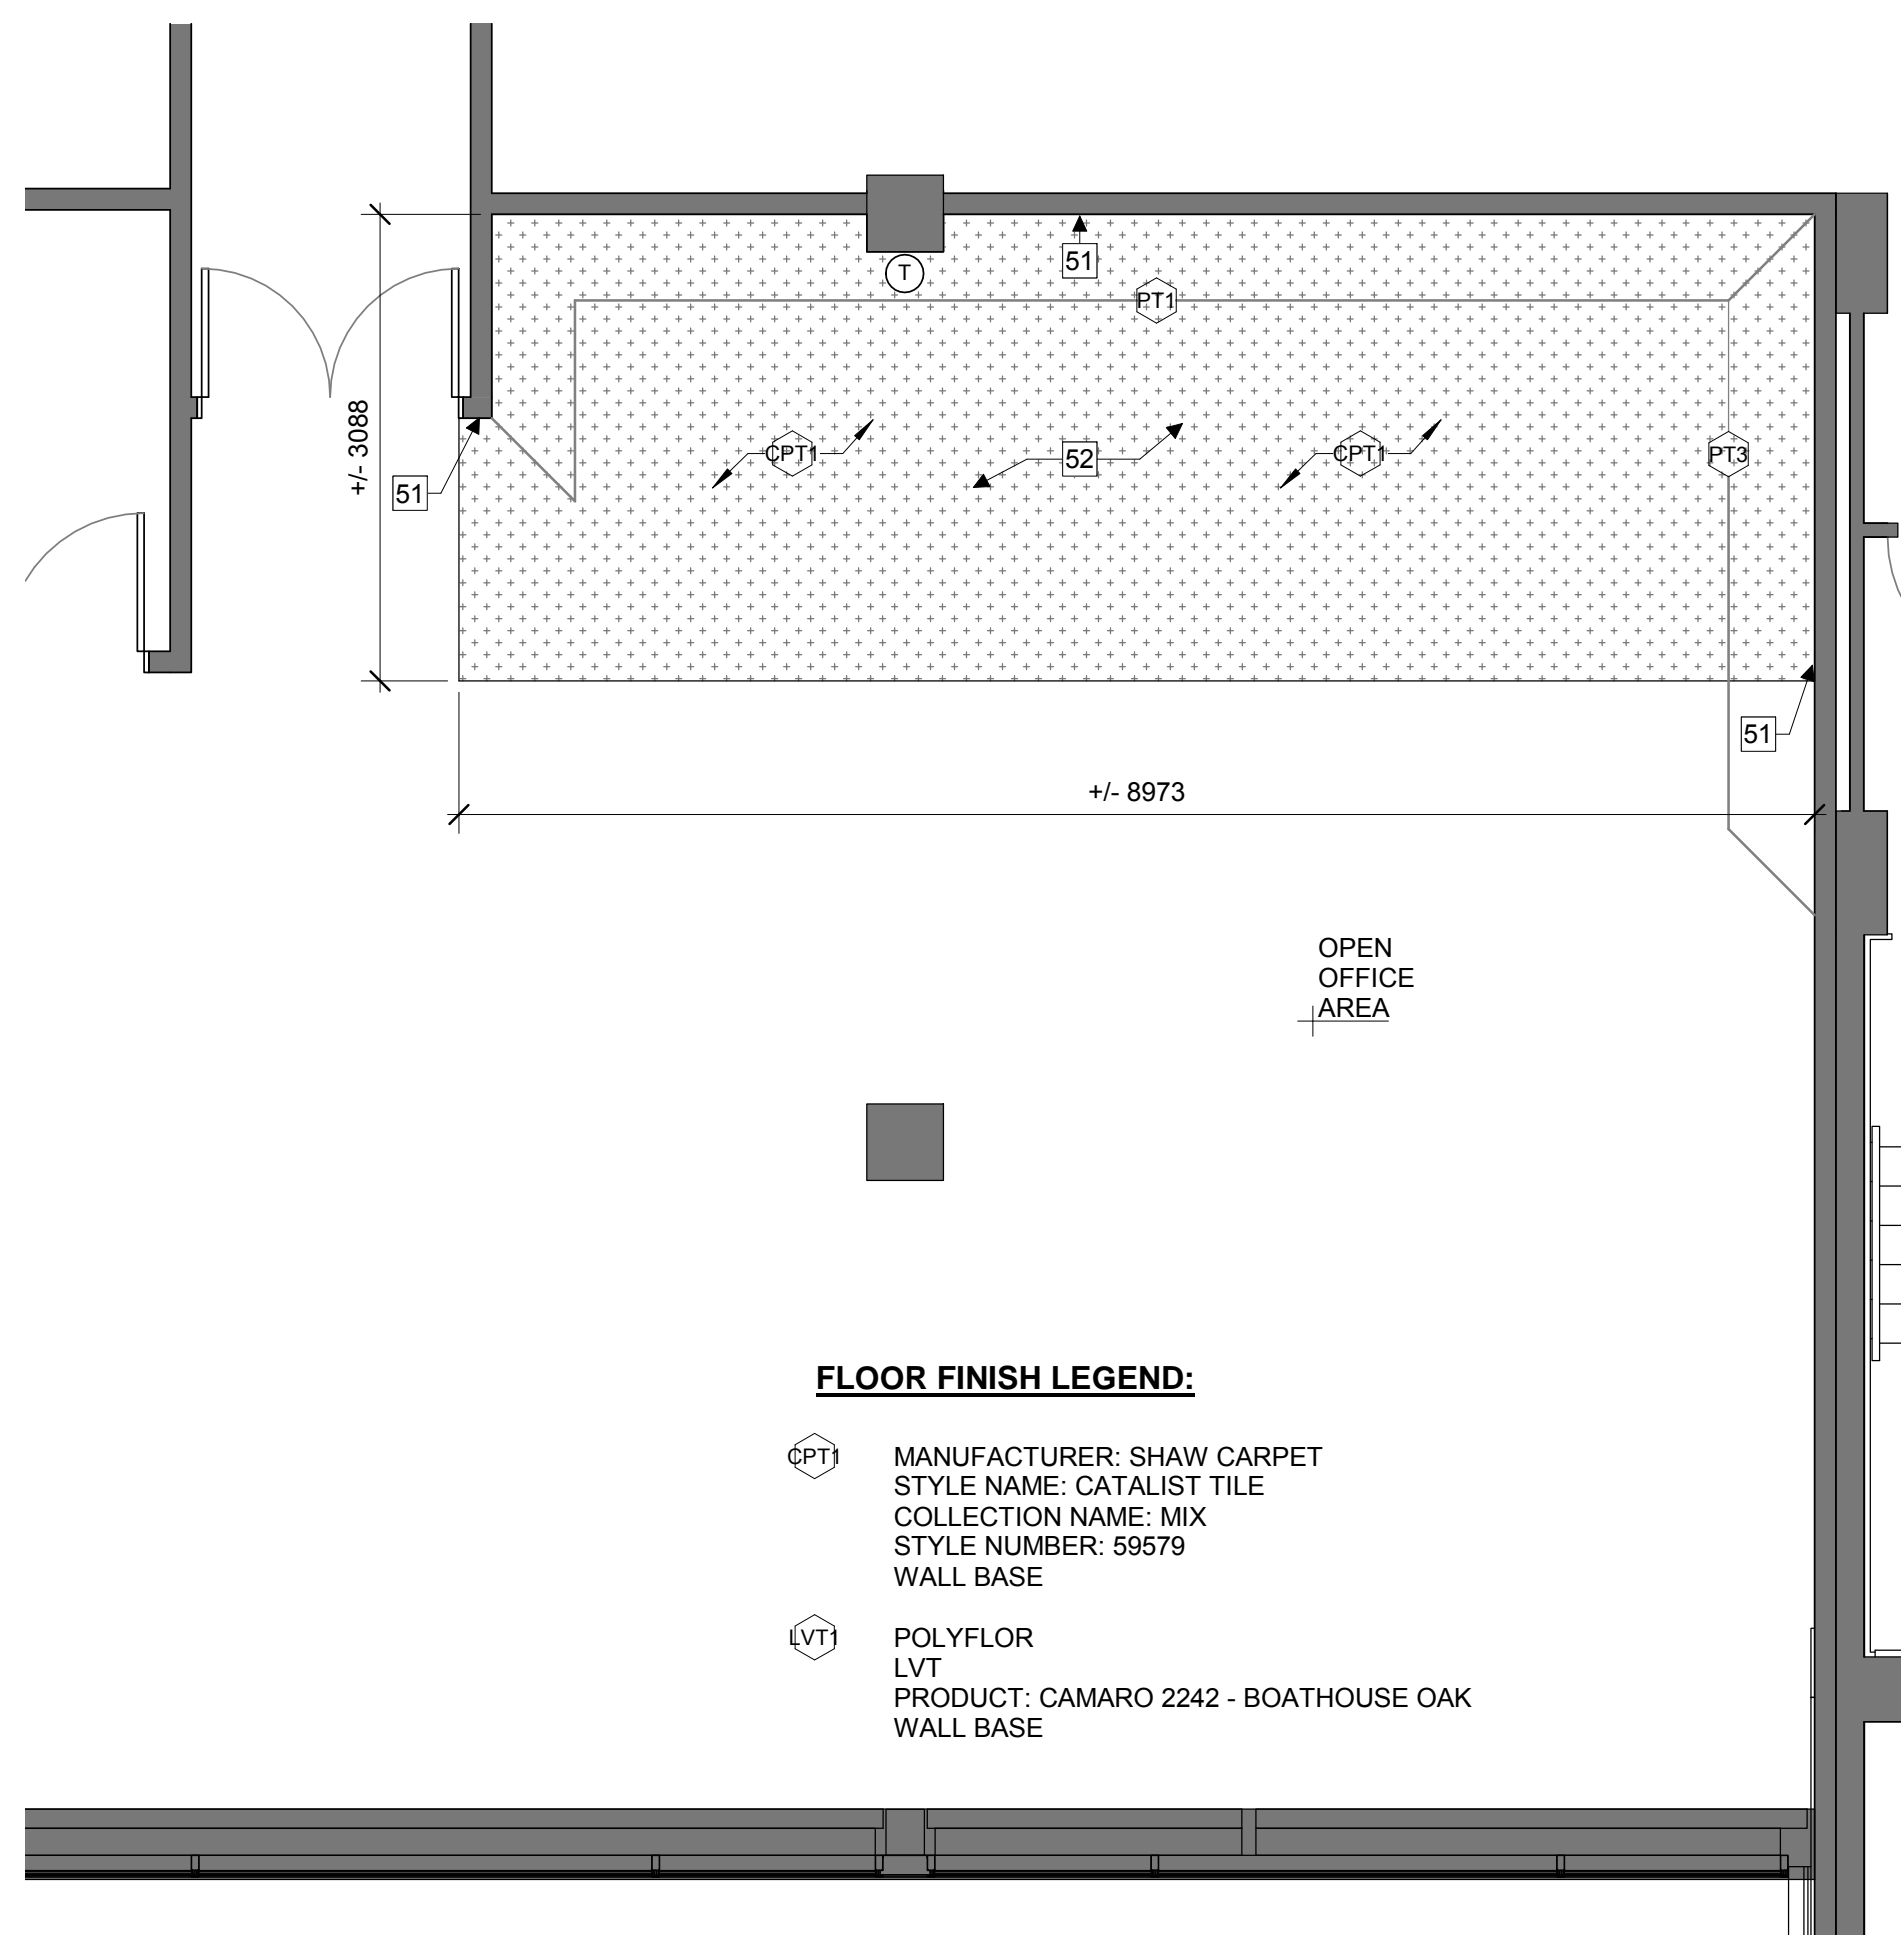

4 C WING 4TH FLOOR OFFICE PLAN - NEW

A240 1:50

FLOOR FINISH LEGEND:

- CPT1 MANUFACTURER: SHAW CARPET
STYLE NAME: CATALIST TILE
COLLECTION NAME: MIX
STYLE NUMBER: 59579
WALL BASE
- LVT1 POLYFLOR
LVT
PRODUCT: CAMARO 2242 - BOATHOUSE OAK
WALL BASE

DEMOLITION PLAN KEYNOTES:

- 1 REMOVE EXISTING DEMOUNTABLE PARTITION BACK TO ADJACENT WALL. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 2 REMOVE EXISTING DOOR, FRAME AND TRANSOM. REMOVE EXISTING HARDWARE FROM DOOR AND THRESHOLD AND RETURN TO OWNER. DISPOSE DOOR, FRAME AND TRANSOM.
- 3 REMOVE EXISTING SUSPENDED ACOUSTICAL TILE CEILING
- 4 REMOVE EXISTING CARPET AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING
- 5 REMOVE ALL PLENUM BAFFLES AND LAY-IN SOUND INSULATION
- 6 REMOVE EXISTING GLAZING SYSTEM
- 7 AED DEFIBRILLATOR TO REMAIN
- 8 REMOVE PORTION OF EXISTING DRYWALL PARTITION AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 9 ELECTRICAL PANEL TO REMAIN
- 10 EXISTING BULKHEAD TO REMAIN
- 11 REMOVE EXISTING VCT FLOORING AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING.
- 12 REMOVE EXISTING PARTITION TO U/S OF EXISTING SLAB. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- 13 REMOVE EXISTING FLOOR FINISH AND WALL BASES. PREPARE SUBSTRATE TO RECEIVE NEW FLOOR FINISH.
- 14 REMOVE EXISTING ACCESS DOOR TO ISOLATION VALVES (AT BOTTOM OF WALL)
- 15 REMOVE PORTION OF EXISTING CONCRETE BLOCK WALL AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- 16 REMOVE EXISTING SUSPENDED GYPSUM BOARD CEILING AS REQUIRED FOR NEW PLUMBING WORK
- 17 REMOVE EXISTING CEILING ACCESS DOOR. CLEAN, REPAIR AND STORE FOR RE-INSTALLATION.

DEMOLITION LEGEND:

- EXISTING TO REMAIN
- EXISTING TO BE REMOVED
- REMOVE EXISTING GLAZING
- REMOVE EXISTING DOOR
- EXISTING DOOR TO REMAIN
- AREA OF CARPET TO BE REMOVED
- AREA OF VINYL COMPOSITION TILE FLOORING TO BE REMOVED
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING LIGHT FIXTURE TO REMAIN
- REMOVE EXISTING EXIT SIGN
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING DIFFUSER TO REMAIN
- REMOVE EXISTING LINEAR DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING THERMOSTAT AND ALL ASSOCIATED WIRING PER MECHANICAL. PATCH TO MATCH EXISTING WALL WHERE REQUIRED.
- EXISTING THERMOSTAT TO REMAIN. RECONNECT WIRING AND PROVIDE NEW CONDUITS AS REQUIRED PER MECHANICAL.

NEW WORK LEGEND:

- NEW CONSTRUCTION
- NEW DOOR
- AREA OF NEW CARPET
- AREA OF NEW TILE FLOORING
- ARE ON NEW FLOORING TO MATCH EXISTING
- NEW GYPSUM BOARD SUSPENDED CEILING
- NEW EMERGENCY EXIT SIGN
- RE-USE EXISTING LIGHT FIXTURE
- NEW PENDANT LIGHT FIXTURE
- RE-USE EXISTING DIFFUSER
- RE-USE EXISTING DIFFUSER
- NEW RETURN GRILE
- NEW THERMOSTAT PER MECHANICAL C/W
- NEW ALL ASSOCIATED WIRING AND CONDUITS

GENERAL NOTES:


- A. PROVIDE TEMPORARY DUST TIED HOARDING AROUND AREAS OF WORK FOR PERIOD OF CONSTRUCTION. CO-ORDINATE HOARDING LAYOUT WITH OWNER ON SITE.
- B. ALL DIMENSIONS ARE SHOWN TO FACE OF WALL UNLESS OTHERWISE NOTED
- C. ALL SHOWN EXISTING ASSEMBLIES ARE ASSUMED. VERIFY ASSEMBLIES ON SITE AND CO-ORDINATE WITH ARCHITECT DISCREPANCIES
- D. ADJUST EXISTING FRAMING AND RE-INSTATE EXISTING PARTITION ASSEMBLIES AT LOCATION OF NEW PLUMBING AND ELECTRICAL SERVICES.
- E. PROVIDE PENETRATIONS THROUGH FLOOR AND PARTITION ASSEMBLIES AS REQUIRED FOR ELECTRICAL AND MECHANICAL SERVICES. PROVIDE CONDUITS AND FIRE STOPS AROUND SERVICE PENETRATIONS THROUGH PARTITIONS, FLOOR AND CEILING ASSEMBLIES. LOCATE SERVICES PER MECHANICAL AND ELECTRICAL.
- F. PATCH AND FINISH EXISTING PARTITIONS AS REQUIRED AFTER REMOVAL OF ELECTRICAL AND MECHANICAL COMPONENTS.
- G. PROTECT FROM DAMAGE ALL EXISTING TO REMAIN WALL, FLOOR, CEILING ASSEMBLY, ELECTRICAL AND MECHANICAL FIXTURES DURING CONSTRUCTION
- H. REMOVE AND STORE ALL EXISTING FURNITURE FROM WORK AREA FOR PERIOD OF CONSTRUCTION

NEW WORK KEYNOTES:


- 51 PATCH AND REPAIR WALL. PAINT TO MATCH EXISTING
- 52 NEW CARPET TO MATCH EXISTING. USE FULL TILES. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 53 PATCH REPAIR T-BAR CEILING TO MATCH EXISTING. PROVIDE 20% CASH ALLOWANCES FOR NEW T-BAR AND CEILING TILES.
- 54 NEW DOOR AND FRAME. PAINT DOOR AND FRAME TO MATCH EXISTING
- 55 NEW INFILL WALL AT EXISTING PARTITION OPENINGS. MIN. 64mm STEEL STUDS @ 600mm O.C. C/W 2 LAYERS OF 13mm TYPE X GYPSUM BOARD AT EXPOSED SIDES (FRR 1H, SB-2 T.2.3.4.A). CO-ORDINATE STEEL STUD FRAMING WIDTH ON SITE AS REQUIRED TO MATCH EXISTING ADJACENT PARTITION THICKNESS.
- 56 NEW PARTITION. ASSEMBLY TO MATCH EXISTING ADJACENT PARTITION
- 57 NEW PARTITION TO U/S OF SUSPENDED CEILING.
- 58 PROVIDE ADEQUATE BLOCKING WITHIN NEW INFILL WALL CAVITY FOR MILLWORK BRACKET SUPPORT. FOR LOCATION REFER 1/A635.
- 59 NEW PARTITION TO U/S OF SLAB
- 60 PATCH AND REPAIR EXISTING CEILING
- 61 PATCH REPAIR T-BAR CEILING AND T-BAR SYSTEM. MATCH EXISTING ADJACENT CEILING.
- 62 NEW GYPSUM BOARD SUSPENDED CEILING, PAINTED.
- 63 FINISH WALL, TAPE AND FILL JOINTS
- 64 MATCH EXISTING PAINT COLOUR
- 65 FLOOR FINISH TO MATCH EXISTING. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- 66 NEW FIRE RATED DOOR AND DOOR FRAME FRR 45min. PAINT DOOR AND FRAME TO MATCH EXISTING
- 67 NEW +/- 400mm(W) x 500mm(H) ACCESS DOOR TO ISOLATION VALVES. PAINTED. FIT BELOW NEW COUNTERTOP. VERIFY ACCESS DOOR DIMENSIONS TO FIT ON SITE. PATCH AND REPAIR EXISTING WALL AS REQUIRED. MATCH EXISTING WALL ASSEMBLY TO FIT NEW ACCESS DOOR.
- 68 REINSTATE DEMOLISHED PORTION CONCRETE BLOCK WALL WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED
- 69 RE-INSTALL SALVAGED CEILING ACCESS DOOR. PAINTED. ADJUST CEILING FRAMING AS REQUIRED.
- 70 NEW SANITARY DRAIN BY MECHANICAL FROM KITCHENETTE ABOVE. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF MAIN SANITARY DRAIN ON SITE.
- 71 NEW KITCHENETTE WATER SUPPLY LINES BY MECHANICAL. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF CONNECTION POINTS ON SITE.
- 72 NEW FLOOR FINISH TRANSITION PROFILE THR-1 PER SCHEDULE (A001)
- 73 EXISTING STUCCO FINISH AT UPPER PORTION OF WALL TO REMAIN. NEW PAINT AT TOP OF STUCCO TO MATCH EXISTING.
- 74 INFILL WALL OPENING ABOVE DOOR. MATCH ASSEMBLY TO EXISTING ADJACENT PARTITION. PROVIDE NEW HEADER AND DOUBLE STUD JAMB FRAMING.
- 75 NEW SUSPENDED ACOUSTIC TILE CEILING C/W NEW T-BARS AND SUSPENSION SYSTEM ACT-01
- 76 REINSTATE DEMOLISHED PORTION OF DRYWALL PARTITION WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED

WALL FINISH LEGEND:


- PT1 MANUFACTURER: DULUX COLOUR NAME: MEETING HOUSE PRODUCT: 50YY 74/069- A1864 EGGSHELL FINISH
- PT2 MANUFACTURER: DULUX COLOUR NAME: NEWBORN PRODUCT: 35YY 78/269 -A0710 EGGSHELL FINISH
- PT3 MANUFACTURER: DULUX COLOUR NAME: CALICO PRODUCT: 70YR 36/468 A0506 EGGSHELL FINISH
- PT4 MANUFACTURER: DULUX COLOUR NAME: SERENGETI PLAIN PRODUCT: 90YY 48/255- A0970 EGGSHELL FINISH
- PT5 MANUFACTURER: DULUX COLOUR NAME: FROST GREY PRODUCT: 30GG 52/011 A1942 EGGSHELL FINISH
- PT6 MANUFACTURER: DULUX COLOUR NAME: ANLANTIS BLUE PRODUCT: 970BG 54/164 EGGSHELL FINISH

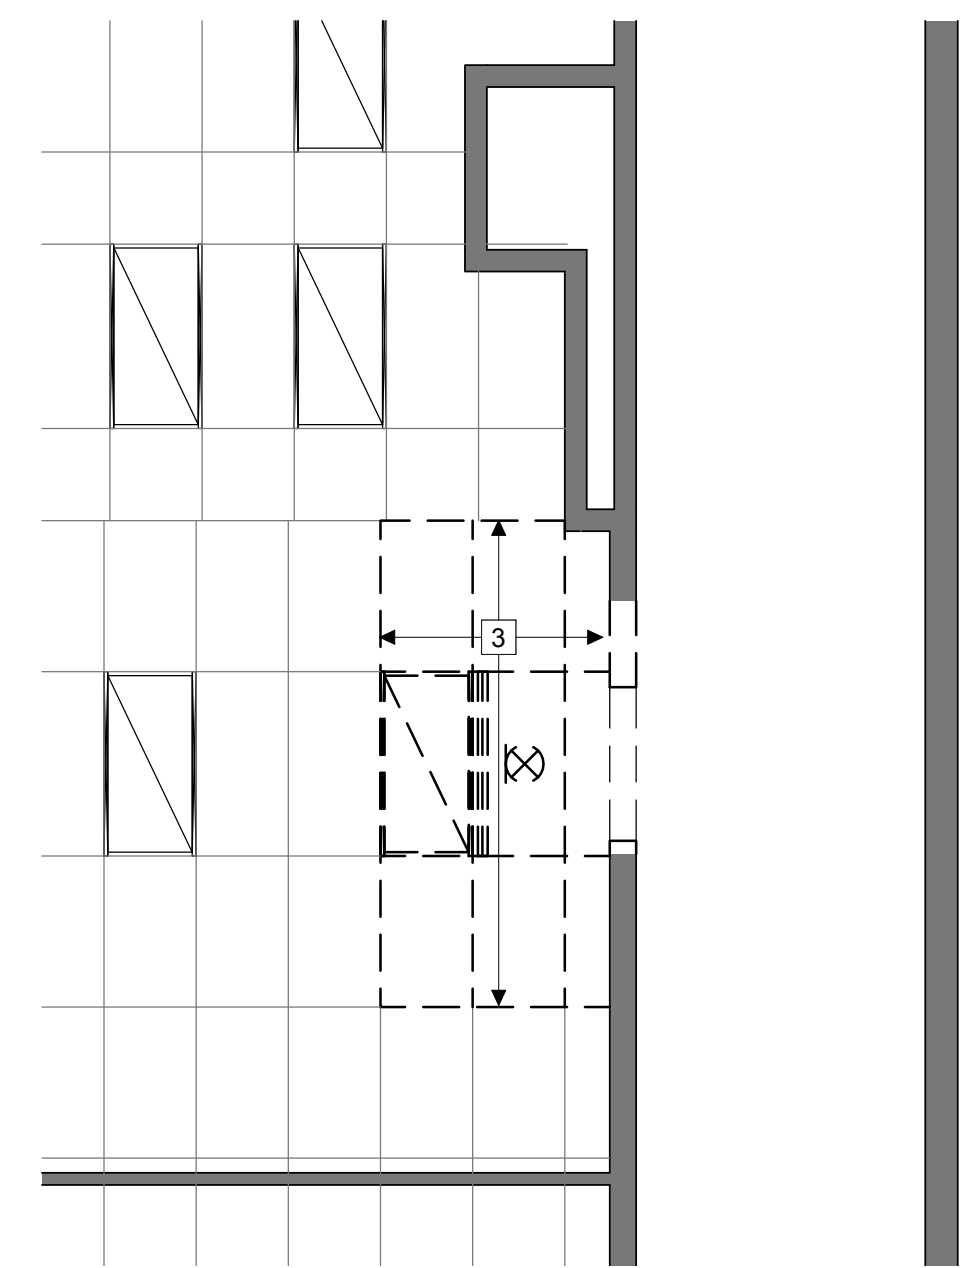


1 C WING 3RD FLOOR CORRIDOR REFLECTED CEILING PLAN - DEMOLITION
A250 | 1:50

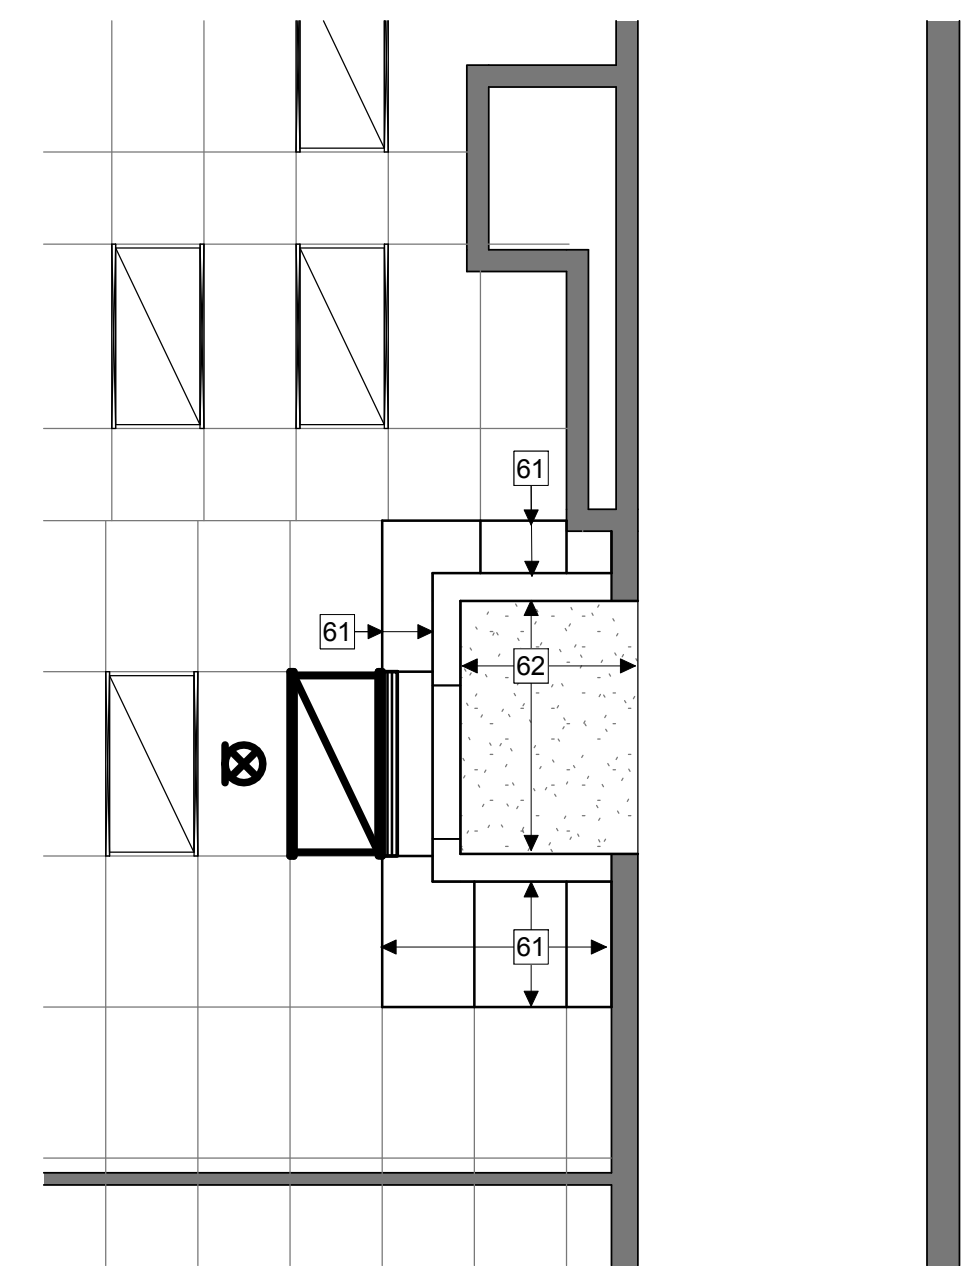

2 C WING 3RD FLOOR CORRIDOR REFLECTED CEILING PLAN - NEW
A250 | 1:50

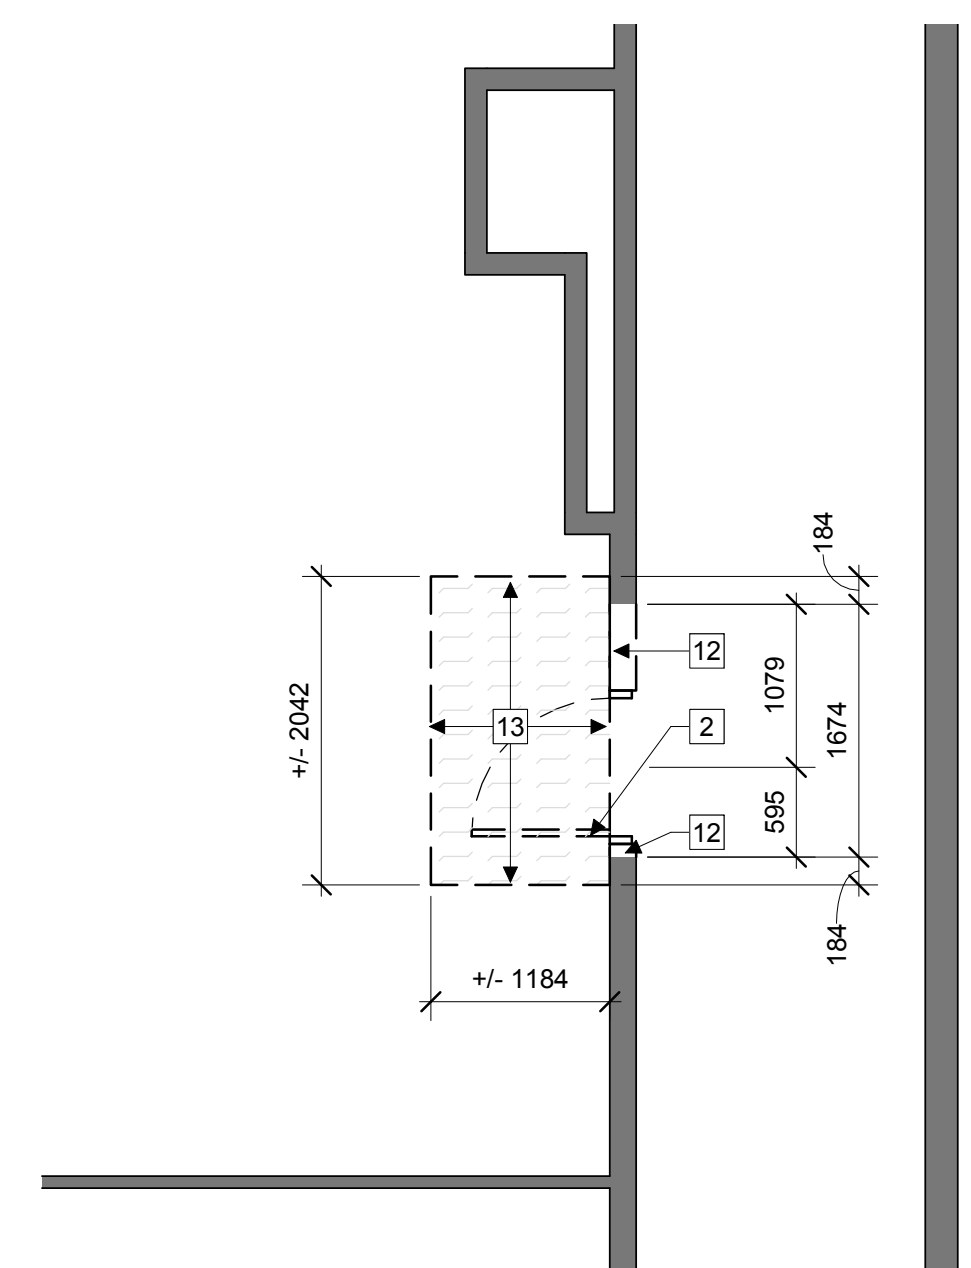


3 C WING 3RD FLOOR CORRIDOR FLOOR PLAN - DEMOLITION
A250 | 1:50

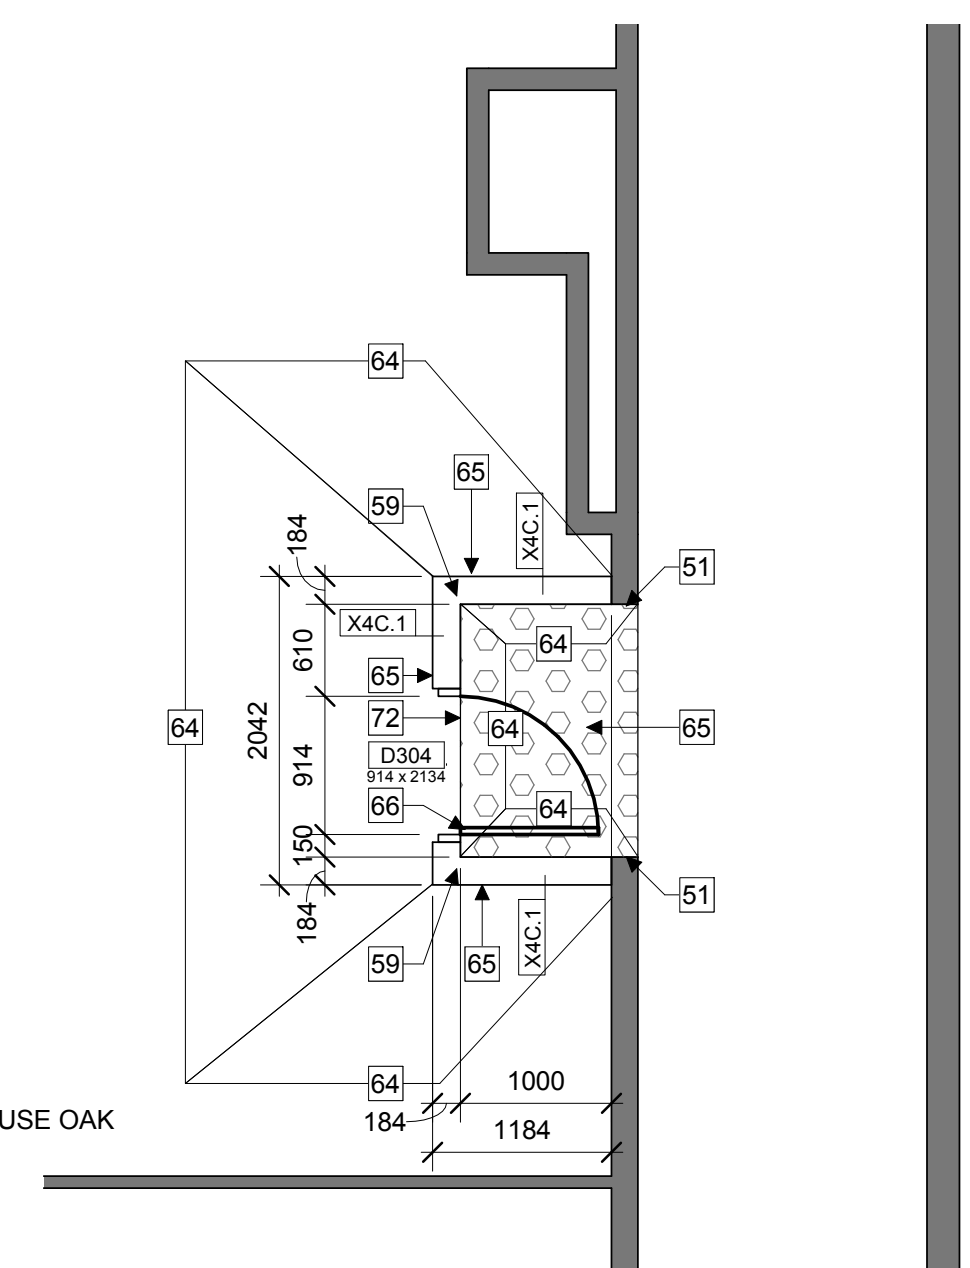


4 C WING 3RD FLOOR CORRIDOR FLOOR PLAN - NEW
A250 | 1:50

FLOOR FINISH LEGEND:

- MANUFACTURER: SHAW CARPET
STYLE NAME: CATALIST TILE
COLLECTION NAME: MIX
STYLE NUMBER: 59579
WALL BASE
- POLYFLOR
LVT
PRODUCT: CAMARO 2242 - BOATHOUSE OAK
WALL BASE

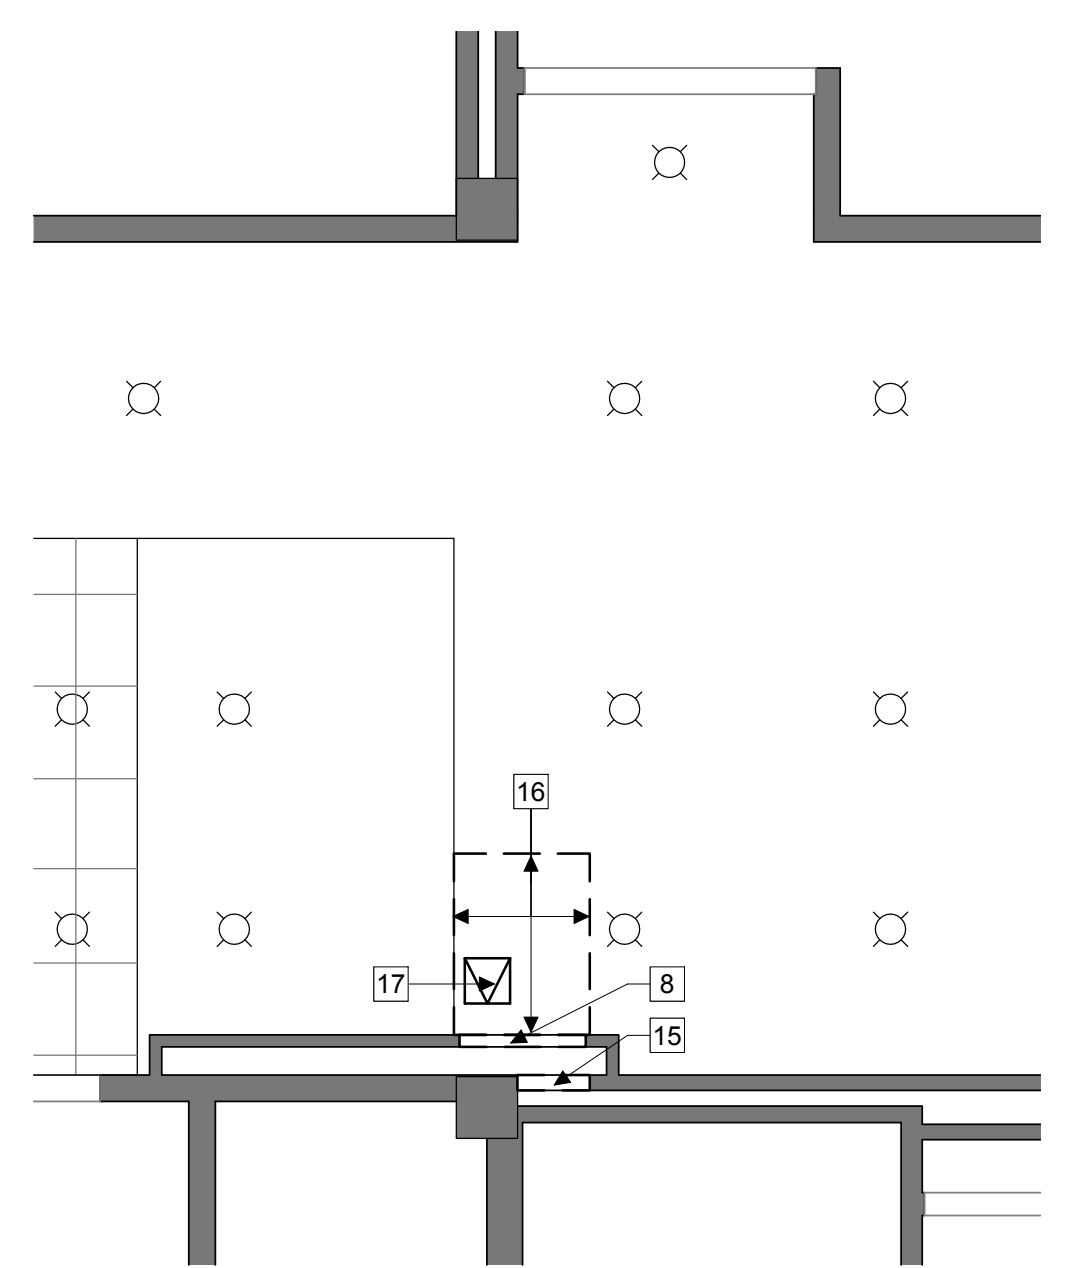

5 C WING 2ND FLOOR CORRIDOR REFLECTED CEILING PLAN - DEMOLITION
A250 | 1:50

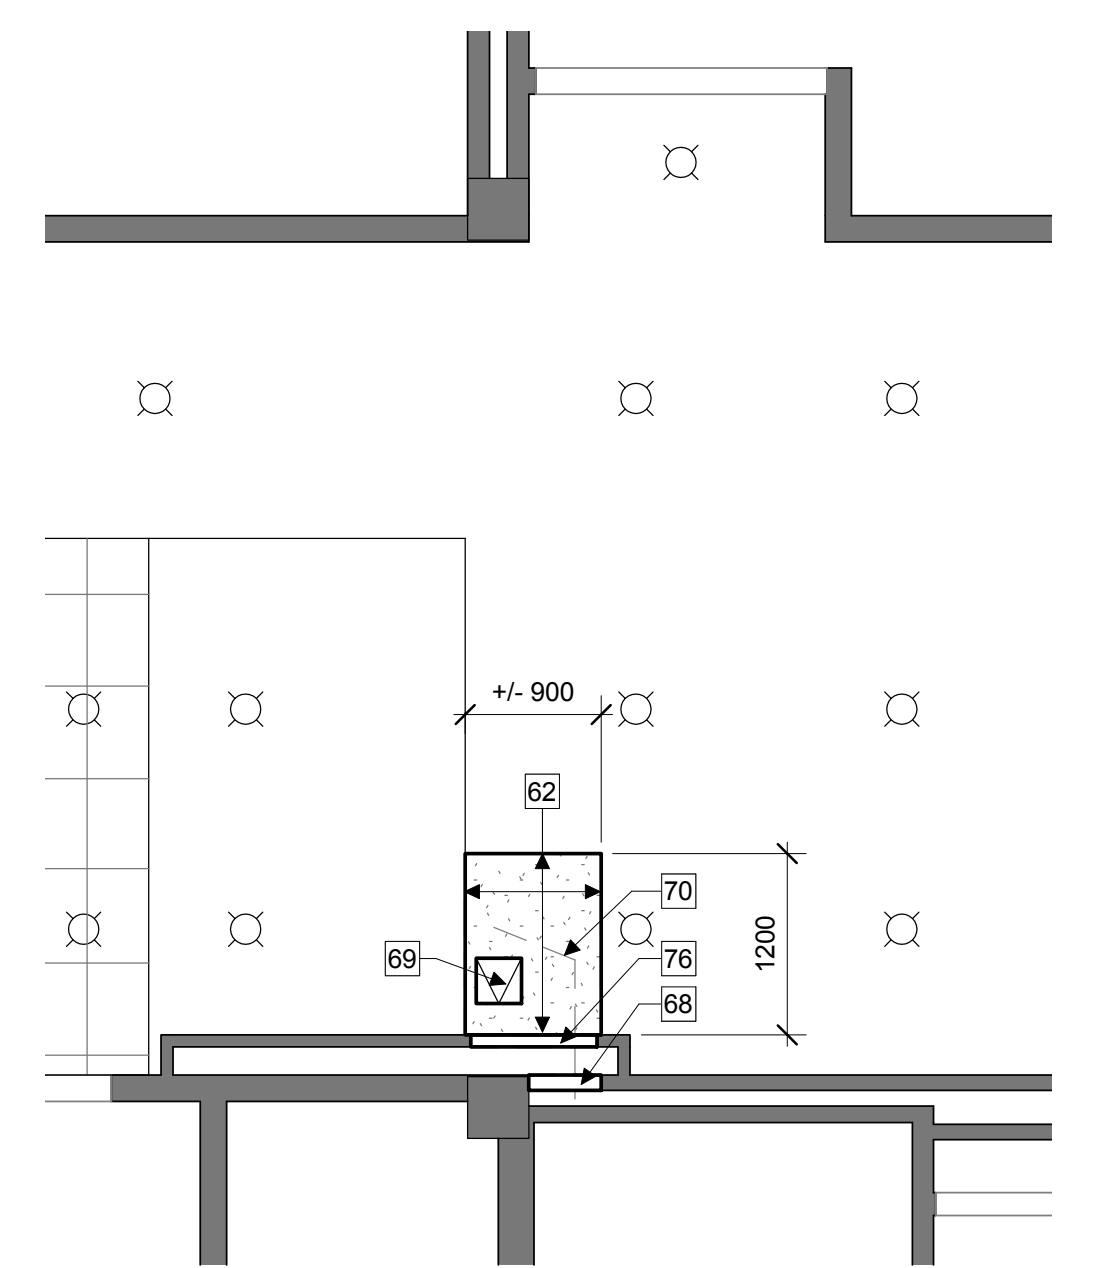

6 C WING 2ND FLOOR CORRIDOR REFLECTED CEILING PLAN - NEW
A250 | 1:50

REV DATE	ISSUE
1	OWNERSHIP OF THE COPYRIGHT OF THE DESIGN AND THE WORKS EXECUTED FROM THE DESIGN REMAINS WITH CSV ARCHITECTS, AND MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN CONSENT OF CSV ARCHITECTS.
2	THE DRAWINGS, PRESENTATIONS AND SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF CSV ARCHITECTS. THEY ARE NOT TO BE USED BY THE CLIENT ON OTHER PROJECTS OR ON EXTENSIONS TO THIS PROJECT WITHOUT THE WRITTEN CONSENT OF CSV ARCHITECTS.
3	THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER PROJECT DRAWINGS AND SPECIFICATIONS.
4	DO NOT SCALE DRAWINGS. CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY DIMENSIONS ON SITE.
5	ALL WORK SHALL BE IN ACCORDANCE WITH THE ONTARIO BUILDING CODE AND ALL SUPPLEMENTS AND APPLICABLE MUNICIPAL REGULATIONS.

DEMOLITION PLAN KEYNOTES:

- REMOVE EXISTING DEMOUNTABLE PARTITION BACK TO ADJACENT WALL. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- REMOVE EXISTING DOOR, FRAME AND TRANSOM. REMOVE EXISTING HARDWARE FROM DOOR AND THRESHOLD AND RETURN TO OWNER. DISPOSE DOOR, FRAME AND TRANSOM.
- REMOVE EXISTING SUSPENDED ACOUSTICAL TILE CEILING
- REMOVE EXISTING CARPET AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING
- REMOVE ALL PLENUM BAFFLES AND LAY-IN SOUND INSULATION
- REMOVE EXISTING GLAZING SYSTEM
- AED DEFIBRILLATOR TO REMAIN
- REMOVE PORTION OF EXISTING DRYWALL PARTITION AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- ELECTRICAL PANEL TO REMAIN
- EXISTING BULKHEAD TO REMAIN
- REMOVE EXISTING VCT FLOORING AND WALL BASES. PREPARE TO RECEIVE NEW FLOORING.
- REMOVE EXISTING PARTITION TO U/S OF EXISTING SLAB. REMOVE ALL ASSOCIATED WIRES, CONDUITS, AND ALL ELECTRICAL AND MECHANICAL COMPONENTS ATTACHED TO THE PARTITION.
- REMOVE EXISTING FLOOR FINISH AND WALL BASES. PREPARE SUBSTRATE TO RECEIVE NEW FLOOR FINISH.
- REMOVE EXISTING ACCESS DOOR TO ISOLATION VALVES (AT BOTTOM OF WALL)
- REMOVE PORTION OF EXISTING CONCRETE BLOCK WALL AS REQUIRED FOR PLUMBING CONNECTIONS. (WITHIN PLENUM SPACE)
- REMOVE EXISTING SUSPENDED GYPSUM BOARD CEILING AS REQUIRED FOR NEW PLUMBING WORK
- REMOVE EXISTING CEILING ACCESS DOOR. CLEAN, REPAIR AND STORE FOR RE-INSTALLATION.

DEMOLITION LEGEND:

- EXISTING TO REMAIN
- EXISTING TO BE REMOVED
- REMOVE EXISTING GLAZING
- REMOVE EXISTING DOOR
- EXISTING DOOR TO REMAIN
- AREA OF CARPET TO BE REMOVED
- AREA OF VINYL COMPOSITION TILE FLOORING TO BE REMOVED
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING LIGHT FIXTURE TO REMAIN
- REMOVE EXISTING EXIT SIGN
- REMOVE EXISTING LIGHT FIXTURE. STORE FOR RE-USE IN NEW LAYOUT. LIGHT FIXTURE ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- REMOVE EXISTING DIFFUSER. STORE FOR RE-USE IN NEW LAYOUT. DIFFUSERS ARE TO BE REINSTATED WITHIN FLOOR AREA THEY WERE REMOVED.
- EXISTING DIFFUSER TO REMAIN
- REMOVE EXISTING THERMOSTAT AND ALL ASSOCIATED WIRING PER MECHANICAL. PATCH TO MATCH EXISTING WALL WHERE REQUIRED.
- EXISTING THERMOSTAT TO REMAIN. RECONNECT WIRING AND PROVIDE NEW CONDUITS AS REQUIRED PER MECHANICAL.

NEW WORK LEGEND:

- NEW CONSTRUCTION
- NEW DOOR
- AREA OF NEW CARPET
- AREA OF NEW TILE FLOORING
- ARE ON NEW FLOORING TO MATCH EXISTING
- NEW GYPSUM BOARD SUSPENDED CEILING
- NEW EMERGENCY EXIT SIGN
- RE-USE EXISTING LIGHT FIXTURE
- NEW PENDANT LIGHT FIXTURE
- RE-USE EXISTING DIFFUSER
- RE-USE EXISTING DIFFUSER
- NEW RETURN GRILE
- NEW THERMOSTAT PER MECHANICAL C/W NEW ALL ASSOCIATED WIRING AND CONDUITS

GENERAL NOTES:


- PROVIDE TEMPORARY DUST TIED HOARDING AROUND AREAS OF WORK FOR PERIOD OF CONSTRUCTION. CO-ORDINATE HOARDING LAYOUT WITH OWNER ON SITE.
- ALL DIMENSIONS ARE SHOWN TO FACE OF WALL UNLESS OTHERWISE NOTED
- ALL SHOWN EXISTING ASSEMBLIES ARE ASSUMED. VERIFY ASSEMBLIES ON SITE AND CO-ORDINATE WITH ARCHITECT DISCREPANCIES
- ADJUST EXISTING FRAMING AND RE-INSTATE EXISTING PARTITION ASSEMBLIES AT LOCATION OF NEW PLUMBING AND ELECTRICAL SERVICES.
- PROVIDE PENETRATIONS THROUGH FLOOR AND PARTITION ASSEMBLIES AS REQUIRED FOR ELECTRICAL AND MECHANICAL SERVICES. PROVIDE CONDUITS AND FIRE STOPS AROUND SERVICE PENETRATIONS THROUGH PARTITIONS, FLOOR AND CEILING ASSEMBLIES. LOCATE SERVICES PER MECHANICAL AND ELECTRICAL.
- PATCH AND FINISH EXISTING PARTITIONS AS REQUIRED AFTER REMOVAL OF ELECTRICAL AND MECHANICAL COMPONENTS
- PROTECT FROM DAMAGE ALL EXISTING TO REMAIN WALL, FLOOR, CEILING ASSEMBLY, ELECTRICAL AND MECHANICAL FIXTURES DURING CONSTRUCTION
- REMOVE AND STORE ALL EXISTING FURNITURE FROM WORK AREA FOR PERIOD OF CONSTRUCTION

NEW WORK KEYNOTES:

- PATCH AND REPAIR WALL. PAINT TO MATCH EXISTING
- NEW CARPET TO MATCH EXISTING. USE FULL TILES. PROVIDE NEW CONTINUOUS WALL BASEBOARD
- PATCH REPAIR T-BAR CEILING TO MATCH EXISTING. PROVIDE 20% CASH ALLOWANCES FOR NEW T-BAR AND CEILING TILES.
- NEW DOOR AND FRAME. PAINT DOOR AND FRAME TO MATCH EXISTING
- NEW INFILL WALL AT EXISTING PARTITION OPENINGS: MIN. 64mm STEEL STUDS @ 600mm O.C. C/W 2 LAYERS OF 13mm TYPE X GYPSUM BOARD AT EXPOSED SIDES (FRR 1H, SB-2 T.2.3.4.A). CO-ORDINATE STEEL STUD FRAMING WIDTH ON SITE AS REQUIRED TO MATCH EXISTING ADJACENT PARTITION THICKNESS.
- NEW PARTITION. ASSEMBLY TO MATCH EXISTING ADJACENT PARTITION
- NEW PARTITION TO U/S OF SUSPENDED CEILING.
- PROVIDE ADEQUATE BLOCKING WITHIN NEW INFILL WALL CAVITY FOR MILLWORK BRACKET SUPPORT. FOR LOCATION REFER 1/A635.
- NEW PARTITION TO U/S OF SLAB
- PATCH AND REPAIR EXISTING CEILING
- NEW ACOUSTICAL TILE CEILING AND T-BAR SYSTEM. MATCH EXISTING ADJACENT CEILING.
- NEW GYPSUM BOARD SUSPENDED CEILING, PAINTED.
- FINISH WALL, TAPE AND FILL JOINTS
- MATCH EXISTING PAINT COLOUR
- FLOOR FINISH TO MATCH EXISTING. PROVIDE NEW CONTINUOUS WALL BASEBOARD.
- NEW FIRE RATED DOOR AND DOOR FRAME FRR 45min. PAINT DOOR AND FRAME TO MATCH EXISTING
- NEW +/- 400mm(W) x 500mm(H) ACCESS DOOR TO ISOLATION VALVES. PAINTED. FIT BELOW NEW COUNTERTOP. VERIFY ACCESS DOOR DIMENSIONS TO FIT ON SITE. PATCH AND REPAIR EXISTING WALL AS REQUIRED. MATCH EXISTING WALL ASSEMBLY TO FIT NEW ACCESS DOOR.
- REINSTATE DEMOLISHED PORTION CONCRETE BLOCK WALL WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED
- RE-INSTALL SALVAGED CEILING ACCESS DOOR. PAINTED. ADJUST CEILING FRAMING AS REQUIRED.
- NEW SANITARY DRAIN BY MECHANICAL FROM KITCHENETTE ABOVE. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF MAIN SANITARY DRAIN ON SITE.
- NEW KITCHENETTE WATER SUPPLY LINES BY MECHANICAL. SHOWN LAYOUT IS APPROXIMATE. VERIFY LAYOUT AND LOCATION OF CONNECTION POINTS ON SITE.
- NEW FLOOR FINISH TRANSITION PROFILE THR-1 PER SCHEDULE (A001)
- EXISTING STUCCO FINISH AT UPPER PORTION OF WALL TO REMAIN. NEW PAINT AT TOP OF STUCCO TO MATCH EXISTING.
- INFILL WALL OPENING ABOVE DOOR. MATCH ASSEMBLY TO EXISTING ADJACENT PARTITION. PROVIDE NEW HEADER AND DOUBLE STUD JAMB FRAMING.
- NEW SUSPENDED ACOUSTIC TILE CEILING C/W NEW T-BARS AND SUSPENSION SYSTEM ACT-01
- REINSTATE DEMOLISHED PORTION OF DRYWALL PARTITION WITHIN PLENUM SPACE. MATCH ADJACENT EXISTING ASSEMBLIES AND FINISHES. PAINTED


WALL FINISH LEGEND:

- MANUFACTURER: DULUX COLOUR NAME: MEETING HOUSE PRODUCT: 50YY 74/069- A1864 EGGHELL FINISH
- MANUFACTURER: DULUX COLOUR NAME: NEWBORN PRODUCT: 35YY 78/269 -A0710 EGGHELL FINISH
- MANUFACTURER: DULUX COLOUR NAME: CALICO PRODUCT: 70YR 36/468 A0506 EGGHELL FINISH
- MANUFACTURER: DULUX COLOUR NAME: SERENGETI PLAIN PRODUCT: 90YY 48/255- A0970 EGGHELL FINISH
- MANUFACTURER: DULUX COLOUR NAME: FROST GREY PRODUCT: 30GG 52/011 A1942 EGGHELL FINISH
- MANUFACTURER: DULUX COLOUR NAME: ANLANTIS BLUE PRODUCT: 970BG 54/164 EGGHELL FINISH

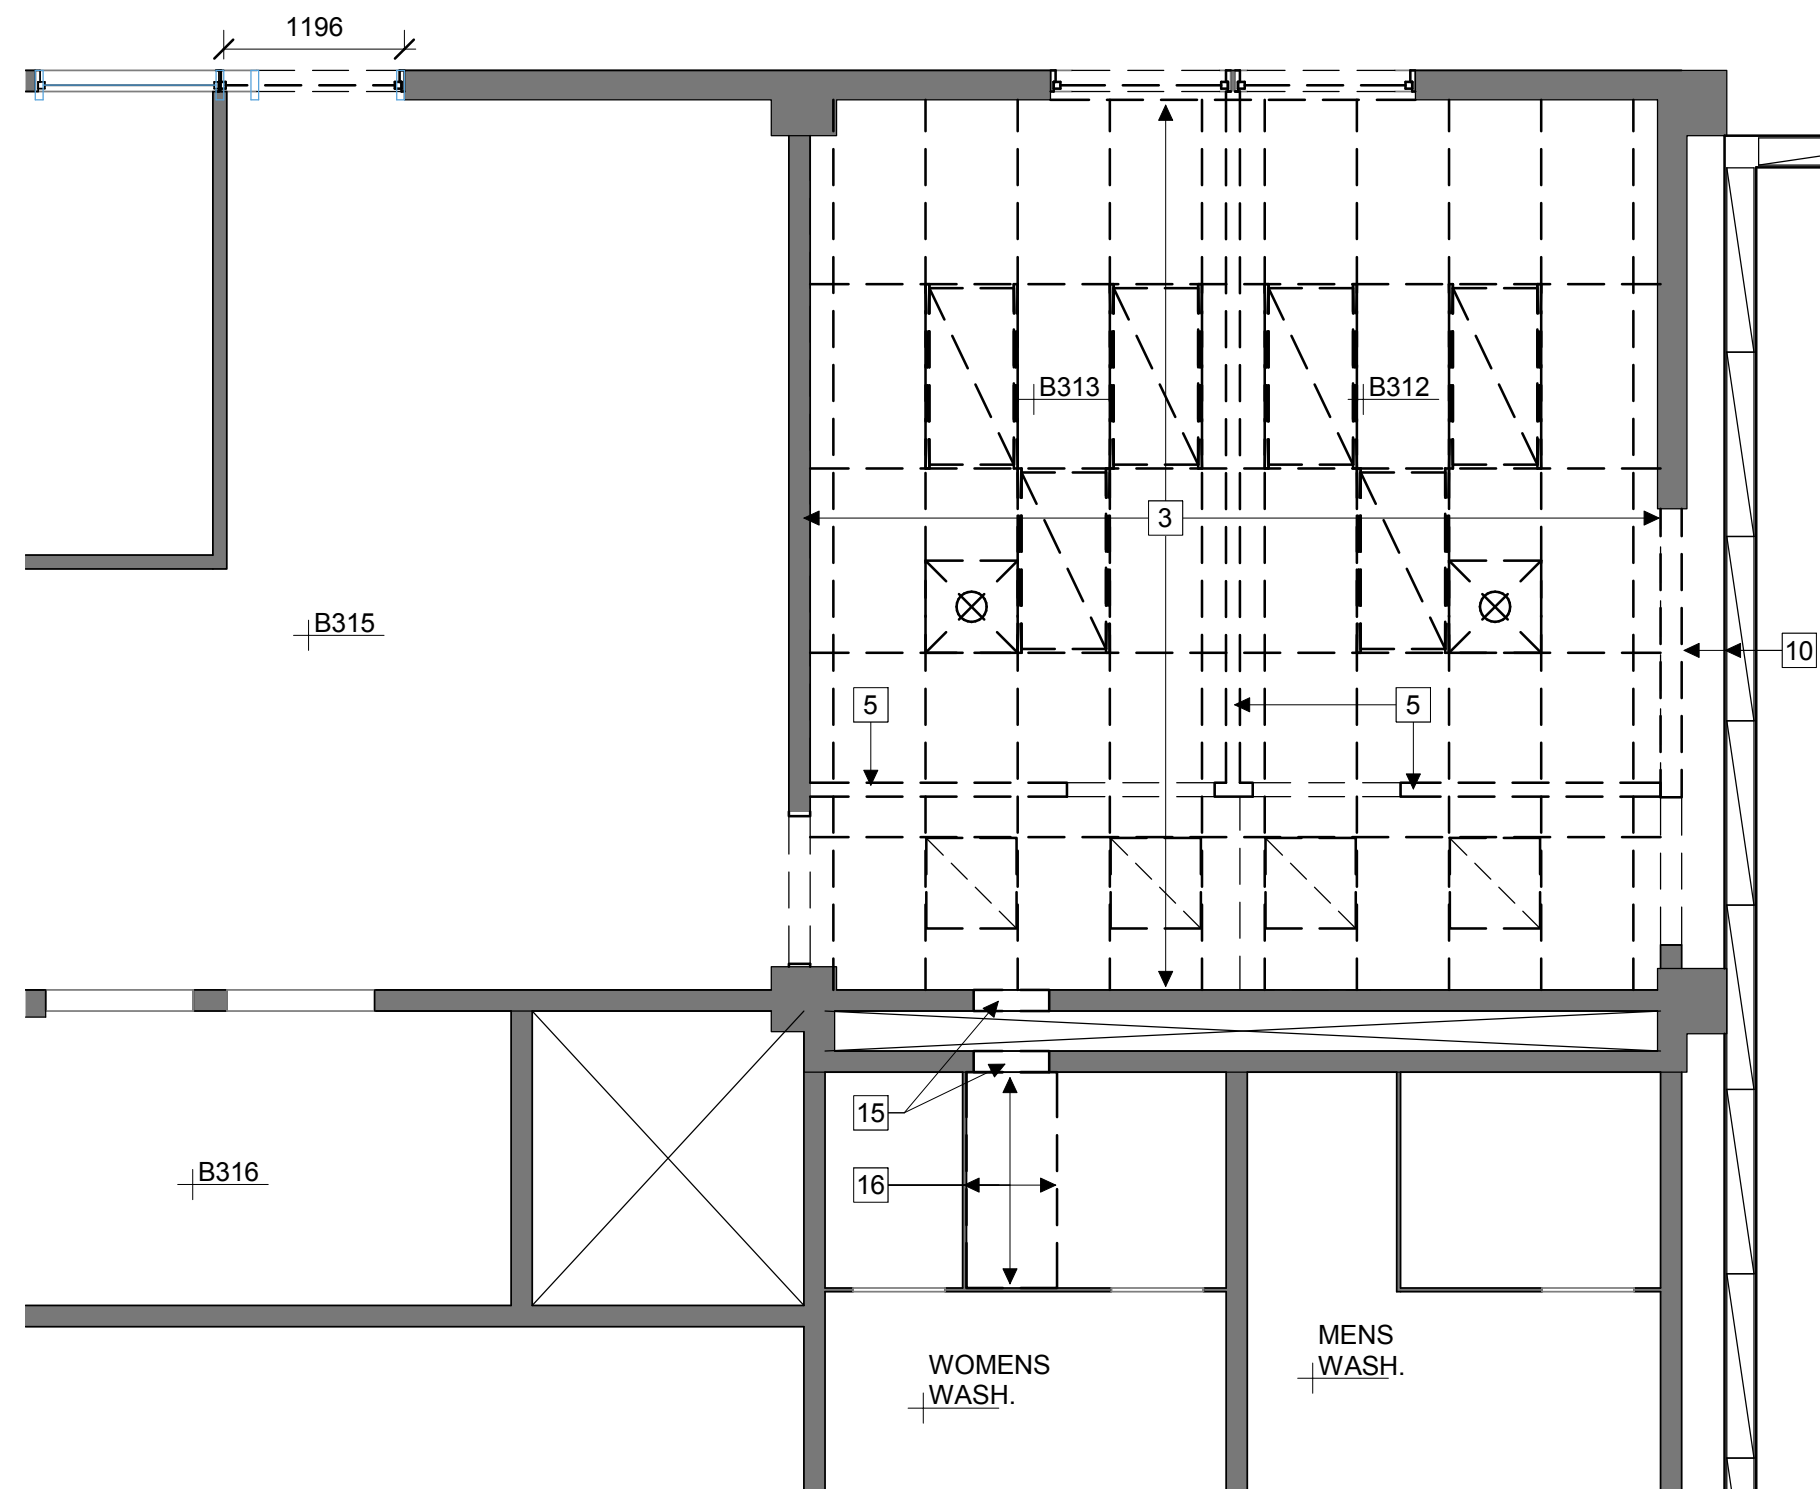


1 C WING 3RD FLOOR KITCHENETTE REFLECTED CEILING PLAN - DEMOLITION

A260 1:50

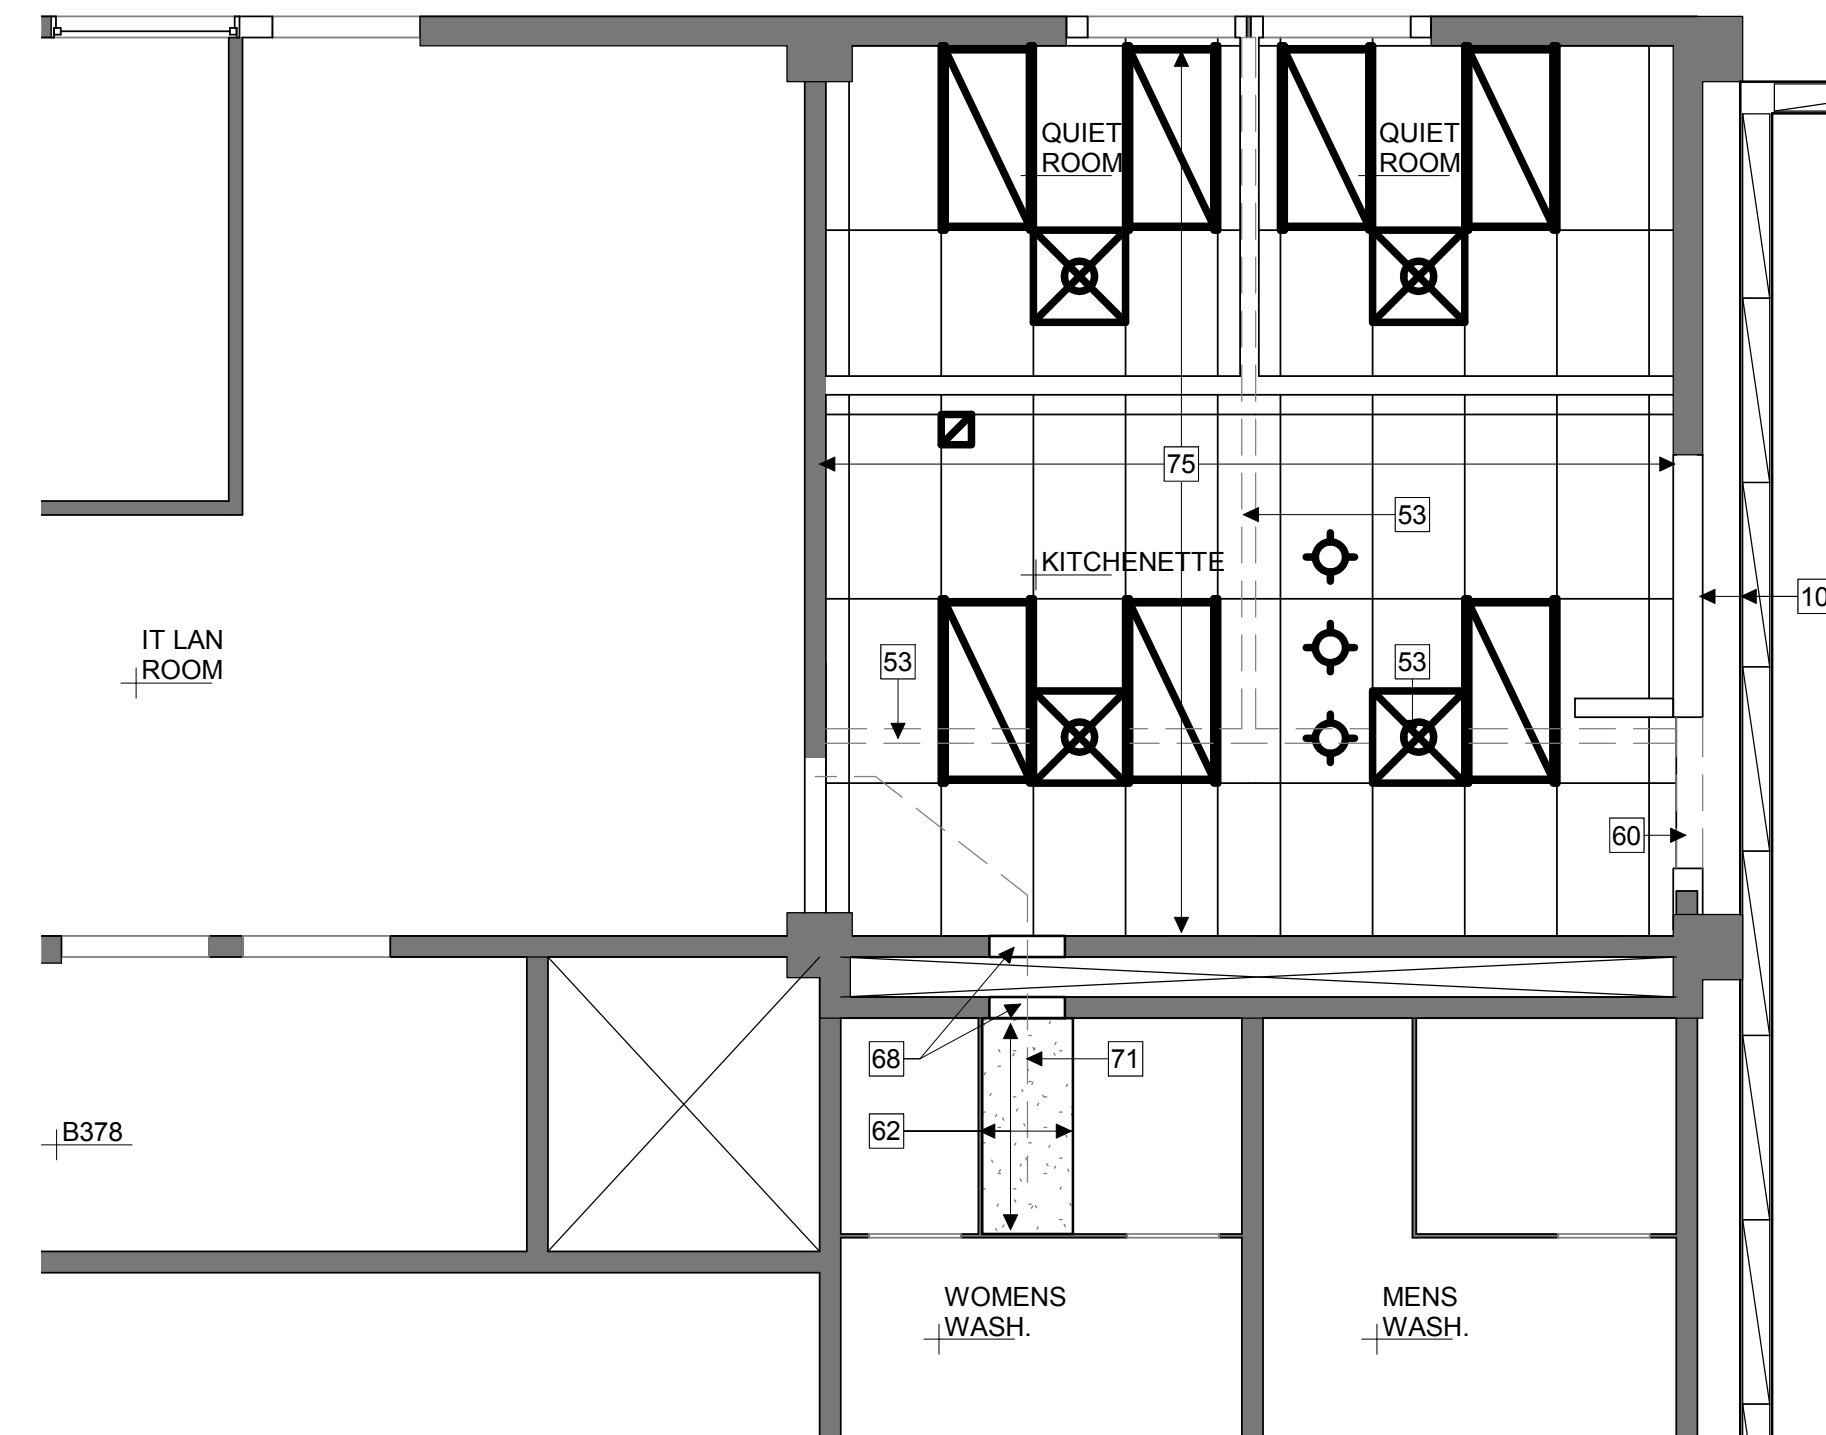


2 C WING 3RD FLOOR KITCHENETTE REFLECTED CEILING PLAN - NEW

A260 1:50

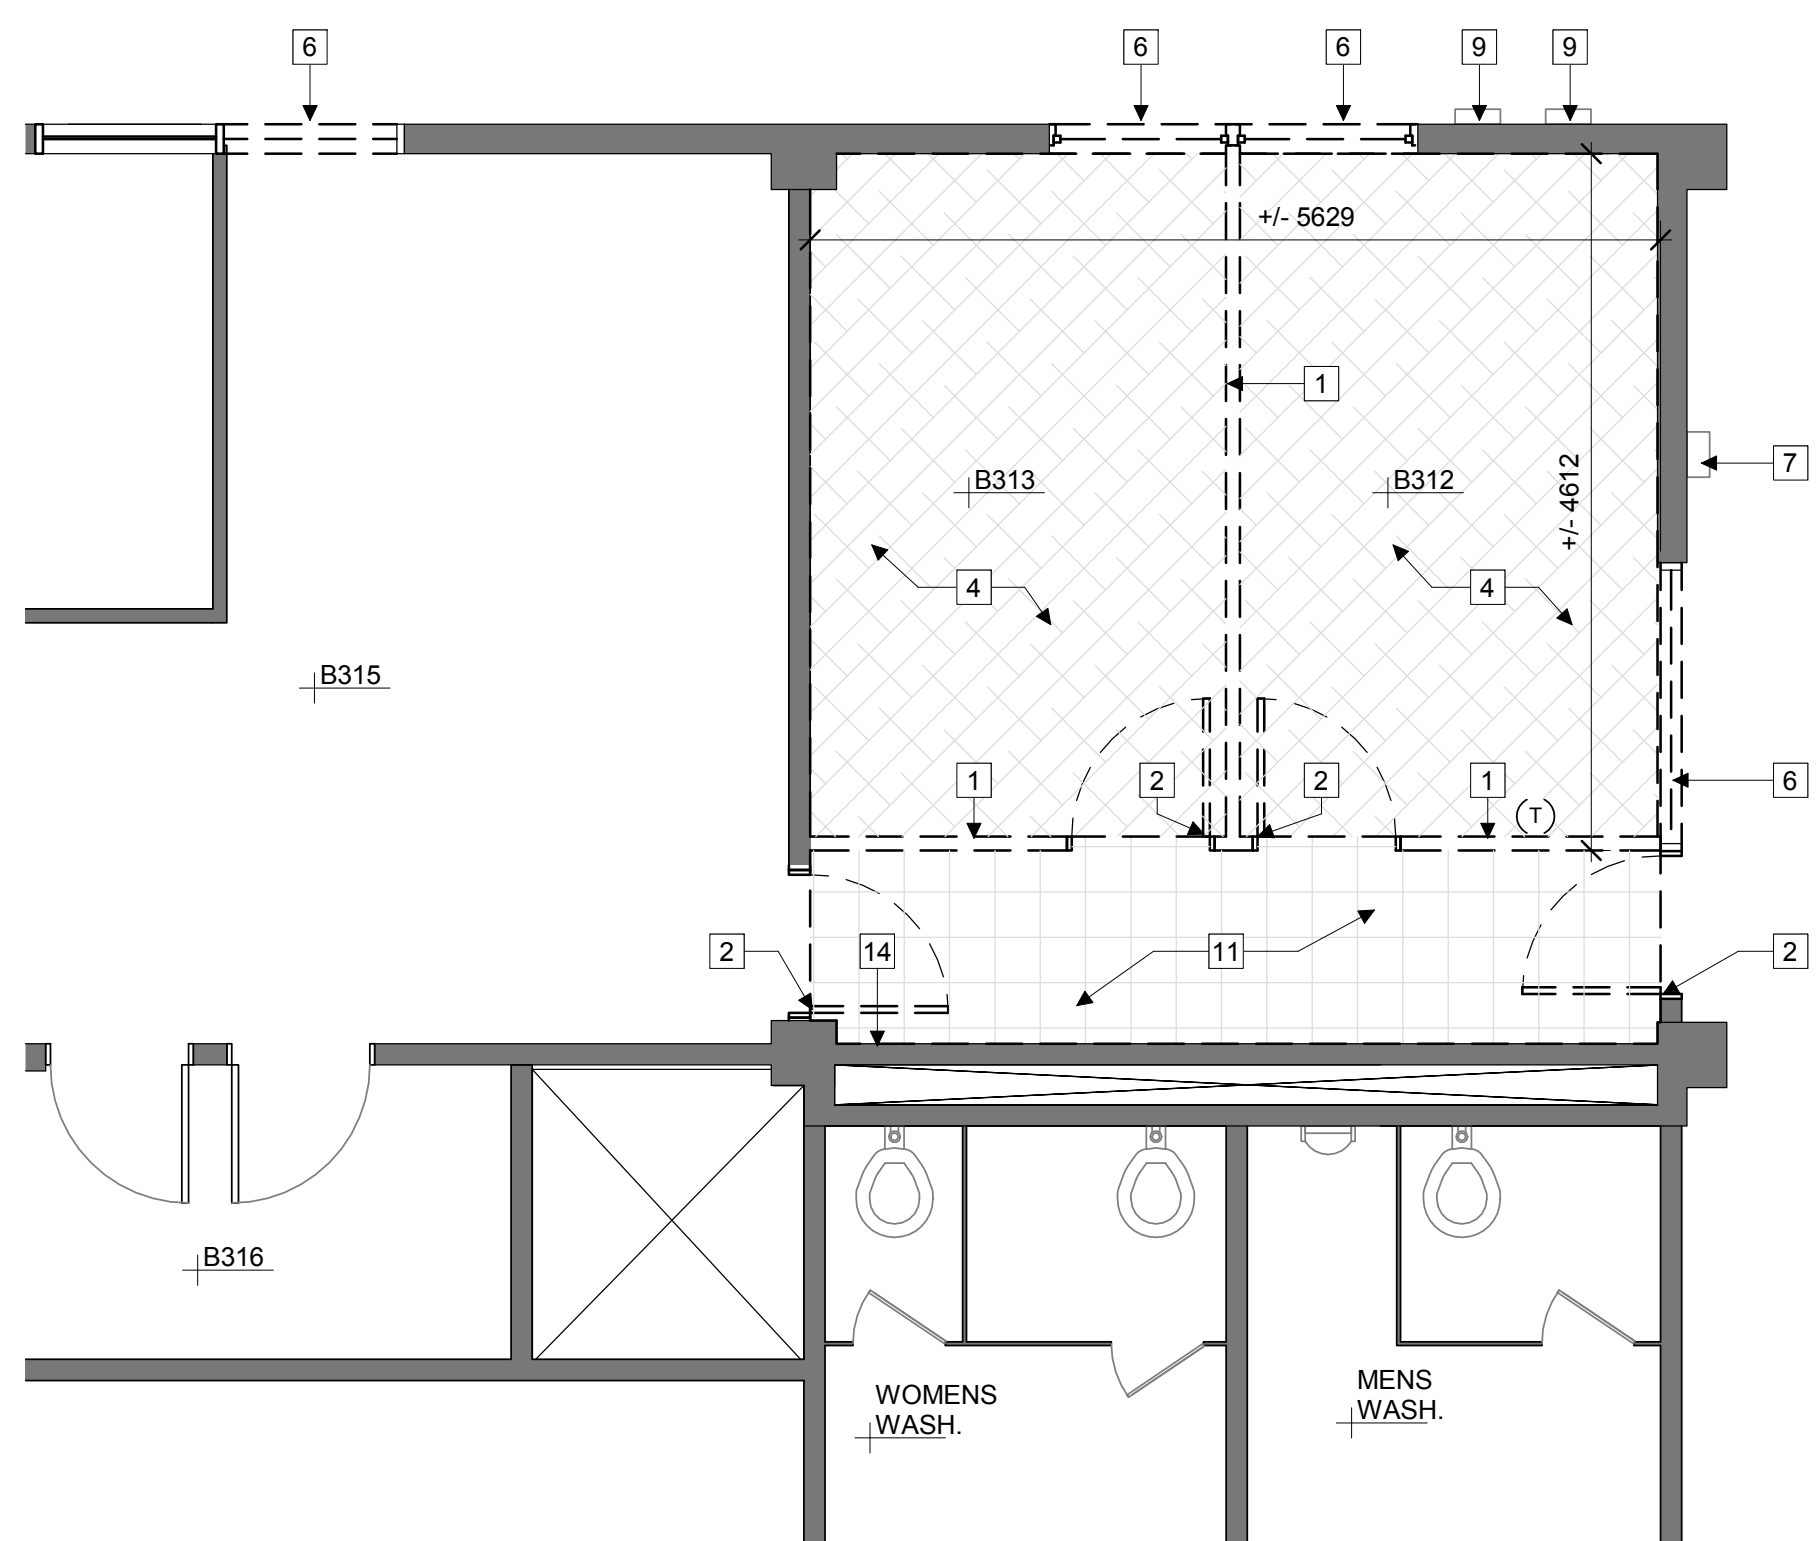

3 C WING 3RD FLOOR KITCHENETTE PLAN - DEMOLITION

A260 1:50

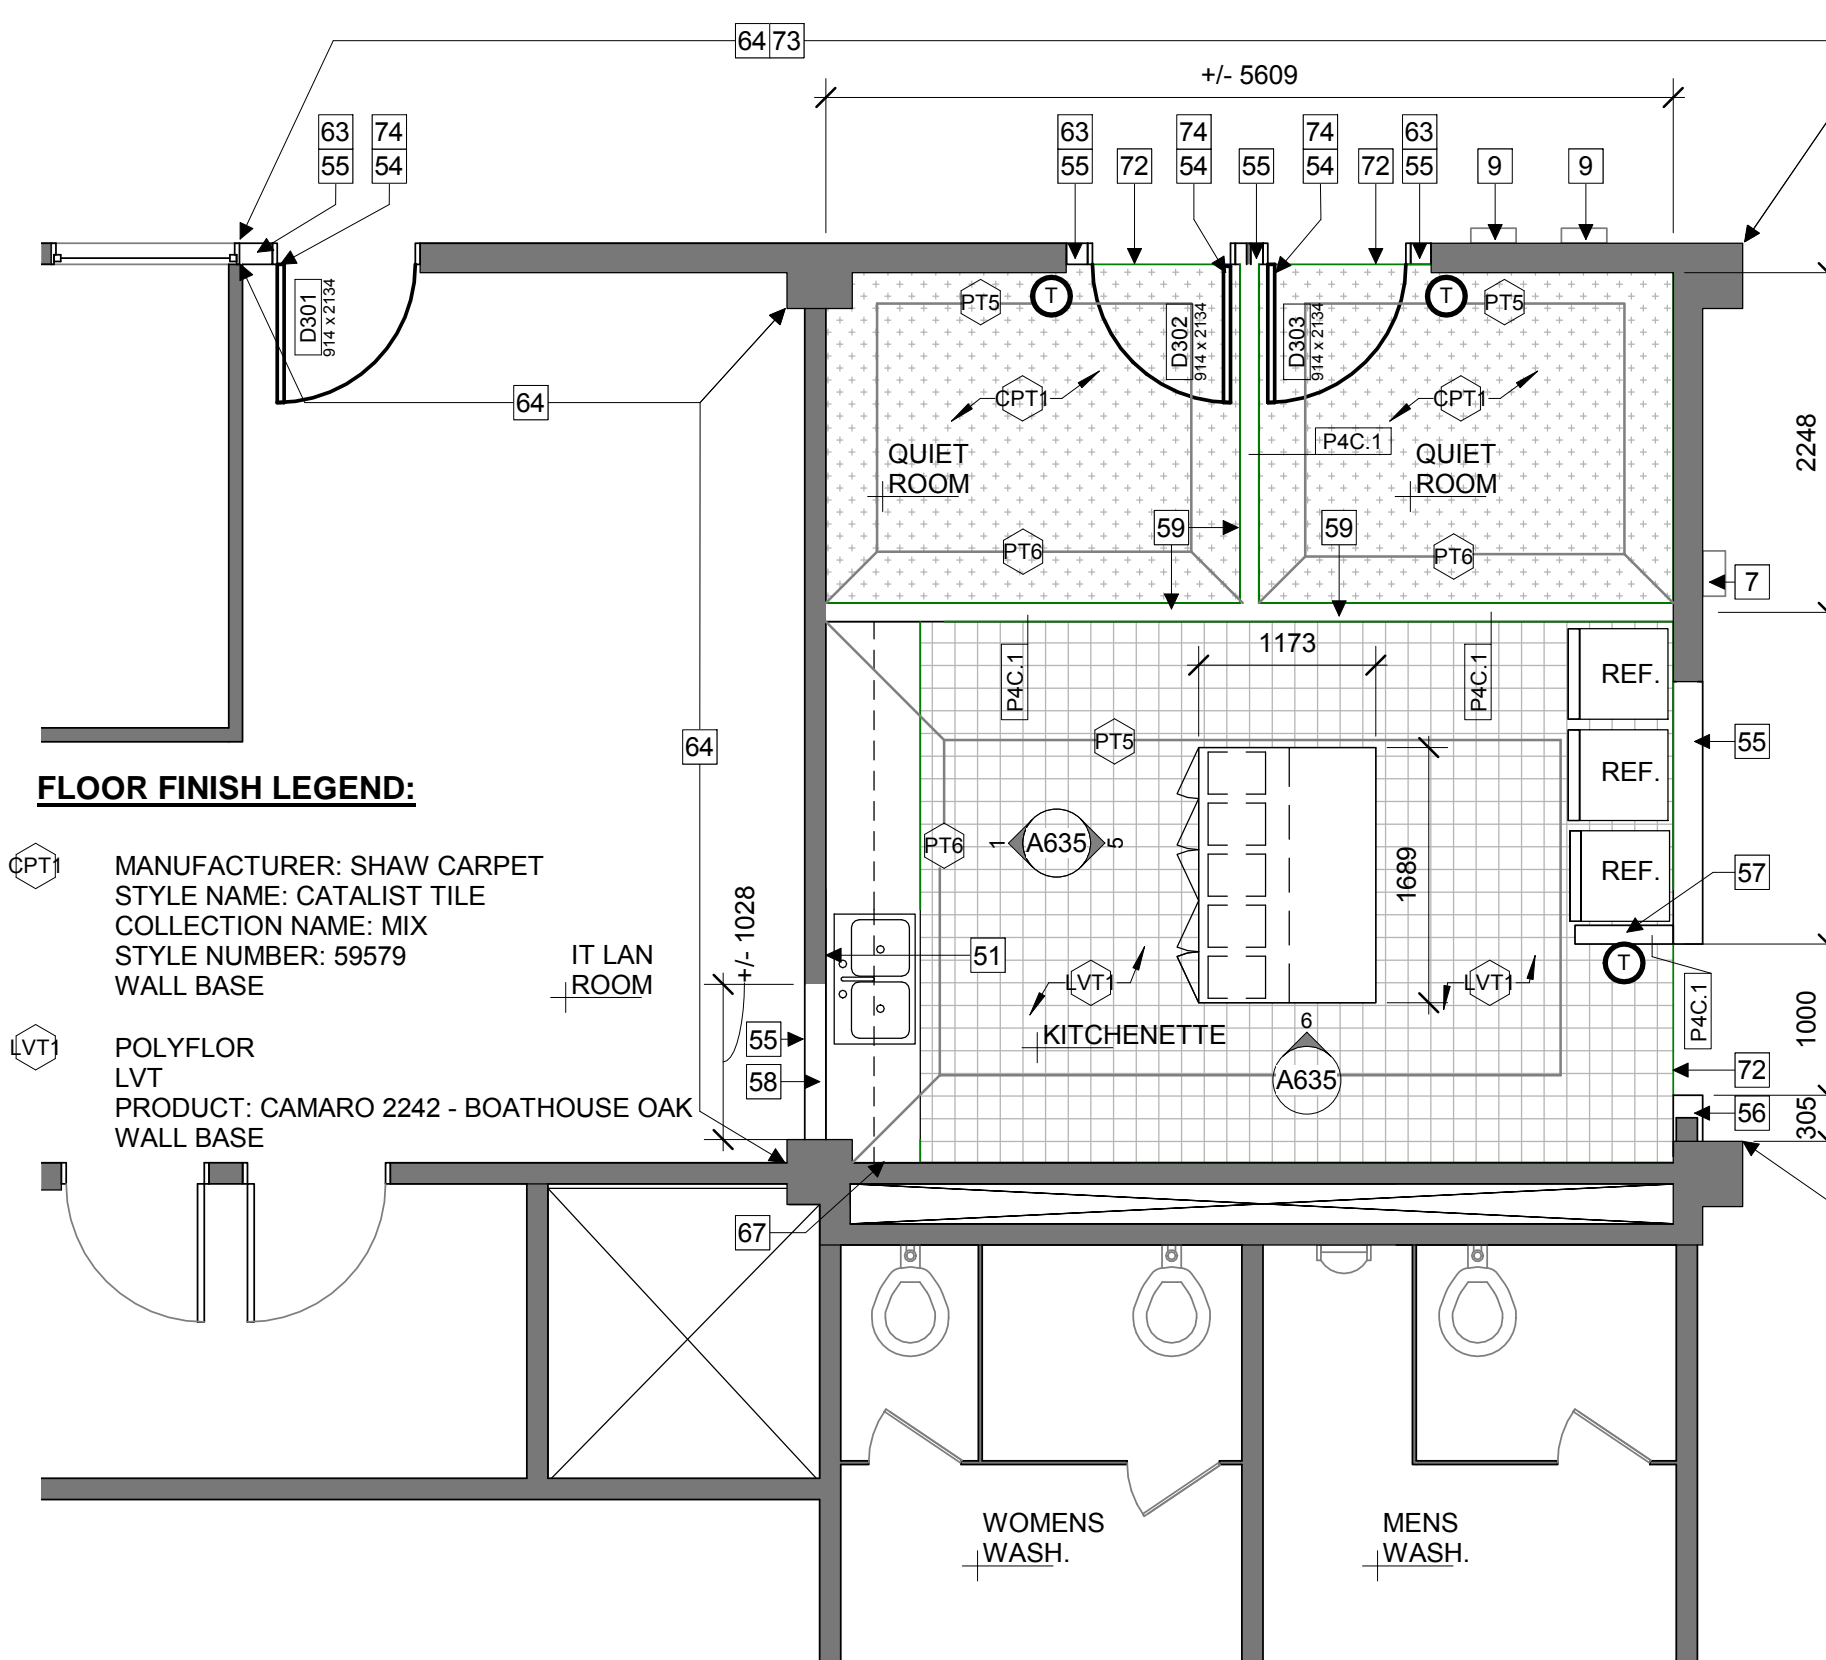

4 C WING 3RD FLOOR KITCHENETTE PLAN - NEW

A260 1:50

FLOOR FINISH LEGEND:

- MANUFACTURER: SHAW CARPET STYLE NAME: CATALIST TILE COLLECTION NAME: MIX STYLE NUMBER: 59579 WALL BASE
- POLYFLOR LVT PRODUCT: CAMARO 2242 - BOATHOUSE OAK WALL BASE

FINISH MATERIALS LEGEND

SYMBOL	DESCRIPTION
PL1	P-LAM 1 - MILLWORK CABINETS PER FINISH SCHEDULE
PL2	P-LAM 2 - COUNTERTOP PER FINISH SCHEDULE
CT1	CERAMIC TILE 1 - BACKSPASH PER FINISH SCHEDULE
PT6	PAINT 6 - WALL PAINT PER FINISH SCHEDULE

STAMP

KEYNOTES

- COUNTERTOP C/W P-LAM FINISH
- DOOR PULL
- FAUCET C/W SINGLE LEVER TYPE THAT IS OPERABLE WITH CLOSED FIST. PER MECHANICAL
- SINK PER MECHANICAL
- MICROWAVE
- CERAMIC TILE BACKSPASH
- APRON
- REMOVABLE APRON WITH L-BRACKETS TO SIDES
- TOE SPACE
- WALL BASE
- MICROWAVE SHELF INTEGRATED IN CABINET UNIT - 16mm PLYWOOD C/W P-LAM AT ALL SIDES
- PUSH SLOT DOOR INTEGRATED IN CABINET DOOR
- 279(W) x 381(L) x 508mm (H) GARBAGE BIN
- INTERMEDIATE WOOD BRACKETS C/W CONNECTION PLATE AND P-LAM FINISH
- NEW GFI ELECTRICAL RECEPTACLE
- NEW +/- 400mm(W) x 500mm(H) ACCESS DOOR TO ISOLATION VALVES. PAINTED. FIT BELOW NEW COUNTERTOP. VERIFY ACCESS DOOR DIMENSIONS TO FIT ON SITE. PATCH AND REPAIR EXISTING WALL AS REQUIRED. MATCH EXISTING WALL ASSEMBLY TO FIT NEW ACCESS DOOR.
- END GABLE PANEL C/W P-LAM FINISH AT ALL EXPOSED SIDES
- ADEQUATELY ANCHOR MILLWORK TO EXISTING FLOOR
- NEW KITCHENETTE DRAIN PER MECHANICAL. EXTEND DOWN THROUGH CAVITY WITHIN NEW INFILL WALL, CORE DRILL THROUGH SLAB BELOW. DIRECT TO THE CONNECTION POINT THROUGH CEILING PLENUM. PROVIDE FIRE STOP AT FLOOR AND WALL PENETRATIONS.
- NEW WATER SUPPLY LINES PER MECHANICAL. EXTEND UP THROUGH WALL CAVITY TO THE CEILING SPACE. DIRECT TOWARDS CONNECTION POINTS. REMOVE PORTION OF CONCRETE BLOCK WALL AS REQUIRED FOR PIPE PASSING. REINSTATE EXISTING WALL AND PROVIDE FIRE STOPS AT WALL PENETRATIONS.
- MILLWORK FILLER. VERIFY DIMENSION ON SITE TO FIT EXISTING SPACE.
- PROVIDE ADEQUATE BLOCKING WITHIN INFILL WALL CAVITY FOR MILLWORK BRACKET SUPPORT
- BILINGUAL RECYCLING SIGNAGE TO BE INCLUDED IN MILLWORK. CLIENT TO PROVIDE STANDARD LOGO AND WORDING.
- CUPBOARD WITH ADJUSTABLE SHELVES

1 2018/06/29 ISSUED FOR TENDER
REV DATE ISSUE

NOTE
1. OWNERSHIP OF THE COPYRIGHT OF THE DESIGN AND THE WORKS EXECUTED FROM THE DESIGN REMAINS WITH CSV ARCHITECTS, AND MAY NOT BE REPRODUCED IN ANY FORM WITHOUT THE WRITTEN CONSENT OF CSV ARCHITECTS.
2. THE DRAWINGS, PRESENTATIONS AND SPECIFICATIONS AS INSTRUMENTS OF SERVICE ARE AND SHALL REMAIN THE PROPERTY OF CSV ARCHITECTS. THEY ARE NOT TO BE USED BY THE CLIENT ON OTHER PROJECTS OR ON EXTENSIONS TO THIS PROJECT WITHOUT THE WRITTEN CONSENT OF CSV ARCHITECTS.
3. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER PROJECT DRAWINGS AND SPECIFICATIONS.
4. DO NOT SCALE DRAWINGS. CONTRACTOR SHALL BE RESPONSIBLE TO VERIFY DIMENSIONS ON SITE.
5. ALL WORK SHALL BE IN ACCORDANCE WITH THE ONTARIO BUILDING CODE AND ALL SUPPLEMENTS AND APPLICABLE MUNICIPAL REGULATIONS.

CLIENT
HEALTH CANADA

PROJECT
SIR FREDERICK BANTING BLDG. FIT-UP PROJECT PHASE 2 & 3
251 Sir Frederick Banting Driveway, Ottawa, Ontario
TITLE

KITCHENETTE ELEVATIONS AND DETAILS
PROJECT NO: 2018-0220
DRAWN: JW / KC / IK
APPROVED: RF
SCALE: As indicated
FIRST ISSUE: 2018/04/24

DRAWING NO. _____ REV _____

A635 1

