


1  
D-001  
ARCHITECTURAL DEMOLITION PLAN  
SCALE 1:50  
2000 1000 0 2000


- LEGEND**
- EXISTING TO REMAIN
  - WALL TO BE DEMOLISHED
  - CASEWORK SYSTEM / EQUIPMENT TO BE REMOVED OR RELOCATED

- GENERAL NOTES**
- CONTRACTOR TO FIELD VERIFY DIMENSIONS AND LOCATION OF ALL EXISTING MECHANICAL, PLUMBING, ELECTRICAL AND MISCELLANEOUS FIXTURES TO BE DEMOLISHED OR RELOCATED BEFORE RENOVATION WORK BEGINS.
  - CONTRACTOR TO MAKE GOOD ALL WALLS, FLOOR AND CEILING AFTER DEMOLITION IS COMPLETE. ALL SURFACES AND SERVICES SHALL BE MADE SUITABLE FOR SUBSEQUENT WORK AS DETAILED BY THIS DRAWING PACKAGE AND FOR CODE COMPLIANCE.
  - DIMENSIONS ARE TO FACE OF FINISHED MATERIALS, UNLESS OTHERWISE NOTED.
  - EXISTING FUMEHOOD ENCLOSURE TO BE REMOVED AND REINSTALLED AS PART OF THE RENOVATION WORK. PROTECT DURING CONSTRUCTION AND REINSTALLED AT NEW LOCATION. COORDINATE SERVICES AND EXHAUST DUCT CONNECTION WITH MEP PACKAGE.
  - CONTRACTOR TO PROVIDE ADEQUATE NOISE AND DUST CONTROL BETWEEN CORRIDOR AND CONSTRUCTION SPACE.
  - CONTRACTOR TO DEMOLISH EXISTING ACOUSTIC TILE CEILING LAYER WITH SUSPENSION SYSTEM. COORDINATE WITH ELECTRICAL AND MECHANICAL FOR REMOVAL OF ALL FIXTURES. SECONDARY GYPSUM CEILING TO REMAIN - PROTECT AS REQUIRED.
  - CONTRACTOR TO DEMOLISH DEMISING WALL BETWEEN LABORATORIES 2048 AND 2050 UP TO EXISTING FIRE RATED STRUCTURE. AFTER DEMOLITION WORK IS COMPLETE, VERIFY CONDITIONS OF FIRE SEPARATION. CONTRACTOR WILL BE REQUIRED TO PROVIDE A MINIMUM 2 HOUR, ULC-DESIGN, FIRE RATED ASSEMBLY TO PROTECT ANY EXPOSED STRUCTURAL ELEMENTS. IN ADDITION, CONTRACTOR TO REPAIR THE SURROUNDING AREA TO ENSURE A CODE COMPLIANT FIRE SEPARATION.


- KEY NOTES**
- CORRIDOR DOORS. CONTRACTOR TO REMOVE PRIOR TO DEMOLITION, PROTECT DURING NEW CONSTRUCTION AND REINSTALL.
  - WOOD PANEL SERVICE CHASE. SEE DETAIL 2/A-001. REFER TO MECHANICAL FOR SERVICES TO REMAIN AND/OR DEMOLISHED.
  - RADIATOR ENCLOSURE. SEE DETAILS 3/A-001 AND 4/A-001.
  - WALL / PARTITION & DOOR TO BE DEMOLISHED. REFER TO GENERAL NOTES.
  - CASEWORK SYSTEM TO BE DEMOLISHED.
  - PLUMBING FIXTURES TO BE DEMOLISHED. COORDINATE WITH PLUMBING DRAWINGS.
  - OVERHEAD EMERGENCY SHOWER TO BE REMOVED AND REINSTALLED AT NEW LOCATION. REFER TO PLUMBING PACKAGE.
  - EXISTING FUMEHOOD ENCLOSURE TO BE REMOVED AND REINSTALLED AS PART OF THE RENOVATION WORK. PROTECT DURING CONSTRUCTION AND REINSTALLED AT NEW LOCATION. COORDINATE SERVICES AND EXHAUST DUCT CONNECTION WITH MEP PACKAGE.
  - CONTRACTOR TO DEMOLISH EXISTING SHEET VINYL TILE FLOOR FINISH. PATCH AND REPAIR FLOOR SURFACE PRIOR TO NEW CONSTRUCTION.
  - EXISTING FLOOR MOUNTED EQUIPMENT TO BE REMOVED / RELOCATED TO OTHER LAB AREAS. CONTRACTOR TO COORDINATE LOGISTICS WITH OWNER AND ENSURE EQUIPMENT IS PROTECTED AT ALL TIMES.
  - ACOUSTIC CEILING TILE SYSTEM TO BE DEMOLISHED.
  - ALUMINUM ELECTRICAL SERVICE CHASE TO BE DEMOLISHED.
  - SHAFT ACCESS DOOR TO REMAIN.

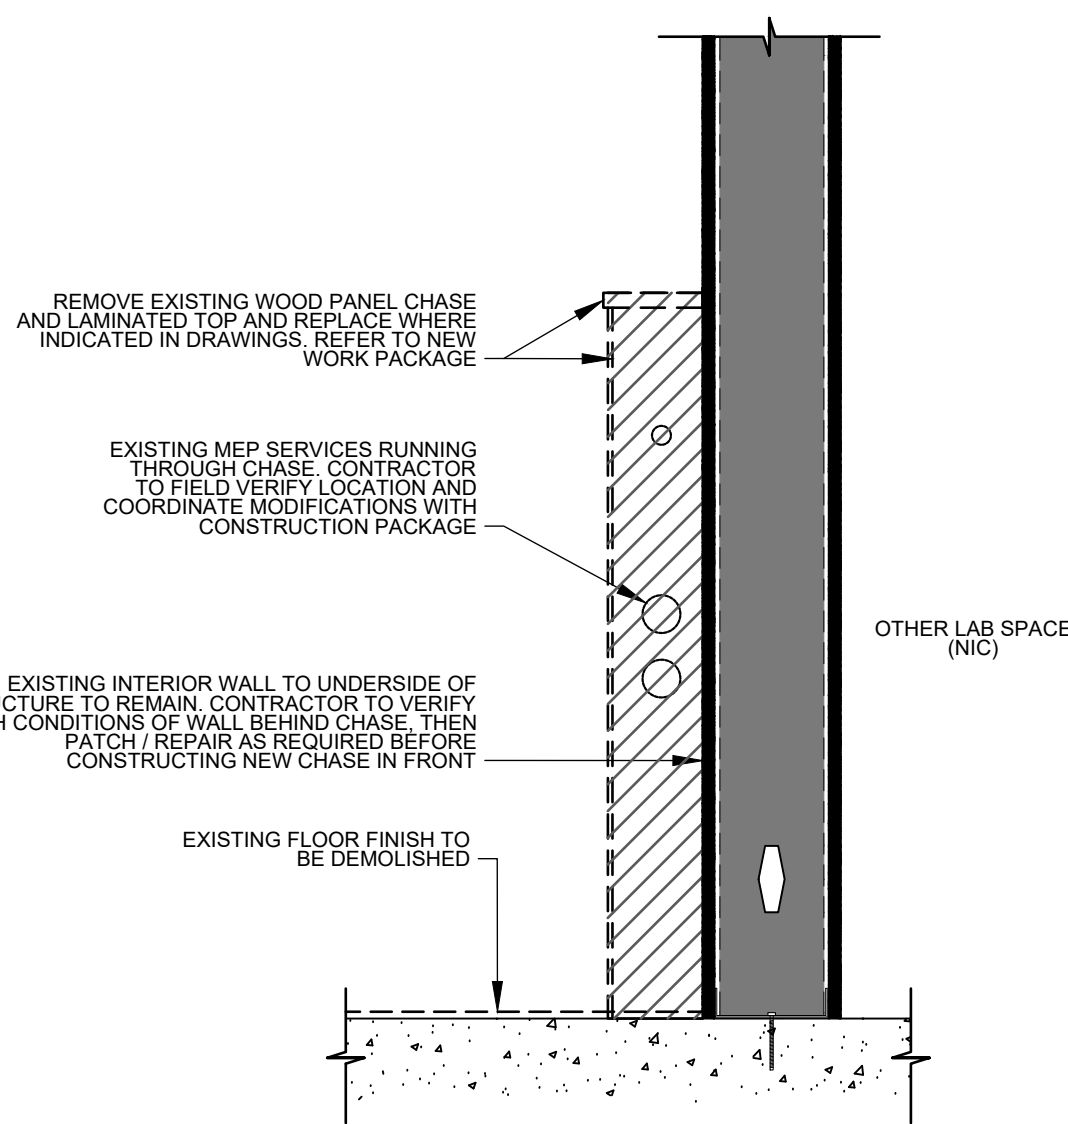


2  
D-001  
INTERIOR WALL CHASE DEMO  
SCALE 1:10  
400 200 0 400

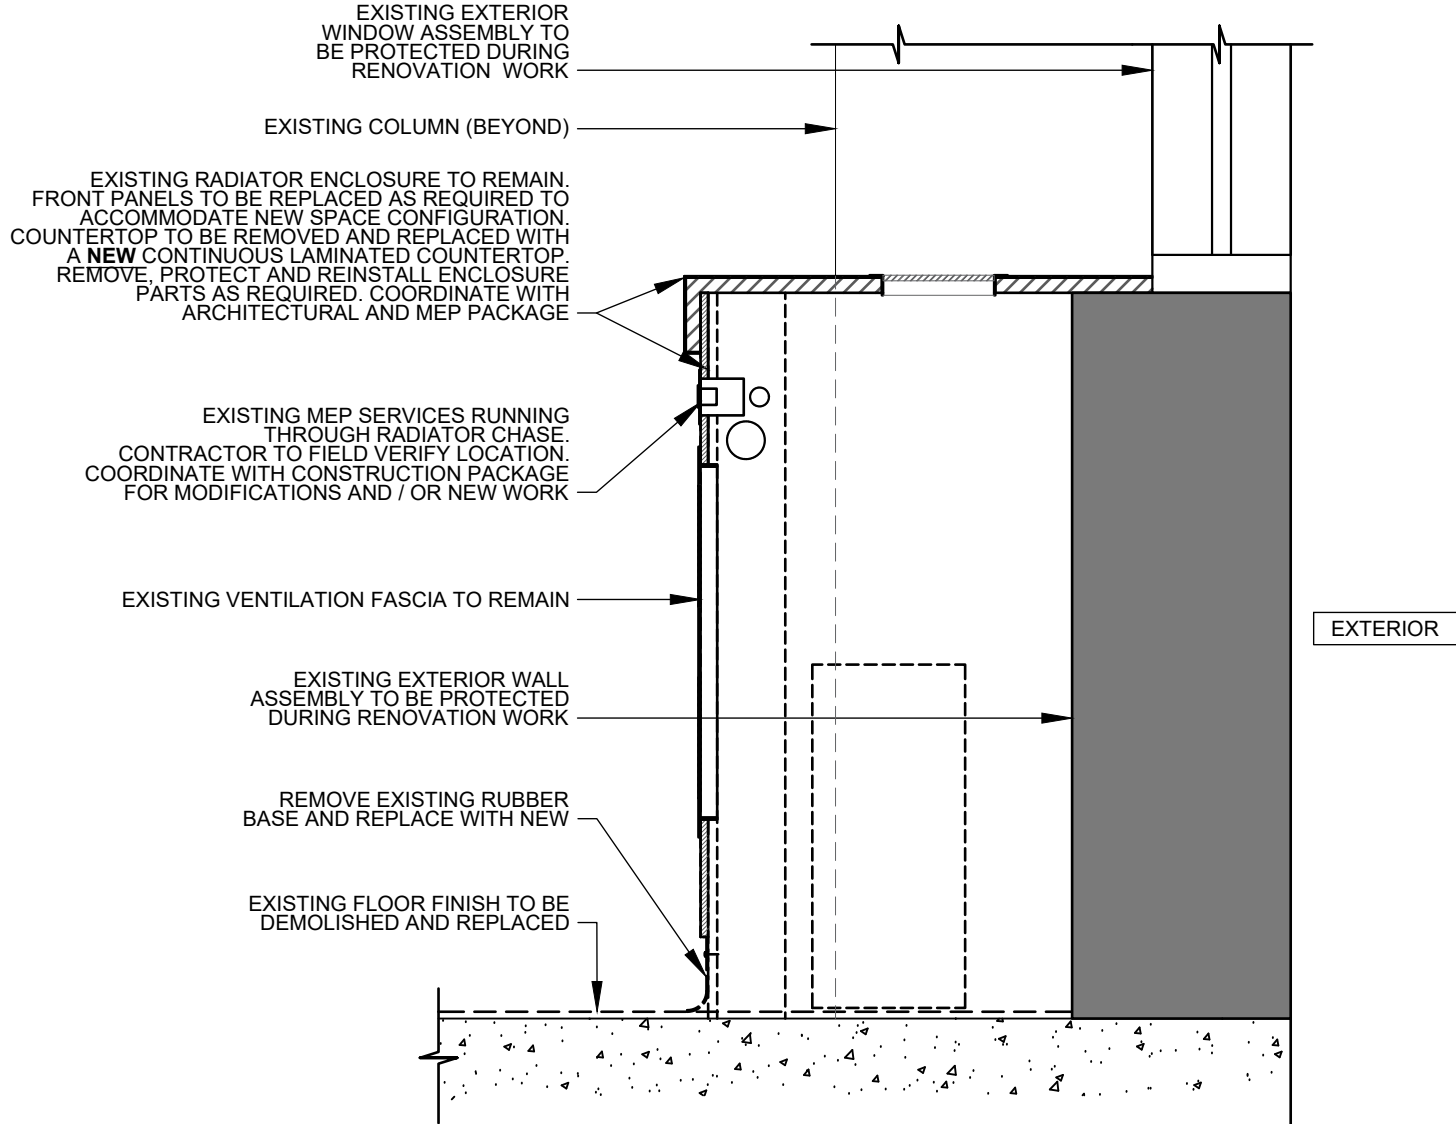

3  
B-001  
EXTERIOR WALL CHASE DEMO  
SCALE 1:10  
400 200 0 400

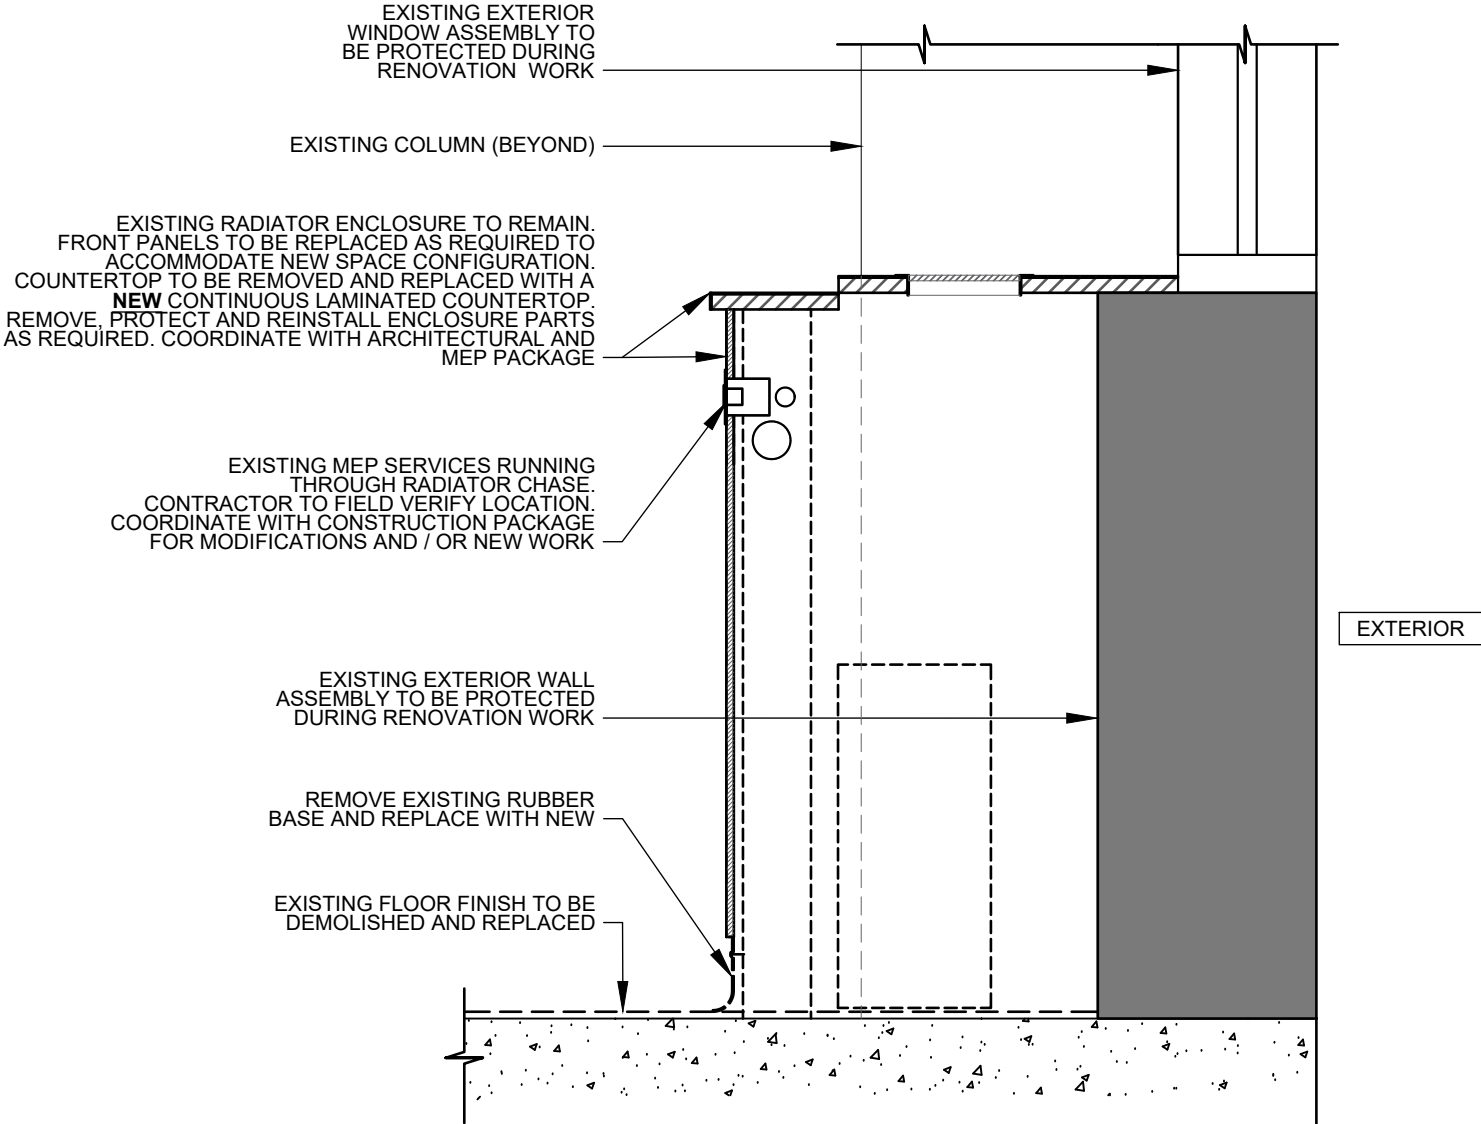

4  
D-001  
EXTERIOR WALL CHASE DEMO  
SCALE 1:10  
400 200 0 400

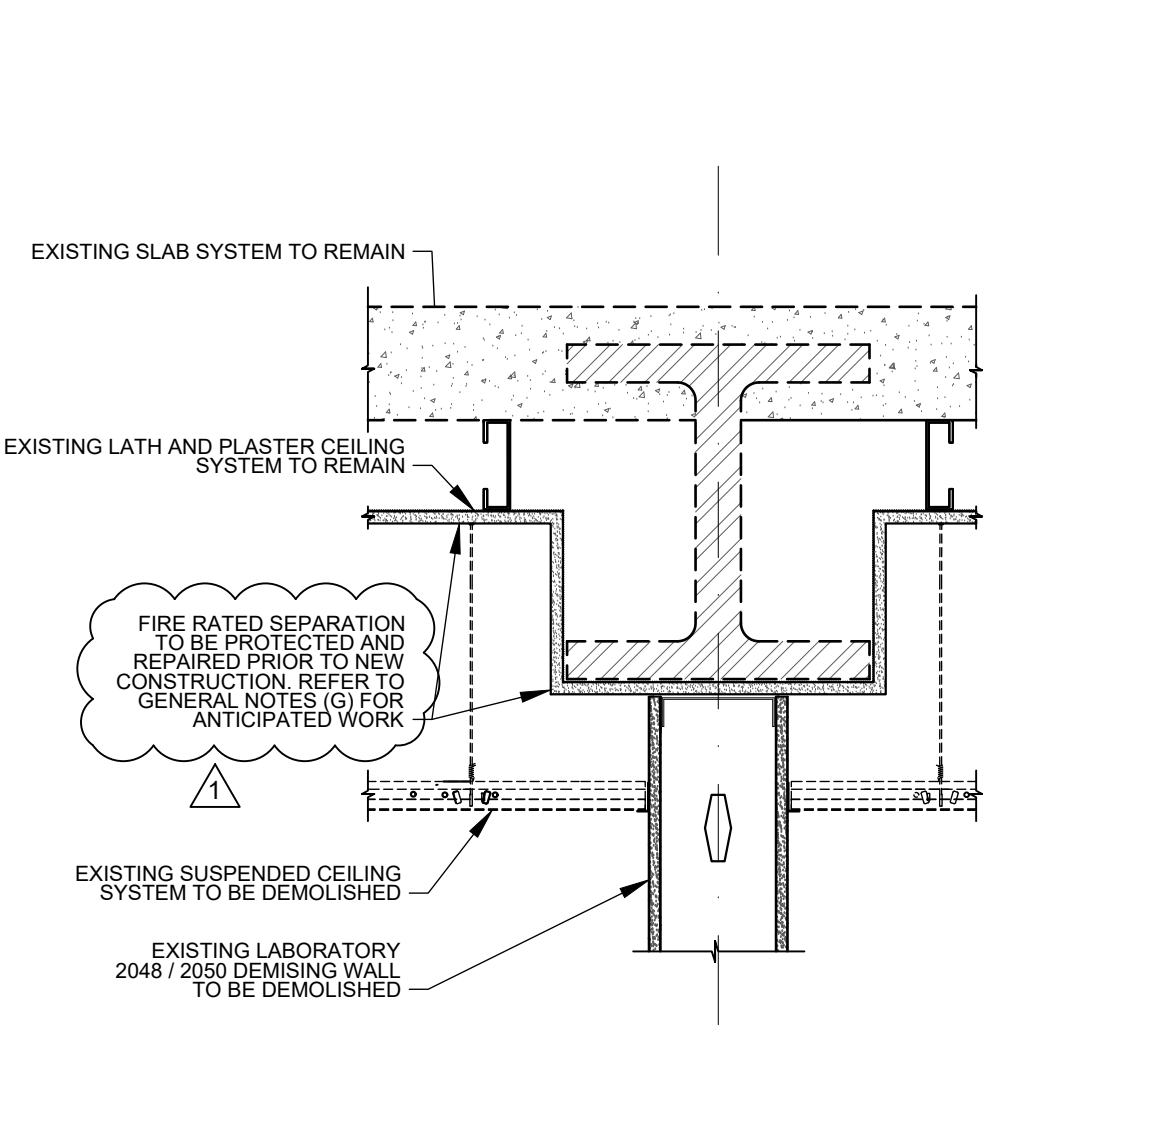

5  
D-001  
DEMISING WALL DEMO  
SCALE 1:10  
400 200 0 400

ISSUE	DESCRIPTION	DATE
0	ISSUE FOR CONSTRUCTION	05/18/2018
1	MODIFICATION	07/09/2018