






David R. Coupland

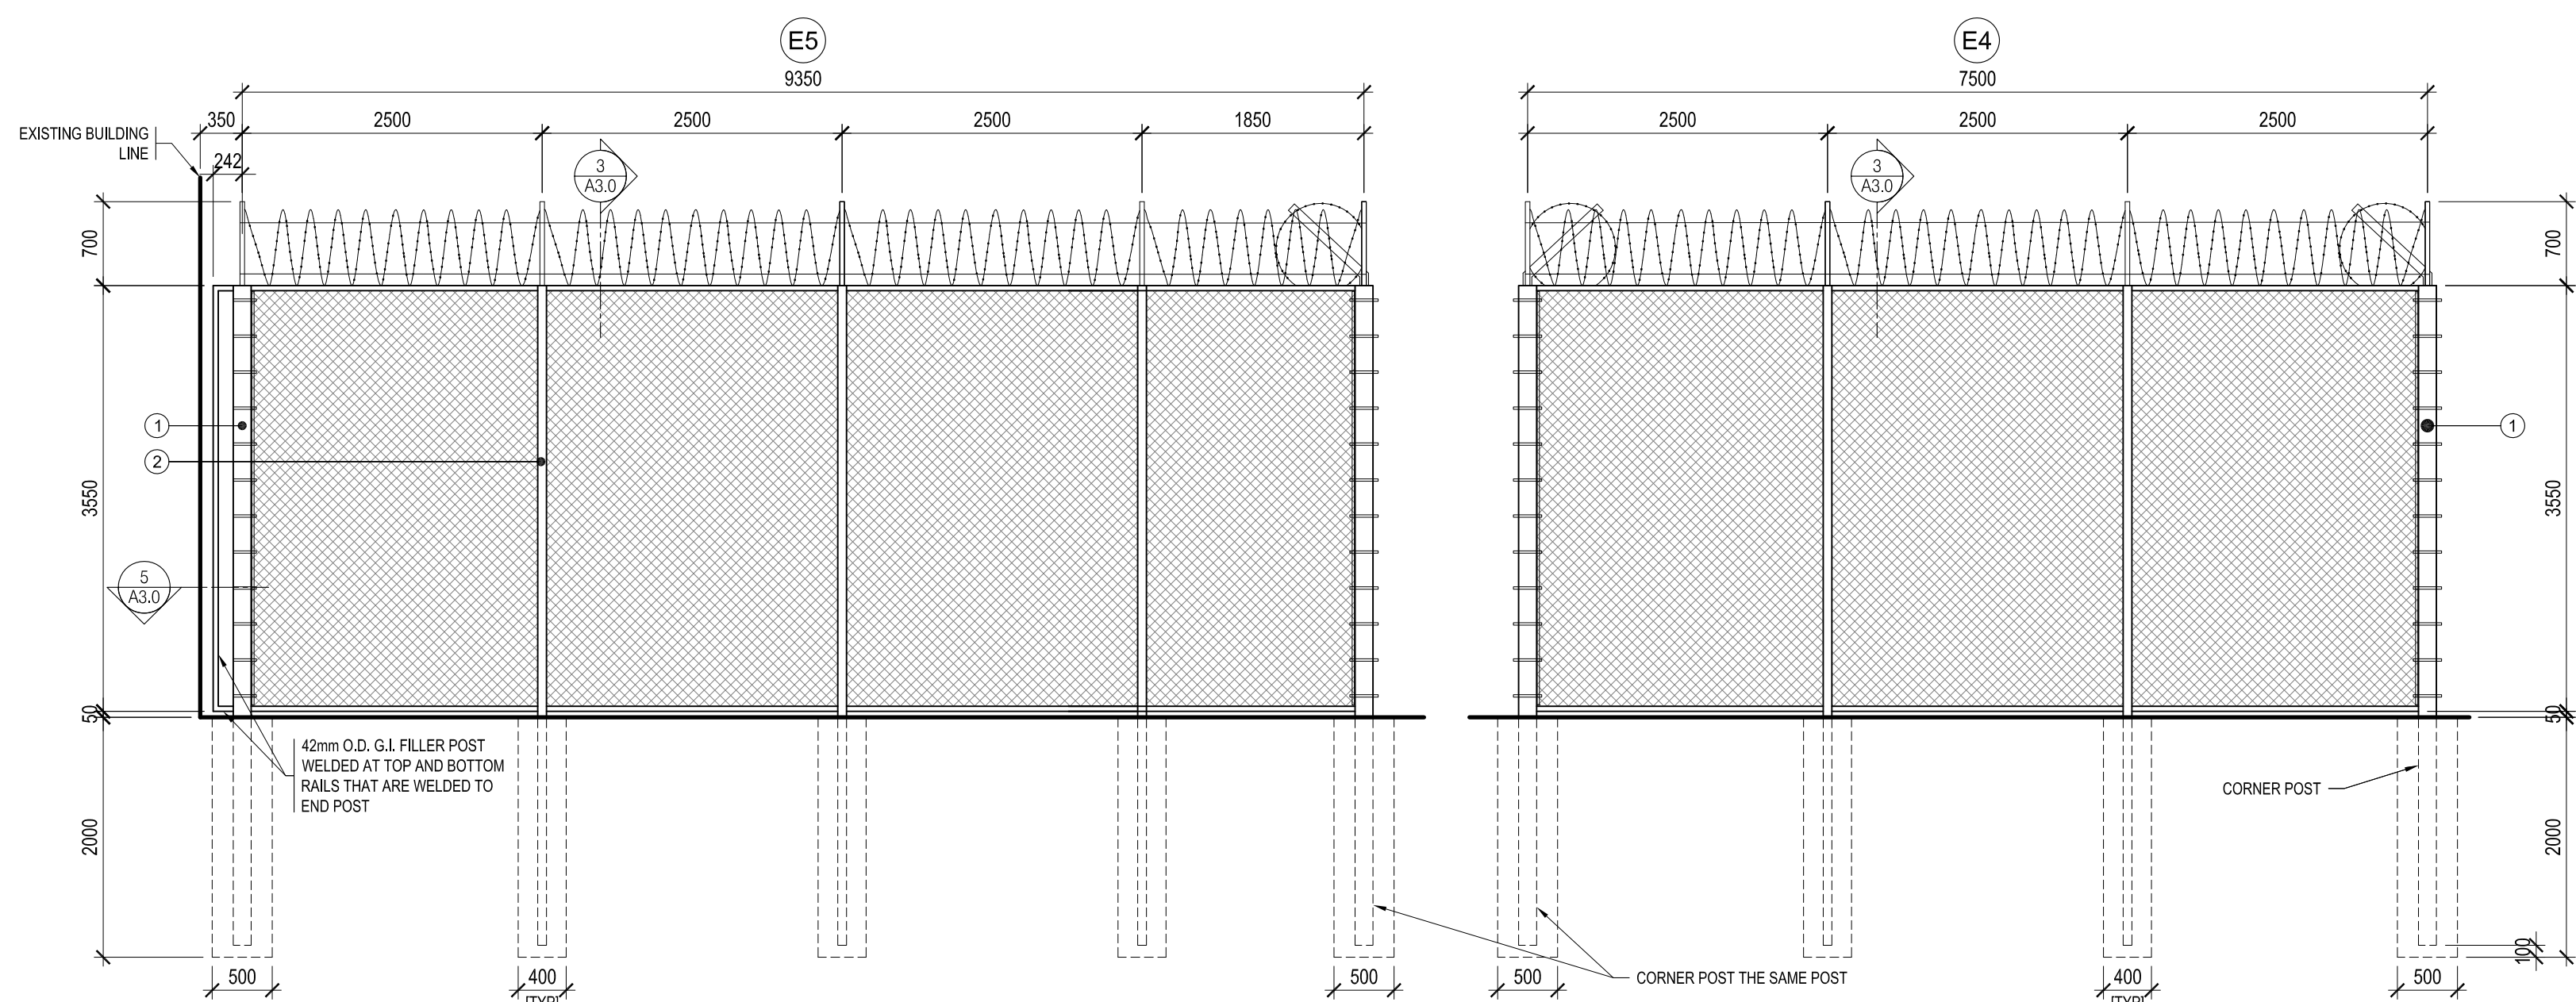

3
A2.2 DF2 FENCE & GATE ELEVATION - 'E'
SCALE - 1:50

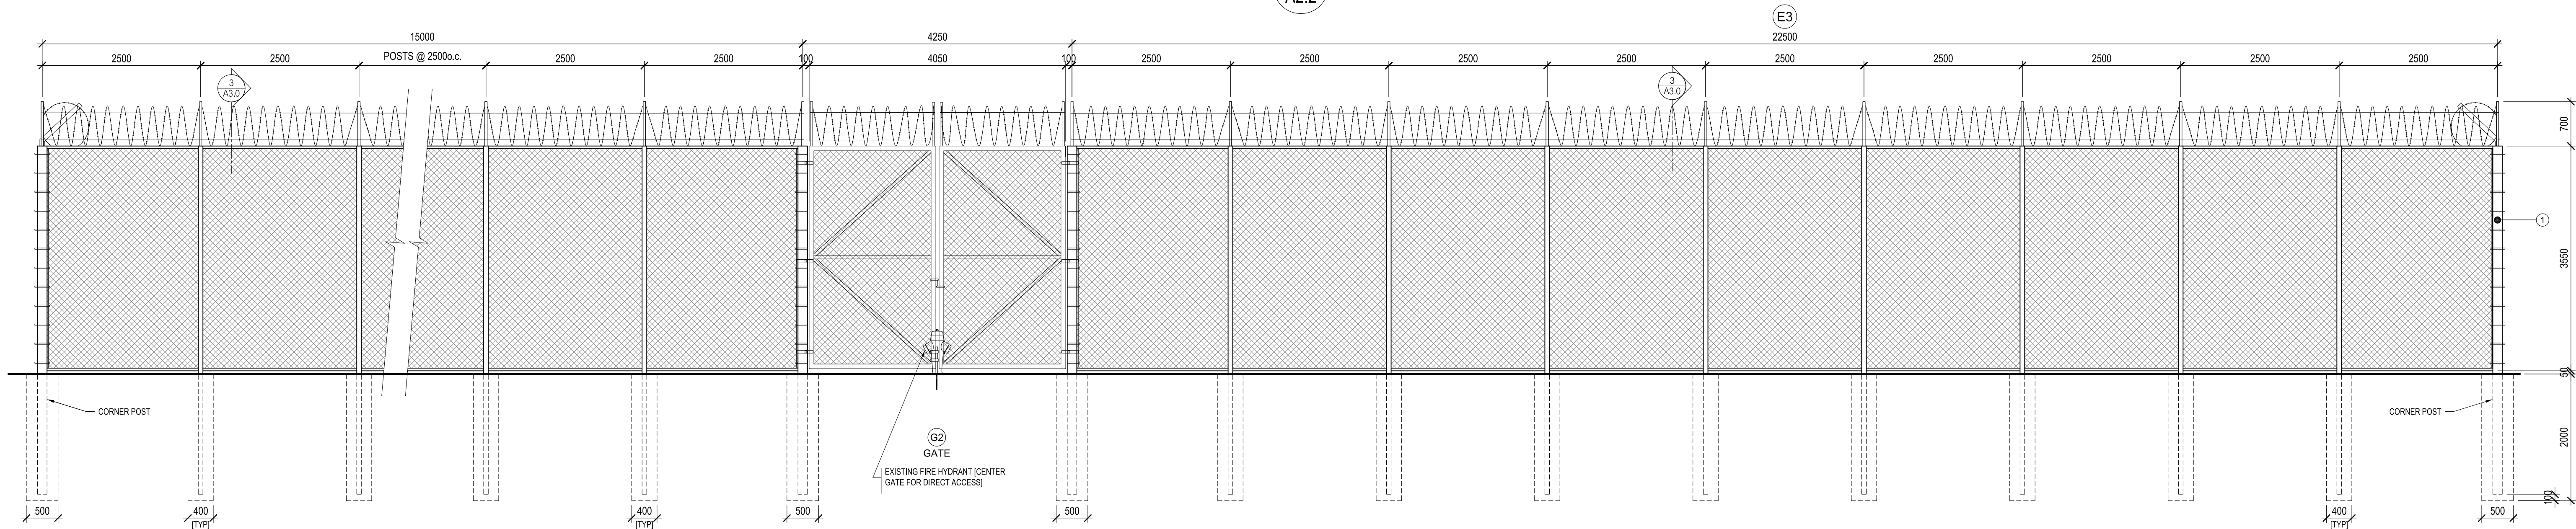

2
A2.2 DF2 FENCE & GATE ELEVATION - 'E'
SCALE - 1:50

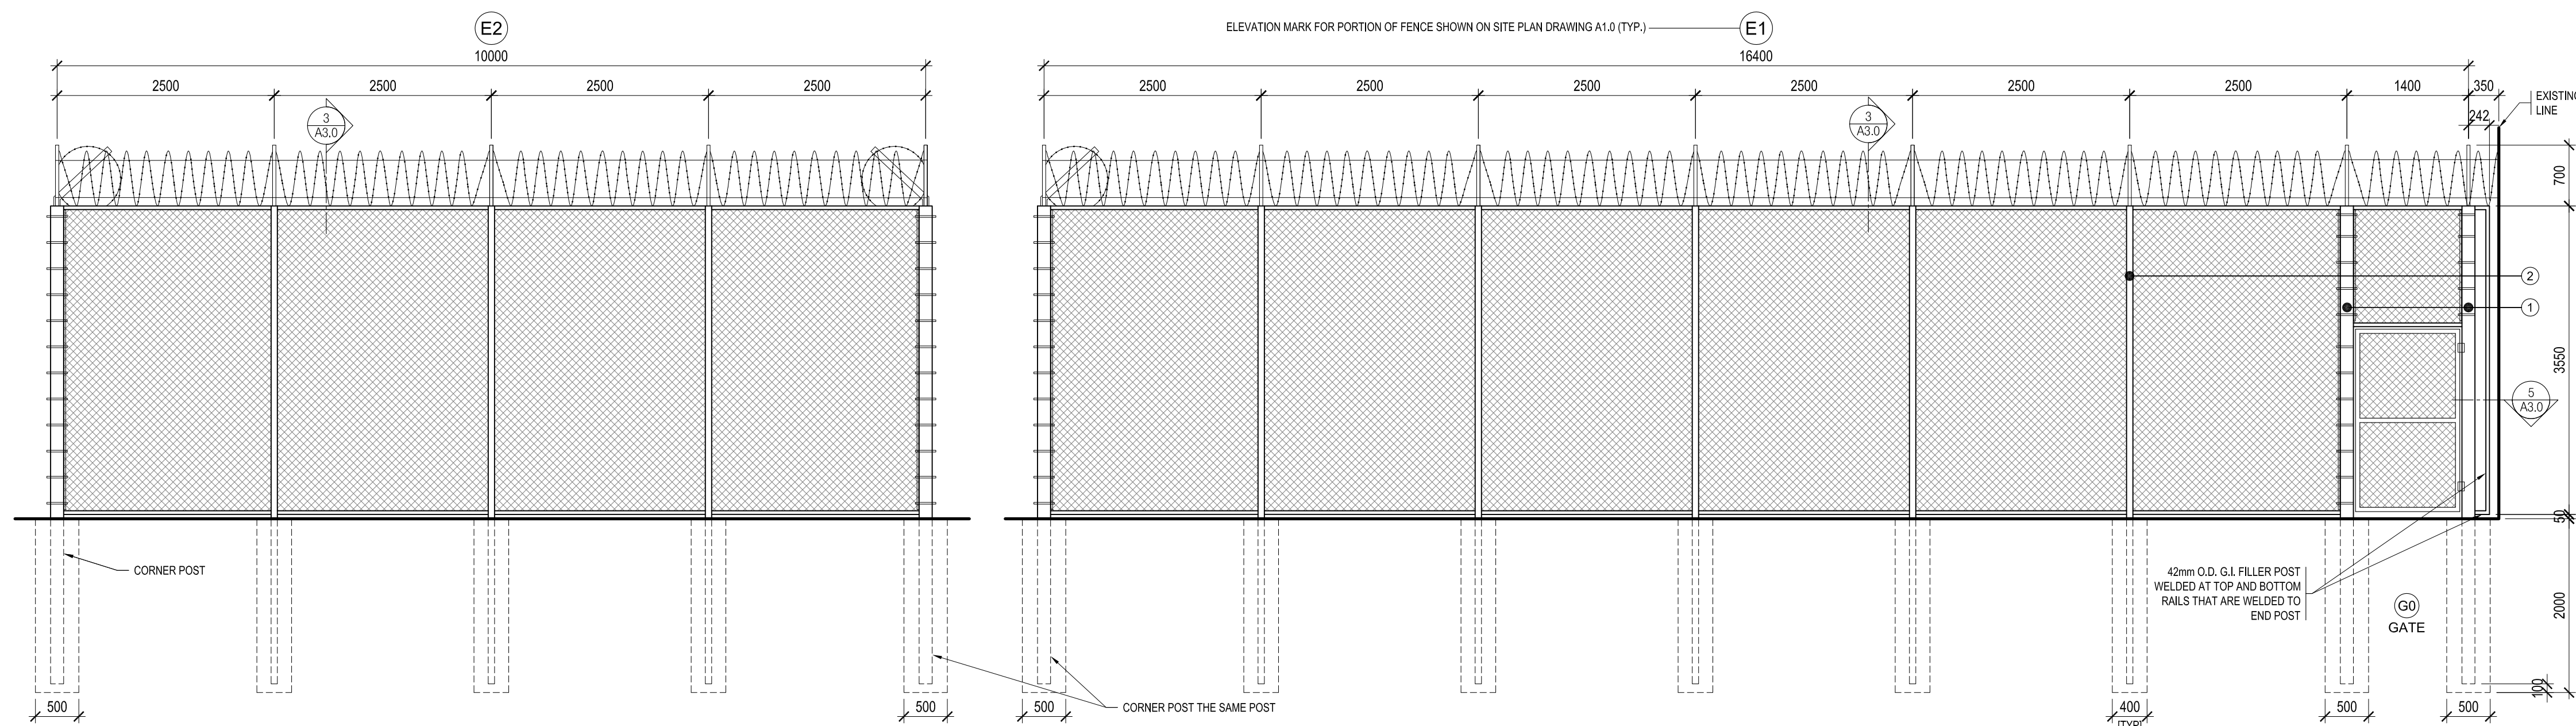

1
A2.2 DF2 FENCE & GATE ELEVATION - 'E'
SCALE - 1:50

GENERAL FENCING NOTES:

- 1 EXPOSED CONDUIT NOT ACCEPTED.
- 2 ALL WELDS GROUNDED SMOOTH.
- 3 ALL CORNERS ROUNDED.
- 4 ALL STEEL TO BE HOT-DIPPED GALVANIZED AFTER FABRICATION.
- 5 SITE WELDS TO BE FINISHED WITH PRIMER & FINISH COAT.
- 6 42mm O.D. G.I. TOP AND BOTTOM RAILS.
- 7 ALL CONCERTINA WIRE TO BE ON YARD SIDE (INMATE SIDE).
- 8 ALL TIE WIRES ON POSTS TO BE FOLDED TIGHT TO POST.
- 9 ALL PILES FOR 114mm Ø & 150mm Ø POSTS TO BE 500mm Ø.
- 10 ALL PILES FOR 73mm Ø POSTS TO BE 400mm Ø.

KEY LEGEND

- ① 150 mm [minimum] O.D. CORNER AND GATE POST
- ② 73 mm [minimum] O.D. LINE POST
- ③ 114 mm [minimum] O.D. STRAIN POST

0	TENDER SUBMISSION	2018/02/15
REVISIONS	DESCRIPTION	DATE

A C	A detail number number du détail	A B C
B	source drawing no. de dessin no.	
C	detail on drawing no. détail sur dessin no.	

project title

titre du projet

Fence Assessment and Repair

**CSC REGIONAL PSYCHIATRIC CENTRE
SASKATOON, SASKATCHEWAN**

drawing title

titre du dessin

FENCE ELEVATIONS

designed by	DRC	conçu par	
drawn by	coupland	dessiné par	
approved by		approuvé par	
PWSC Project Manager	JERRY AUJLA	Administrateur de Projets TPSC	
scale	AS NOTED	échelle	sheet
project no.	R.084540.001	project no.	A2.2
date	2018/02/15	date	OF 16