


**NOTES:**

1. USE 308L STAINLESS STEEL FILLER ROD FOR WELDING. ALL NELSON STUDS TO BE COATED WITH COAL TAR EPOXY.
2. INSIDE FACE OF STAINLESS STEEL NOSING AND EXISTING NOSING TO BE BOTH COATED WITH COAL TAR EPOXY WHERE THEY ARE IN CONTACT, PLUS EXTEND COAL TAR EPOXY COATING AN ADDITIONAL 100mm BEYOND CONTACT LOCATIONS ON BOTH SURFACES

G	REISSUED FOR TENDER	AUG. 7 2018	T.M. WAG
F	ISSUED FOR TENDER	MAY 18 2018	T.M. WAG
E	ISSUED FOR FINAL REVIEW II	MAR. 7 2018	T.M. WAG
D	ISSUED FOR FINAL REVIEW	AUG. 16 2017	T.M. WAG
C	99% DESIGN SUBMISSION	FEB. 3 2017	T.M. WAG
B	ISSUED FOR PRELIMINARY DESIGN RESUBMISSION	SEPT. 9 2016	T.M. WAG
A	ISSUED FOR PRELIMINARY DESIGN SUBMISSION	AUG. 11 2016	T.M. WAG
<b>REVISIONS</b>			
No.		Date	Rev. App.

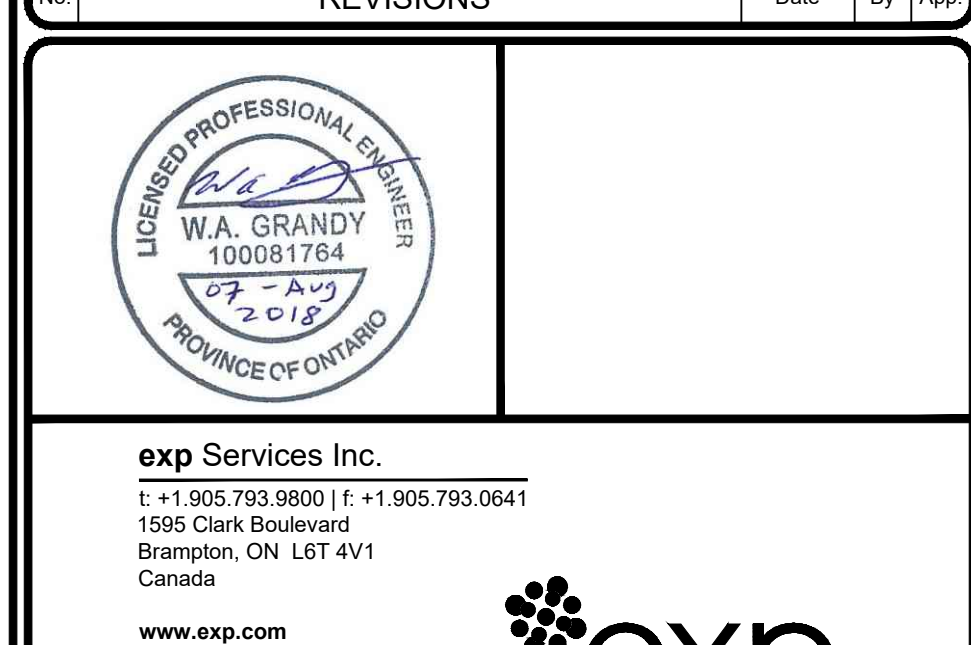

• BUILDINGS • EARTH & ENVIRONMENT • ENERGY •  
• INDUSTRIAL • INFRASTRUCTURE • SUSTAINABILITY •

