

**PRELIMINARY  
NOT FOR CONSTRUCTION**

**A + I D**


Scale 1/61  
2025-12-23  
125.23.23  
125.23.23  
F. 402.288.3789

GOULD & PARKER  
ARCHITECTS & ENGINEERS INC.

203 MELMAN GRESSENT  
SASKATOON, SASKATCHEWAN, CANADA S7N 1J1  
TEL: 1-306-656-6223 | FAX: 1-306-656-6889 | WWW.WSPRQJP.COM

**WSP**

203 MELMAN GRESSENT  
SASKATOON, SASKATCHEWAN, CANADA S7N 1J1  
TEL: 1-306-656-6223 | FAX: 1-306-656-6889 | WWW.WSPRQJP.COM

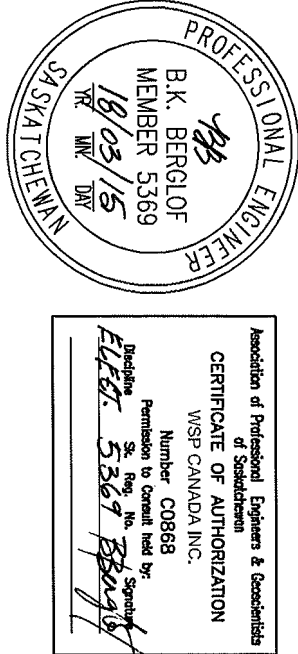

5		
4		
3		
2		
1		
0	ISSUED FOR TENDER	2016/03/16
Revision / Revisão	Description / Description	Date / Data
Client / client		

**Immigration, Refugees and  
Citizenship Canada**


Saskatoon  
Saskatchewan

Projet /Titre du projet  
Government of Canada Building  
101 - 22 Street East

**IRCC Relocation Fit-up  
Saskatoon, Saskatchewan**

Approved by/ Approuvé par	
Designed by/ Conçue par	T.M.
Drawn by/ Dessiné par	T.M.
Project Manager/ Responsable de projet	19/03/2016
AR	
WSPSC - Saskatoon and Regina - Project Resources Manager/	
Projet /Titre du projet	
Client / client	
Drawing title/ Titre du dessin	
1ST FLOOR - DEMOLITION POWER & SYSTEMS	

Project No./ No. de projet	Sheet /Feuille	Revision No./ La Révision No.
R.076325.006	<b>E1.2</b> OF	<b>0</b>

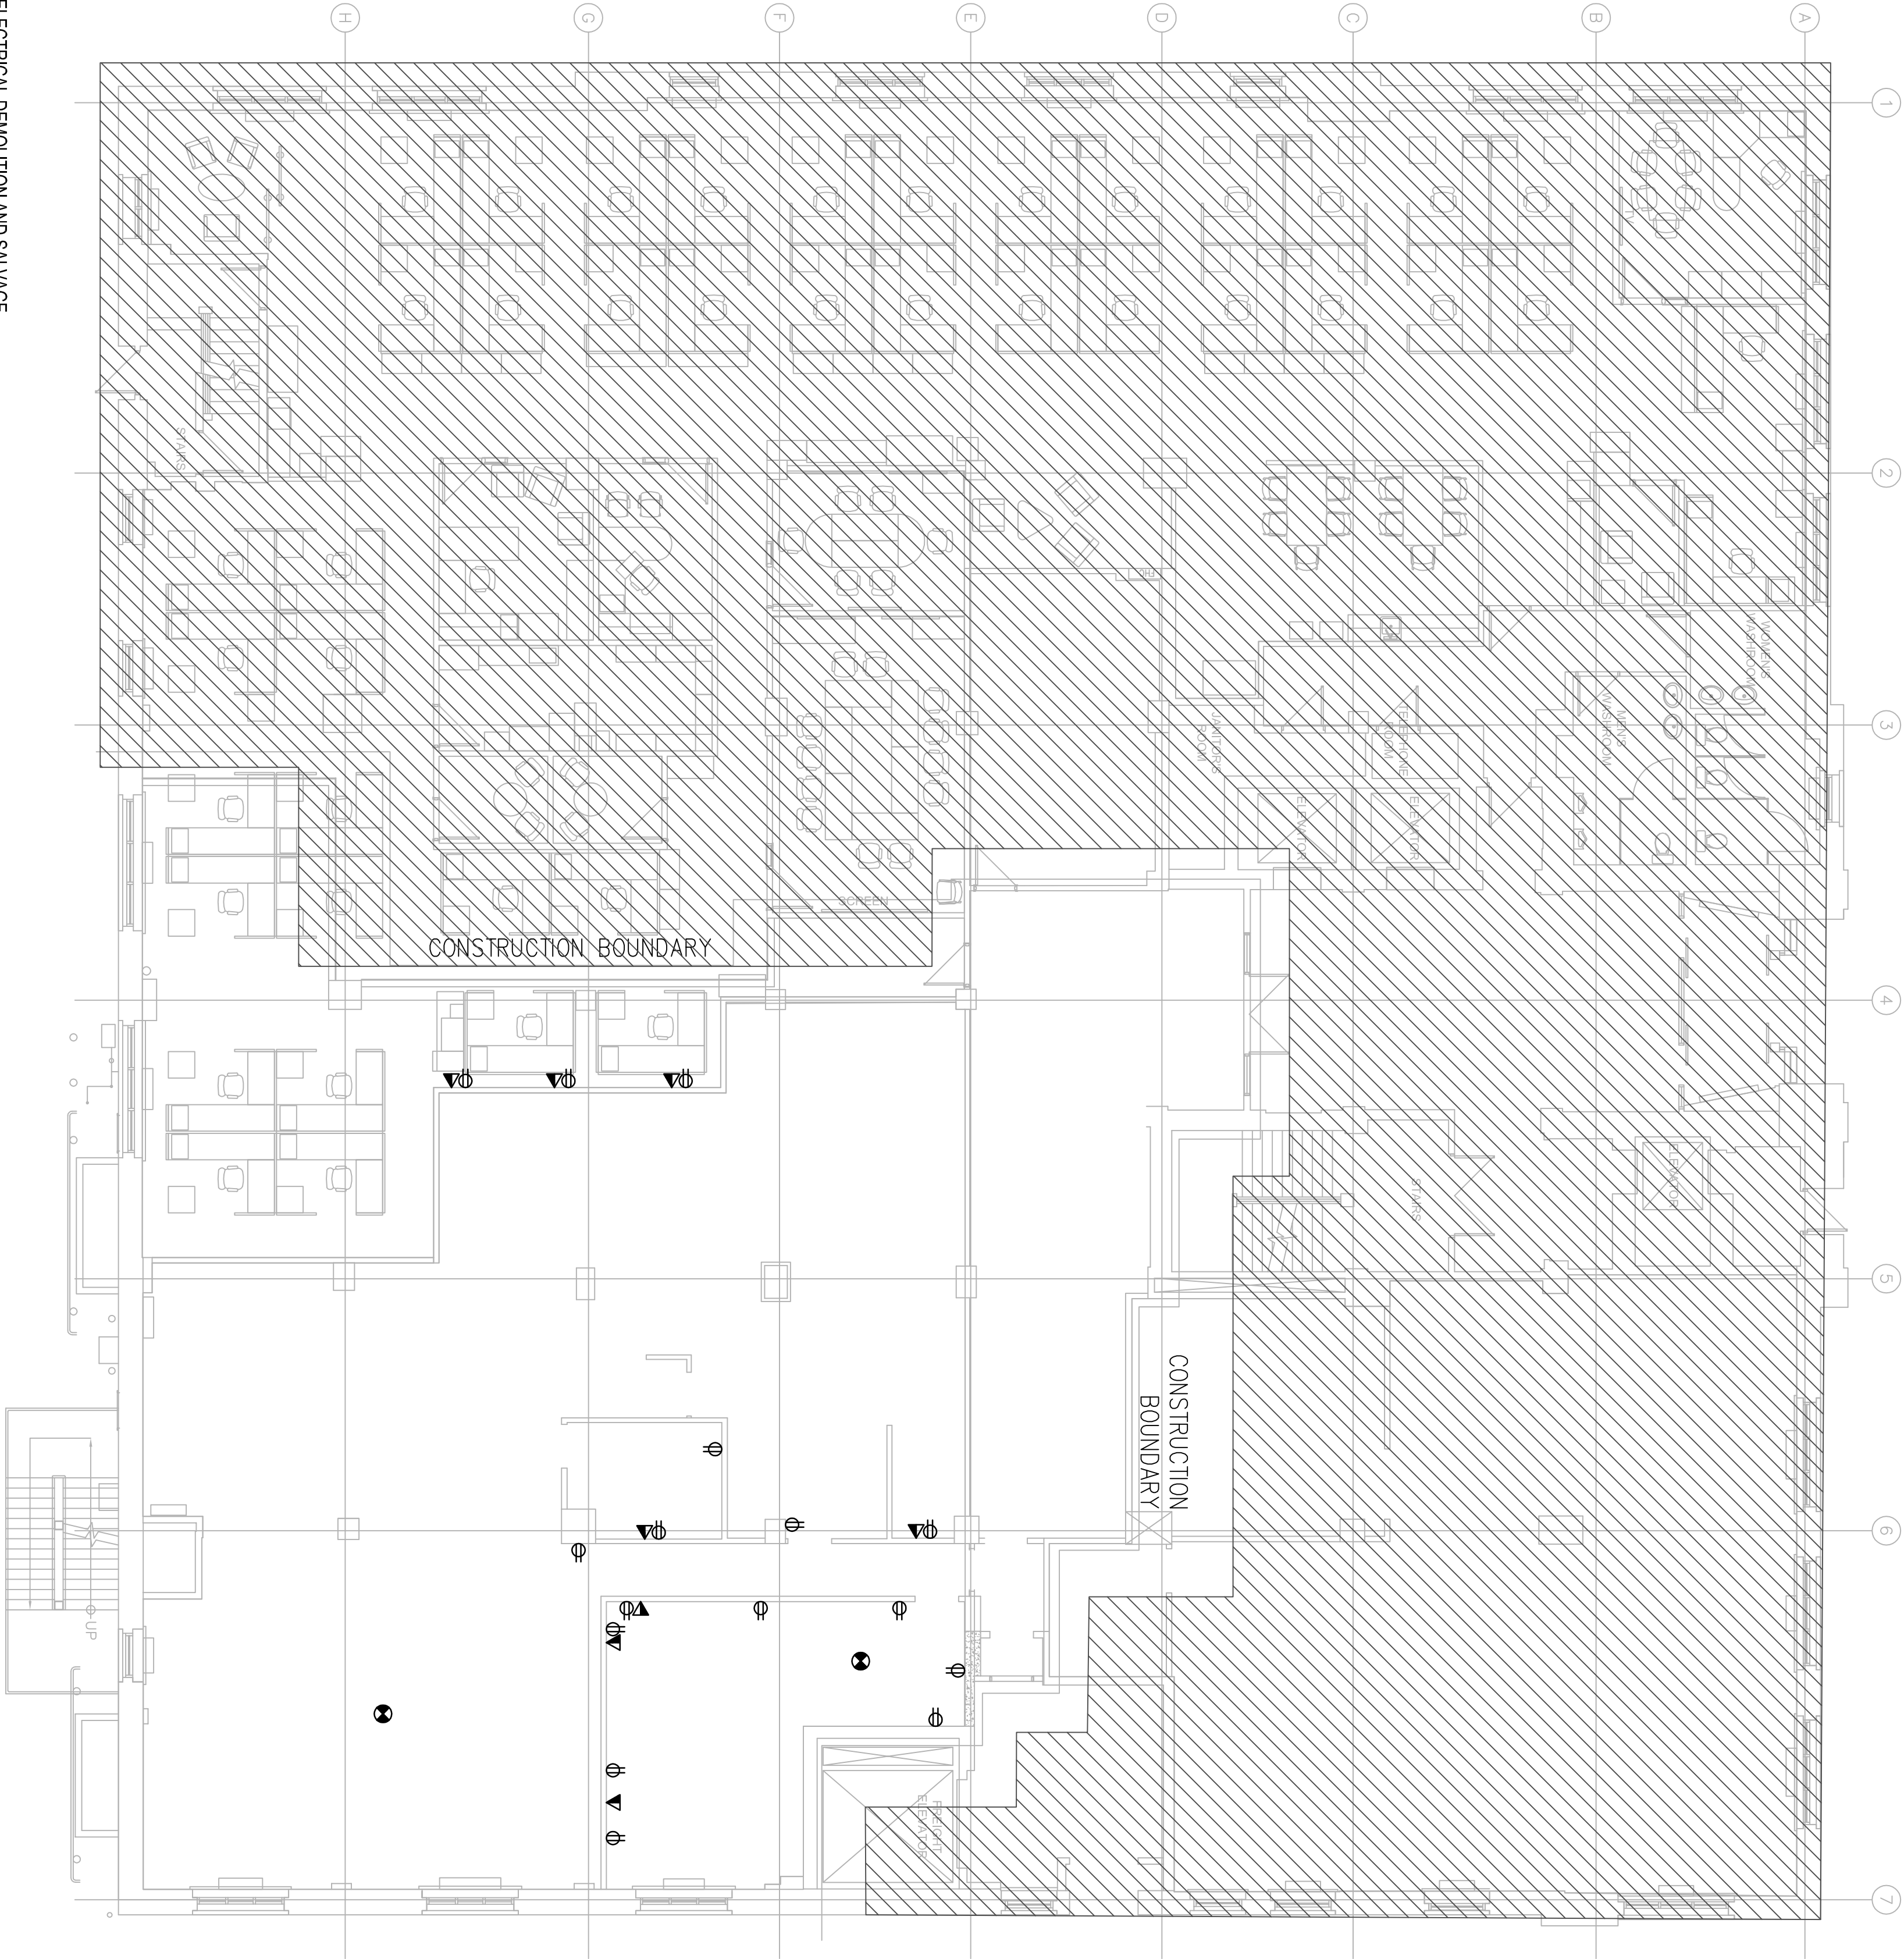

**ELECTRICAL DEMOLITION AND SALVAGE**

- UNLESS OTHERWISE NOTED, ALL EXISTING ELECTRICAL SYSTEMS WHICH BECOME REDUNDANT SHALL BE REMOVED BY THE CONTRACTOR.
- REMOVE ALL REDUNDANT EXISTING CONDUIT WHERE ACCESSIBLE.
- REMOVE ALL REDUNDANT EXISTING CONDUITS TO POINT OF SOURCE.
- CUT AND PATCH EXISTING WALLS WHERE REQUIRED TO ACCOMMODATE NEW EQUIPMENT OR CONDUIT.
- LEAVE FINISHED SURFACE OF WALL IN READY TO PAINT CONDITION.
- TURN ALL SALVAGE MATERIAL OVER TO BUILDING OWNER.
- CONTRACTOR SHALL VISIT SITE PRIOR TO TENDER TO DETERMINE EXTENT OF DEMOLITION REQUIRED, AND SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS AND INSURANCE FROM CONDITIONS THAT MAY HAVE BEEN EVIDENT UPON THOROUGH EXAMINATION OF THE SITE.
- CONTRACTOR SHALL UPDATE AND CONFIRM PANEL SCHEDULES AND LOADS FOR ALL PANELS AFFECTED BY THIS DEMOLITION.
- MAINTAIN CONTINUITY OF EXISTING BRANCH CIRCUITS AS REQUIRED TO PROVIDE POWER TO REMAINING EQUIPMENT, DEVICES AND LUMINAIRES THAT ARE NOT BEING REMOVED.
- ANY EXISTING CONDITIONS INDICATED ARE BASED UPON INFORMATION PROVIDED BY OTHERS. THE CONTRACTOR SHALL ADJUST FOR ACTUAL FIELD CONDITIONS AT NO ADDITIONAL EXPENSE TO THE OWNER.
- ALL IT CABLES SHALL BE DEMOLISHED BACK TO IT ROOM. CONTRACTOR RESPONSIBLE FOR DEMOLITION OF ALL IT CONDUIT & PATHWAYS IN ADDITION TO CABLEING INFRASTRUCTURE.

**1ST FLOOR DEMOLITION - POWER & SYSTEMS**

E1.2 1:100