
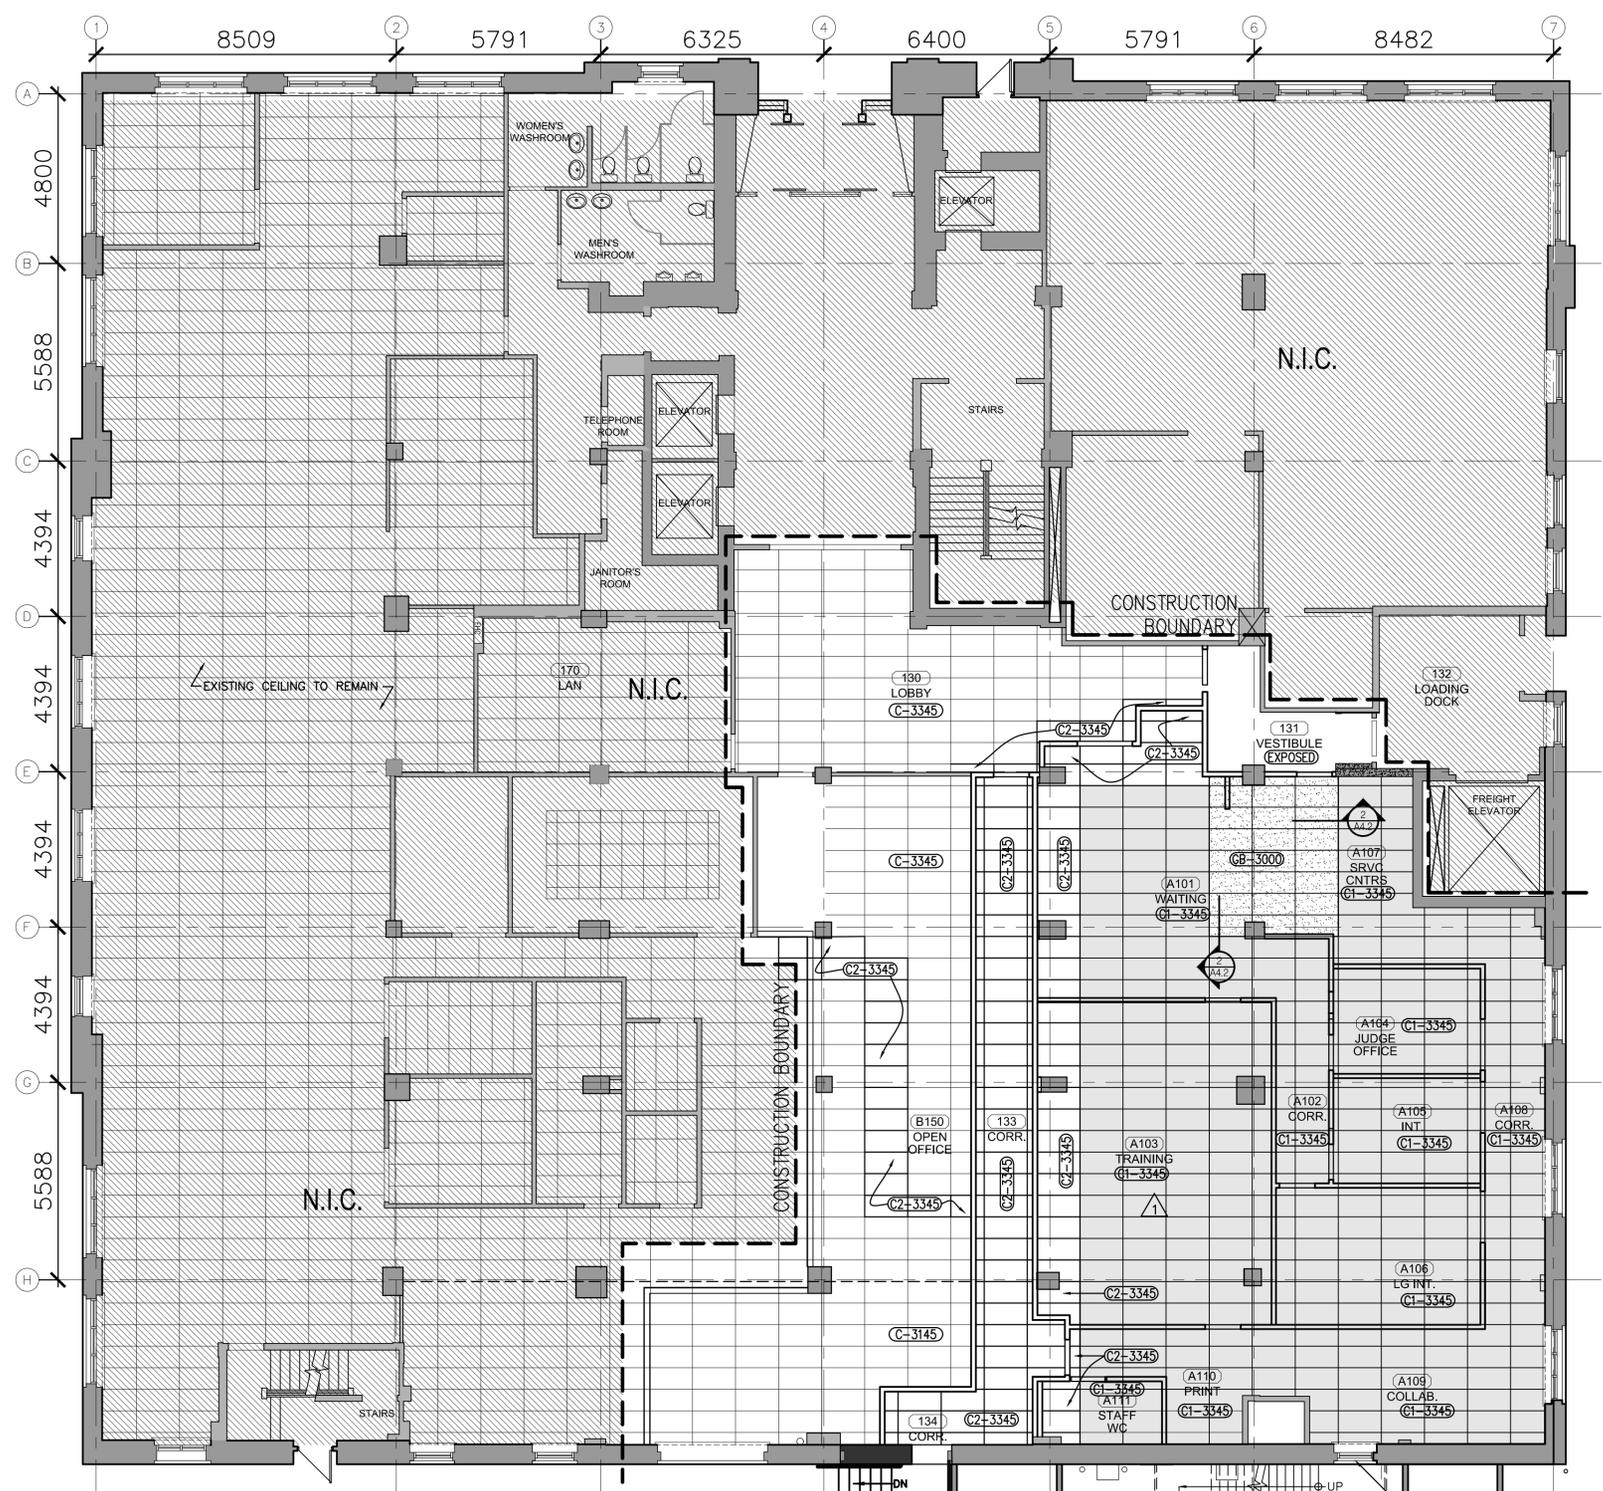


COUPLAND KRAEMER ARCHITECTURE + INTERIOR DESIGN INC.



CEILING SCHEDULE

ROOM NUMBER	ROOM NAME	Finish	CEILING
-------------	-----------	--------	---------

IRCC

A101	WAITING	C1 & GB=P2	C2 AT ALL NEW PARTITION EDGES AS REQUIRED C2 AT NORTH END
A102	CORRIDOR	C1	
A103	TRAINING	C1	C2 AT ALL NEW PARTITION EDGES AS REQUIRED C2 AT SOUTH WEST AREA
A104	JUDGE OFFICE	C1	
A105	INTERVIEW	C1	
A106	LARGE INTERVIEW	C1	
A107	SERVICE COUNTERS	C1 & GB=P2	
A108	CORRIDOR	C1	
A109	COLLABORATIVE	C1	
A110	PRINT	C1	
A111	STAFF WC	C1	C2 AT ALL NEW PARTITION EDGES AS REQUIRED C2 AT WEST END

BASE BUILDING

130	LOBBY	C	C2 AT ALL NEW PARTITION EDGES AS REQUIRED
131	CORRIDOR	EXPOSED	
170	LAN	-	

WED

B150	OPEN OFFICE (WED)	C & C2	C AT ALL LOCATIONS WHERE NOT AFFECTED BY WORK C2 WHERE PARTITION REMOVED AND AS REQUIRED C2 AT ALL NEW PARTITION EDGES AS REQUIRED
------	-------------------	--------	--

NEW CEILING TILES TO MATCH EXISTING:  
ARMSTRONG PP933  
RANDOM TEXTURED  
610x1219x16mm

- EXISTING ACOUSTIC CEILING TILE SYSTEM TO REMAIN
  - LOCATION FOR NEW CEILING TILES TO MATCH EXISTING IN EXISTING GRID TO REMAIN
  - LOCATION FOR NEW GRID AND CEILING TILES TO MATCH EXISTING.
  - NEW GYPSUM BOARD CEILING WITH EXISTING GRID TO REMAIN. DO NOT CUT GRID
- 16 GB, TAPE SAND & PAINT as per LEGEND ABOVE (FLAT)  
FRAMING:  
 • 31x92 STEEL STUDS @ 400 O.C. SECURED TO STRUCTURE ABOVE.  
 OR  
 • HANGERS @ 1200 O.C. SECURED TO STRUCTURE ABOVE  
 • 38 CARRYING CHANNEL @ 1200 O.C.  
 • 20 FURRING CHANNEL @ 400 O.C.

NOTE: SOUNDMASKING REQUIRED THROUGHOUT CONTRACT AREA. REFER TO ELECTRICAL DRAWINGS AND SPECIFICATIONS.

PHASING

These notes are the same on every 1st floor sheet and have been included for ease of consideration

SUGGESTED 1ST FLOOR PHASING:

All phasing will need to be coordinated by the General Contractor, Departmental Representative and WED on site for the duration of this project.

	Week	Duration
1. WED to vacate 10 workstations	Week 0	1 day
2. Departmental Representative (CORCAN) disassemble WED workstations and equipment.	Week 1	1 week
3. GC to temporarily store WED workstations and equipment.		
4. GC to erect temporary hoarding barrier (as per demolition plan), full height to limit distractions to WED operations		
5. GC to begin and complete work (exterior window, corridors, ceilings, partitions, finishes)	Week 2	4 weeks
6. CORCAN to re-assemble workstations and GC to reconnect electrical to workstations.	Week 6	1 week
7. GC to remove temporary barrier and ensure space is 100% complete	Week 7	1 week
8. GC to patch and make good areas affected by temporary barrier.		
9. WED to move into new work area.	Week 8	2 days

1 1ST FLOOR CONSTRUCTION - RCP  
A4.1 SCALE: 1:100

5		
4		
3		
2		
1		
0	Issued for Tender	2018/03/19

Revision/Revision	Description/Description	Date/Date
-------------------	-------------------------	-----------

Client/client  
**Immigration, Refugees and Citizenship Canada**  
Saskatoon  
Saskatchewan

Project title/Titre du projet  
**Government of Canada Building  
101 - 22 Street East**

**IRCC Relocation Fit-up  
Saskatoon, Saskatchewan**

Approved by/Approuvé par  
DC

Designed by/Concept par  
GK

Drawn by/Dessiné par  
GK JG

PWSC Project Manager/Administrateur de Projets TPSCG  
AR

PWSC, Architectural and Engineering Resources Manager/  
Ressources Architectural et de Directeur d'Ingénierie, TPSCG

Client/client

Drawing title/Titre du dessin  
**1ST Floor Construction - RCP**

Project No./No. du projet <b>R.076325.006</b>	Sheet/Feuille <b>A4.1</b> OF	Revision no./ La Révision no.
--	------------------------------------	----------------------------------