

PRELIMINARY
NOT FOR CONSTRUCTION

CK A + I D
 Suite 101
 4032 1st Street SE
 Calgary, Alberta
 T2G 2L3
 T: 403.269.7100
 F: 403.269.7595

wsp
 203 WELLMAN CRESCENT
 SASKATON SASKATCHEWAN CANADA S7T 0J1
 TEL: 1-306-665-6223 | FAX: 1-306-665-8589 | WWW.WSPGROUP.COM

PROFESSIONAL ENGINEER
 B.K. BERGLOF
 MEMBER 5359
 18/05/15
 ELIC 5367 Berglof
 SASKATCHEWAN

5		
4		
3		
2		
1		
0	ISSUED FOR TENDER	2018/03/16
Revision/	Description/Description	Date/Date

Client/client
Immigration, Refugees and Citizenship Canada
 Saskatoon
 Saskatchewan

Project title/Titre du projet
**Government of Canada Building
 101 - 22 Street East**
**IRCC Relocation Fit-up
 Saskatoon, Saskatchewan**

Approved by/Approve par

Designed by/Concept par
 T.M

Drawn by/Dessiné par
 T.M

FWSC Project Manager/Administrateur de Projets IPSC
 AR

FWSC Architectural and Engineering Resources Manager/
 Ressources Architectural et de Directeur d'Ingénierie, IPSC



Client/client

Drawing title/Titre du dessin
**2ND FLOOR - NEW CONSTRUCTION
 POWER & SYSTEMS**

Project No./No. de projet
R.076325.006

Sheet/Feuille
E4.2
 OF

Revision no./
 La Révision no.
0

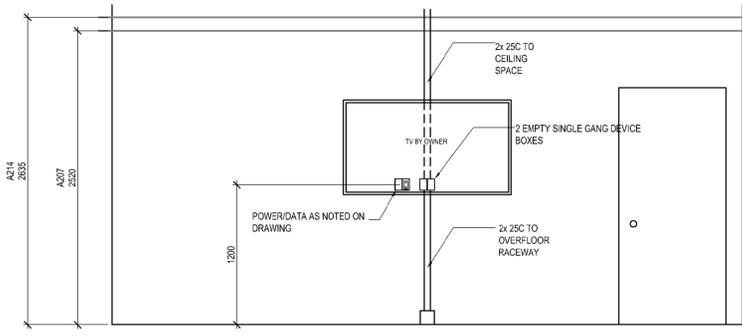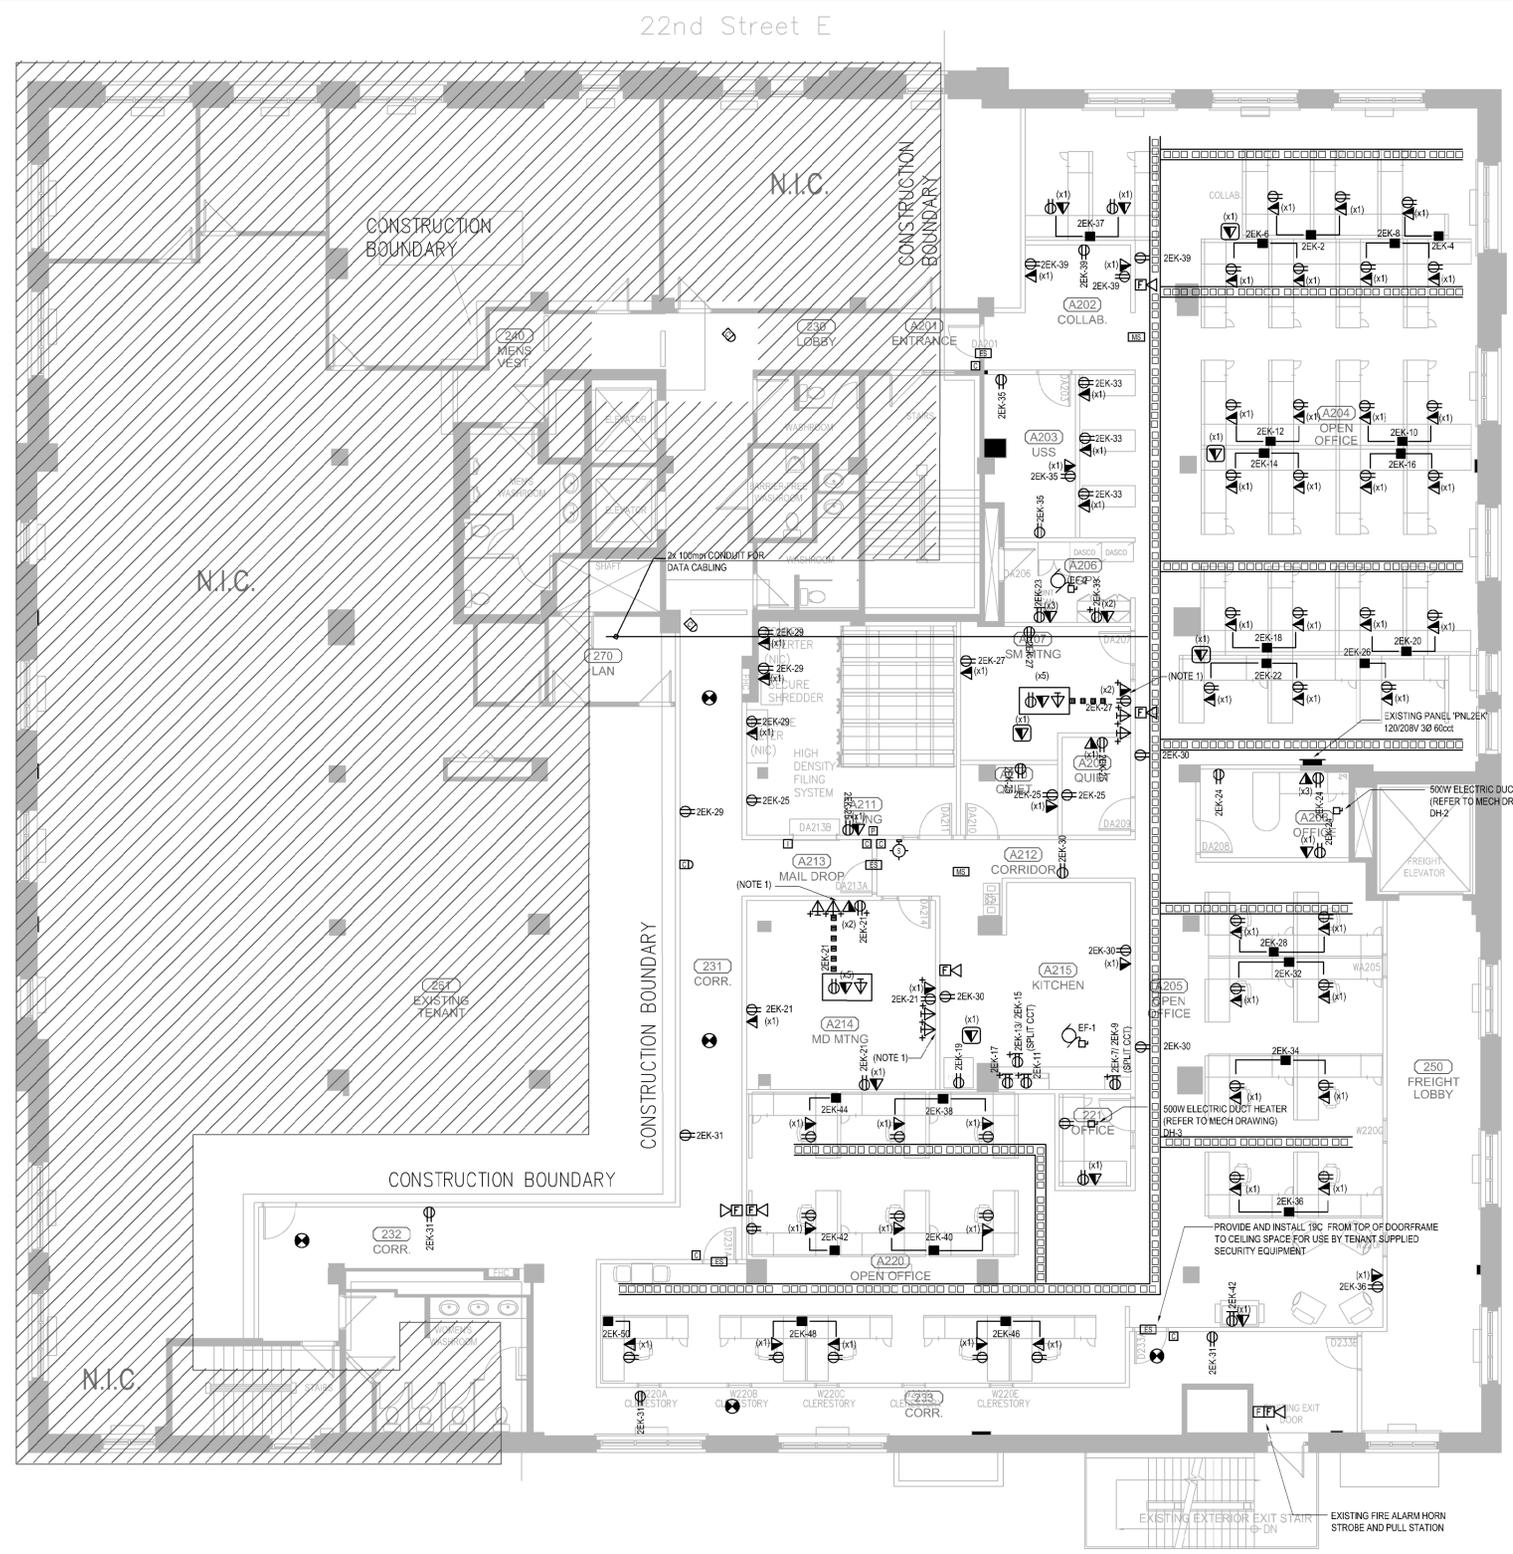

2 AV AND TV MOUNTING DETAIL
 1:30

- ELECTRICAL GENERAL NOTES**
- REFER TO DETAIL #2 "ROOM A214 AND A207 AV AND TV MOUNTING"
 - CONTRACTOR TO PROVIDE NEW TYPE WRITTEN PANEL DIRECTORY UPON COMPLETION OF PROJECT.
 - SOUND MASKING SYSTEM SHALL BE PROVIDED WITHIN ALL RENOVATED AREAS AS PER SPECIFICATION SECTION 27.51.19.

1 2ND FLOOR NEW CONSTRUCTION - POWER & SYSTEMS
 E-4.2 1:100

MOTOR CONTROL SCHEDULE

MOTOR No	DESCRIPTION	HP/NW	VOLTS, PH	FLA	BREAKER	FEEDER	CIRCUIT	STARTER	DISCON.	REMARKS	MOTOR No
EF-1	EXHAUST FAN	..	120V 1Ø	N/A	15A1P	2F12.1#12GRND-19C	2EK-30	MAG SZ 00	15A1P	..	EF-1
EF-2	EXHAUST FAN	..	120V 1Ø	N/A	15A1P	2F12.1#12GRND-19C	2EK-33	MAG SZ 00	15A1P	..	EF-2
DH-2	ELECTRIC DUCT HEATER (2nd FLOOR)	500W	120V 1Ø	4.2A	15A1P	2F12.1#12GRND-19C	2EK-24	BY MANUF.	15A1P	..	DH-2
DH-3	ELECTRIC DUCT HEATER (2nd FLOOR)	500W	120V 1Ø	4.2A	15A1P	2F12.1#12GRND-19C	2EK-24	BY MANUF.	15A1P	..	DH-3