

0 ISSUED FOR TENDER MAR 13 2018

revisions date

project project

**CANADIAN HERITAGE
4th FLOOR FIT-UP
1045 MAIN STREET
MONCTON, NB**

drawing design

**4TH FLOOR EXISTING
& MODIFICATION
FLOOR PLANS
- FIRE PROTECTION**

designed M.A.M. conçu

date DECEMBER, 2017

drawn J.M. dessiné

date DECEMBER, 2017

approved R.M. approuvé

date DECEMBER, 2017

Tender Soumission

PWGC Project Manager Administrateur de projets TPSC

project number no. du projet

R.083347.002

drawing no. no. du dessin

M-1

DRAWING REFERENCE NOTES - DEMOLITION

- EXISTING SEMI-RECESSED PENDENT SPRINKLER HEAD c/w ESCUTCHEON CUPS TO BE REMOVED. REFER TO MODIFICATION PLAN FOR RELOCATION AND SPRINKLER COVERAGE.
- EXISTING SEMI-RECESSED PENDENT SPRINKLER HEAD c/w ESCUTCHEON CUPS TO BE REMOVED. HEADS ARE LOCATED IN SLOPED BULKHEAD AND FLAT GYPSUM BOARD AREA.
- EXISTING FIRE EXTINGUISHER c/w WALL BRACKET TO BE REMOVED AND TURN OVER TO OWNER.
- EXISTING FIRE EXTINGUISHER CABINET c/w EXTINGUISHER AND HOSE VALVE TO BE REMAIN.

4TH FLOOR EXISTING ROOM LIST			
ROOM #	NAMES	ROOM #	NAMES
4454	OPEN OFFICE	4458A	STORAGE
4455	TELE ROOM	4459	OFFICE
4456	EMERGENCY OPS ROOM	4460	OPEN OFFICE
4456A	STORAGE	4461	STAIRWELL
4457	OFFICE	4462	S.R. MEETING ROOM
4458	SPECTRUM	4463	HR FILE ROOM

EXISTING ROOM NAME LIST 3
SCALE : N.T.S. M-1

SYMBOL LEGEND - DEMOLITION

- EXISTING PENDENT SPRINKLER HEAD LOCATION TO REMAIN
- EXISTING PENDENT SPRINKLER HEAD TO BE REMOVED
- EXISTING FIRE EXTINGUISHER CABINET c/w EXTINGUISHER AND HOSE VALVE TO BE REMAIN
- EXISTING FIRE EXTINGUISHER c/w WALL BRACKET TO BE REMOVED

EXISTING SYMBOL LEGEND 4
SCALE : N.T.S. M-1

4TH FLOOR MODIFICATION ROOM LIST			
ROOM #	NAMES	ROOM #	NAMES
4451	KITCHEN	4524D	CORRIDOR
4452	W/R	4524E	OPEN OFFICE
4453	W/R	4524F	CORRIDOR
4454	CORRIDOR	4524G	OPEN OFFICE
4455	TEL DATA	4524H	
4468	LAN	4525	STORAGE CLOSET
4518	ENTRANCE	4526	EQUIP. & MAILING
4519	PRIVATE ROOM	4527	OFFICE
4520	PRIVATE ROOM	4528	Huddle ROOM
4521	MEDIUM MEETING RM	4529	Huddle ROOM
4522	PERSONAL TOWERS	4530	PRIVATE ROOM
4523	LOUNGE CAFE	4530A	SECURITY CLOSET
4524A	OPEN OFFICE	4531	FILE ROOM
4524B	CORRIDOR	4532	SMALL MEETING ROOM
4524C	CORRIDOR		

MODIFICATION ROOM NAME LIST 5
SCALE : N.T.S. M-1


SYMBOL LEGEND - MODIFICATION

- EXISTING PENDENT SPRINKLER HEAD LOCATION TO REMAIN
- EXISTING PENDENT SPRINKLER POSITION TO BE RELOCATED c/w NEW QUICK RESPONSE SPRINKLER HEAD
- EXISTING PENDENT SPRINKLER HEAD TO BE REMOVED
- NEW QUICK RESPONSE PENDENT SPRINKLER HEAD
- EXISTING PENDENT SPRINKLER HEAD TO BE REMOVED AND REPLACED IN SAME LOCATION WITH NEW QUICK RESPONSE PENDENT SEMI RECESSED TWO PIECE WHITE ESCUTCHEON CUP. K=5.6 FACTOR, 25mm N.P.T. THREAD, TEMPERATURE 68°C, WHITE FINISH.
- EXISTING FIRE EXTINGUISHER CABINET c/w EXTINGUISHER AND HOSE VALVE TO BE REMAIN
- NEW SEMI RECESSED FIRE EXTINGUISHER CABINET c/w 4.5 kg ABC MULTI-PURPOSE DRY CHEMICAL FIRE EXTINGUISHER


MODIFICATION SYMBOL LEGEND 6
SCALE : N.T.S. M-1

DRAWING REFERENCE NOTES - MODIFICATIONS

- ALL RECESSED PENDENT SPRINKLER HEADS TO BE REPLACED WITH QUICK RESPONSE TYPE SPRINKLER HEADS. K=5.6 FACTOR, 68°C TEMPERATURE, 25mm N.P.T. THREAD, WHITE FINISH.
- PIPING INSTALLATION METHOD FOR THE RELOCATED SPRINKLER HEADS TO BE DETERMINED ON SITE. REFER TO RETURN BEND OR FLEXIBLE HOSE DETAIL FOR INSTALLATION DETAILS.
- REFER TO ELECTRICAL LIGHTING DRAWINGS FOR LOCATIONS AND FIXTURE TYPES
- REFER TO MECHANICAL HVAC DRAWINGS FOR LOCATIONS AND DIFFUSER TYPES
- EXISTING FIRE EXTINGUISHER CABINET AND EXTINGUISHER TO REMAIN

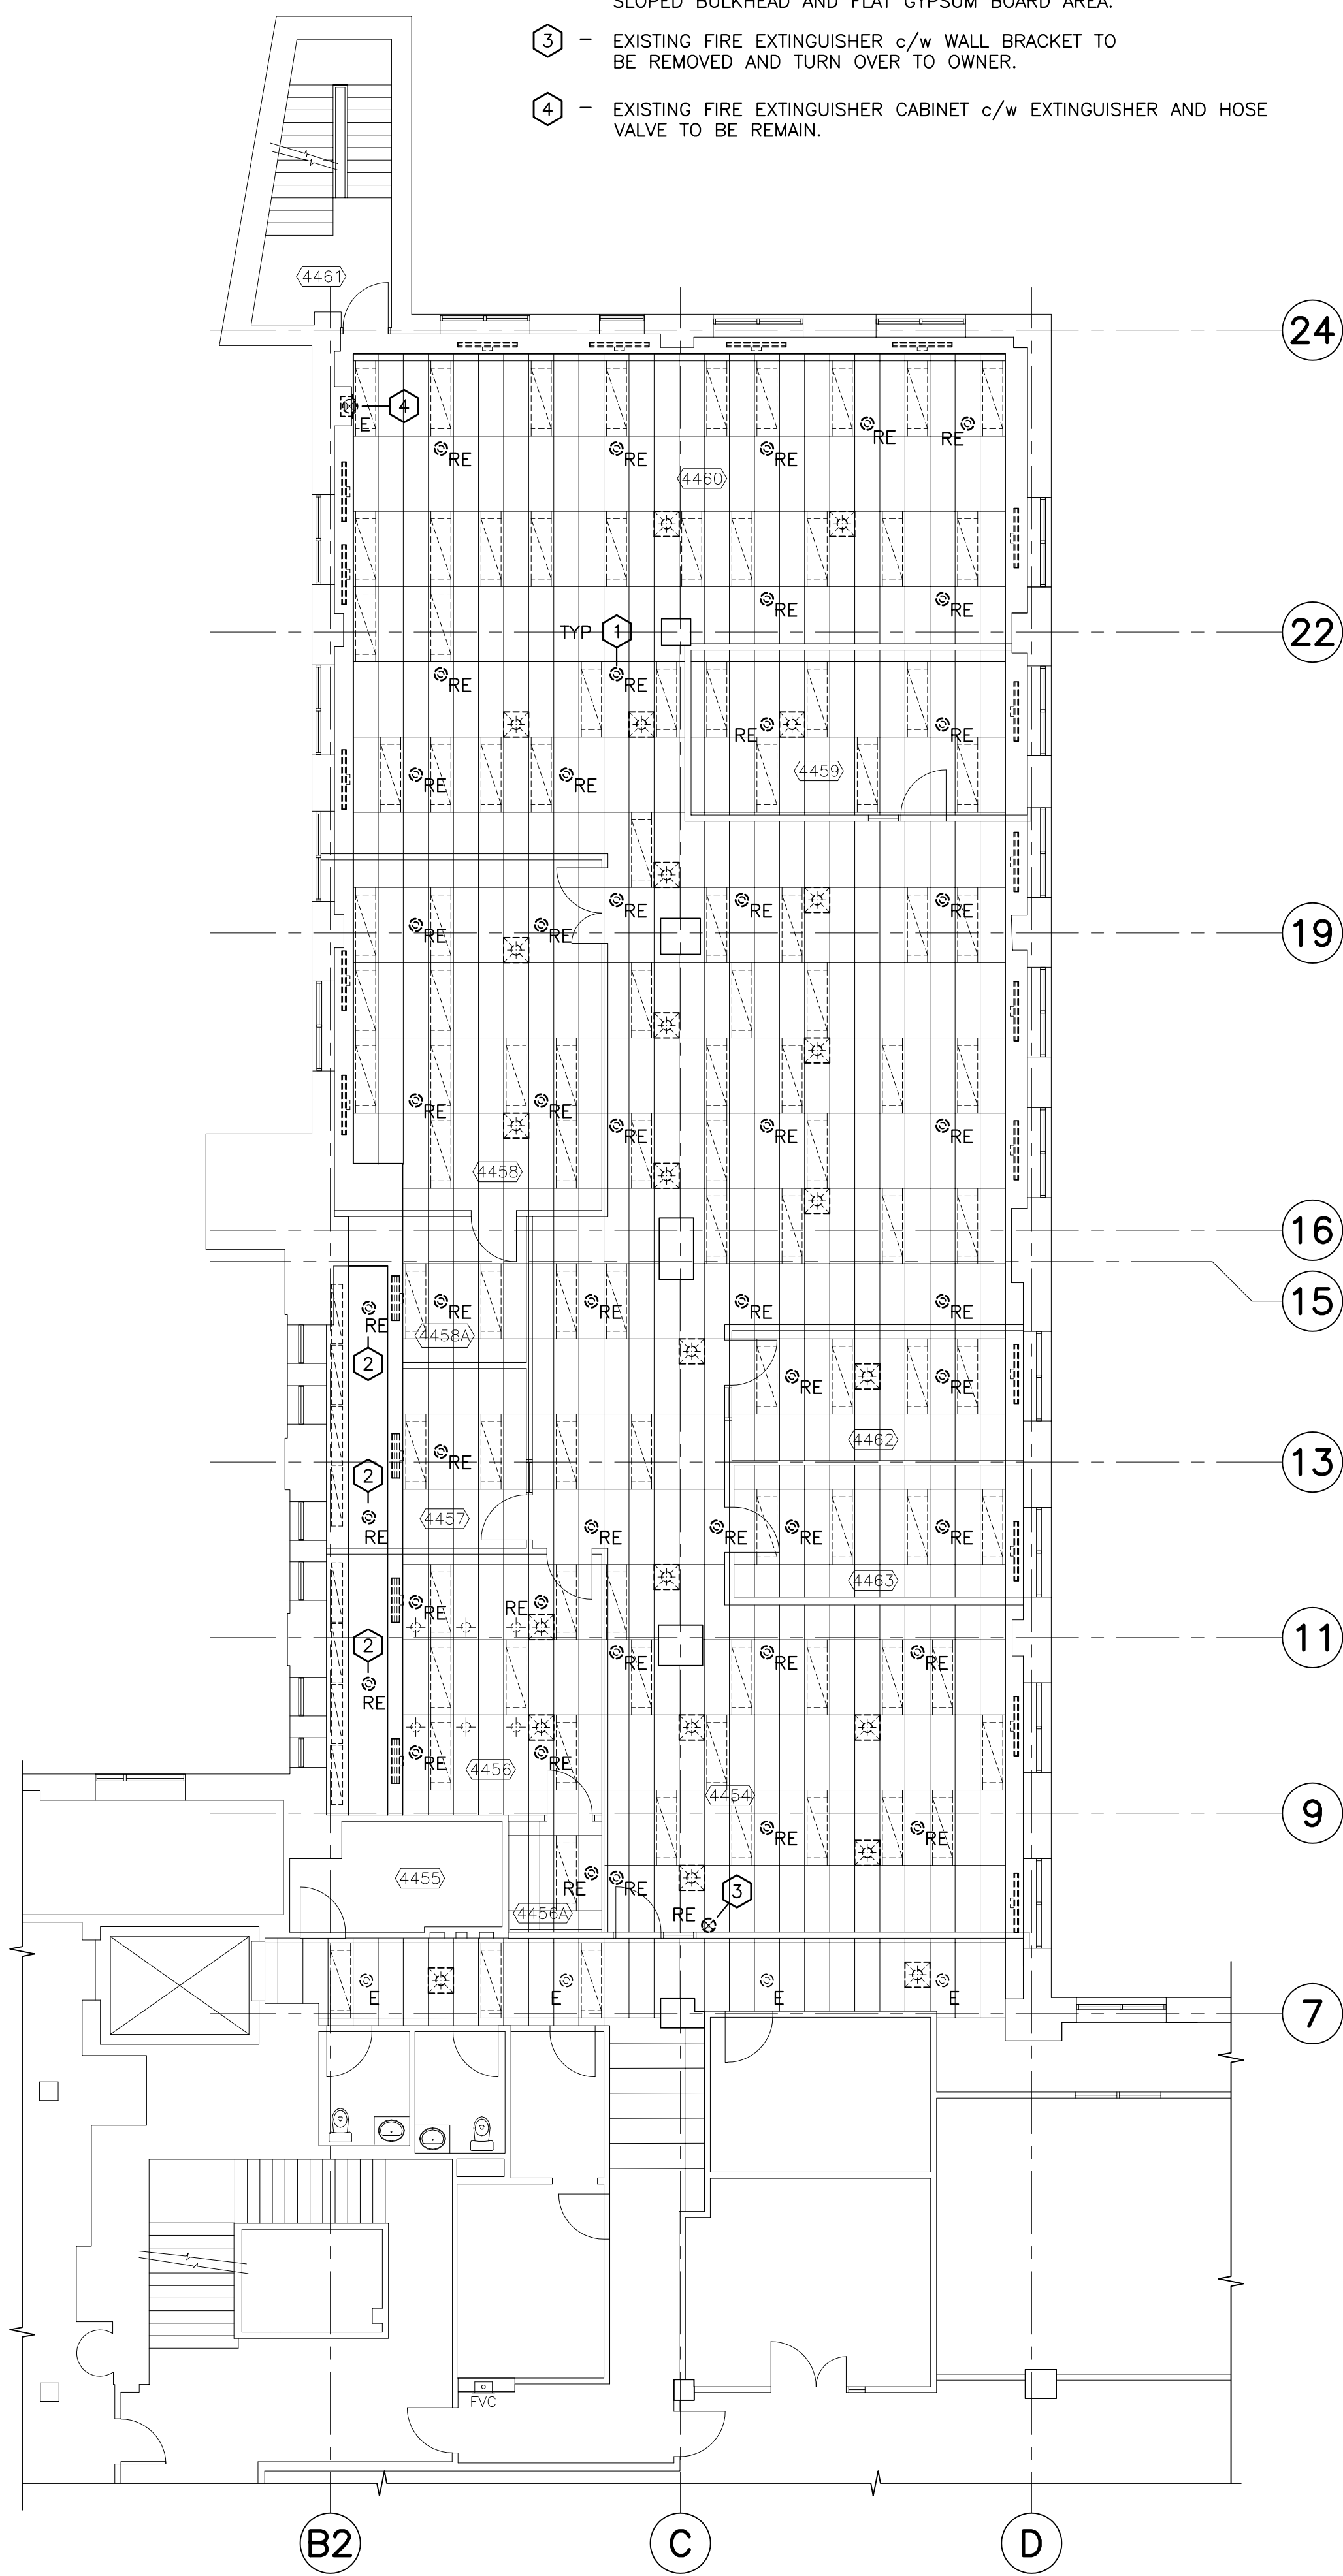

4TH FLOOR EXISTING FLOOR PLAN - FIRE PROTECTION 1
SCALE : 1:100 M-1

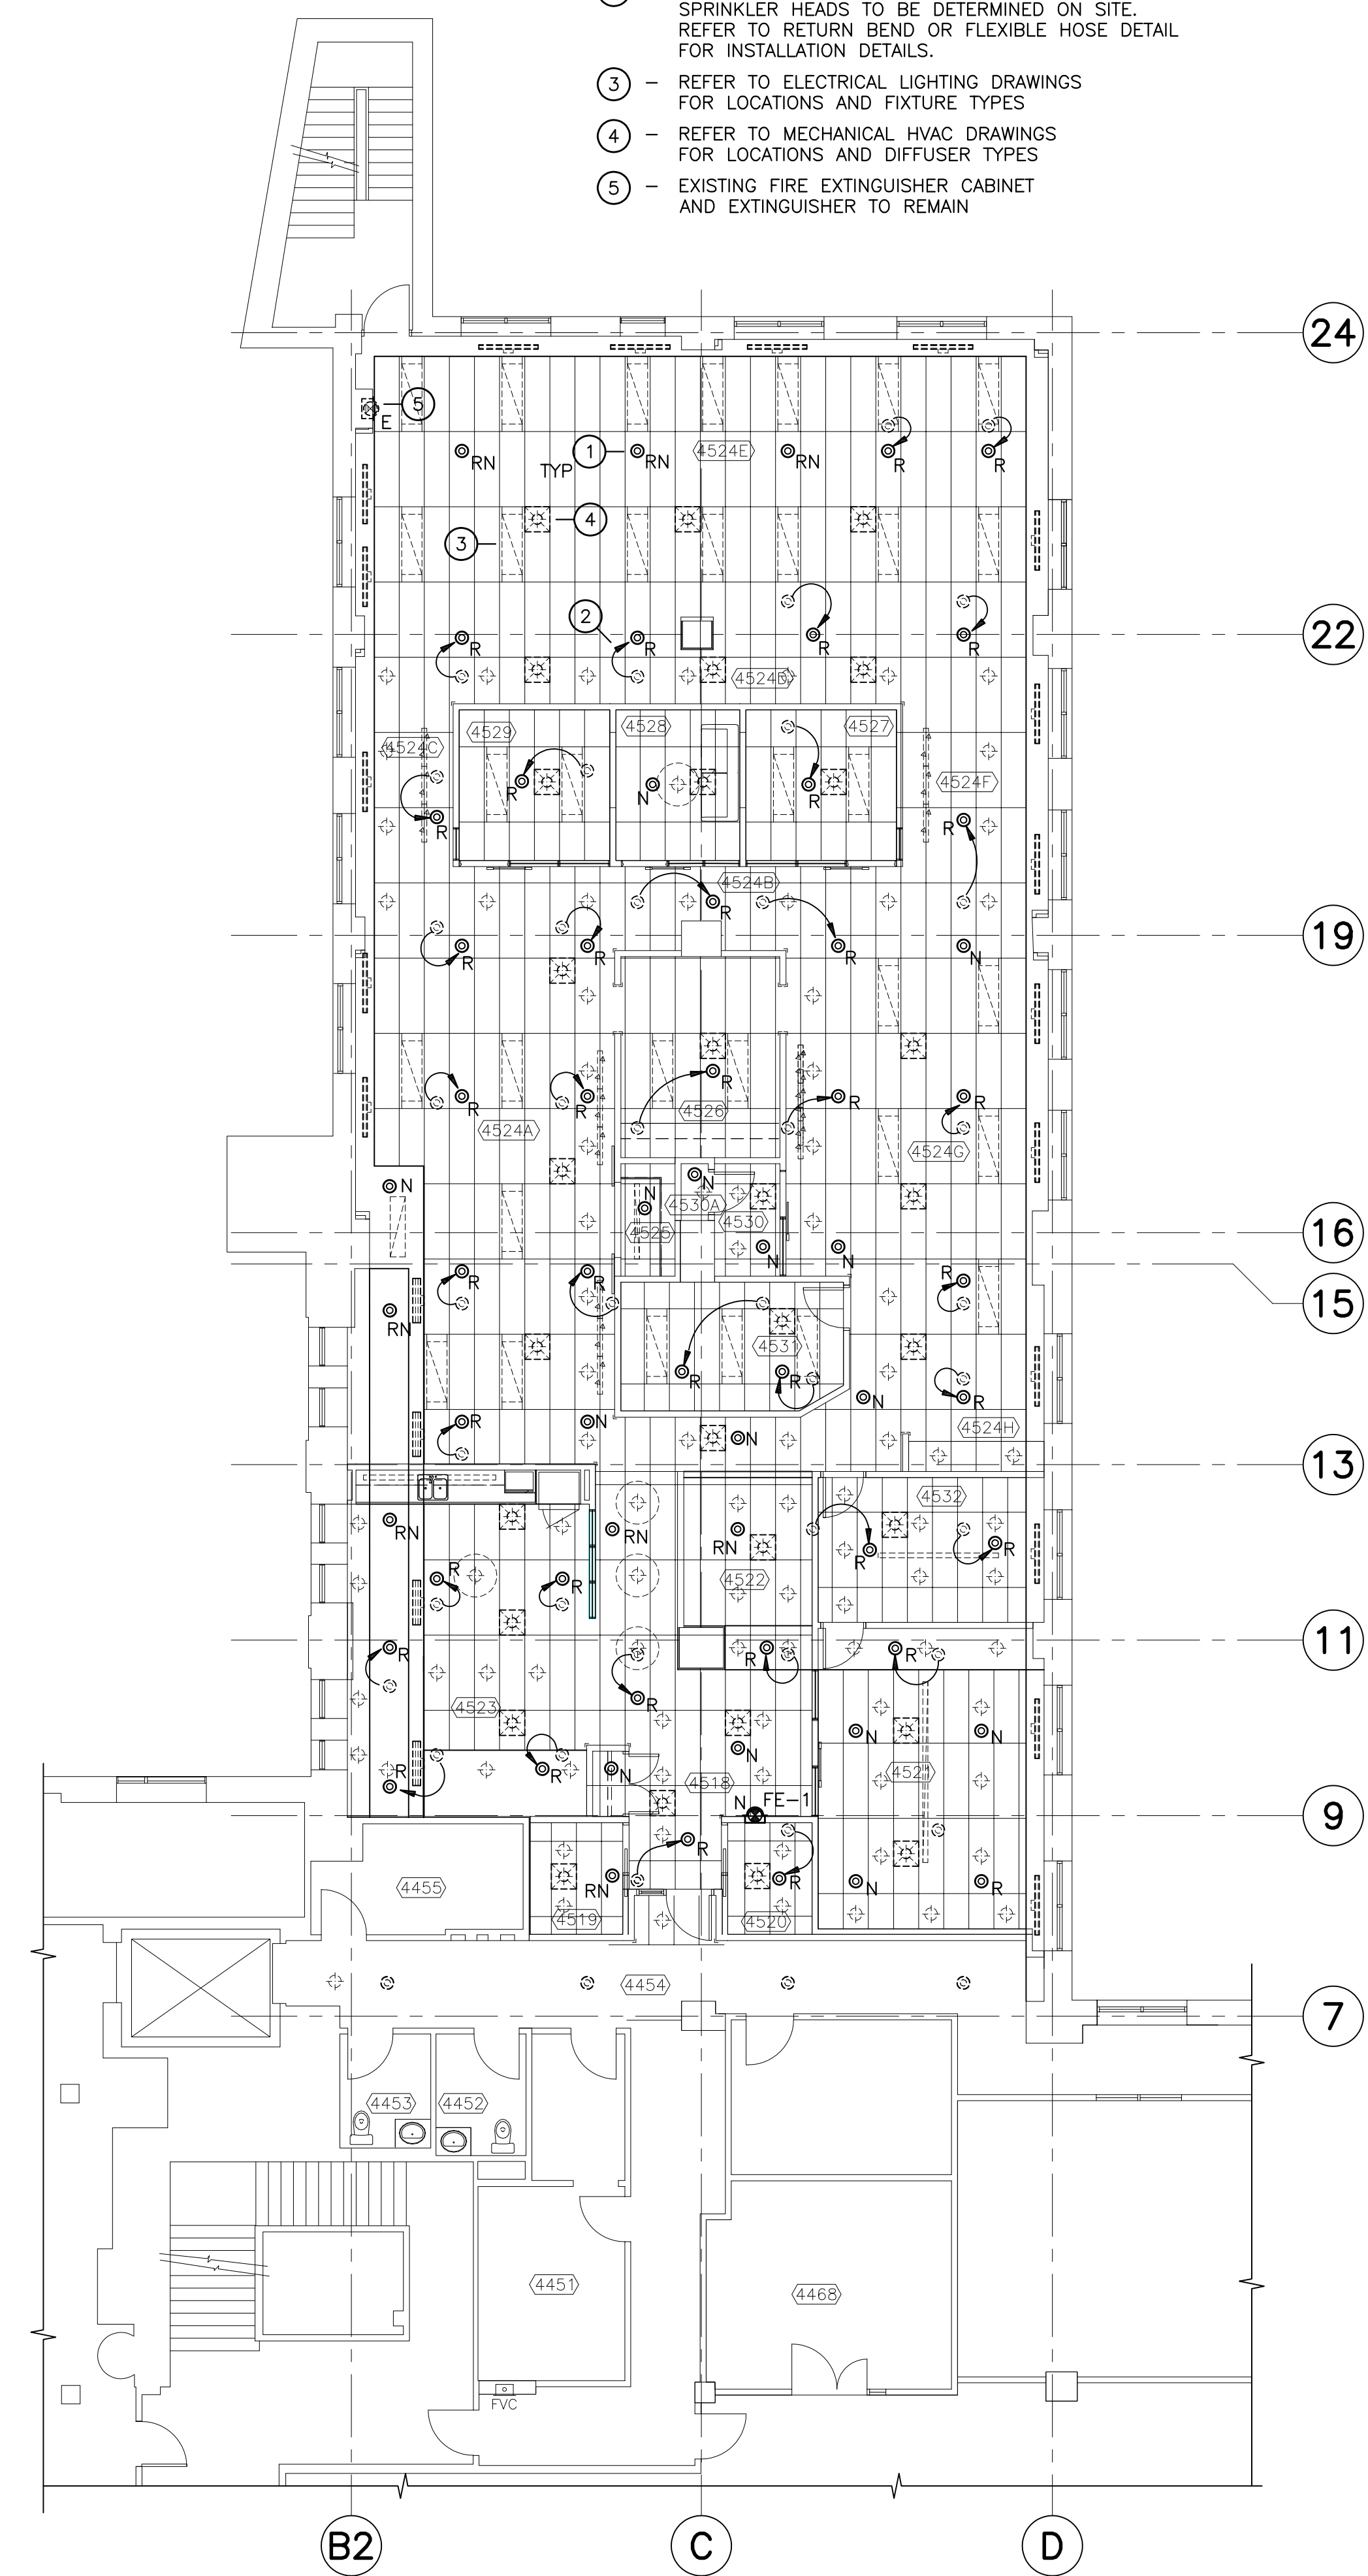

4TH FLOOR MODIFICATION FLOOR PLAN - FIRE PROTECTION 2
SCALE : 1:100 M-1