



RETURN BIDS TO:

RETOURNER LES SOUMISSIONS À:

Réception des soumissions - TPSGC / Bid Receiving -
PWGSC
1550, Avenue d'Estimauville
1550, D'Estimauville Avenue
Québec
Québec
G1J 0C7

**SOLICITATION AMENDMENT
MODIFICATION DE L'INVITATION**

The referenced document is hereby revised; unless otherwise indicated, all other terms and conditions of the Solicitation remain the same.

Ce document est par la présente révisé; sauf indication contraire, les modalités de l'invitation demeurent les mêmes.

Comments - Commentaires

Vendor/Firm Name and Address
Raison sociale et adresse du
fournisseur/de l'entrepreneur

Issuing Office - Bureau de distribution
TPSGC/PWGSC
601-1550, Avenue d'Estimauville
Québec
Québec
G1J 0C7

| | |
|---|--|
| Title - Sujet Roulotte de chantier | |
| Solicitation No. - N° de l'invitation W7701-186770/A | Amendment No. - N° modif. 003 |
| Client Reference No. - N° de référence du client W7701-186770 | Date 2018-05-24 |
| GETS Reference No. - N° de référence de SEAG PW-\$QCL-050-17372 | |
| File No. - N° de dossier QCL-7-40307 (050) | CCC No./N° CCC - FMS No./N° VME |
| Solicitation Closes - L'invitation prend fin at - à 02:00 PM on - le 2018-05-29 | |
| Time Zone Fuseau horaire Heure Avancée de l'Est HAE | |
| F.O.B. - F.A.B. | |
| Plant-Usine: <input type="checkbox"/> Destination: <input checked="" type="checkbox"/> Other-Autre: <input type="checkbox"/> | |
| Address Enquiries to: - Adresser toutes questions à: Martinich, Estefania | Buyer Id - Id de l'acheteur qcl050 |
| Telephone No. - N° de téléphone (418) 649-2782 () | FAX No. - N° de FAX (418) 648-2209 |
| Destination - of Goods, Services, and Construction: Destination - des biens, services et construction: | |

Instructions: See Herein

Instructions: Voir aux présentes

| | |
|--|--|
| Delivery Required - Livraison exigée | Delivery Offered - Livraison proposée |
| Vendor/Firm Name and Address Raison sociale et adresse du fournisseur/de l'entrepreneur | |
| Telephone No. - N° de téléphone Facsimile No. - N° de télécopieur | |
| Name and title of person authorized to sign on behalf of Vendor/Firm (type or print) Nom et titre de la personne autorisée à signer au nom du fournisseur/ de l'entrepreneur (taper ou écrire en caractères d'imprimerie) | |
| Signature | Date |


Amendment 003 is intended to answer some industry questions.

1. Do you require this unit to be trailer mounted on wheels? **Yes**
The drawing shows a structural frame but can't determine if that is to be a wheeled unit or skidded? **See page 12 of the request of proposal, section 5.1.17**
2. Do you prefer electric or gas/propane heat? **Electric**
3. Can you provide details on Annex A, requirement 5.1.15: "16 tripods / stabilizers"?
Quantity of tripods = 16; 8 on each side. These will be used to stabilize the trailer once in its place.
4. Can you provide details on Annex A, requirement 5.1.16 "2 stanchions"
The requirement is for the standard stairways- as recommended in the industry.
5. What is the desired interior ceiling height?
8 feet – standard
6. What is the preference for interior floor and wall/ceiling finish?
Floor : linoleum
Wall and ceiling : vinyl
7. Section 5.1.11 - Can you provide a picture of the 10x10 inch doors that are required for the passage cables or technical specs on them?
For illustrative purposes only, here are some pictures that show a door for the passage of cables. However, please note that the requested dimensions are 10 x 10 inch.

Solicitation No. - N° de l'invitation
W7701-186770/A
Client Ref. No. - N° de réf. du client

Amd. No. - N° de la modif.
003
File No. - N° du dossier
W7701-186770

Buyer ID - Id de l'acheteur
qc1050
CCC No./N° CCC - FMS No./N° VME
QCL-7-40307

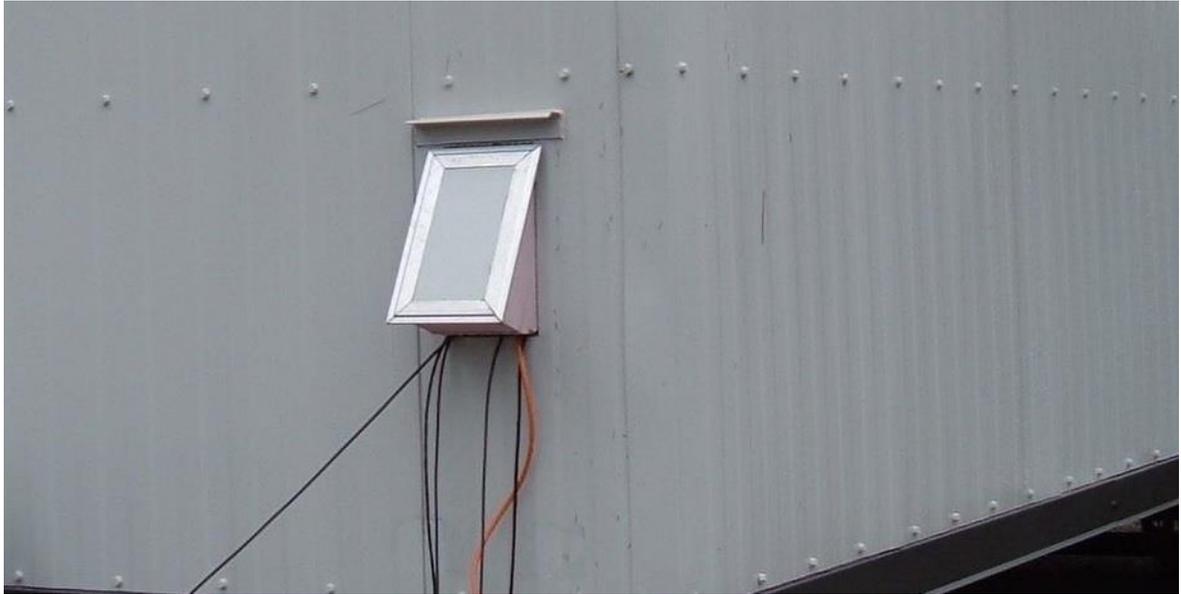

8. Section 5.1.17 – Typically 4 is the maximum number of axles to put on a trailer for transportation purposes can you confirm that is okay?

We can accept 4 or 6 axles if they are able to support all the weight of the trailer and if it meets Transport regulation.

9. Section 5.1.19 – Do you have a picture of what you are looking for. Why is a steel plate required on the roof as this will make the trailer extremely heavy

No, because the steel plate is hidden. This is require to protect the shelter and the people working inside against the debris that can be produced during explosions

10. Section 5.1.22 – what do you mean by reinforcement of structure?

We ask for a solid trailer, we don't want to end up with a shelter built in 2x4. To meet this criterion, you must simply respect the specifications mentioned on page 12 of the request of proposal, section 5.1.22 and the specifications found on the plans provided.

11. Section 5.1.4 - 100 amp minimum electrical circuit box with an 100 amps outlet (60 amps minimum) to be powered by a generator, see Plan no.5 - Wall B.

The power provided on site will be 120/240V and for the generator, you must to provide a transfer switch with connection for when the unit would get connected to a generator.

12. Section 5.1.5 - Protected circuit to avoid damage to equipment. The request is to incorporate a protecting system to the circuit. There are different kinds of products available on the market with high price difference. What should we choose?

We do not require any particular product. You are free to choose the brand or product you want on the market, as long as it protects valuable equipment. The global offer will be evaluated only on the basis of the lowest price.

13. Section 5.1.12 Quantity four (4) heating units with wall thermostat, installed on Walls A, B and C see Plan no. 2

Four (4) electrical baseboards that provide heating are required. The temperature must be adjustable using a wall thermostat. However, as mentioned on page 13 of the Request for Proposal, Section 14 "Special Considerations", heating and air conditioning can be combined into a heat pump. The global offer will be evaluated only on the basis of the lowest price.

14. Section 5.1.13 Quantity three (3) air conditioning units with a minimum of 8,000 BTUs distributed on Wall B see Plan no. 2.

It consists of three (3) wall-mounted air conditioning units with the drain pipe for the water that passes inside the wall. However, as mentioned on page 13 of the Request for Proposal, Section 14 "Special Considerations", the heating and air

conditioning can be combined into a heat pump. The global offer will be evaluated only on the basis of the lowest price.

15. Can you provide details on section 5.1.16 Quantity two (2) stanchions and stairs galvanized, screened, in accordance with building code.
You must provide duckboard stairs so snow and water can go through. The request is to get stairs as per the industry standard.
16. Section 5.1.19 Steel plate at least 3/16 inch thick, located on the trusts under the roof membrane.
This will add significant weight on the unit. This brings us to ask another question to know if this unit could be modular (wood structure with no steel frame and no axles/wheels) so that the weight of the unit does not become a problem anymore?
The trailer must be on wheels and the required steel plate is needed to protect the shelter and the people working inside from the debris that may be produced during explosions. No other proposal will be accepted.
17. Section 5.1.21 Standard roof shingles for construction trailers, enabling evacuation of water.
There is an error in the statement of work. You should read 'Standard roof for trailer, instead of 'Standard roof shingles for construction trailers'. We do not require shingles on the roof. We only require standard roof for trailer that enable evacuation of water.
18. Section 1.22.3 insulated roof with R28, as well as 2 x 10 inches joists.
Comment received: «2x10 for 16' wide roof does not meet snow load capacity. Roof should be built with 2x12 to respect snow loads requirements, and would offer insulation ratio of R-40»
We are asking for a strong roof so that it can support the weight of the steel plate. To satisfy this criterion, you must at the minimum respect the characteristics mentioned on page 12, section 5.1.22.3.

**** All other terms and conditions remain the same ****