
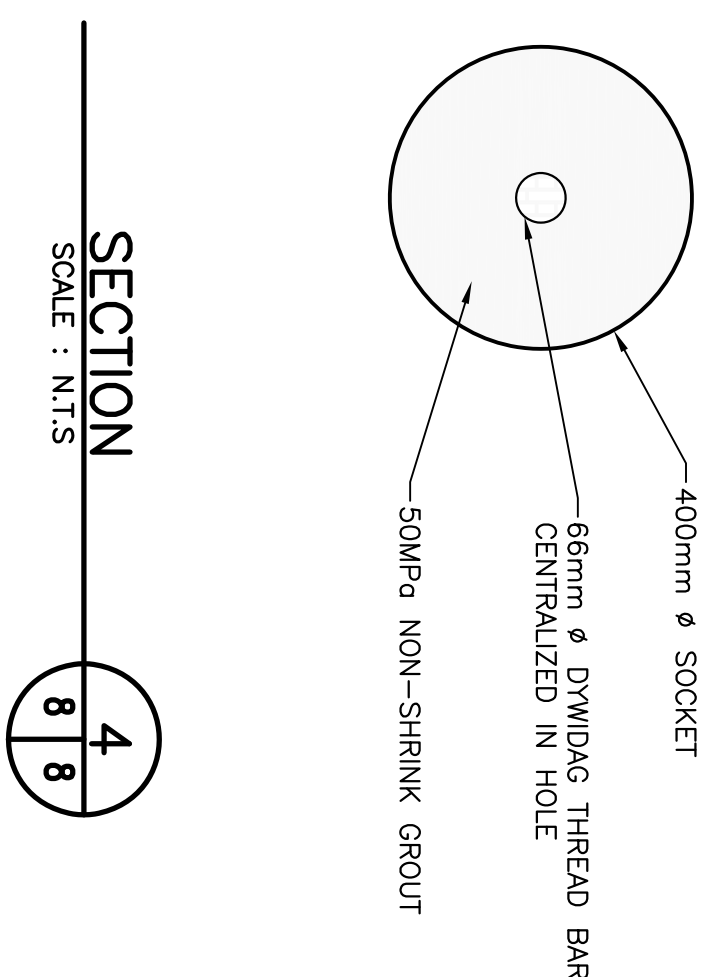
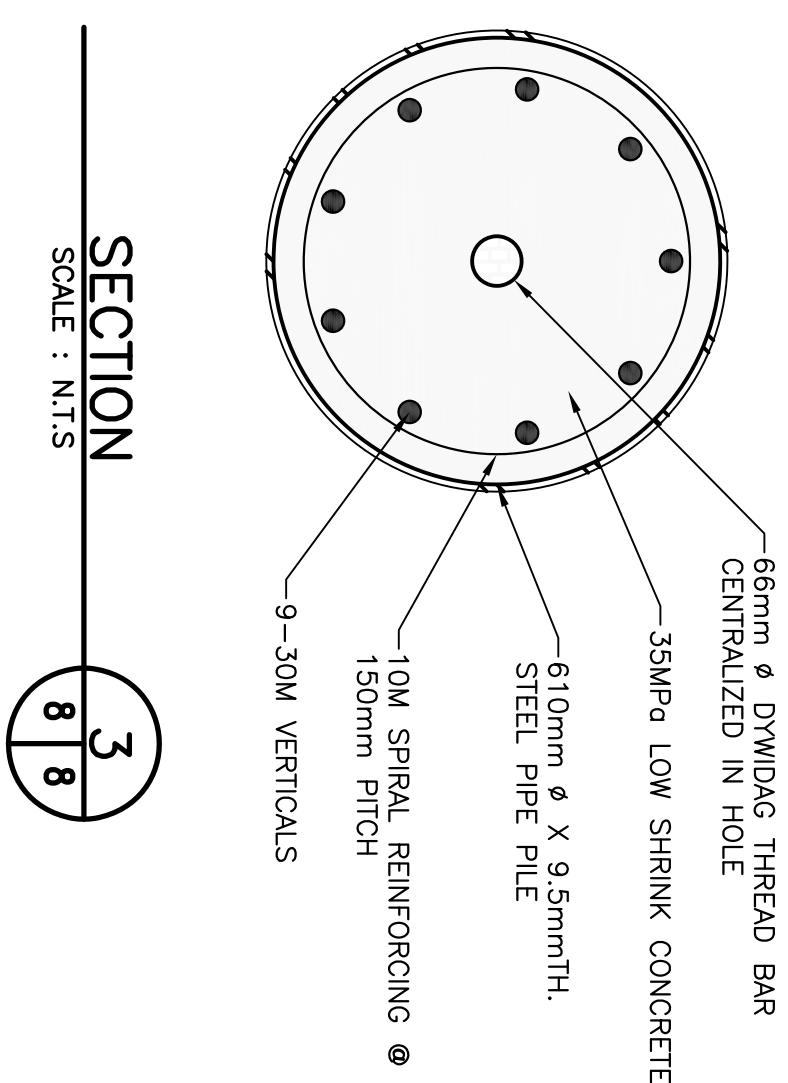
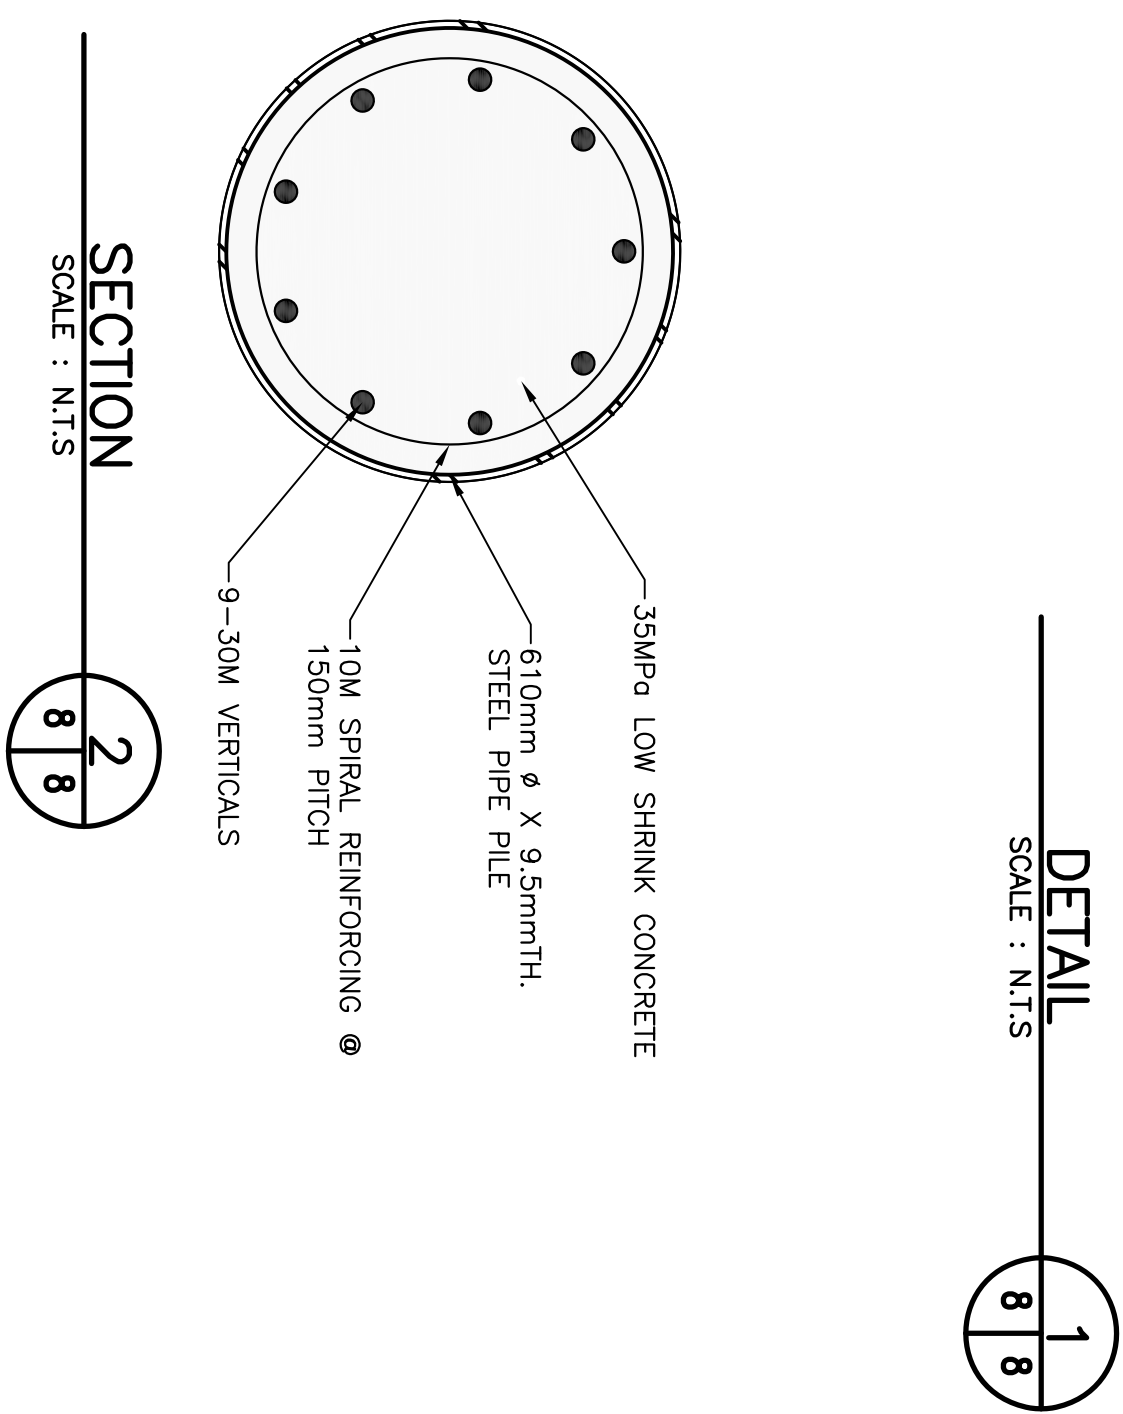


GENERAL NOTES

-
1. DO NOT SCALE FROM DRAWINGS.
2. CONTRACTOR MUST VERIFY ALL DIMENSIONS AND LOCATIONS OF REINFORCEMENT PROCEEDING WITH ANY PORTION OF THIS WORK.
3. REFERENCE SPECIFICATIONS FOR CONCRETE.
4. REBAR COVER TO BE 75mm UNLESS NOTED OTHERWISE.
5. COATING ON STEEL PILE AND STEEL SHEET PILING TO BE 3 LITERS COATS OF AMERCOCK 2 SURFACE TOLERANT EPOXY (6-8 MILS DRY FILM THICKNESS PER COAT). STEEL SURFACE TO BE PREPARED AS PER MANUFACTURERS REQUIREMENTS. COATING OF STEEL SHEET PILING IS NOT REQUIRED TO BE USED WHERE TOUCH UP REPAIRS ARE NECESSARY AT WELDING ATTACHMENT LOCATIONS.
- CONCRETE FILL
- 10M SPIRAL REINFORCEMENT
- 30M VERTICAL
- 2
- 8
- 8

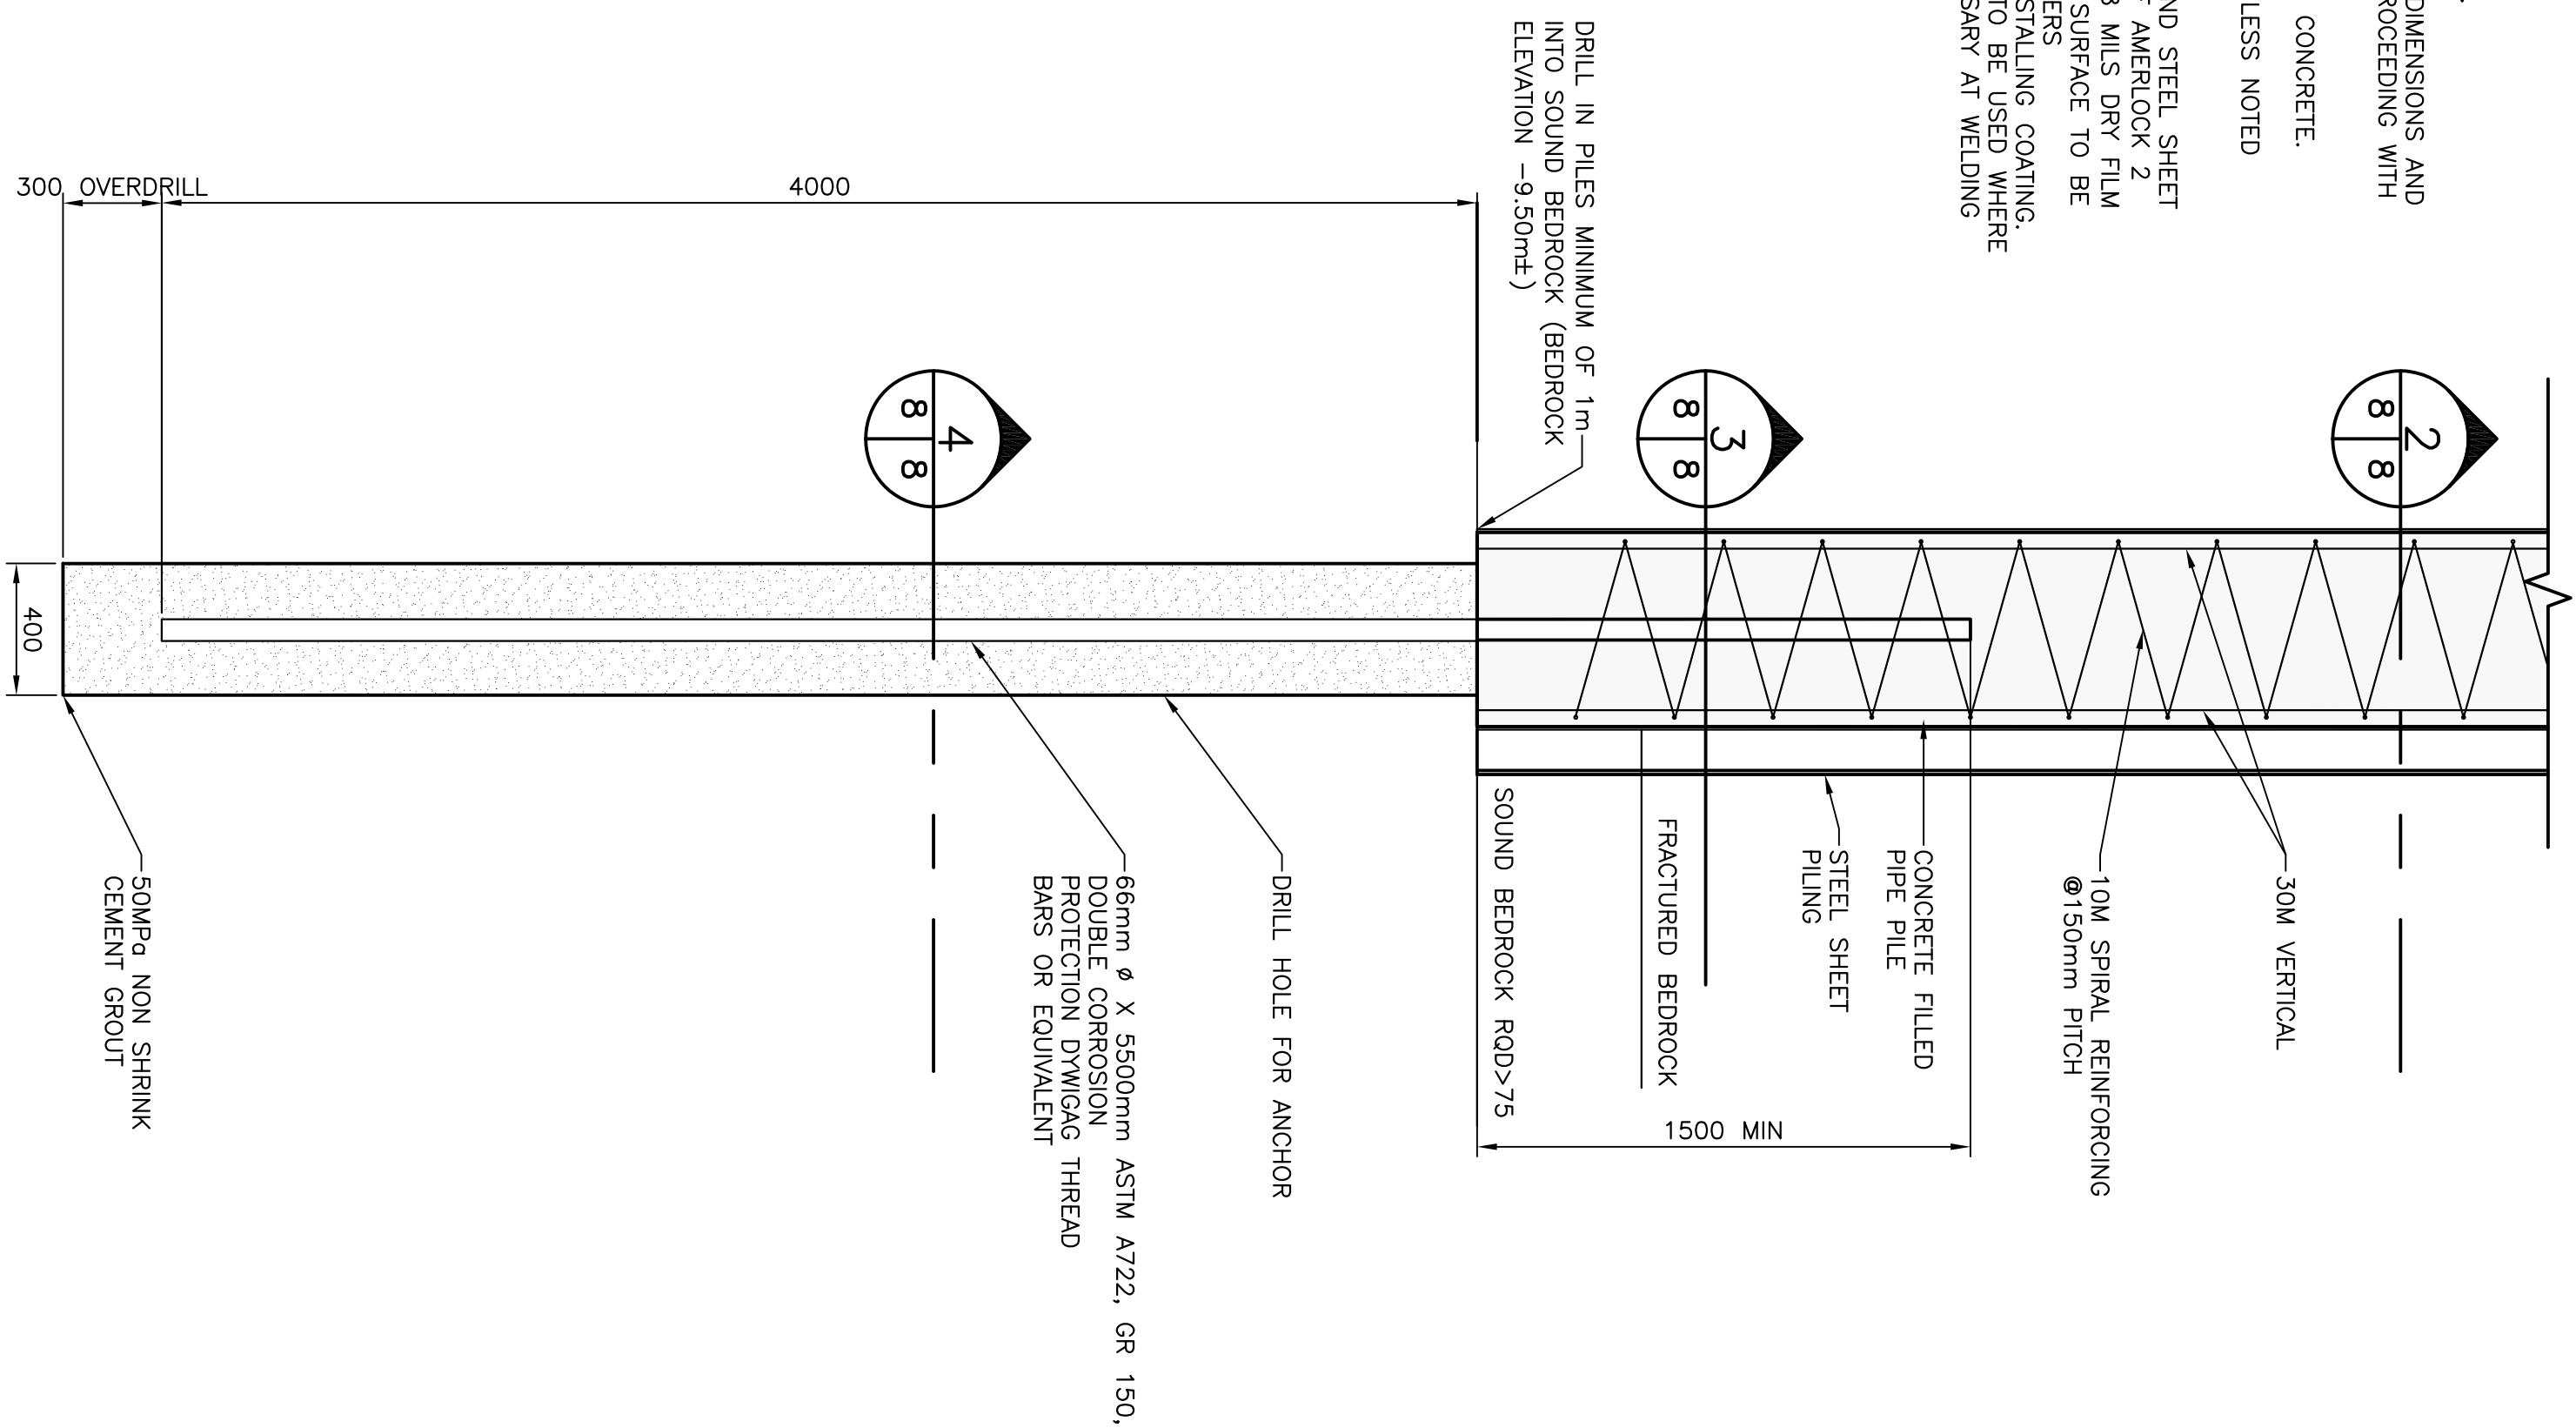

C	ISSUED FOR TENDER	11/23/1
B	ISSUED FOR 99% REVIEW	9/4/1
A	ISSUED FOR REVIEW	8/10/1
revisions		date

WHARF REPAIRS
BURIN, NL

drawing	dessin
---------	--------

PILE DETAILS

designed	N.H.	comp
date	NOVEMBER 23, 2018	
dram	P.H.	designe
date	NOVEMBER 23, 2018	
approved	<i>SSA VLS</i>	approve
date	NOVEMBER 23, 2018	
sender		Sounstion

R.096621.001

drowning no.	no. du desir
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

33