





1. CONTRACTOR IS RESPONSIBLE TO PROVIDE HEAT DETECTORS (CR135) IN THE SPACE AS SHOWN AND CONNECT THEM TO THE EXISTING FIRE ALARM LOOP IN THE SAME MANNER AS EXISTING DETECTOR COMPONENTS ARE CONNECTED.

3. CONTRACTOR IS RESPONSIBLE TO PROVIDE UPDATED VERIFICATION REPORT.


4. CONTRACTOR IS RESPONSIBLE TO PROVIDE AND INSTALL 150mm DIAMETER FIRE ALARM BELL IN THE SPACE AS SHOWN AND CONNECT THEM TO THE EXISTING FIRE ALARM LOOP. MOUNTING HEIGHT MUST NOT BE LESS THAN 150mm FROM THE UNDERSIDE OF CEILING TO THE TOP OF THE GONG.



FIRE ALARM	
SYMBOL	DESCRIPTION
	HEAT DETECTOR (COMBINATION FIXED RATE AND RATE OF RISE - 57°F) - CR 135
	FIRE ALARM BELL - 150mm DIAMETER

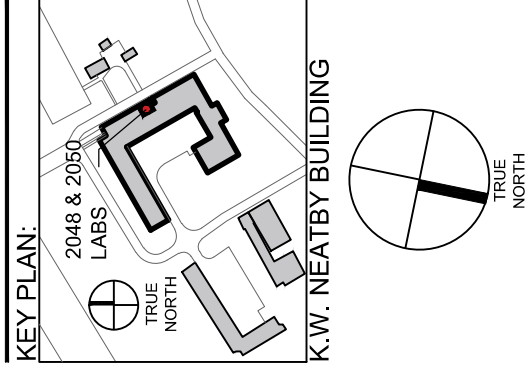

SLIP	DESCRIPTION	DATE
0	ISSUE FOR CONSTRUCTION	06/16/2018
1	ADDENDUM 1	07/05/2018

 Agriculture and Agri-Food Canada
Agriculture et Agroalimentaire Canada

K.W. NEATBY BUILDING - BUILDING 25
RENOVATION OF LABS 2048 & 2050

SHEET TITLE:
FIRE ALARM PLAN

SCALE:	AS INDICATED
DATE:	07/10/2017
DRAWN:	JT
CHECKED:	SR
PROJECT:	74019688
SHEET NO:	

E-401R1