


GENERATOR CONNECTIONS



NOTES:




1. KATO ENGINEERING RECOMMENDS SHIELDED WIRING FOR MAXIMUM EMI SUPPRESSION. USE TWISTED PAIR, SHIELD GROUNDED TO CHASSIS AT BOTH ENDS, ON ALL SHIELDED WIRING.

2. ALL RTD WIRE #22 AWG. MINIMUM

3. ALL WIRING RATED 600V. MINIMUM UNLESS OTHERWISE STATED.

ENCLOSURES WITH THIS
LINE TYPE, ARE INDIVIDUAL
LEAD JUNCTION BOXES.
UNLESS OTHERWISE NOTED.

MOTOR CONNECTIONS

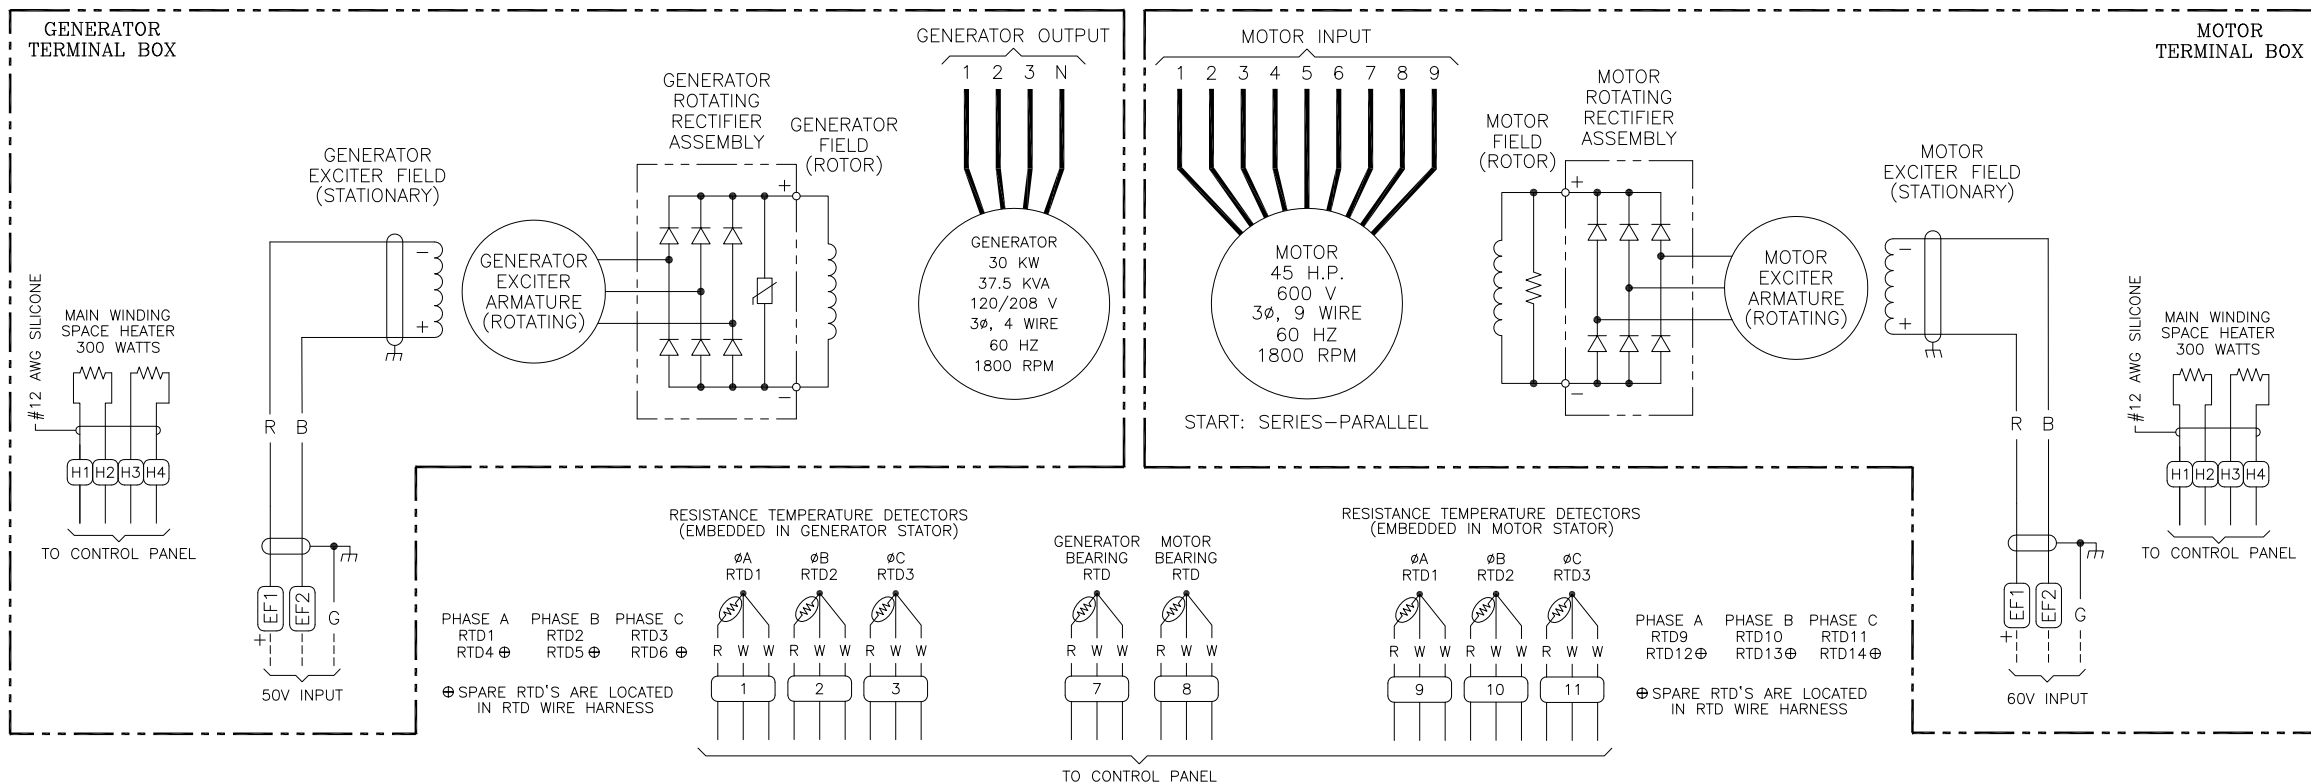

THE INFORMATION HEREON IS THE PROPERTY OF KATO ENGINEERING.
WITHOUT WRITTEN PERMISSION, ANY COPYING, TRANSMITTAL TO OTHERS,
AND ANY USE EXCEPT THAT FOR WHICH IT IS LOANED IS PROHIBITED.

REV

A

NEE DLB 8-27-18 47796

MAT'L NONE

TITLE MOTOR GENERATOR
CONNECTION DRAWING**Kato
Engineering**2075 Howard Drive West
North Mankato, MN 56003

DRAWING NUMBER SH 1 OF 1

888-00477-96