


DOOR SCHEDULE

Door Number		Room Name	Door Schedule						Glazing	Door		Frame			Hardware	Remarks	
			Fire Rating	Size		Door Frame Type	Door Material	Frame Material		Frame Finish	Frame Dimension	Threshold Dimension					
				Width	Height												
Main Floor																	
E04	NEW PROGRAM ROOM		915	2150	45	J	HM	P	PS	P					meets level B protection as per CSC Technical Criteria, section 6.4.2.1, glazing	06	New Door, Existing Frame (To meet Builder Hardware (BH))
E05	NEW BARRIER FREE WC		915	2150	45	A	HM	P	PS	P					No Glazing	03	New Door and Frame (To meet Builder Hardware (BH))
E07	NEW PROGRAM ROOM		915	2150	45	H	HM	P	PS	P					to meet level B protection as per CSC Technical Criteria, section 6.4.2.1, glazing	05	New Door, Existing Frame (To meet Builder Hardware (BH))
E09B	CORRIDOR E09 TO E02		915	2150	45	B	HM	P	PS	P					to meet level B protection as per CSC Technical Criteria, section 6.4.2.1, glazing	07	New Door, Existing Frame (To meet Builder Hardware (BH))
E12	NEW WAITING AREA		915	2150	50	H	HM	P	PS	P					Commercial Level 3 Window, 16, 16	02	New Door (To meet Builder Hardware (BH))
E13	NEW VIDEO CONTROL ROOM		915	2150	50	E	HM	P	PS	P					Window light - seems to be a window, not a door	04	New Door and Frame (To meet Builder Hardware (BH))
E15A	OBSERVATION GALLERY		915	2150	50	G	HM	P	HM	P					meets level B protection as per CSC Technical Criteria, section 6.4.2.1, glazing	08	New Door and Frame (To meet Builder Hardware (BH))
E15B	OBSERVATION GALLERY		915	2150	50	G	HM	P	HM	P					meets level B protection as per CSC Technical Criteria, section 6.4.2.1, glazing	09	New Door and Frame (To meet Builder Hardware (BH))
E15C	MECHANICAL SPACE		600	2150	45	D	HM	P	PS	P					-	10	New Door and Frame (To meet Builder Hardware (BH))
E16	NEW BR-SHOWER		915	2150	-	C	S	PS	PS	P					6mm Laminated glass with stainless steel framescrewed to gate with security screws	12	New Door (To meet Builder Hardware (BH))
E18	NEW CELL		860	2150	50	F	HM	P	PS	P					-	11	New Door and Frame (To meet Builder Hardware (BH))
E19	NEW CELL		860	2150	50	F	HM	P	PS	P					-	11	New Door and Frame (To meet Builder Hardware (BH))
E36	NEW WELLNESS ROOM		915	2150	45	A	HM	P	PS	P					-	06	New Door and Frame (To meet Builder Hardware (BH))
E09A	CORRIDOR E01 TO E09		915	2150	45	A	HM	P	PS	P					-	01	New Door and Frame (To meet Builder Hardware (BH))


DOOR TYPES / ELVATIONS

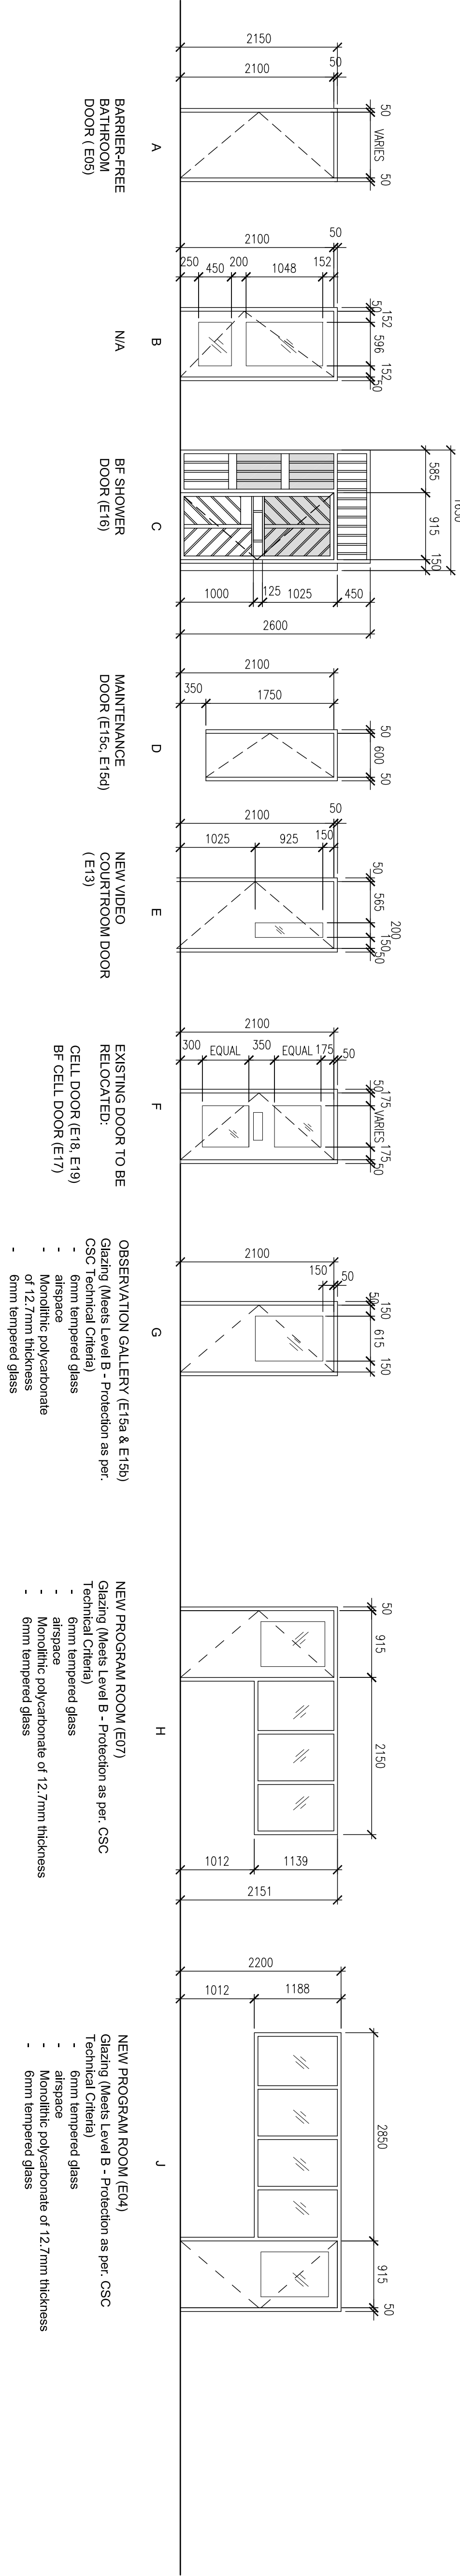

WINDOW SCHEDULE

WINDOW SCHEDULE (EXTERIOR)					
TYPE MARK	WIDTH	HEIGHT	HEAD HEIGHT	OPERATOR	NOTES
W1	1000	1600	2400	YES	meets Definition Level 2 (DL2) - For Secure Construction 3 application.
W2 (existing)	-	-	-	-	new glazing only; meets level B protection as per CSC Technical Criteria; section 6.4.2.1, glazing, frames: to remain, to be cleaned and repaired.
W3 (existing)	-	-	-	-	new glazing only; meets level B protection as per CSC Technical Criteria; section 6.4.2.1, glazing, frames: to remain, to be cleaned and repaired.
				</	

WINDOW ELEVATIONS

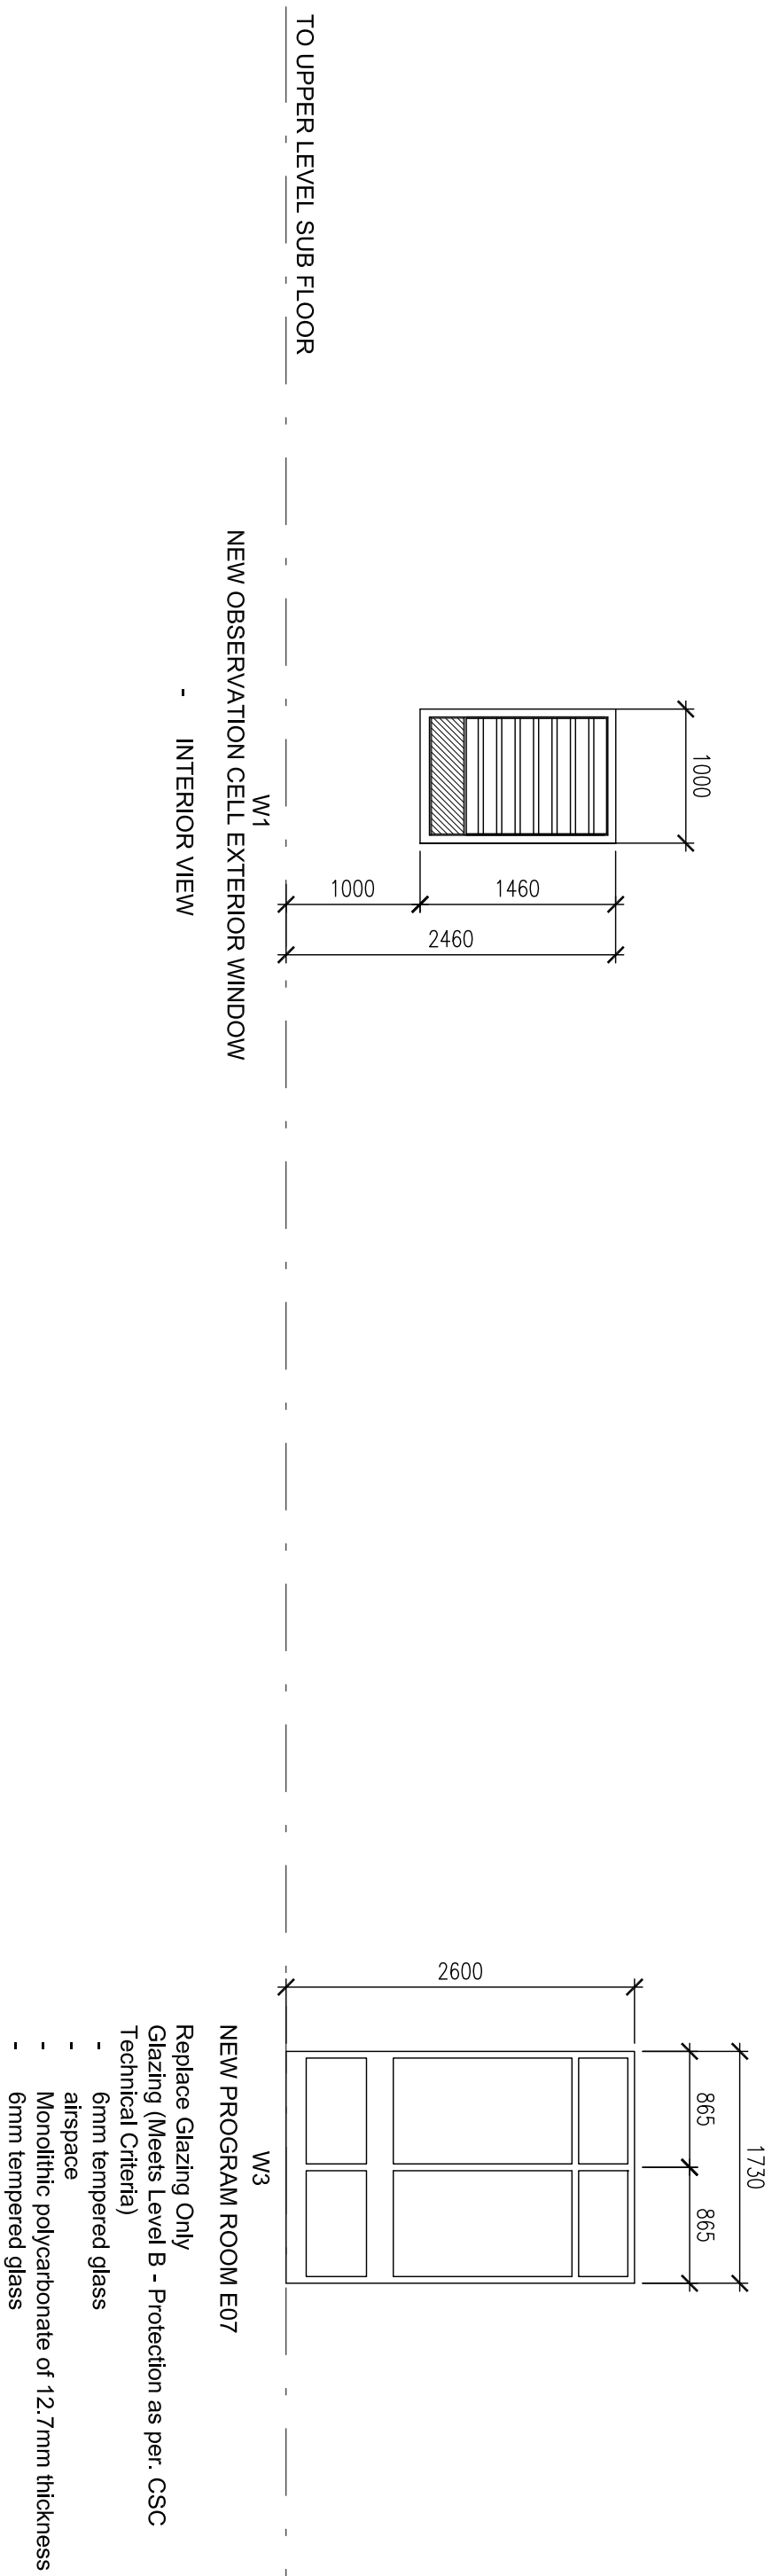

DOOR & FRAME LEGEND

MATERIALS	
HM	HOLLOW METAL
SS	STAINLESS STEEL
GS	GALVANIZED STEEL
ST	STEEL
FINISH	
P	PAINT
PS	PRESSED STEEL
TG	TEMPERED GLASS
LG	LAMINATED GLASS