


PLAN


SCALE 1:200

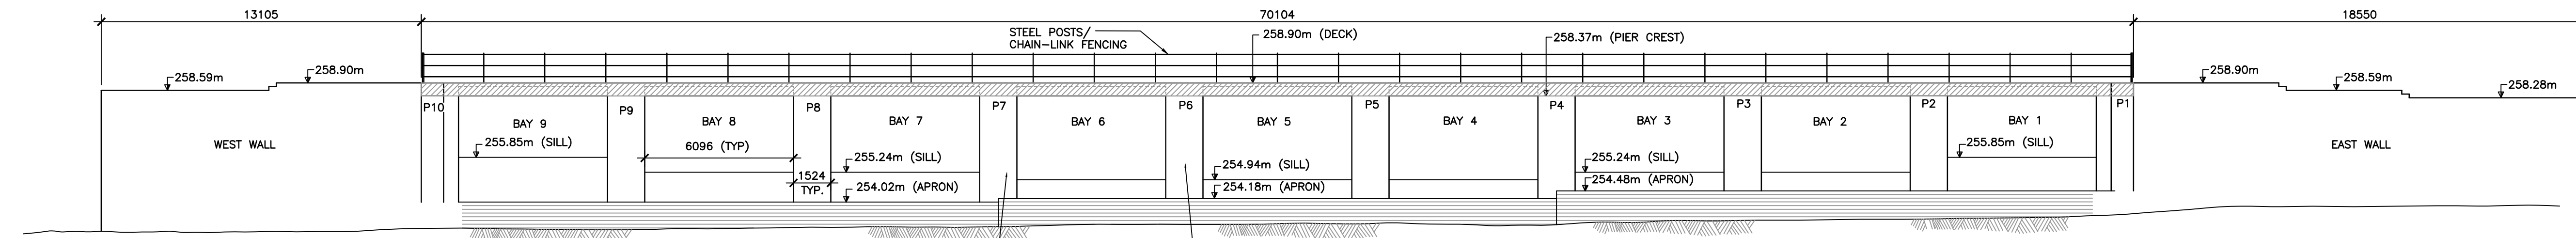

A

DOWNSTREAM ELEVATION


SCALE 1:150

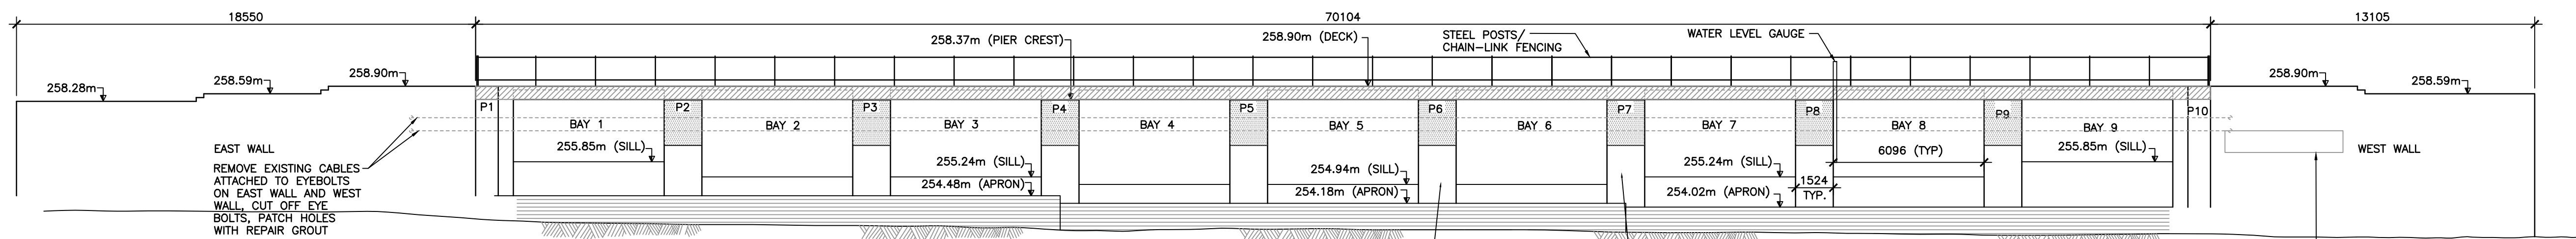

B

UPSTREAM ELEVATION


SCALE 1:150

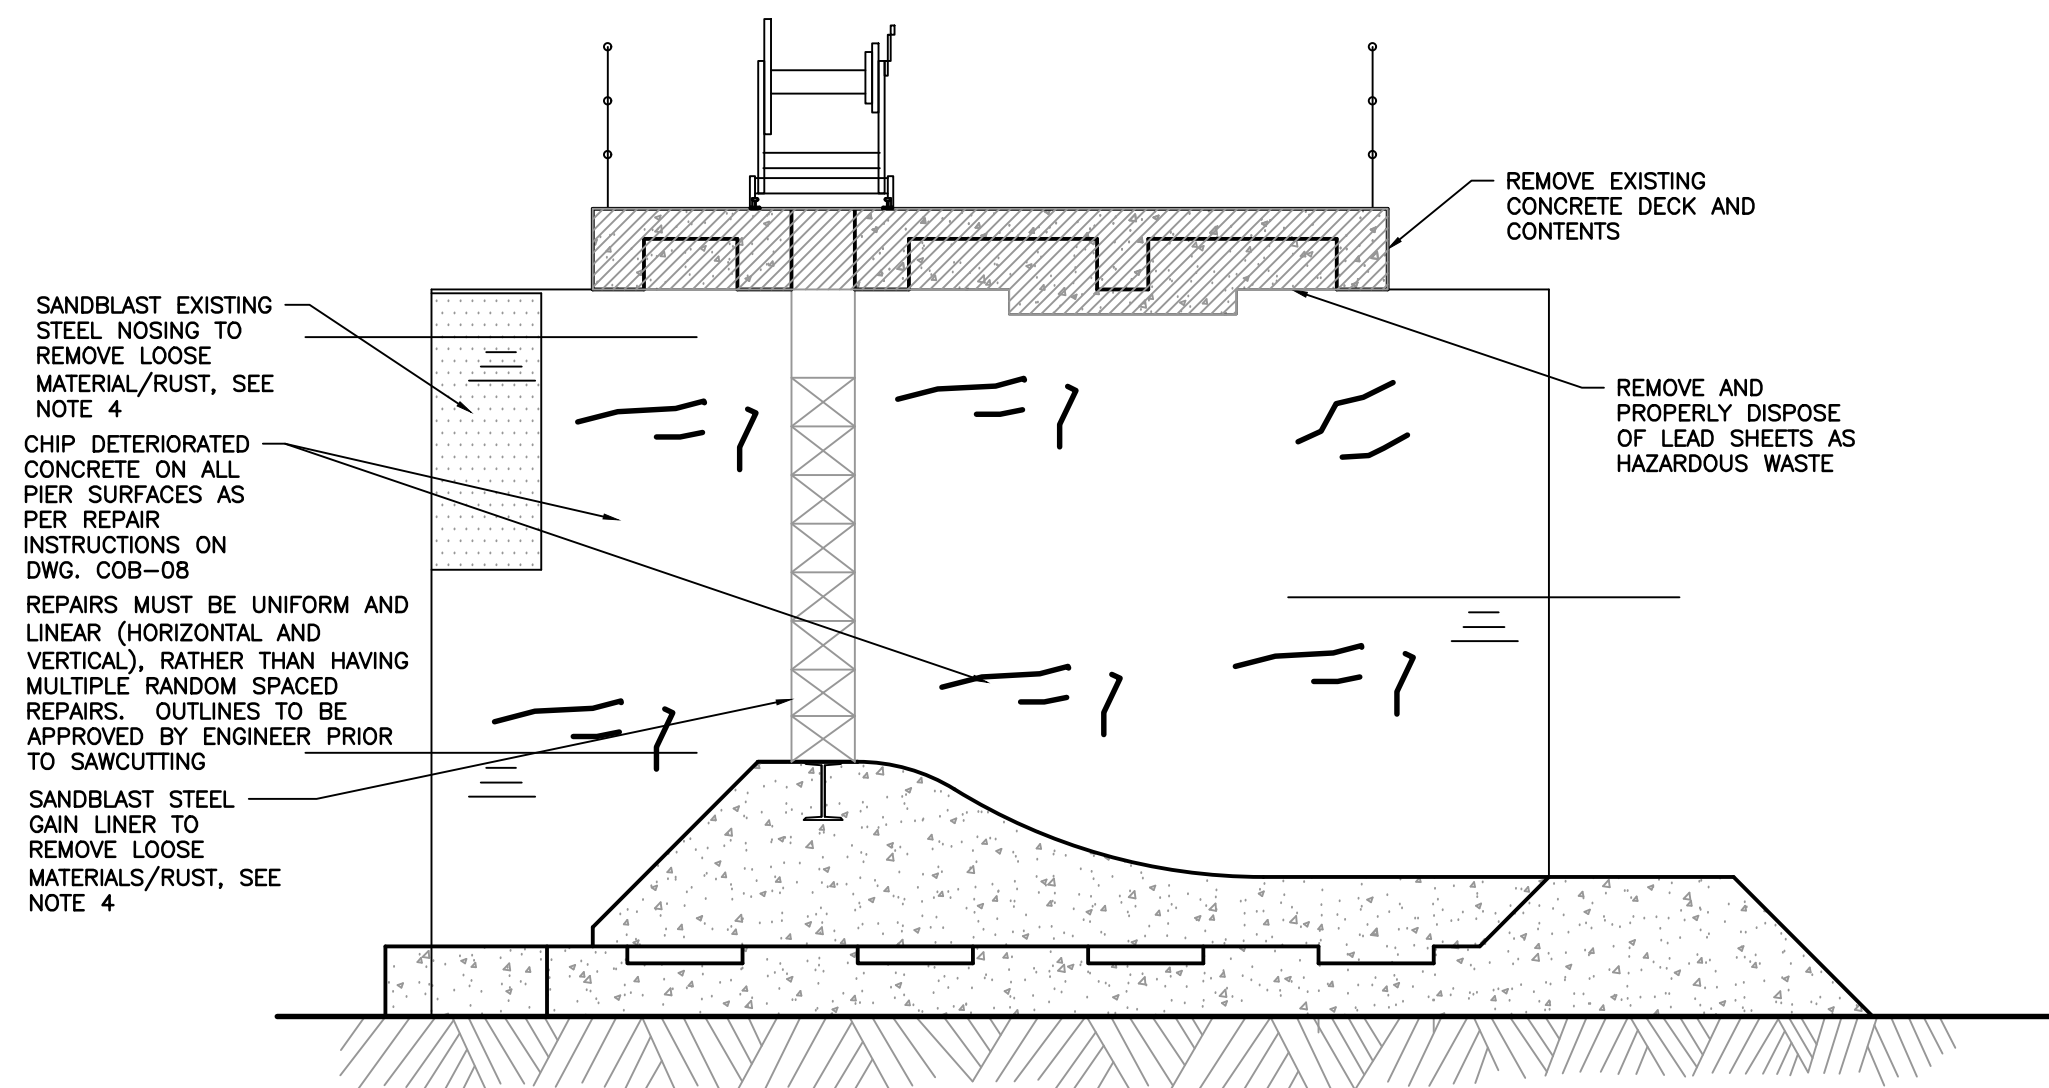

C

SECTION

SCALE 1:50

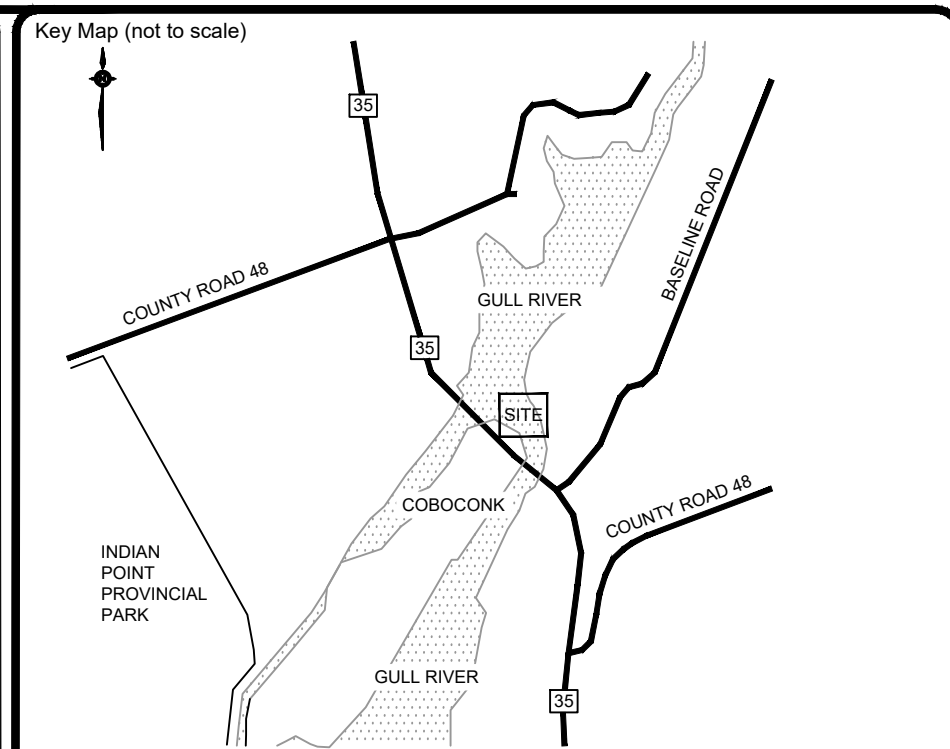

- REMOVAL
CHIP/REPAIR

NOTES:

1. REMOVE EXISTING AUTOMATIC WATER LEVEL GAUGE (PCA WATER MANAGEMENT WILL REMOVE OIL FROM GAUGE FIRST); REINSTALL WHEN NEW DECK AND RAILINGS HAVE BEEN INSTALLED. COORDINATE TIMING WITH PCA.
2. INSTALL A TEMPORARY METRIC STAFF GAUGE FOR WATER LEVEL MEASUREMENT DURING CONSTRUCTION. LOCATION TO BE APPROVED BY ENGINEER.
3. EXISTING STEEL PIER NOSINGS TO REMAIN (LOOSE MATERIAL/RUST TO BE REMOVED), EXPOSED CONCRETE TO BE CHIPPED TO SOUND CONCRETE WHERE NECESSARY (AS DIRECTED BY DEPARTMENTAL REPRESENTATIVE).
4. SANDBLAST EXISTING STEEL PIER NOSINGS AND STEEL STOP LOG GAINS TO COMMERCIAL BLAST SSPC-SP6 STANDARD.

G	ISSUED FOR TENDER	AUG. 7 2018	T.M.	WAG
F	ISSUED FOR TENDER	MAY 18 2018	T.M.	WAG
E	ISSUED FOR FINAL REVIEW II	MAR. 7 2018	T.M.	WAG
D	ISSUED FOR FINAL REVIEW	AUG. 16 2017	T.M.	WAG
C	99% DESIGN SUBMISSION	FEB. 3 2017	T.M.	WAG
B	ISSUED FOR PRELIMINARY DESIGN RESUBMISSION	SEPT. 9 2016	TM	WAG
A	ISSUED FOR PRELIMINARY DESIGN SUBMISSION	AUG. 11 2016	TM	WAG
No.	REVISIONS	Date	By	App.



exp Services Inc.
t: +1.905.793.0800 | f: +1.905.793.0641
1595 Clark Boulevard
Brampton, ON L6T 4V1
Canada
www.exp.com



- BUILDINGS • EARTH & ENVIRONMENT • ENERGY •
- INDUSTRIAL • INFRASTRUCTURE • SUSTAINABILITY •

Owner/Cliet:
 Parcs Canada Parks Canada

Canadä

Location:
**COBOCONK DAM
TRENT- SEVERN WATERWAY**

Title:
**DEMOLITION SITE PLAN AND
ELEVATION**

Designed By:	Drawn By:	T.M.	Checked By:	W.A.G.
Scale:	AS NOTED	Date:	JUNE 2016	Drawing No.:
Project No.:	BRM00605412a			COB-04