

L'ENTREPRENEUR DEVRA VÉRIFIER TOUTES
LES DIMENSIONS ET LES CONDITIONS SUR LE
CHANTIER ET AVISER SANS DÉLAI LE
REPRÉSENTANT DU MINISTÈRE DE TOUTE
ANOMALIE.

Contractor to verify all dimensions and
conditions on site and immediately notify
the departmental representative of all
discrepancies.

4	REISSUED FOR TENDER	2019/05/28
3	ISSUED FOR TENDER	2019/06/03
2	ISSUED FOR 100% REVIEW	2019/04/08
1	ISSUED FOR 99% REVIEW	2019/03/19

revisions	description	date
A	A detail no. no. du détail	A
C	B location drawing no. sur dessin no.	B C
	C drawing no. dessin no.	

project project

C.D. HOWE BLDG.
LEVEL C2
FIT-UP

235 QUEEN ST., OTTAWA, ONTARIO

drawing dessin

WASHROOM
INTERIOR ELEVATIONS
AND DETAILS

Designed By AN/DL Conçu par

Date (yyyy/mm/dd)

Drawn By AN/PJKA Dessiné par

Date (yyyy/mm/dd)

Reviewed By DL Examiné par

Date 2019/05 (yyyy/mm/dd)

Approved By PK/DL Approuvé par

Date (yyyy/mm/dd)

Tender Soumission

Project Manager ISMAT BEGUM Administrateur de projets

Project no. No. du projet

R.100325.004

Drawing no. No. du dessin


A501

GENERAL NOTES, A501


- SLAB TO SLAB HEIGHT: 3886mm±
- ALL NEW CONSTRUCTION/FINISHES EXCEPT WHERE NOTED.
- REFER TO DOOR SCHEDULE AND ELEVATIONS FOR DOOR TYPES.
- REFER TO WALL FINISHES PLAN AND LEGEND FOR PARTITION FINISHES.

DRAWING NOTES, A501


- DOOR EQUIPPED WITH POWER ASSISTED DOOR OPENER AND LOCKING MECHANISM ABLE TO BE UNLOCKED FROM THE OUTSIDE IN AN EMERGENCY SITUATION.
- EQUAL DISTANCE
- SUSPENDED LAY-IN ACOUSTICAL TILE.
- FLOOR FINISH (REFER TO FINISH PLAN)
- WALL-MOUNT GLASS CLAMP, BRUSHED STAINLESS STEEL
- EMERGENCY CALL BUTTON W/ SIGNAGE ABOVE "IN THE EVENT OF AN EMERGENCY, PUSH EMERGENCY BUTTON, AND AUDIBLE AND VISUAL SIGNAL WILL ACTIVATE." W/ LETTERS 25mm HIGH W/ 5mm STROKE.
- REQUIRED CLEAR WIDTH DOOR OPENING FOR BARRIER FREE TOILET STALL.
- MINIMUM DOOR WIDTH
- DOOR: REFER TO DOOR SCHEDULE A507
- DOOR HARDWARE
- MAXIMUM DOOR LEVER HEIGHT
- PAPER TOWEL DISPENSER
- SOAP DISPENSER
- MAXIMUM DISTANCE FROM EDGE OF SINK TO SOAP AND PAPER TOWEL DISPENSERS, TYPICAL.
- MAXIMUM DISPENSING HEIGHT FROM FF FOR SOAP DISPENSERS AND PAPER TOWEL DISPENSERS, TYPICAL.
- MIRROR
- SINK AND FAUCET. REFER TO MECHANICAL.
- MINIMUM DISTANCE FROM CENTERLINE OF LAVATORY TO THE SIDE WALL.
- MAXIMUM HEIGHT FROM BOTTOM EDGE OF MIRROR TO FF.
- PROVIDE INSULATION COVER FOR UNDER-COUNTER HOT WATER PIPING AND P-TRAP.
- MINIMUM CLEAR WIDTH BELOW LAVATORY.
- MINIMUM CLEAR HEIGHT AT FRONT EDGE OF COUNTER/LAVATORY.
- REQUIRED CLEAR AREA BELOW COUNTER/LAVATORY.
- POLISHED GRANITE COUNTER, 32mm THICK c/w 3mm CHAMFER, ALL EDGES.
- PREFABRICATED PREFINISHED TOILET COMPARTMENT PARTITION.
- COAT HOOK MOUNTED ON SIDE PARTITION.
- REQUIRED TOILET SEAT OR BACK SUPPORT.
- MIN 600mm HORIZONTAL GRAB BAR ABOVE WC.
- L-SHAPED GRAB BAR MIN 760mm IN BOTH DIRECTIONS. LOCATED MIN 150mm FROM FRONT EDGE OF TOILET.
- REQUIRED GRAB-BAR MOUNTING HEIGHT
- REQUIRED HEIGHT OF TOILET SEAT FROM FF
- TOILET PAPER DISPENSER
- REQUIRED DISTANCE BETWEEN SIDE OF TOILET AND SIDE WALL.
- MINIMUM WIDTH OF ACCESSIBLE TOILET STALL.
- MINIMUM DISTANCE FROM FRONT EDGE OF TOILET TO TOILET PAPER DISPENSER.
- MINIMUM DEPTH OF ACCESSIBLE TOILET STALL.
- REQUIRED CLEAR DISTANCE AT ENTRY TO ACCESSIBLE TOILET STALL.
- LINEAR LED WALL SCONCE. SEE ELECTRICAL.
- REQUIRED CLEAR TRANSFER AREA ADJACENT TO WC.
- 6mm FROSTED TEMPERED GLASS SCREEN WITH POLISHED SQUARE EDGE.
- METAL TOILET COMPARTMENT HEIGHT AS SHOWN, TYP.
- SPRING TYPE GRAVITY HINGE TO ALLOW DOOR TO CLOSE AUTOMATICALLY.
- LATCH OPERABLE USING A CLOSED FIST THAT CAN BE RELEASED FROM THE OUTSIDE OF THE STALL.
- 100mm D PULL, BRUSHED STAINLESS STEEL FINISH. ONE ON EITHER SIDE OF THE DOOR.
- WALL-MOUNTED BUMPER
- MAXIMUM HEIGHT TO TOP OF LAVATORY.
- POWER DOOR OPERATOR "PUSH TO OPEN"
- POWER DOOR OPERATOR "PUSH TO LOCK"
- SHELF - 200mm X 457mm
- WASTE RECEPTACLE
- MOUNTING HEIGHT OF DOOR OPERATORS BETWEEN 900mm AND 1100mm ABOVE THE FINISHED FLOOR.
- ADULT CHANGE TABLE
- COAT HOOK
- GCFI OUTLET, TYPICAL
- FLOOR-MOUNT GLASS CLAMP, BRUSHED STAINLESS STEEL FINISH.
- RECESSED SANITARY NAPKIN DISPOSAL.
- BACK REST
- SEE MECHANICAL
- HEIGHT OF SCREEN ABOVE COUNTER, SEE 5/A501
- HEIGHT OF SCREEN BELOW COUNTER, SEE 5/A501
- BLACK NEOPRENE GASKET
- NUT AND STAINLESS STEEL COVER CAP, BRUSHED FINISH
- ROUND STAINLESS STEEL PLATE, BRUSHED FINISH
- 13mm DIA. STAINLESS STEEL SPACER
- 19mm PLYWOOD SUPPORT
- ALIGN BOTTOM OF TOILET COMPARTMENT WITH UNDERSIDE OF WALL MOUNTED WC
- PILASTER SHOE

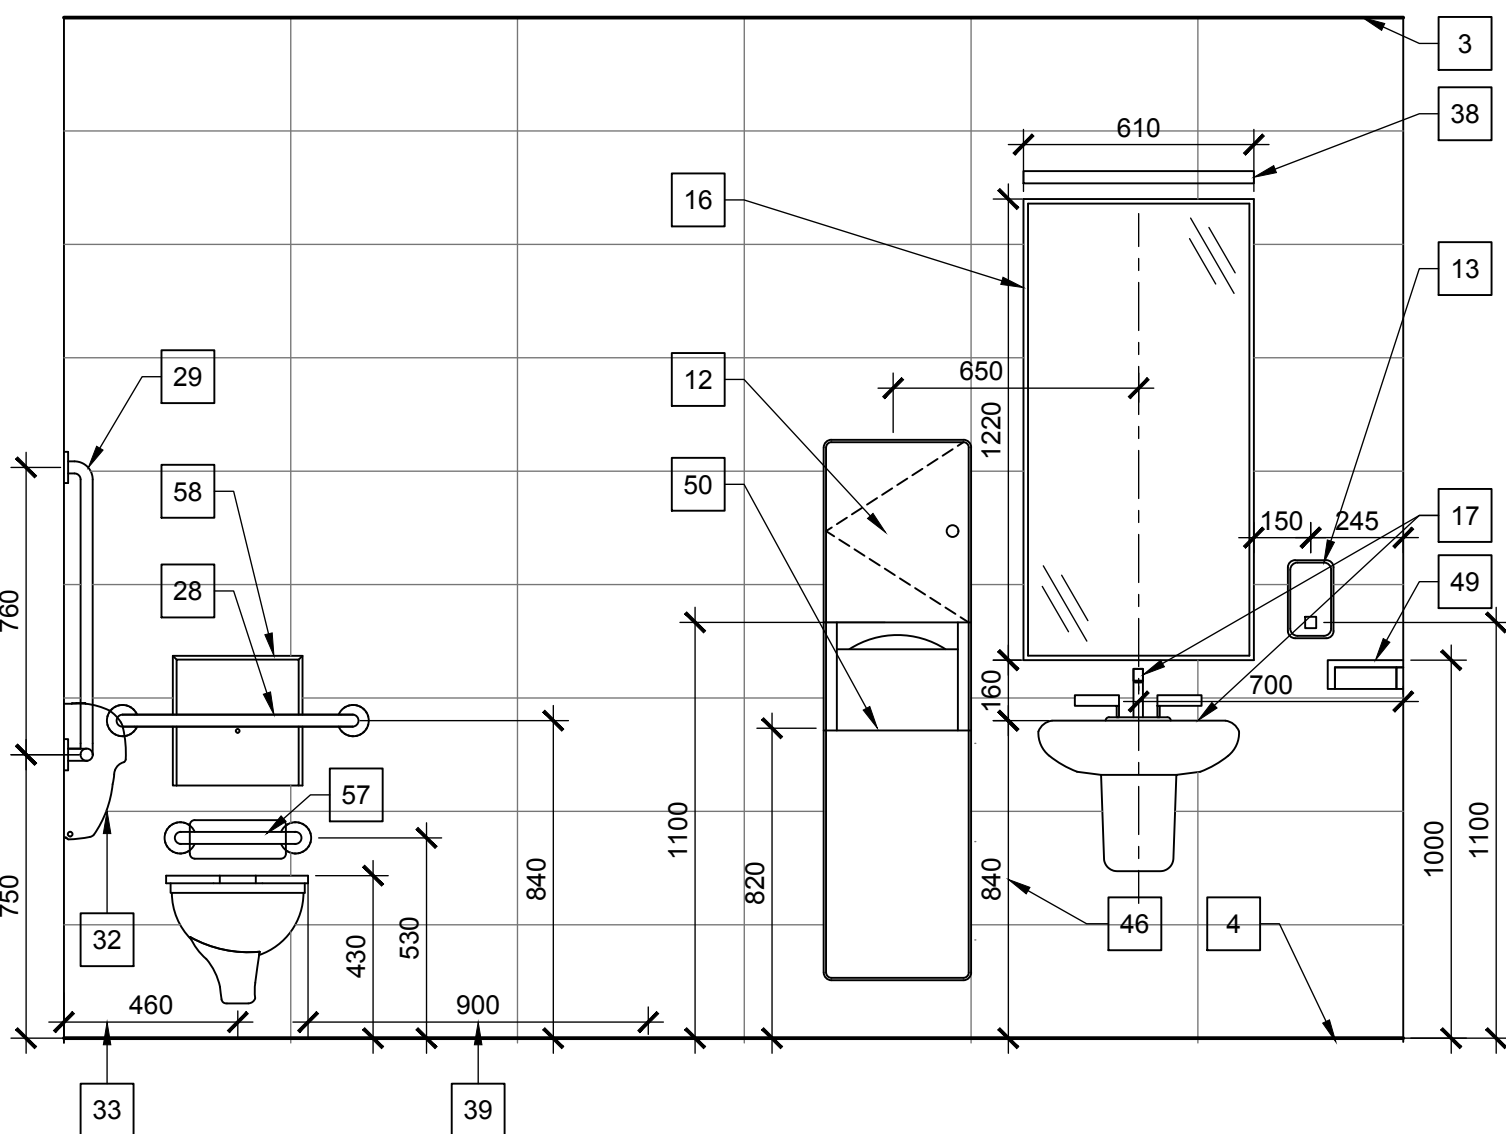


1 UNIVERSAL WASHROOM
EAST ELEVATION
SCALE / ÉCHELLE 1:20

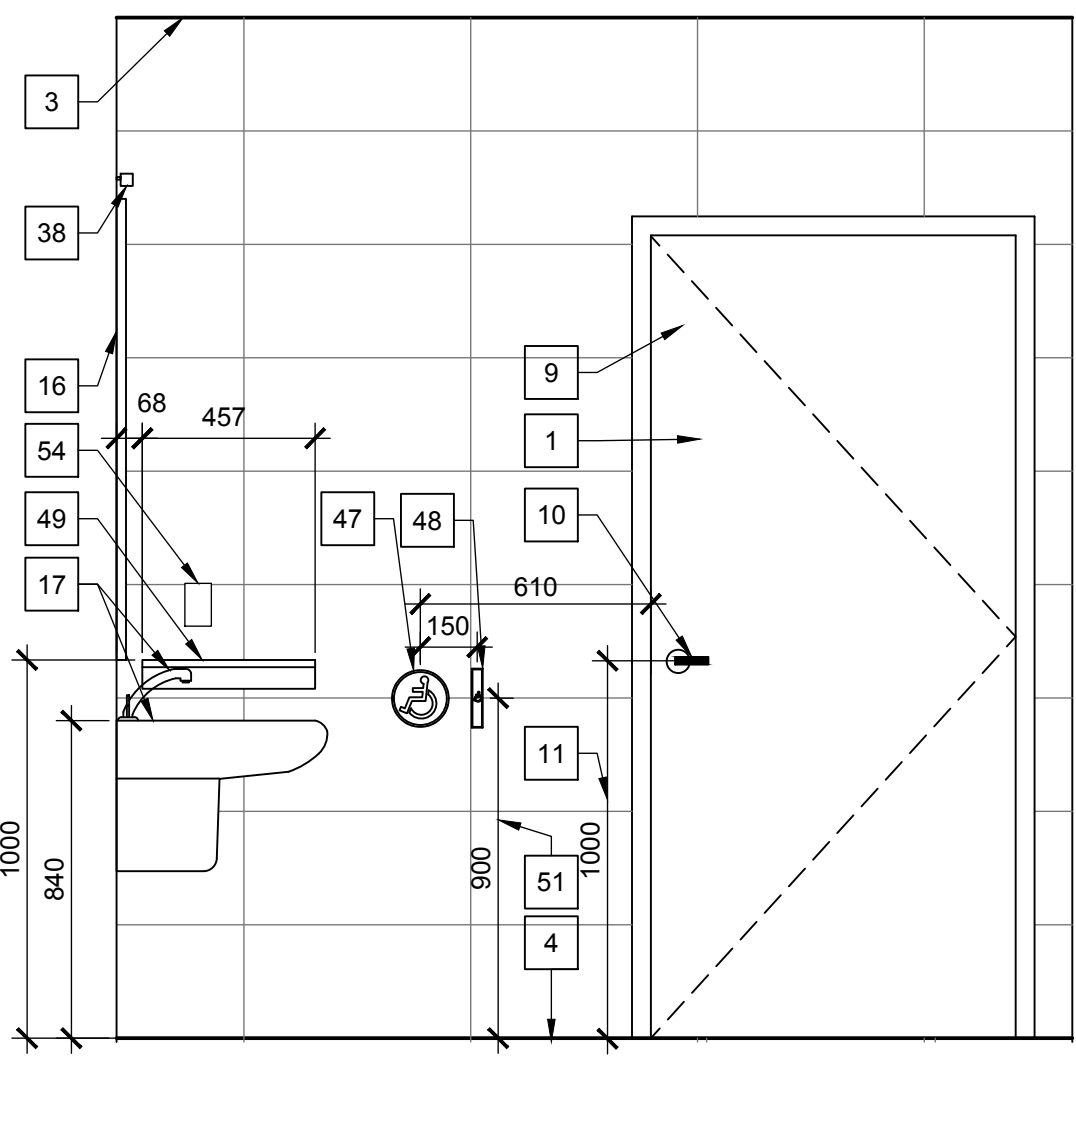


2 UNIVERSAL WASHROOM
SOUTH ELEVATION
SCALE / ÉCHELLE 1:20

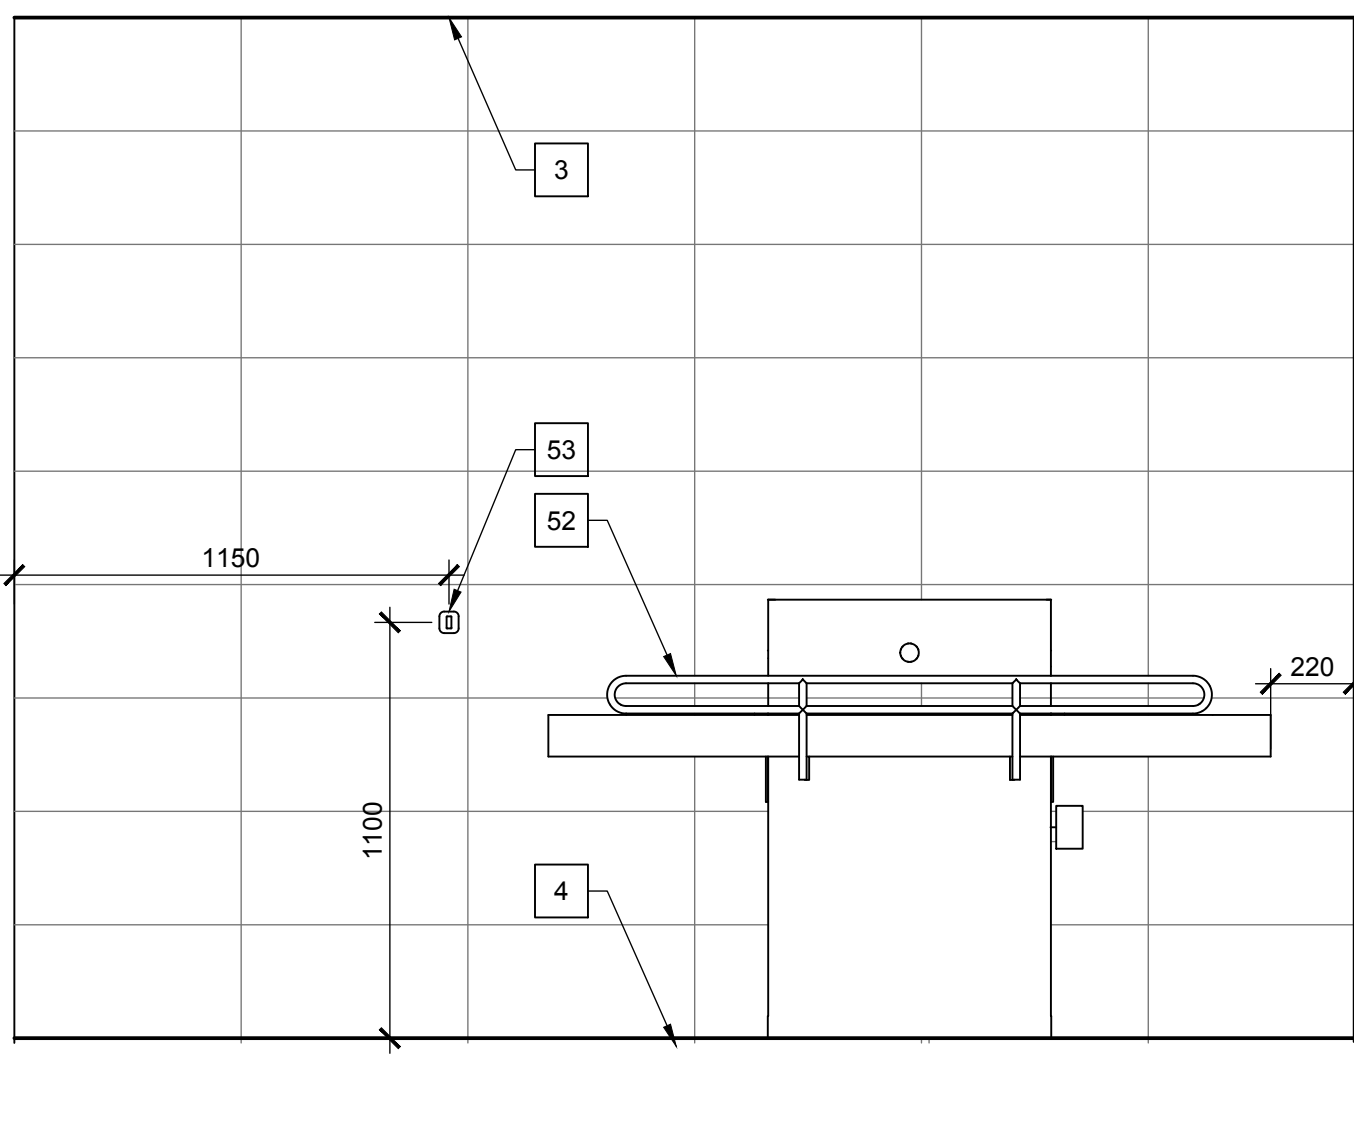


3 UNIVERSAL WASHROOM
WEST ELEVATION
SCALE / ÉCHELLE 1:20

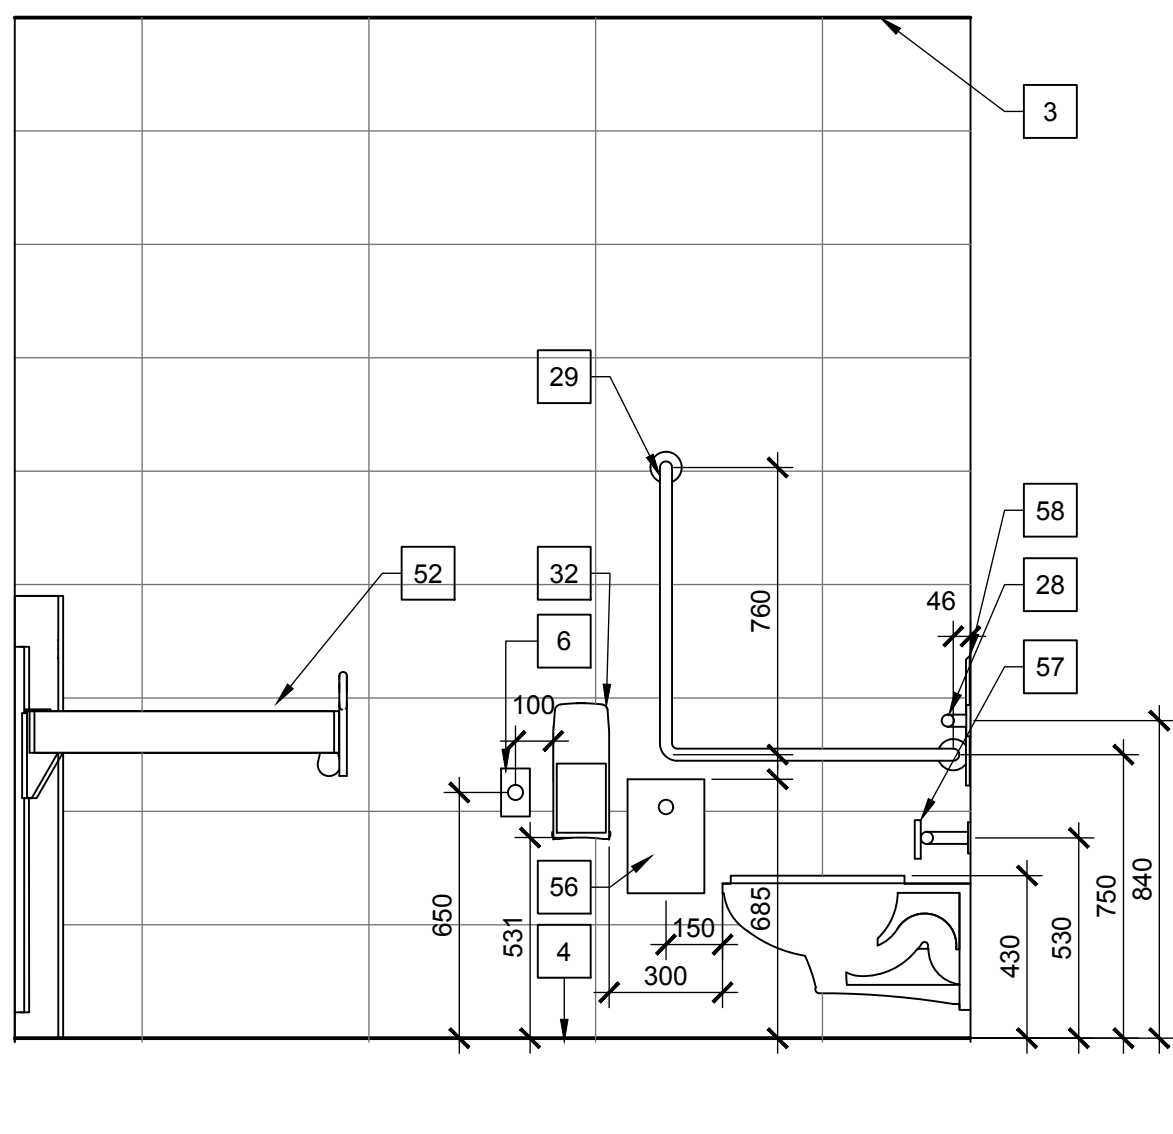


4 UNIVERSAL WASHROOM
NORTH ELEVATION
SCALE / ÉCHELLE 1:20

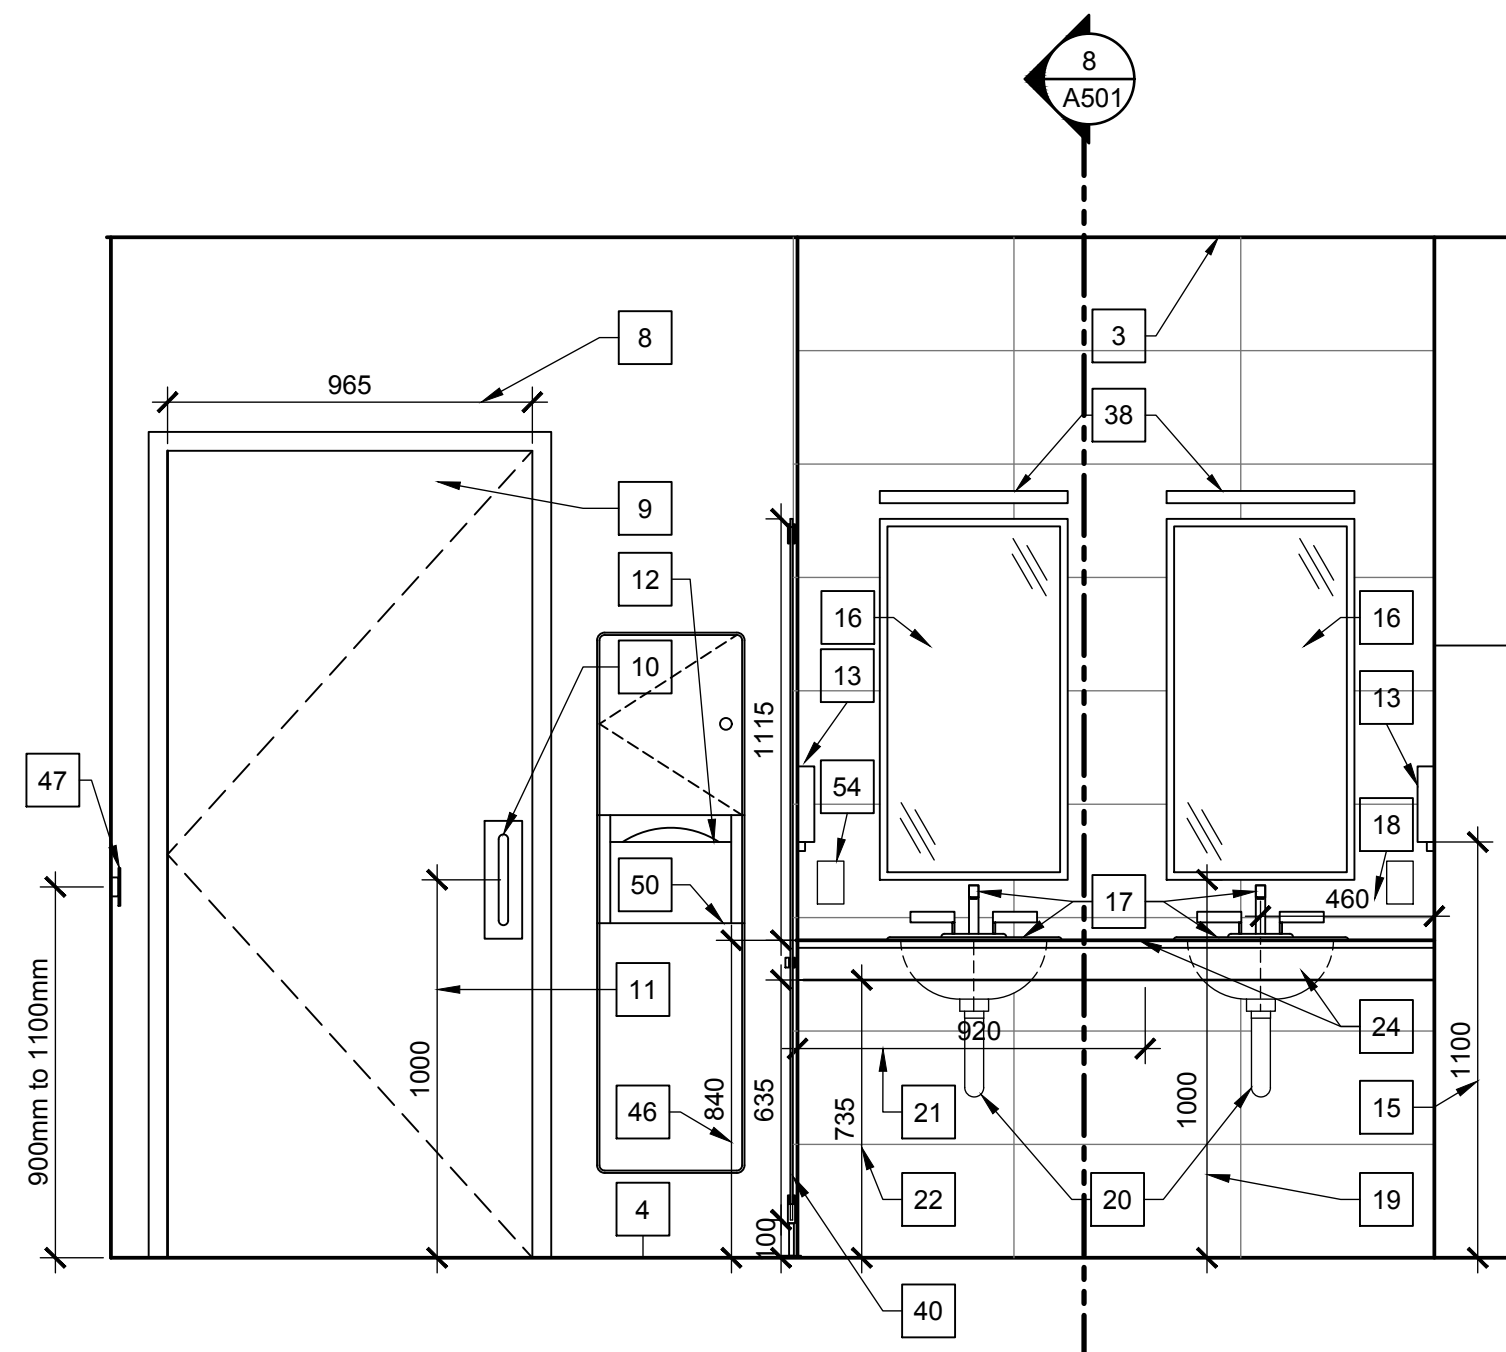


5 TYPICAL WASHROOM
EAST ELEVATION
SCALE / ÉCHELLE 1:20

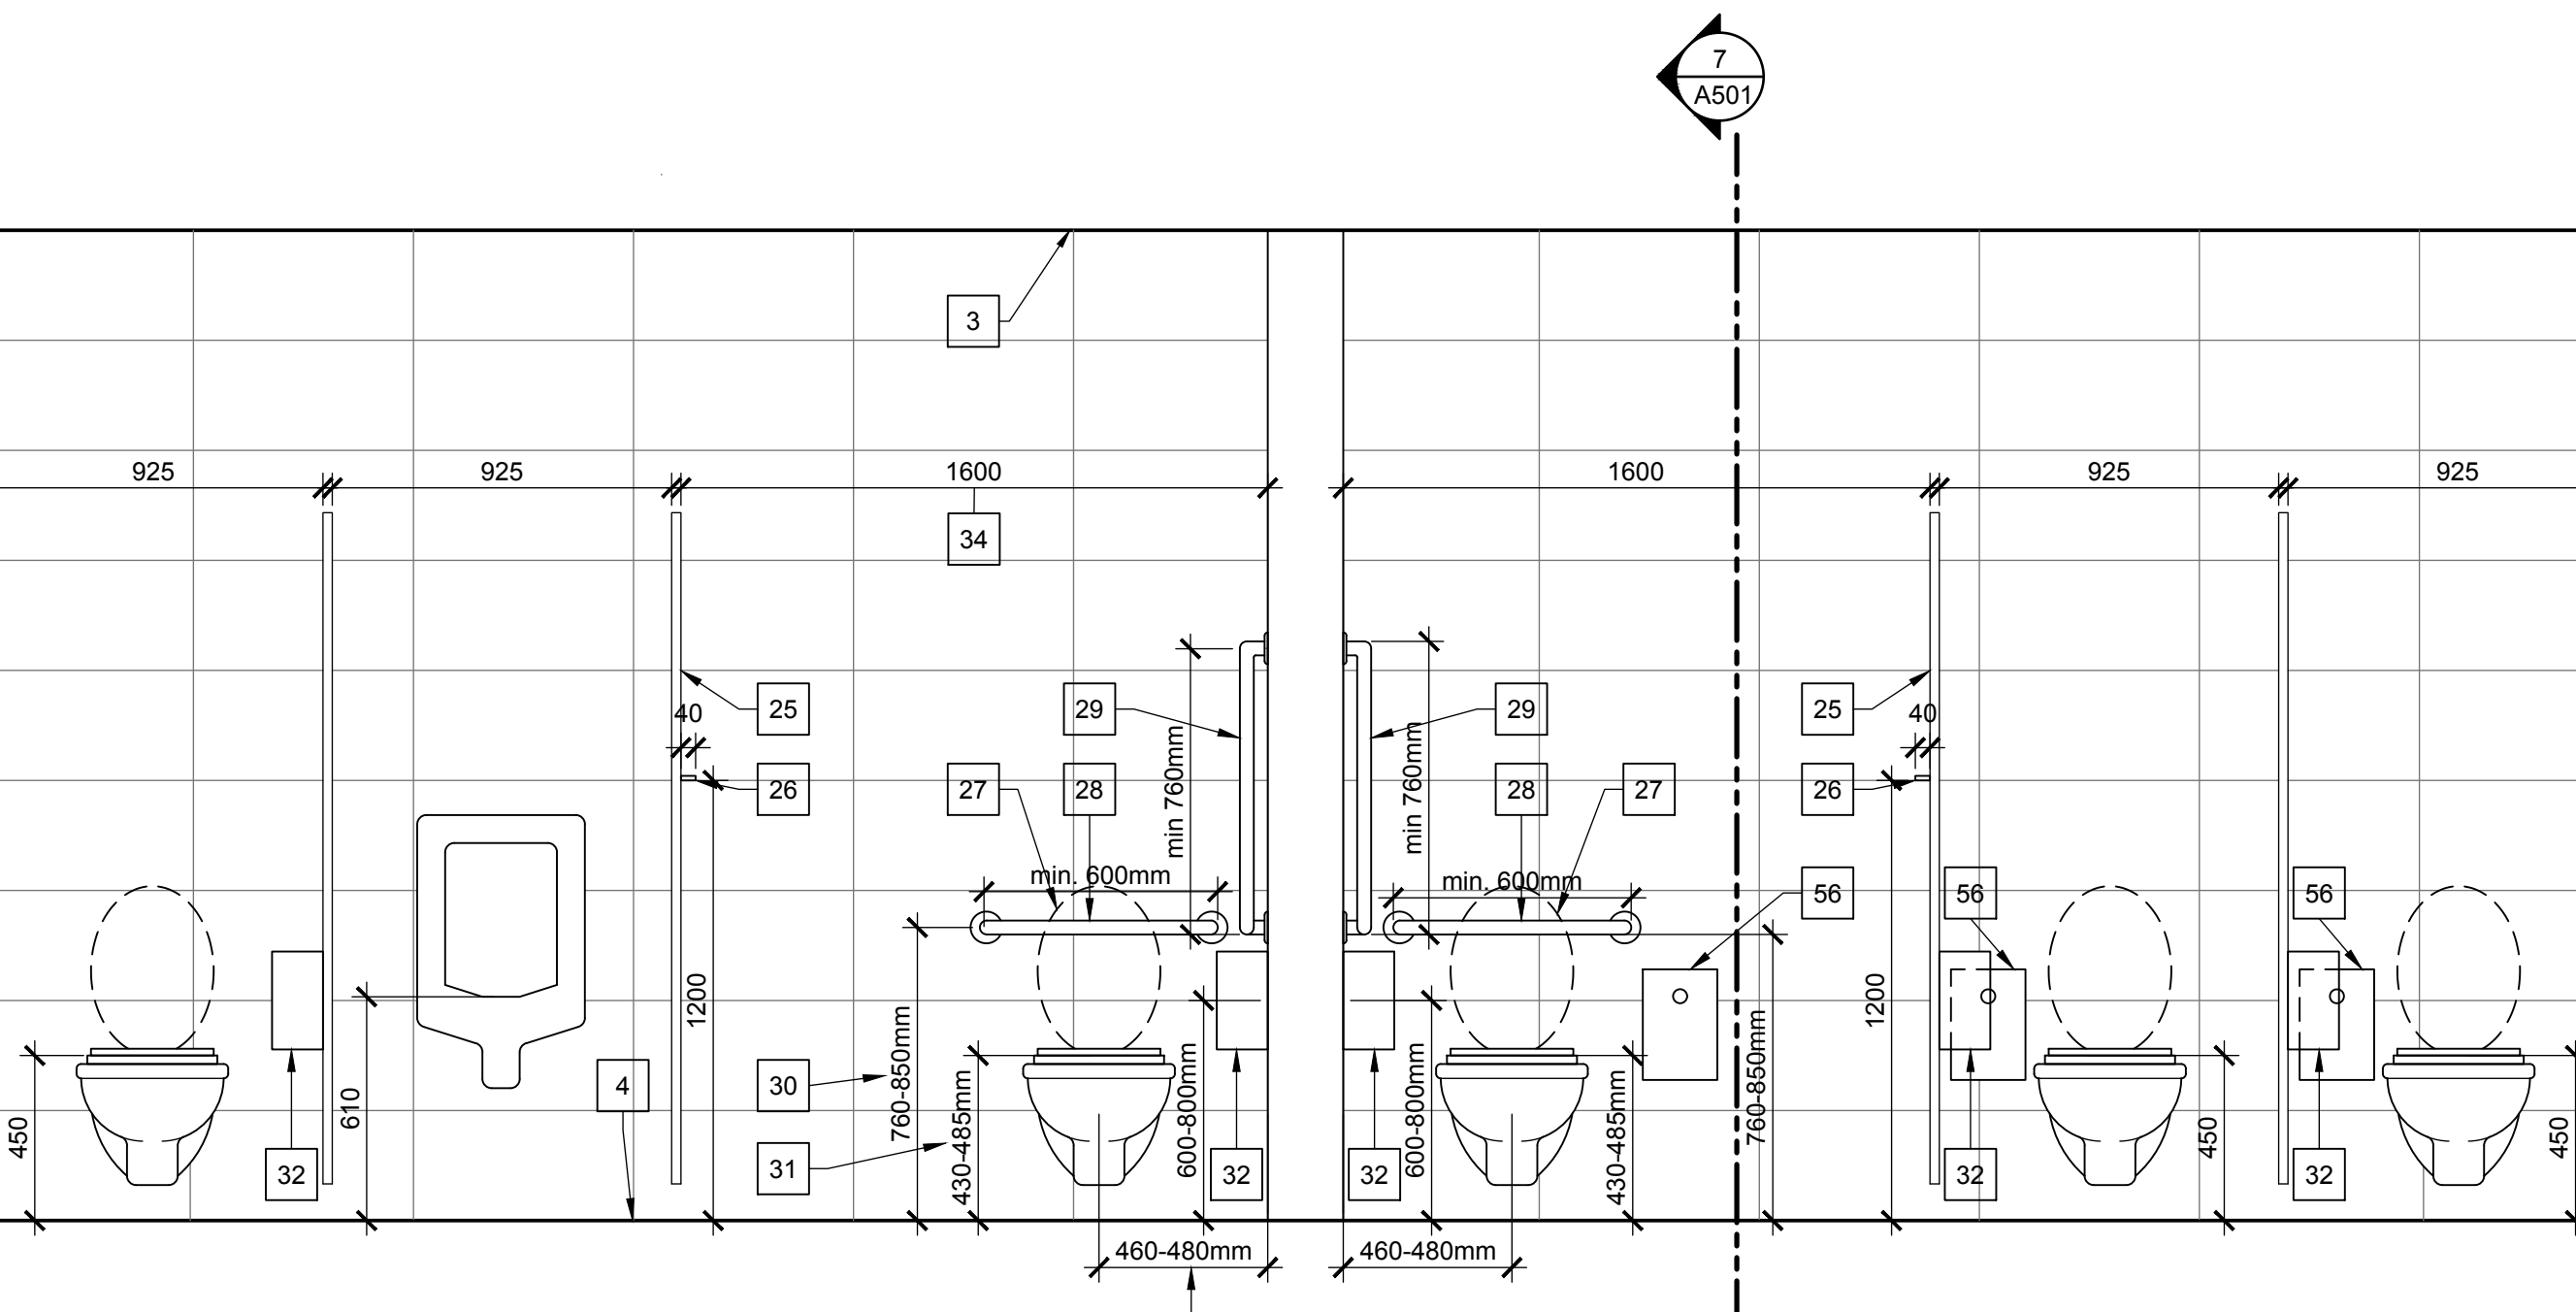


6 WASHROOM
WEST ELEVATION
SCALE / ÉCHELLE 1:20

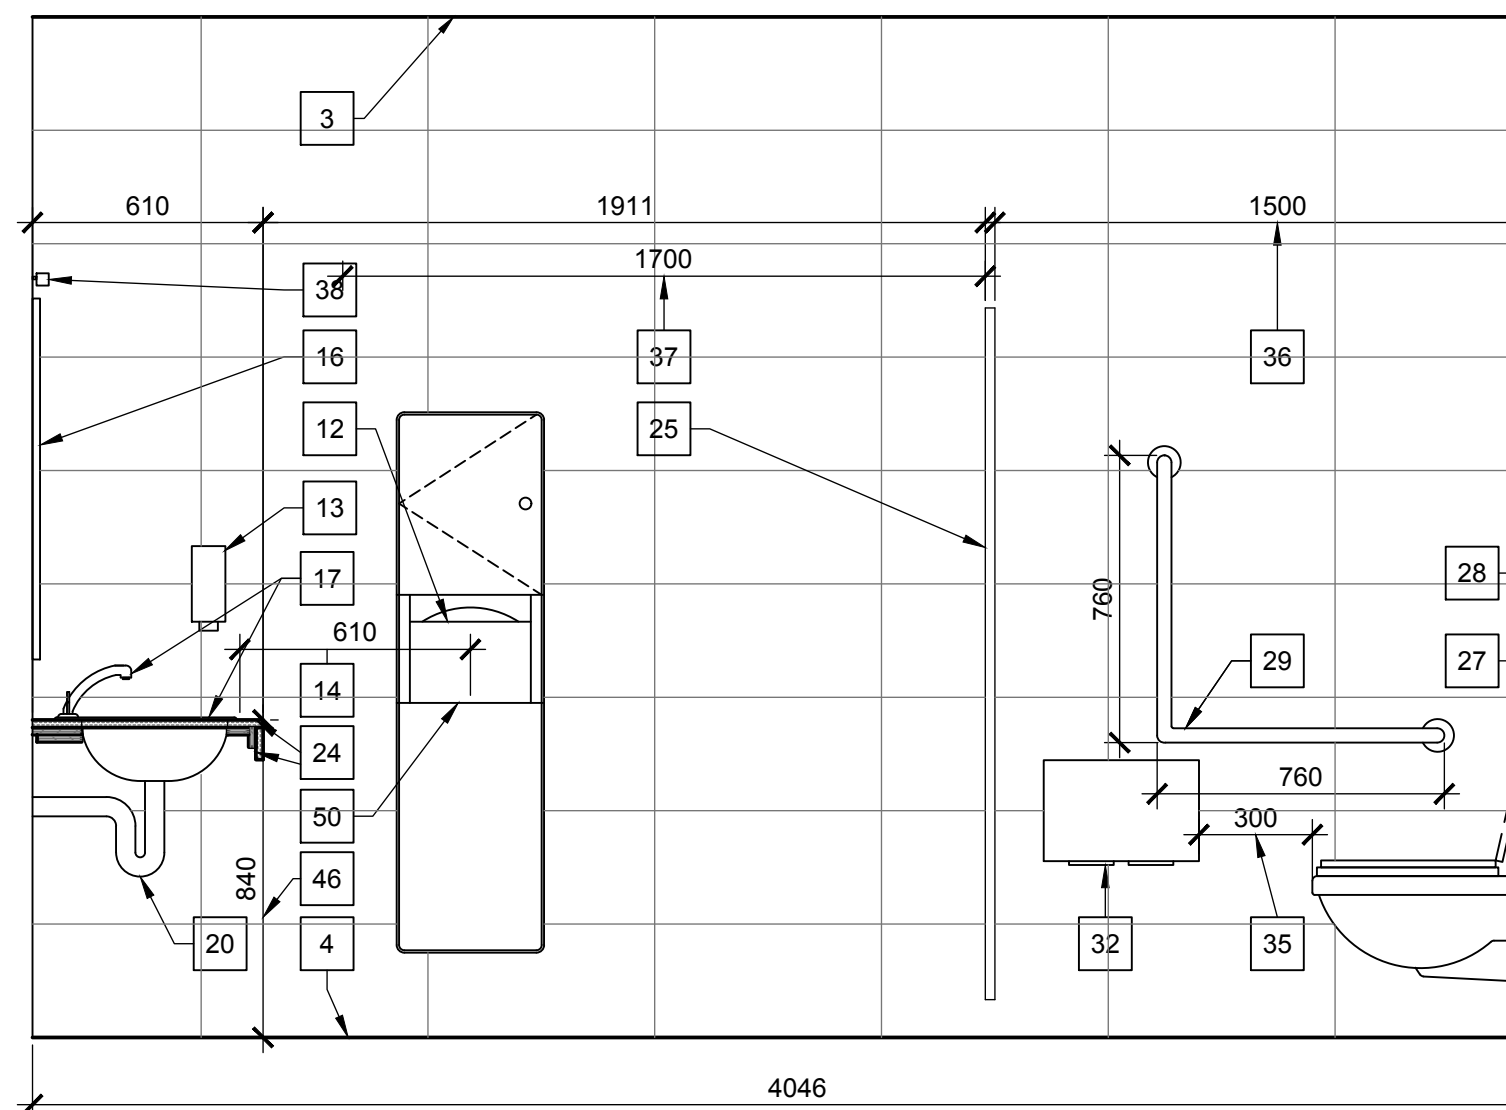


7 TYPICAL WASHROOM
BARRIER FREE W/C SECTION
SCALE / ÉCHELLE 1:20

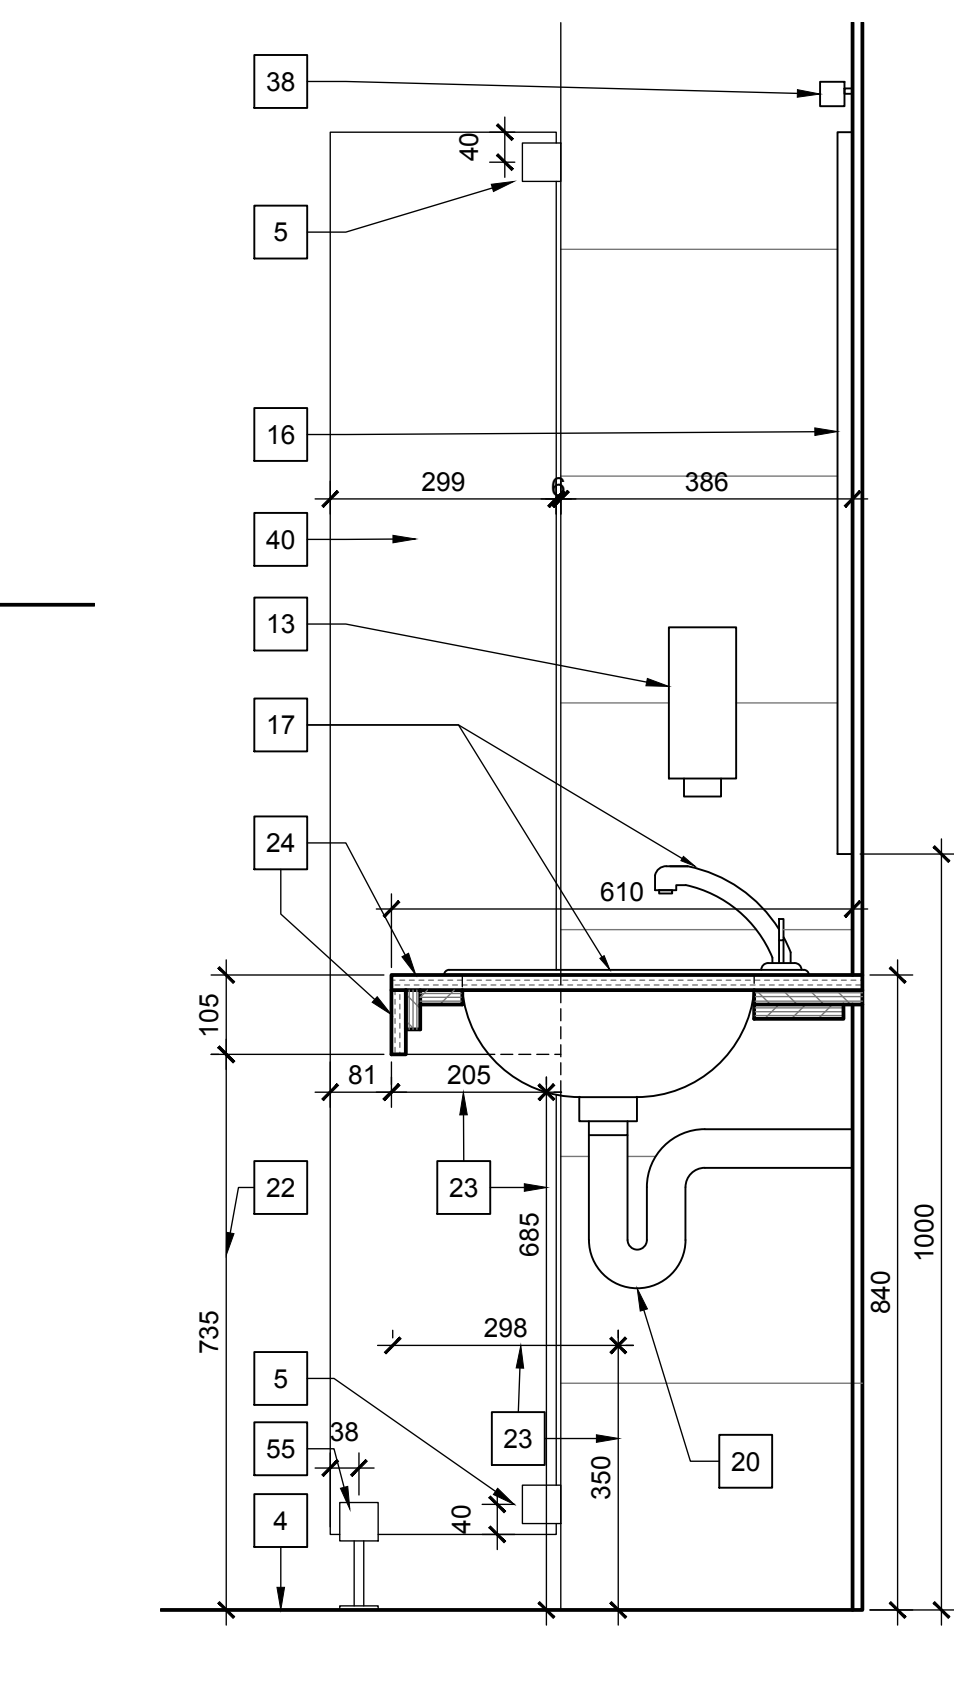

8 TYPICAL WASHROOM
MILLWORK SECTION
SCALE / ÉCHELLE 1:10

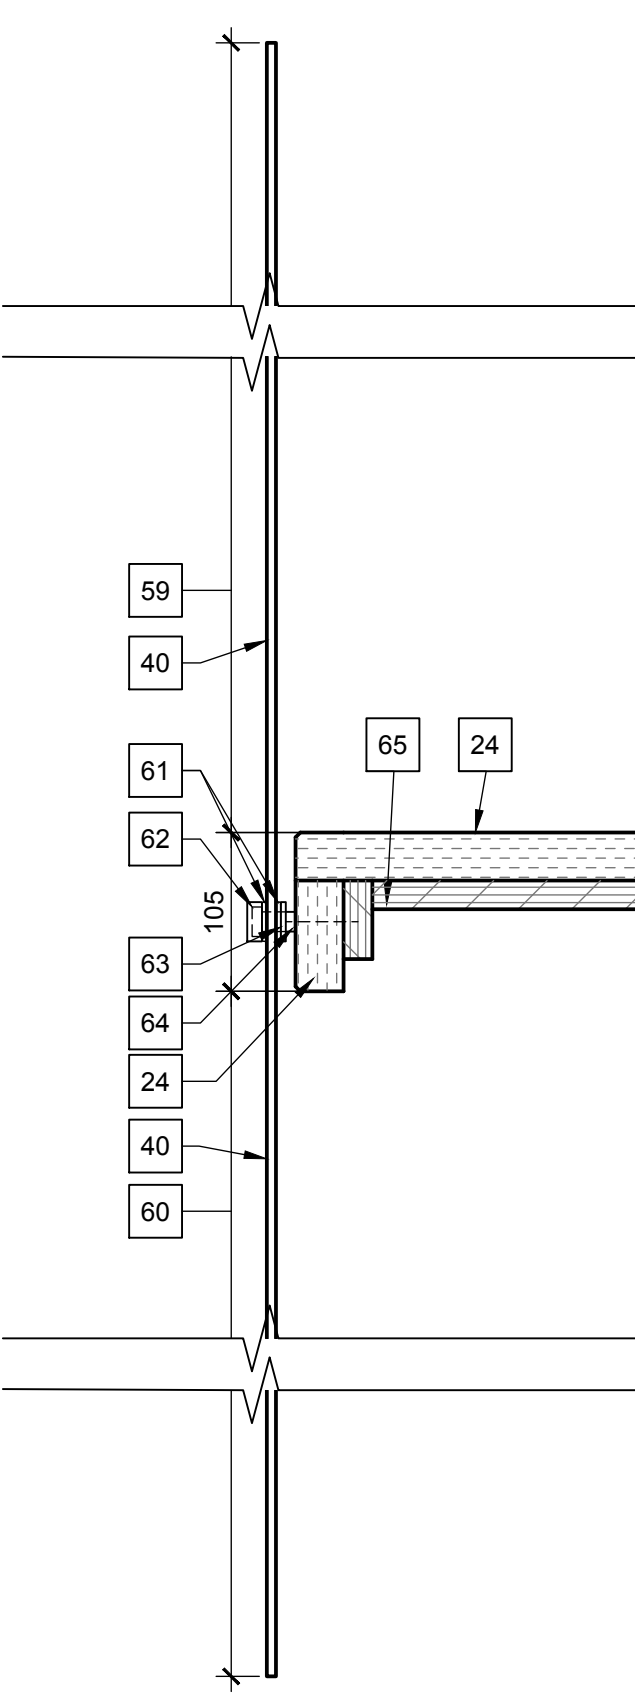

9 TYPICAL GLASS
SCREEN DETAIL
SCALE / ÉCHELLE 1:5

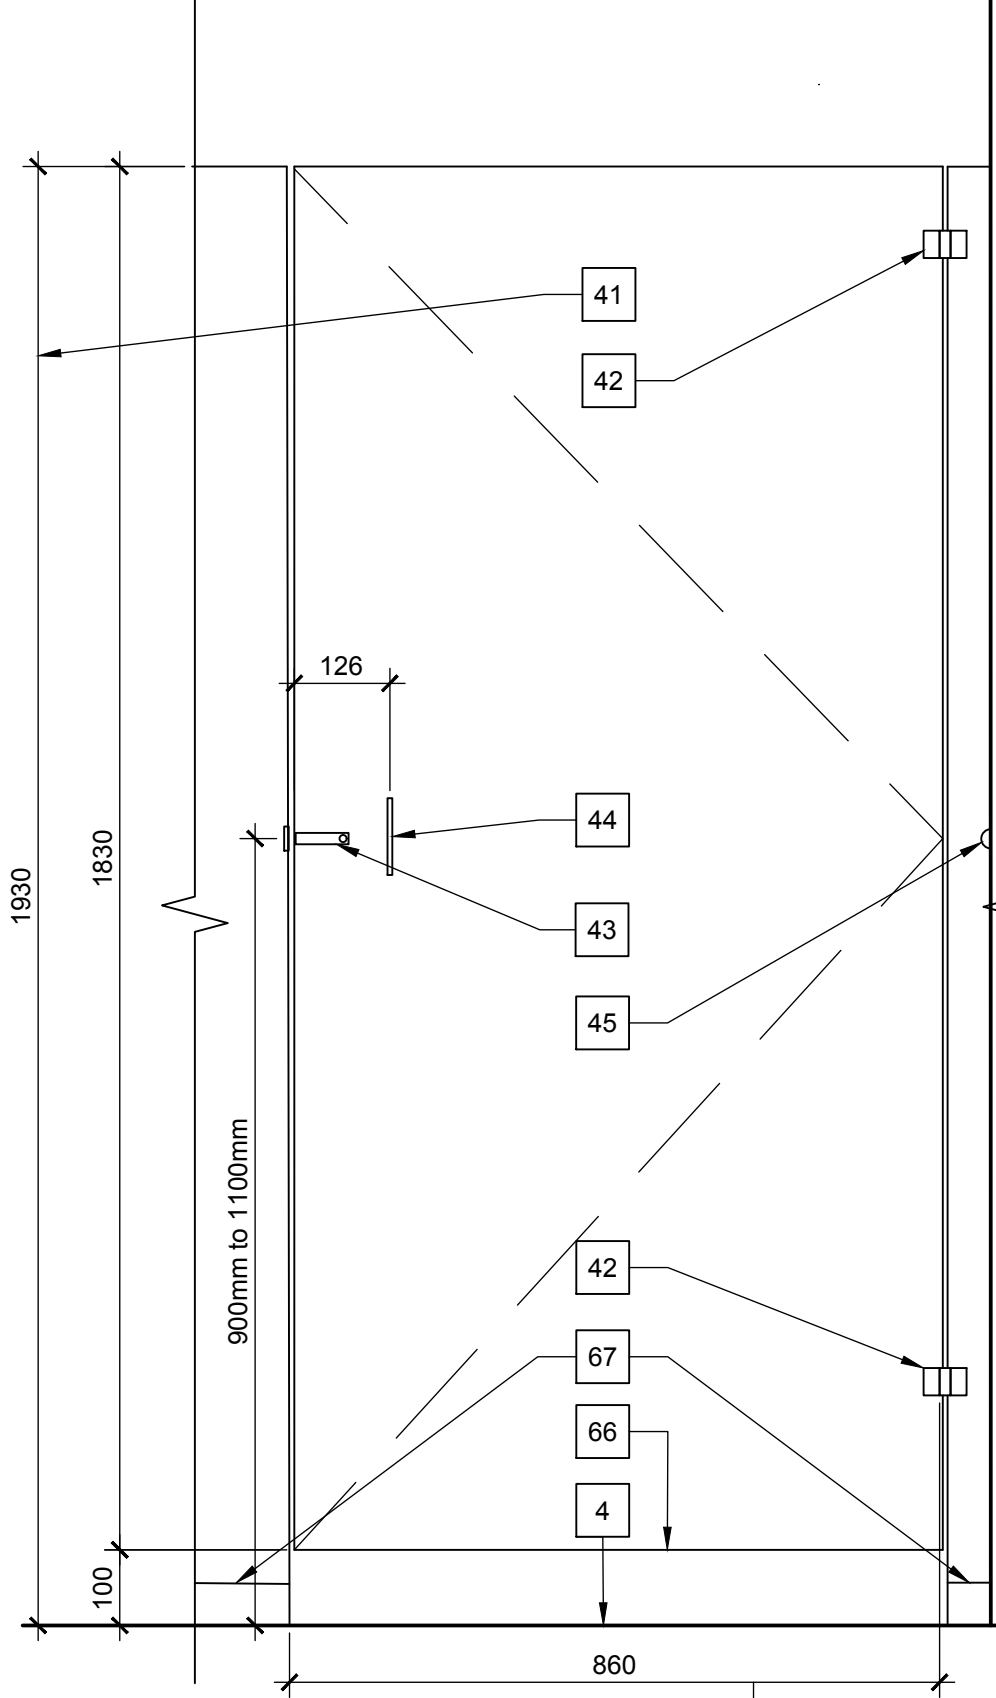

10 TYPICAL WASHROOM
BARRIER FREE STALL DOOR ELEVATION
SCALE / ÉCHELLE 1:10