


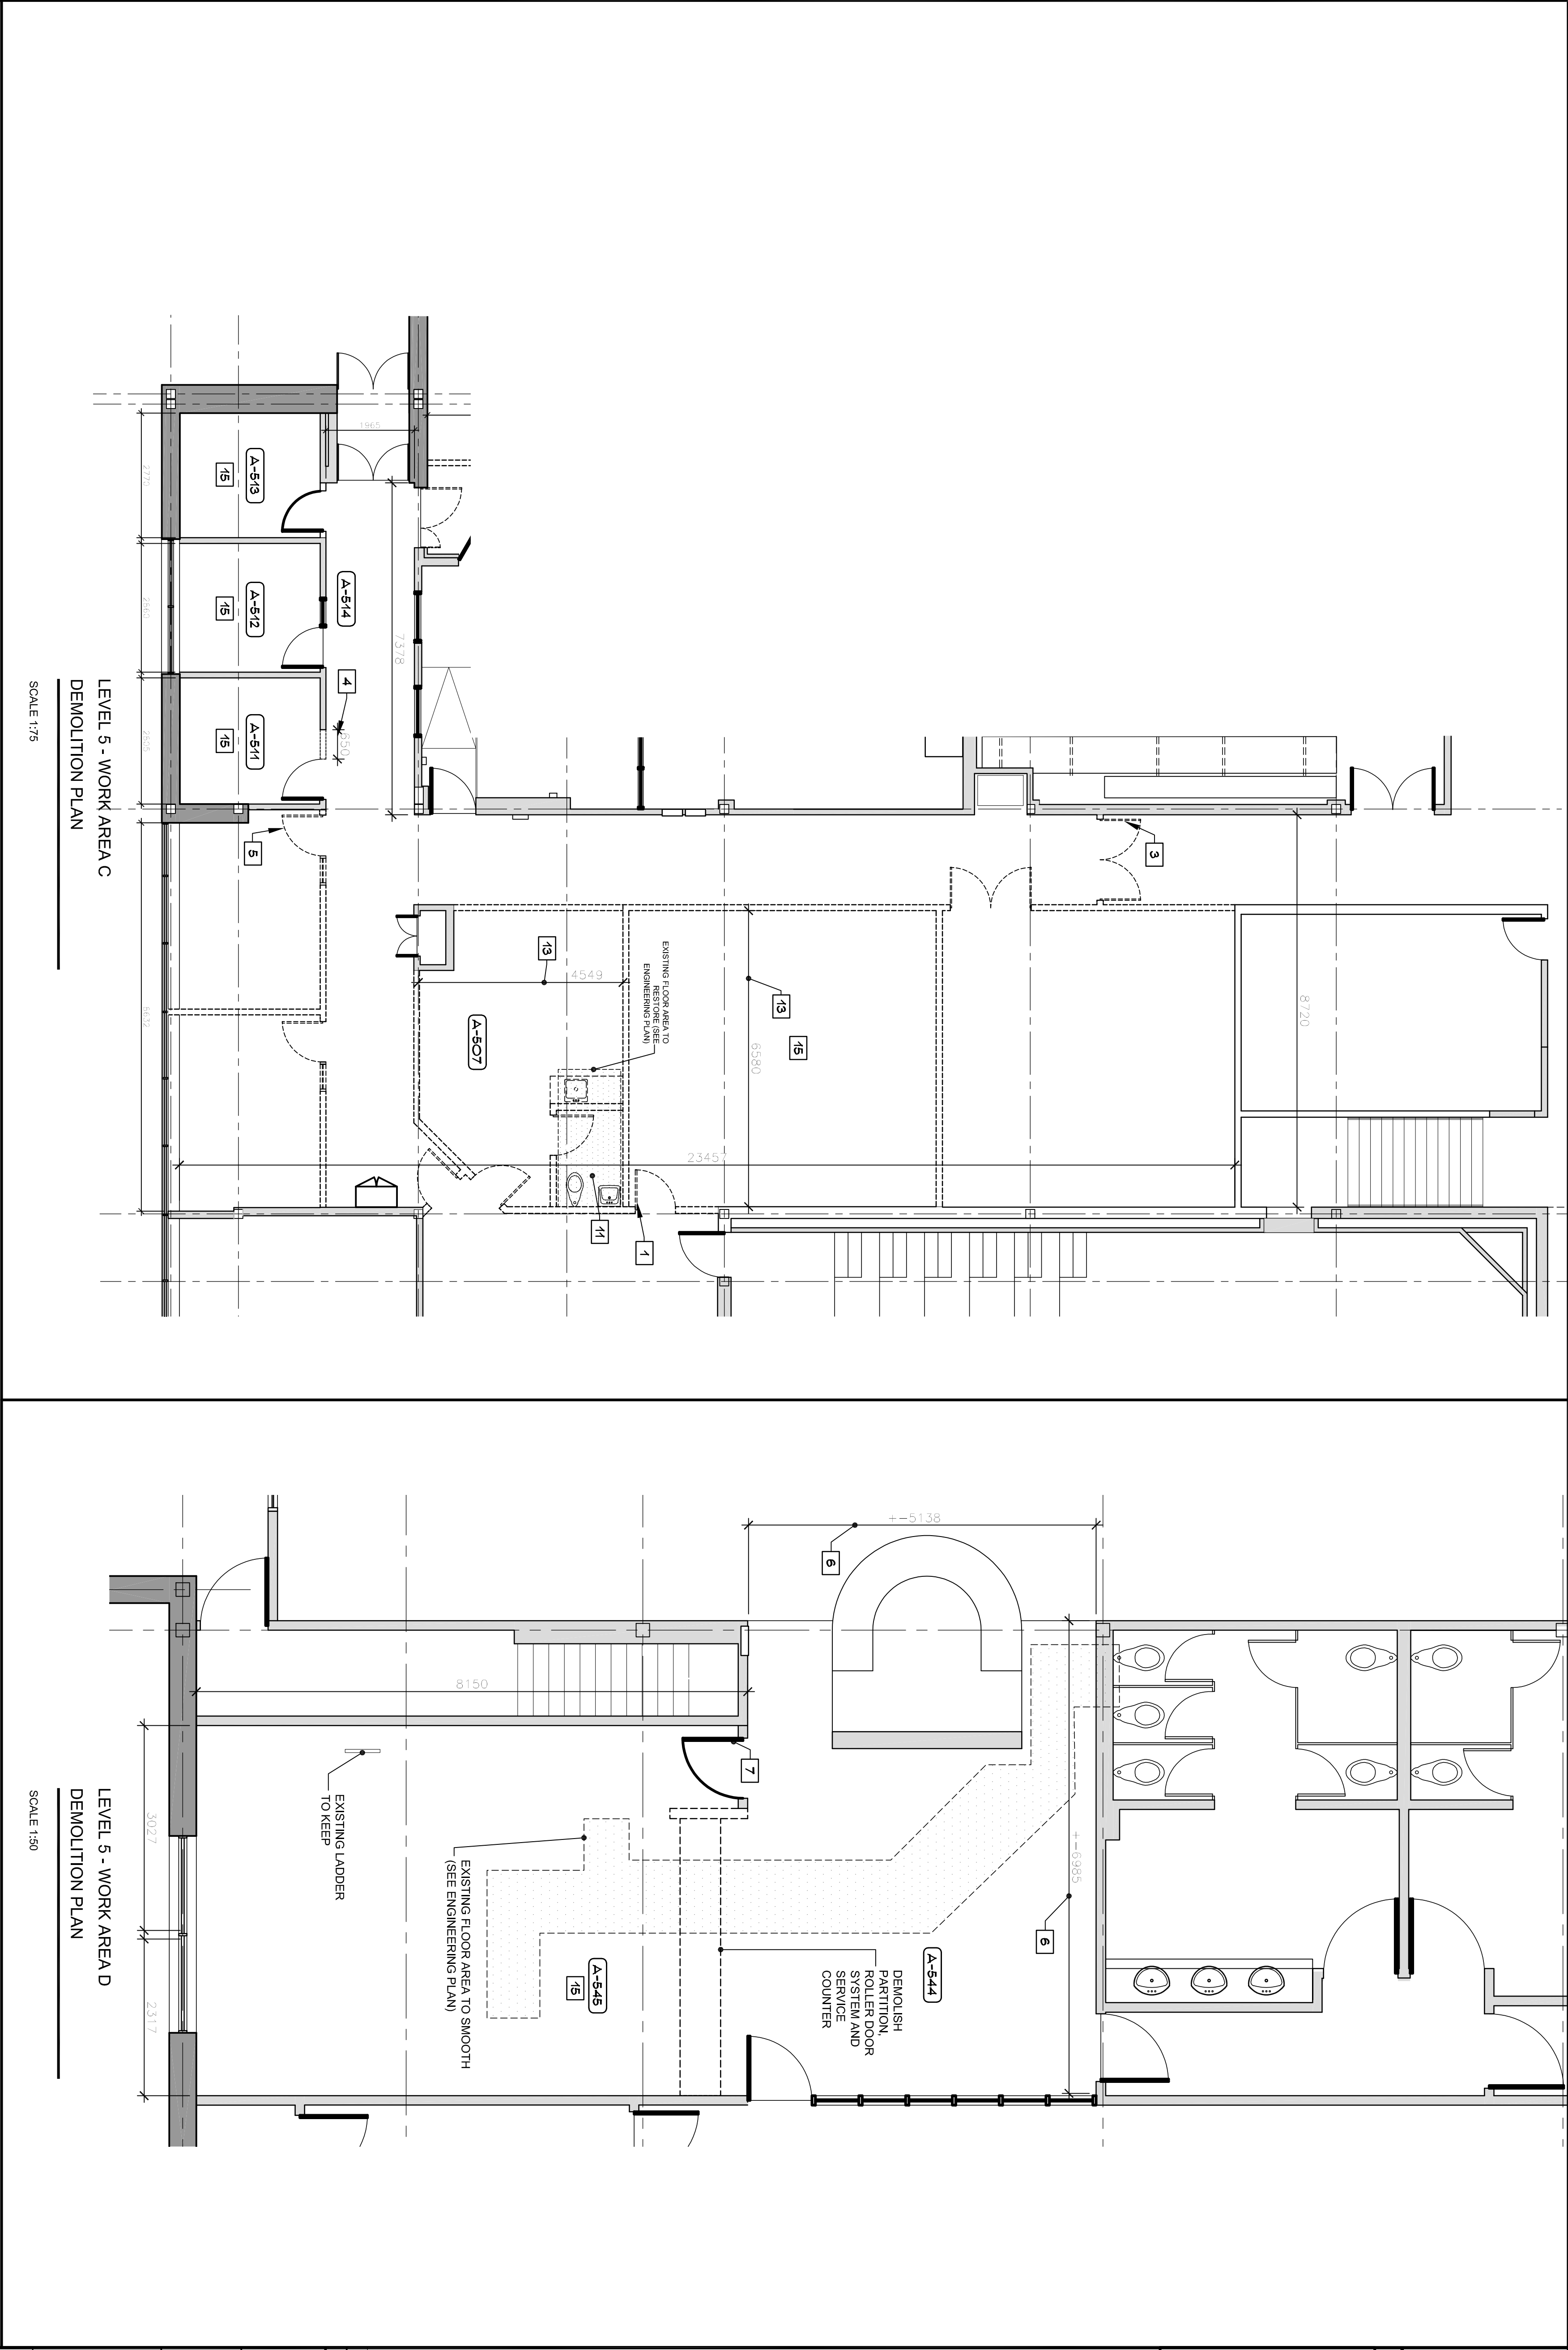


REORGANIZATION LEGEND	
	EXISTING WALL TO PRESERVE OR TO MODIFY
	NEW WALL TO BUILD OR WALL UP THE OPENING LIKE THE EXISTING AND DO THE NECESSARY REWORKS
	EXISTING WALL OR COMPOSITION TO DEMOLISH

Revision	Δ6	POUR SOUMISSION	Empy	2019-03-04
		Description	Parité	Date
A	Normal	le détail		
C	Usual no.			
	B	Faillite sur laquelle le détail est refusé		
	C	Usual no.		
	C	Faillite sur laquelle le détail est refusé		
		Usual no.		

**MONT-JOLI**  
**MAURICE-LAMONTAGNE BUILDING**  
**GIST/SPC REORGANIZATION**

LEVEL 5 - WORK AREAS C AND D DEMOLITION PLAN	
<b>Concrt part</b> Designed by: L. Gauthier Date: 2017-12-01	<b>Approved part</b> Approved by: L. Gauthier Date: 2019-01-09
<b>Dessiné par:</b> Dessiné by: E.M Poulin-Vallières Vérifié par: L. Gauthier Vérifié by: L. Gauthier Date: 2019-01-09	<b>Calibré:</b> Scale: Indicated No. graphic: 103 de 13 Sheet total:
<b>F3766-1/70169</b>	



- |    |  |
|----|--|
|    | INTERVENTIONS LIST:  |
| 1  | DEMOLISH THE EXISTING DOOR, CLOSE THE OPENING WITH A WALL LIKE THE EXISTING AND ADJACENT WALL. PROVIDE FOR THE RESTAURATION OF THE BASEBOARD ON BOTH SIDES OF THE NEW WALL.  |
| 2  | DEMOLISH EXISTING DOOR, FRAME, HARDWARE AND LATERAL GLAZING TO RELOCATE THEM. CONTRACTOR MUST REFER TO THE FLOOR PLAN FOR THE RELOCATION. SEE DOOR 40  |
| 3  | DEMOLISH EXISTING DOOR, FRAME AND HARDWARE TO RELOCATE THEM. CONTRACTOR MUST REFER TO THE FLOOR PLAN FOR THE RELOCATION. SEE DOOR 6  |
| 4  | DEMOLISH THE WALL TO RECEIVE THE NEW FRAME AND/OR LATERAL GLAZING.   |
| 5  | DEMOLISH EXISTING DOOR, FRAME, HARDWARE AND LATERAL GLAZING TO RELOCATE THEM. CONTRACTOR MUST REFER TO THE FLOOR PLAN FOR THE RELOCATION. SEE DOOR 46  |
| 6  | DEMOLISH THE EXISTING PLUG, PROVIDE FOR THE PREPARATION IN A WAY TO RECEIVE THE NEW CERAMIC.   |
|    | INSTALL NEW DOOR AND NEW HARDWARE IN EXISTING FRAME. CONTRACTOR WILL HAVE TO KEEP A PART OF THE EXISTING WALL ET PROVIDE FOR THE RESTAURATION AND FOR THE PAINTING.  |
| 8  | APPROXIMATIVE CEILING AREA TO DEMOLISH, REMOVE THE TILES AND KEEP THE SUSPENSIONS IN PLACE. THE ENGINEERING WORK WILL HAVE TO BE DONE THROUGH THE SUSPENSIONS. PUT THE SUSPENDED CEILING TILES BACK IN PLACE AFTER THE WORKS.  |
| 9  | APPROXIMATIVE FLOOR AREA TO DEMOLISH FOR THE PLUMBING WORKS (SEE ENGINEERING PLAN). PROVIDE FOR THE RESTAURATION OF THE SLAB SUCH AS THE TYPICAL CONSTRUCTION DETAIL ON THE ENGINEERING PLAN.  |
| 10 | PROVIDE FOR THE DEMOLITION OF A SECTION OF THE WALL FOR THE ELECTRICAL AND PLUMBING WORKS (REFER TO THE ENGINEERING PLANS FOR THE WORKS). PROVIDE FOR THE RESTAURATION OF THE SURFACES, PLASTER AND PAINT.   |
| 11 | THE FOLLOWING ITEMS IN THE BATHROOM OF THE EXISTING INFIRMARY WILL BE DEMOLISH AND REINSTALL IN THE PRESENT PROJECT: HYGIENIC PAPER DISTRIBUTOR, SOAP DISTRIBUTEUR, STAINLESS STEEL SHELF, PAPER/WRASH DISTRIBUTOR INTEGRATED AND DEODORING BLOCK, REFER TO THE EXPENDED PLAN OF THE NEW INFIRMARY'S BATHROOM FOR THE LOCATION OF THE ACCESSORIES. |
| 12 | PROVIDE FOR THE REPLACEMENT OF THE HEATING CABINET'S FRAME AFTER THE DEMOLITION OF THE WALL.   |
| 13 | PROVIDE FOR THE DEMOLITION OF VINYL TILES. TILES CONTAINING ASBESTOS REFER TO THE  |

- 14** ALL THE DEMONSTRATED FURNITURE IS INCLUDED IN THE CONTRACT. (REFER TO SPECIFICATIONS)
- 15** FLOOR COATING TO DEMOLISH. (REFER TO TABLE OF FINISHES AND PLANS OF FINISHES)
- 16** WALL ACCESS COVER 200 mm x 200 mm IN S&T STEEL, CP SIZE 16 WITH PLANO TYPE CONTINUOUS HINGE LOCKING WITH FLAT SCREWDRIVERS. EPOXY PRIMER ANTI-CORROSION PRIMER TO BE PAINTED THE SAME COLOR AS THE ADJACENT WALL. COORDINATE INSTALLATION HEIGHT WITH PLUMBING.
- 17** CONTRACTOR WILL HAVE TO INSTALL ADDITIONAL TEMPORARY PROTECTION DURING WORK TO SEAL THE DOORS LEADING TO THE SERVER ROOM.