



Travis Cooke  
Winnipeg, MB S.A. #992  
Aut. 10. 2018.

**1 SITE PLAN**  
SCALE N.T.S.

- GENERAL DRAWING NOTES:**
- CONTRACTOR TO REPAIR / RESTORE / DAMAGED TOPSOIL / GRASS / SOD RESULTANT FROM CONSTRUCTION.
  - CONTRACTOR TO REPAIR / RESTORE DAMAGED ASPHALT RESULTANT FROM CONSTRUCTION.
  - CONTRACTOR TO RUN CONDUIT FOR ELECTRICAL DEVICES IN CRAWLSPACE TO THE EXTERIOR OF THE BUILDING. NO EXPOSED CONDUIT IS PERMITTED WITHIN THE FENCED IN AREAS OF THE EXERCISE YARDS.
  - CONTRACTOR TO REVIEW SLOP OF CONCRETE SLAB IN ACTIVE YARD PRIOR TO COMMENCEMENT OF WORK AND PROVIDE ANY DISCREPANCIES IN SLOP/ELEVATIONS TO DEPARTMENTAL REPRESENTATIVE.
  - CONTRACTOR TO COMPLETE UNDERGROUND UTILITY SURVEY PRIOR TO COMMENCEMENT OF WORK. CONTRACTOR TO NOTIFY DEPARTMENTAL REPRESENTATIVE WITH ANY CONFLICTS WITH CONSTRUCTION.
  - CONTRACTOR TO PROVIDE HYDROVAC EXCAVATION FOR SOIL EXCAVATION FOR PILES IN LOCATIONS WHERE EXISTING UNDERGROUND UTILITY SERVICES ARE PRESENT AND FOR PILES WITHIN 1000mm OF BUILDING.
  - CONTRACTOR TO ENSURE CONCRETE PILES DO NOT INTERFERE WITH BUILDING WEeping TILE.
  - ENSURE ALL EXISTING LANDSCAPE MATERIALS AND SURFACES AFFECTED BY THE WORK WITHIN THE LAYDOWN STAGING, ACCESS, AND STORAGE AREAS RELATED TO THE WORK ARE PATCHED MADE GOOD UPON COMPLETION OF THE WORK.
  - PROVIDE FIRESTOPPING IN ALL PENETRATION IN FIRE RATED WALLS AND FLOOR ASSEMBLIES. MAIN FLOOR SLAB IS A 1 HOUR FIRE RESISTANCE RATING.

- LEGEND:**
- NEW CONCERTINA & BARBED WIRE
  - EXISTING FENCE
  - NEW FENCE
  - TERMINAL POST
  - EXISTING UNDERGROUND TELEPHONE SERVICE
  - EXISTING UNDERGROUND ELECTRICAL SERVICE
  - EXISTING UNDERGROUND WATERMAIN
  - EXISTING STORMSEWER
  - EXISTING SANITARY SEWER
  - EXISTING ELEVATION
  - NEW ELEVATION

5		
4		
3		
2		
1		
0	ISSUED FOR TENDER	2018/08/10
Revision	Description	Date

**PWGSC WESTERN REGION**


Project  
**CSC-RHQ REGIONAL PSYCHIATRIC CENTRE  
2520 CENTRAL AVENUE NORTH  
SASKATOON, SASKATCHEWAN**

**CHURCHILL UNIT  
REDEVELOPMENT**

Designed by: TC  
Drawn by: MLK  
Approved by: EH  
PWGSC Project Manager: Enamul Haque  
Administrateur de Projets TPWGC

**EXISTING FLOOR PLAN &  
DEMOLITION PLAN**

Project No./No. du projet	Drawing No./No. du dessin	Revision No.
R.07945.001	A1	0
	OF	

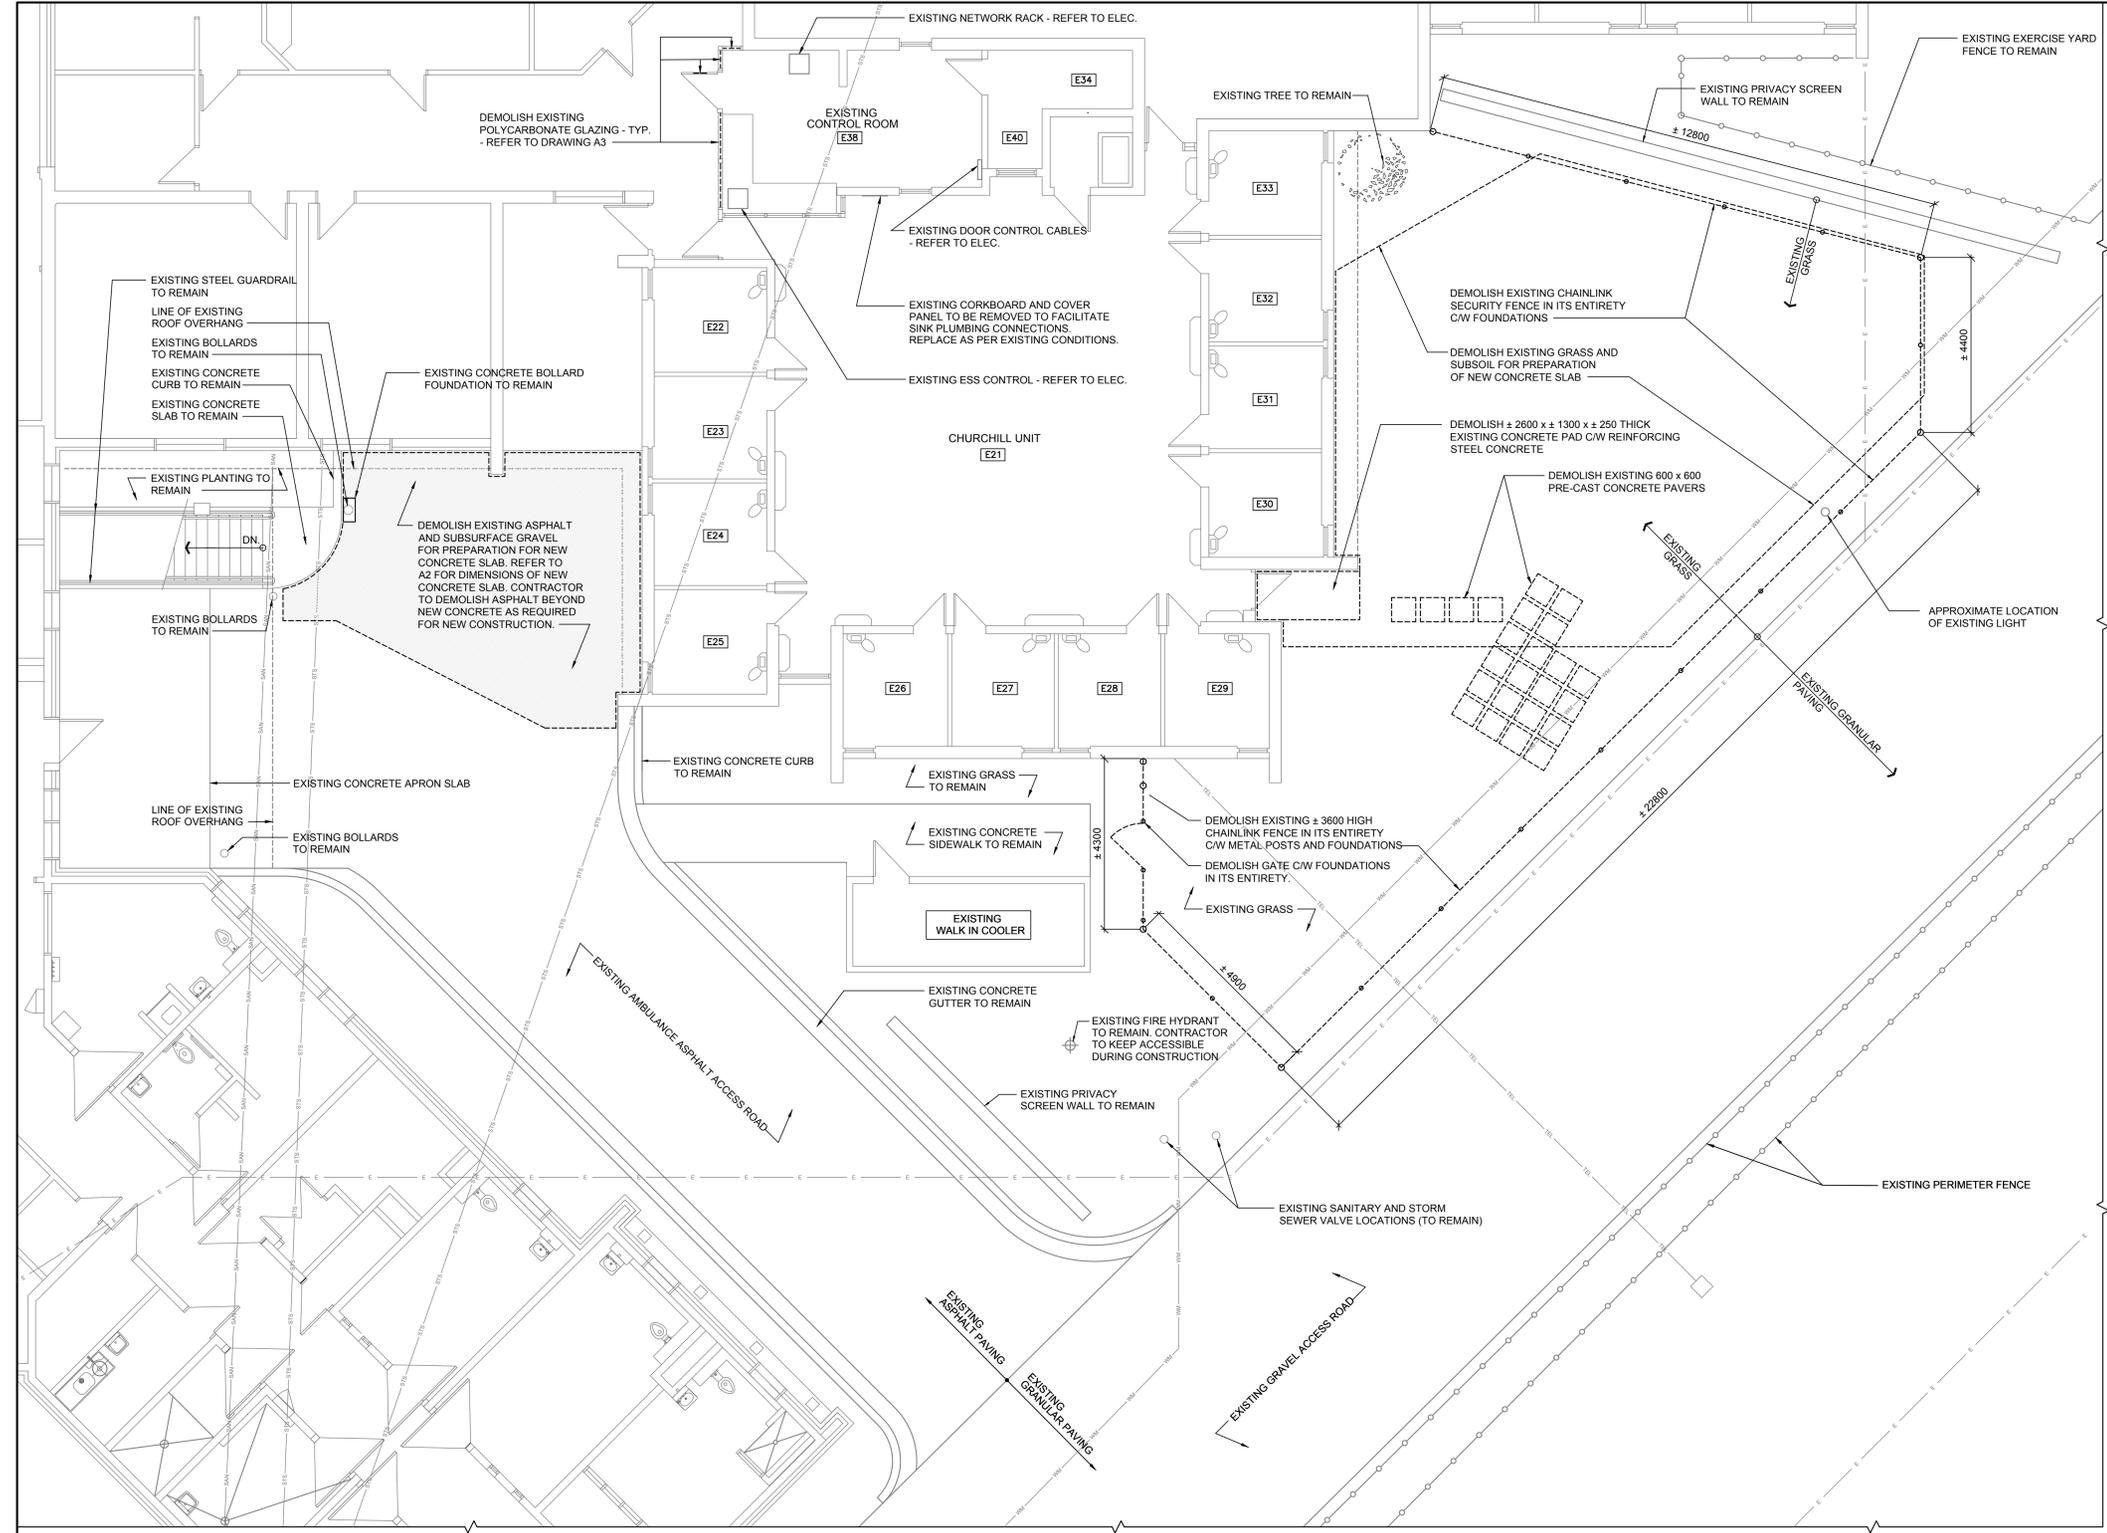

**2 EXISTING FLOOR PLAN & DEMOLITION PLAN**  
SCALE 1:75